

Web Development  
Lesson 20.2






onChange



**onChange** is an event listener that captures changes to an input element.

# How Can We Conditionally Render Elements in React?

We can write conditional logic directly inside JSX curly braces using a ternary expression or short circuit operator.

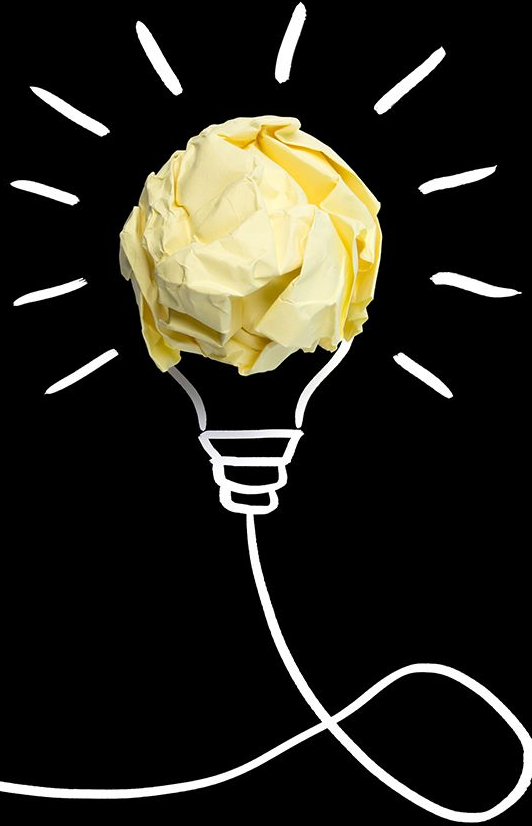




**React Router** is a library  
that handles routing with  
React.

# Keep Practicing React!

---


At this point, we've covered most of what you'll do with React most of the time.

The most important thing to do now is to continue practicing

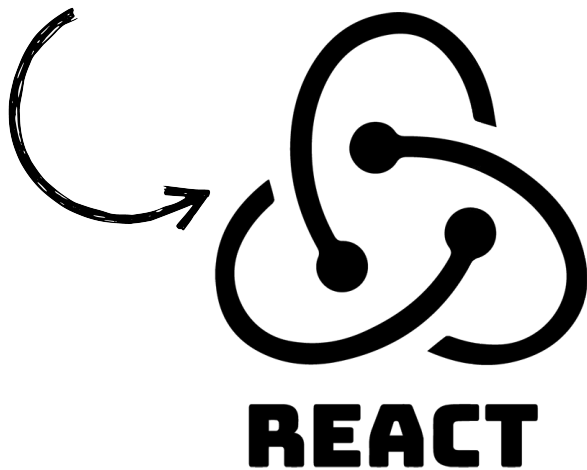

# What's next? Building full-stack apps with React

---

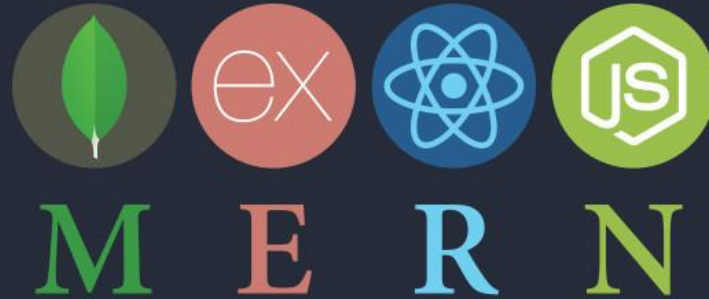



# Questions?



# <Time to Code>

