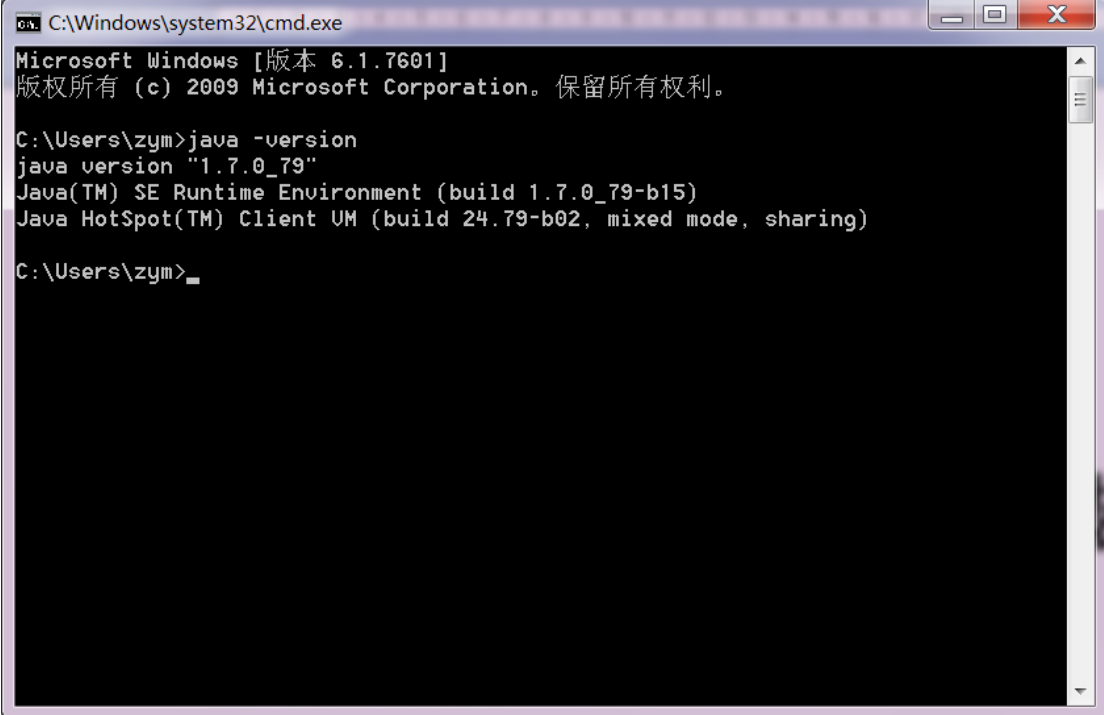


# Mycode-generator 安装与运行

先决条件:要装好 Java7 和 Tomcat 7

检查

JDK 7

A screenshot of a Windows command prompt window. The title bar shows the path 'C:\Windows\system32\cmd.exe'. The window content displays the following text: 'Microsoft Windows [版本 6.1.7601] 版权所有 (c) 2009 Microsoft Corporation。保留所有权利。' followed by the command 'C:\Users\zym>java -version' and its output: 'java version "1.7.0\_79"', 'Java(TM) SE Runtime Environment (build 1.7.0\_79-b15)', and 'Java HotSpot(TM) Client VM (build 24.79-b02, mixed mode, sharing)'. The prompt 'C:\Users\zym>' is shown at the bottom.


```
C:\Windows\system32\cmd.exe
Microsoft Windows [版本 6.1.7601]
版权所有 (c) 2009 Microsoft Corporation。保留所有权利。

C:\Users\zym>java -version
java version "1.7.0_79"
Java(TM) SE Runtime Environment (build 1.7.0_79-b15)
Java HotSpot(TM) Client VM (build 24.79-b02, mixed mode, sharing)

C:\Users\zym>
```


Tomcat7

安装好后访问 <http://localhost:8080>

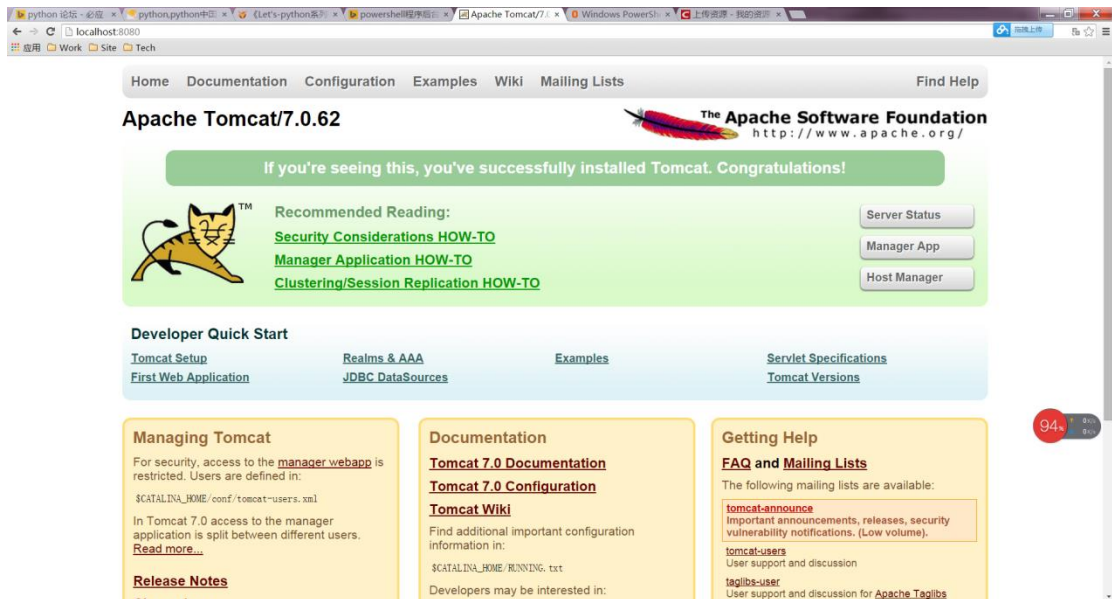


## Mycode-generator 部署

将代码生成器 war 包部署在 Tomcat 7 webapps 目录

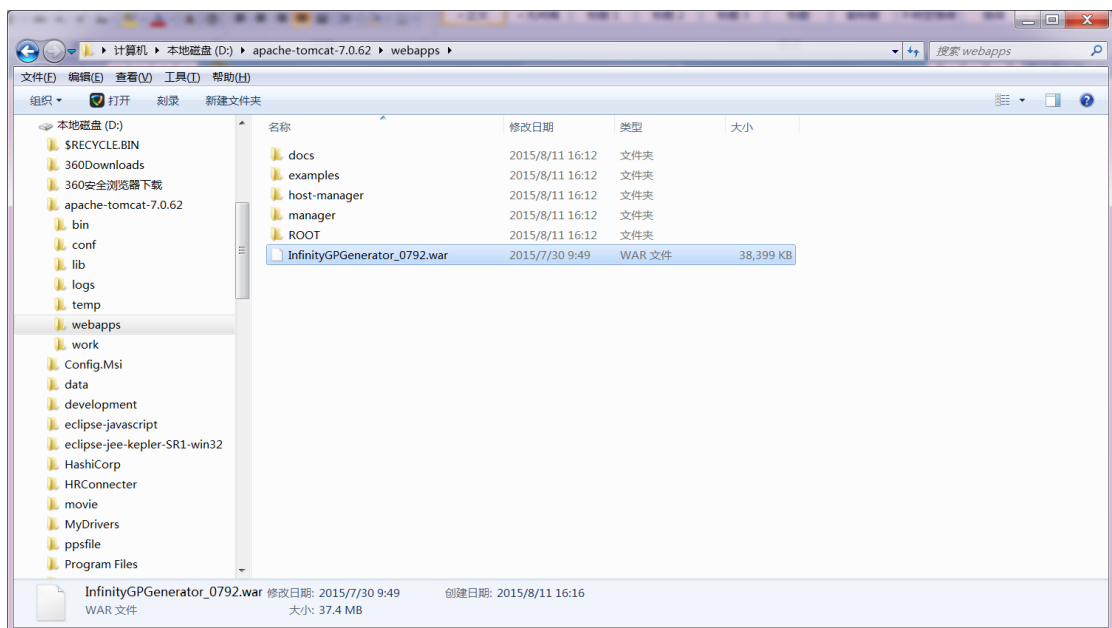

## 启动 Tomcat

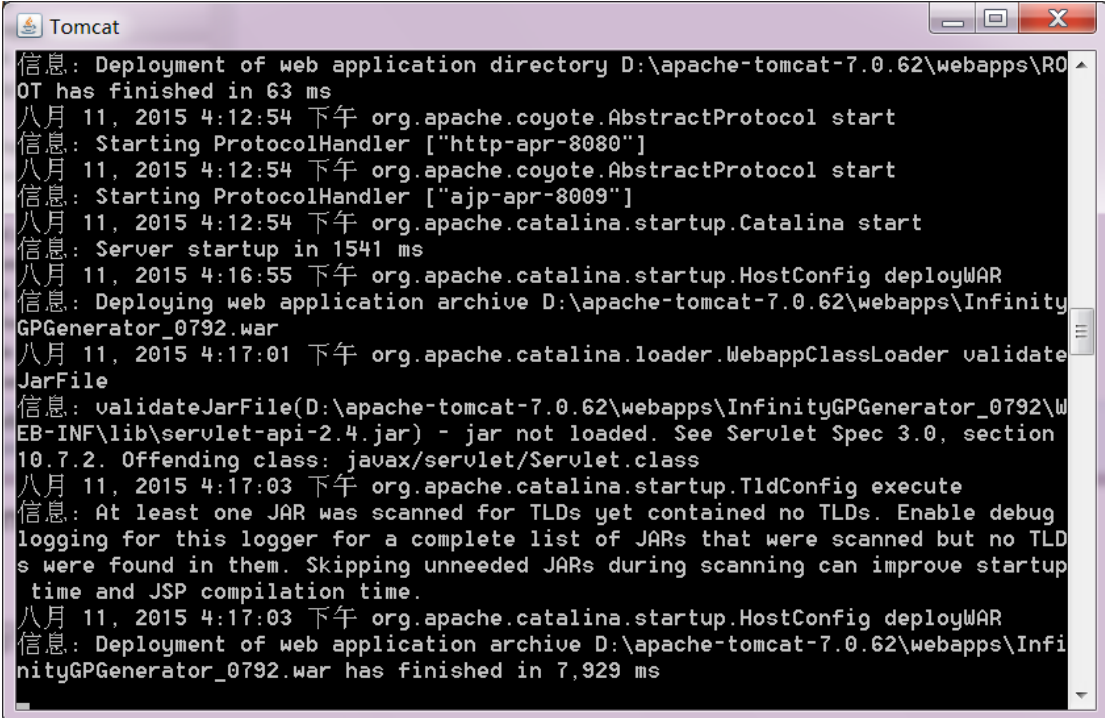

```
Tomcat
信息: Deployment of web application directory D:\apache-tomcat-7.0.62\webapps\R0
OT has finished in 63 ms
八月 11, 2015 4:12:54 下午 org.apache.coyote.AbstractProtocol start
信息: Starting ProtocolHandler ["http-apr-8080"]
八月 11, 2015 4:12:54 下午 org.apache.coyote.AbstractProtocol start
信息: Starting ProtocolHandler ["ajp-apr-8009"]
八月 11, 2015 4:12:54 下午 org.apache.catalina.startup.Catalina start
信息: Server startup in 1541 ms
八月 11, 2015 4:16:55 下午 org.apache.catalina.startup.HostConfig deployWAR
信息: Deploying web application archive D:\apache-tomcat-7.0.62\webapps\Infinity
GPGenerator_0792.war
八月 11, 2015 4:17:01 下午 org.apache.catalina.loader.WebappClassLoader validate
JarFile
信息: validateJarFile(D:\apache-tomcat-7.0.62\webapps\InfinityGPGenerator_0792\W
EB-INF\lib\servlet-api-2.4.jar) - jar not loaded. See Servlet Spec 3.0, section
10.7.2. Offending class: javax/servlet/Servlet.class
八月 11, 2015 4:17:03 下午 org.apache.catalina.startup.TldConfig execute
信息: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug
logging for this logger for a complete list of JARs that were scanned but no TLD
s were found in them. Skipping unneeded JARs during scanning can improve startup
time and JSP compilation time.
八月 11, 2015 4:17:03 下午 org.apache.catalina.startup.HostConfig deployWAR
信息: Deployment of web application archive D:\apache-tomcat-7.0.62\webapps\Infi
nityGPGenerator_0792.war has finished in 7,929 ms
```

## 访问代码生成器

