
Mycode-generator 安装与运行

先决条件:要装好 Java8/7 和 Tomcat 8/7


检查

JDK 8

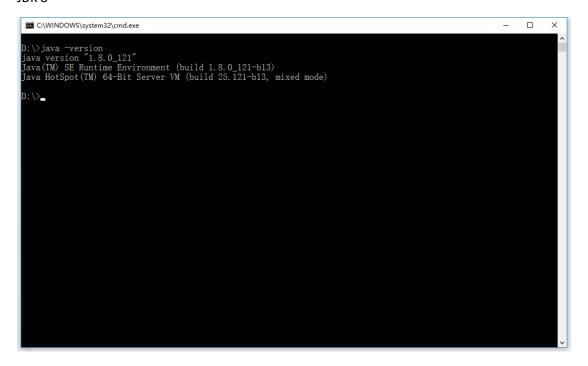


Tomcat8

安装好后访问 http://localhost:8080

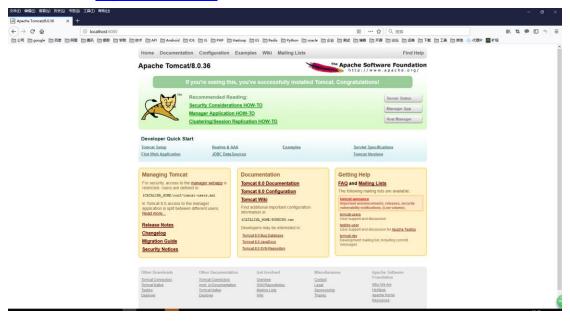

Mycode-generator 部署

将代码生成器部署在 Tomcat 8 webapps 目录

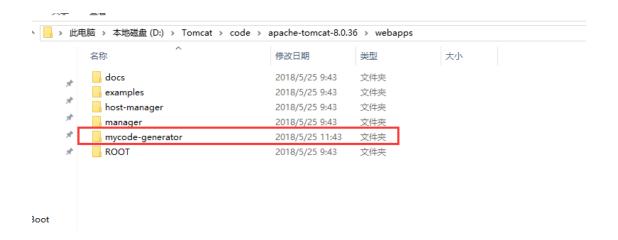

启动 Tomcat

```
penSSL 1.0.2h 3 May 2016)
25-May-2018 13:52:27.126 INPO [main] org. apache, coyote. AbstractProtocol. init Initializing ProtocolHandler ["http-apr-8080"]
25-May-2018 13:52:27.135 INPO [main] org. apache, coyote. AbstractProtocol. init Initializing ProtocolHandler ["ajp-apr-8009"]
25-May-2018 13:52:27.135 INPO [main] org. apache, catalina. core. StandardService. startInernal Starting service datalina
25-May-2018 13:52:27.159 INPO [main] org. apache, catalina. core. StandardService. startInternal Starting service datalina
25-May-2018 13:52:27.159 INPO [main] org. apache, catalina. core. StandardService. startInternal Starting service Engine: Apache Tomocat/S.
0.36
25-May-2018 13:52:28.439 INPO [localhost-startStop-1] org. apache. jasper. servlet. IldScanner. scanJars At least one JAR was scanned for IIDs yet contained no IIDs. Enable debug logging for this logger for a complete list of JARs that were scanned but no IIDs were found in them. Skipping unneeded JARs during scanning can improve startup time and JSP compilation time.
25-May-2018 13:52:28.474 INPO [localhost-startStop-1] org. apache, catalina. util. SessionIdSeneratorBase. createSecureRandom Creation of SecureRandom instance for session ID generation using [SHAIPRNG] took [281] milliseconds.
25-May-2018 13:52:28.78 INPO [localhost-startStop-1] org. apache. catalina. startup. HostConfig. deployDirectory Deploying web application directory D: Yomcat'code apache-tomcat-8. 0. 36 (webapps\docs scanner) and interest orgonized to the scanner of the scanner of
```

访问代码生成器

