

Natural Language Processing with Deep Learning

CS224N/Ling284



Christopher Manning

Lecture 12: Information from parts of words:
Subword Models



Announcements

Assignment 5 will be released today

- Another all-new assignment. You have 7 days....
- Adding convnets and subword modeling to NMT
- Coding-heavy, written questions-light
- The complexity of the coding is similar to A4, **but:**
- **We give you much less help!**
 - Less scaffolding, less provided sanity checks, no public autograder
 - You write your own testing code
 - New policy on getting help from TAs: **TAs can't look at your code**
- A5 is an exercise in learning to figure things out for yourself
- Essential preparation for final project and beyond



Lecture Plan

Lecture 12: Information from parts of words: Subword Models

1. A tiny bit of linguistics (10 mins)
2. Purely character-level models (10 mins)
3. Subword-models: Byte Pair Encoding and friends (20 mins)
4. Hybrid character and word level models (30 mins)
5. fastText (5 mins)



1. Human language sounds: Phonetics and phonology

continuous space 가 ..

human language
distinguished small space sound 가 ..
set of categories

- Phonetics is the sound stream – uncontroversial “physics”
- Phonology posits a small set or sets of distinctive, categorical units: **phonemes** or distinctive features
 - A perhaps universal typology but language-particular realization
 - Best evidence of categorical perception comes from phonology
 - Within phoneme differences shrink; between phoneme magnified

CONSONANTS (PULMONIC)

© 2005 IPA

	Bilabial	Labiodental	Dental	Alveolar	Postalveolar	Retroflex	Palatal	Velar	Uvular	Pharyngeal	Glottal
Plosive	p b			t d		t̪ d̪	c ʃ	k g	q ɢ		ʔ
Nasal	m	n̪		n		ɳ	ɲ	ŋ		N	
Trill	B			r						R	
Tap or Flap		v̪		f		t̪					
Fricative	ɸ β	f v	θ ð	s z	ʃ ʒ	s z	ç ɟ	x ɣ	χ ʁ	ħ ʕ	h ɦ
Lateral fricative				ɬ ɭ							
Approximant		v̪		r̪		ɻ	j̪	w̪			
Lateral approximant				l̪		ɺ	ʎ̪	L̪			

Where symbols appear in pairs, the one to the right represents a voiced consonant. Shaded areas denote articulations judged impossible.

caught
cot

가 ..


phoneme
가 ..




Morphology: Parts of words

- Traditionally, we have morphemes as smallest **semantic** unit
 - [**un**][**fortun(e)**]_{ROOT} [**ate**]_{STEM}]_{STEM} [**ly**]_{WORD}
[un, fortun, ate, ly] 가
- Deep learning: Morphology little studied; one attempt with recursive neural networks is (Luong, Socher, & Manning 2013)

morphe - level structure
가
Recursive NN tree - structure
morpheme

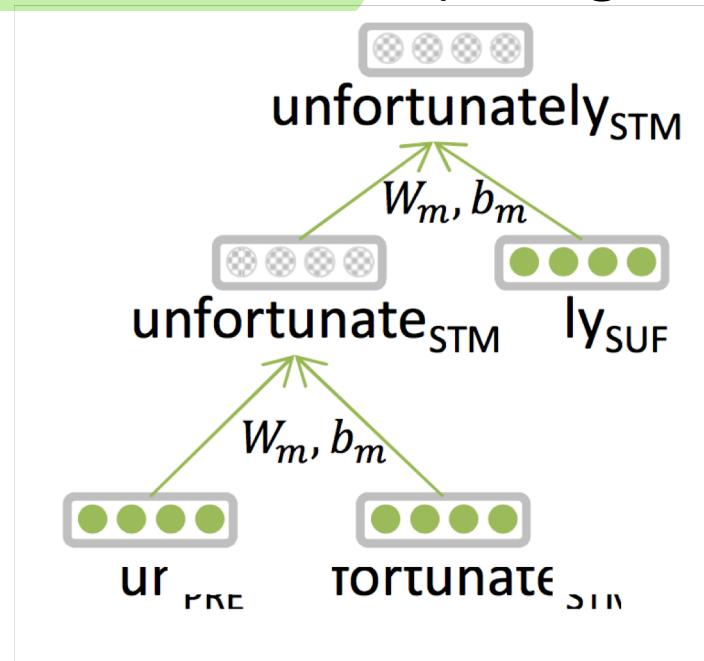

A possible way of dealing with a larger vocabulary – most unseen words are new morphological forms (or numbers)



Morphology

- An easy alternative is to work with character n -grams
 - Wickelphones (Rumelhart & McClelland 1986)
 - Microsoft's DSSM (Huang, He, Gao, Deng, Acero, & Hect 2013)
- Related idea to use of a convolutional layer
- Can give many of the benefits of morphemes more easily??


Structure of Language
(Controversial Work)

past tense form
 가 regular ,
irregular

character trigram representation
 .

controversy
 .

(purely)
engineering solution
 가 .

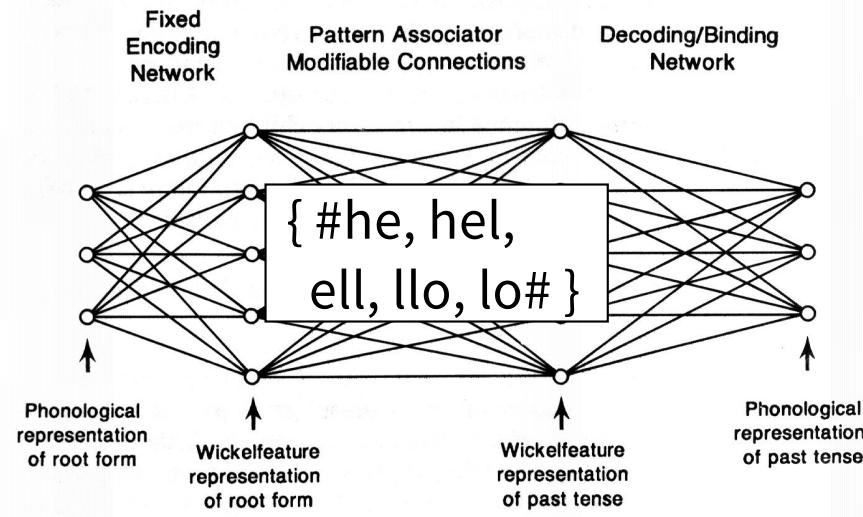

Microsoft
deep semantic model
character n - gram
(fastText ...)

Words in writing systems

Writing systems vary in how they represent words – or don't

- No word segmentation 美国关岛国际机场及其办公室均接获
- Words (mainly) segmented: *This is a sentence with words*
 - Clitics?
 - Separated
 - Joined
 - Compounds?
 - Separated
 - Joined


Je vous ai apporté des bonbons
فقلناها = ها + قال + نا + ف = so+said+we+it

life insurance company employee
Lebensversicherungsgesellschaftsangestellter


compound noun()
each noun
whiteboard highscool

Models below the word level

word - level
가
, character n - gram


- Need to handle **large, open vocabulary**
 - Rich morphology: *nejneobhospodařovávatelnějšímu*
very complex word.
 - Transliteration: Christopher \mapsto Kryštof
sound system between different languages
 - Informal spelling:

sound system
word - level
letter - level

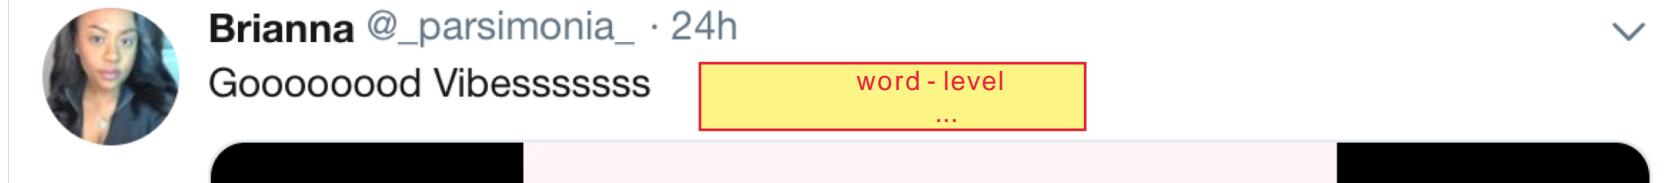

Brianna @_parsimonia_ · 24h
Gooooood Vibesssssss


word - level
...

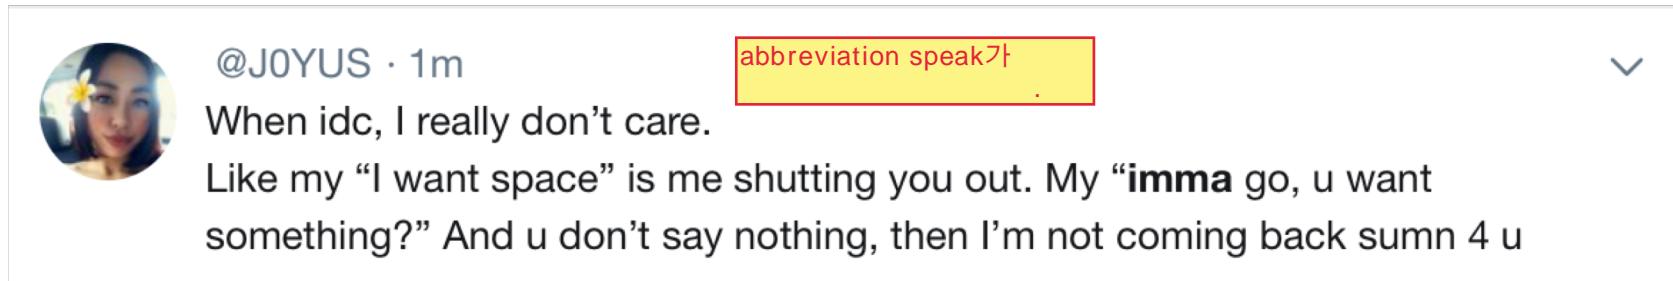

@J0YUS · 1m
When idc, I really don't care.
Like my "I want space" is me shutting you out. My "imma go, u want something?" And u don't say nothing, then I'm not coming back sumn 4 u

abbreviation speak
가

Character-Level Models

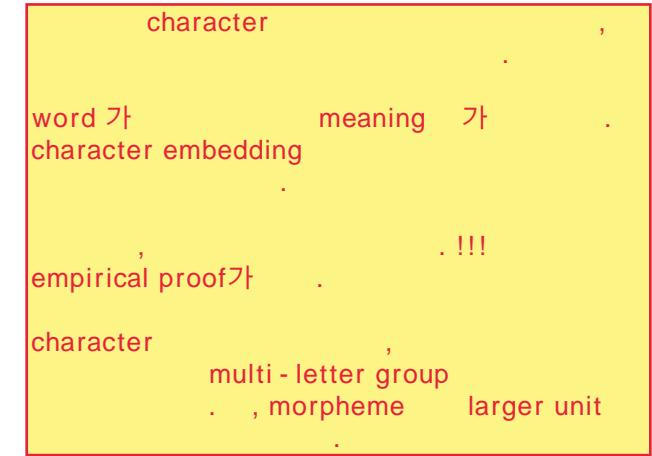

1. Word embeddings can be composed from character embeddings

- Generates embeddings for unknown words
- Similar spellings share similar embeddings
- Solves OOV problem

2. Connected language can be processed as characters

Both methods have proven to work very successfully!


- Somewhat surprisingly – traditionally, phonemes/letters weren't a semantic unit – but DL models compose groups

Below the word: Writing systems

using characters

Most deep learning NLP work begins with language in its written form – it's the easily processed, found data

written form = text data

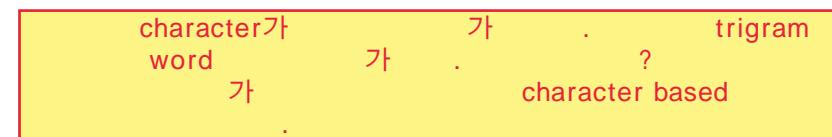

But human language writing systems aren't one thing!

- Phonemic (maybe digraphs) jiyawu ngabulu
- Fossilized phonemic thorough failure
- Syllabic/moraic つゞけんしやう
- Ideographic (syllabic) 去年太空船二号坠毀
- Combination of the above インド洋の島

Wambaya
English
Inuktitut
Chinese
Japanese

2. Purely character-level models

- We saw one good example of a purely character-level model last lecture for sentence classification:
 - Very Deep Convolutional Networks for Text Classification
 - Conneau, Schwenk, Lecun, Barrault. EACL 2017
- Strong results via a deep convolutional stack


Purely character-level NMT models

- Initially, unsatisfactory performance
 - (Vilar et al., 2007; Neubig et al., 2013)
- Decoder only
 - (Junyoung Chung, Kyunghyun Cho, Yoshua Bengio. arXiv 2016).
- Then promising results
 - (Wang Ling, Isabel Trancoso, Chris Dyer, Alan Black, arXiv 2015)
 - (Thang Luong, Christopher Manning, ACL 2016)
 - (Marta R. Costa-Jussà, José A. R. Fonollosa, ACL 2016)

character based
word based

English-Czech WMT 2015 Results

- Luong and Manning tested as a baseline a pure character-level seq2seq (LSTM) NMT system
- It worked well against word-level baseline
- But it was **ssllooooww**
 - 3 weeks to train ... not that fast at runtime

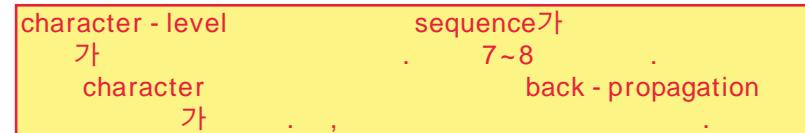

System	BLEU
Word-level model (single; large vocab; UNK replace)	15.7
Character-level model (single; 600-step backprop)	15.9

English-Czech WMT 2015 Example


source	Her 11-year-old daughter , Shani Bart , said it felt a little bit weird
human	Její jedenáctiletá dcera Shani Bartová prozradila , že je to trochu zvláštní
char	Její jedenáctiletá dcera , Shani Bartová , říkala , že cítí trochu divně
word	Její <unk> dcera <unk> <unk> řekla , že je to trochu divné
	Její 11-year-old dcera Shani , řekla , že je to trochu divné

word 11 - year - old 가 unknown word .
unknown word .
unigram copy .
 copy.

System	BLEU
Word-level model (single; large vocab; UNK replace)	15.7
Character-level model (single; 600-step backprop)	15.9



Fully Character-Level Neural Machine Translation without Explicit Segmentation

Jason Lee, Kyunghyun Cho, Thomas Hoffmann. 2017.
Encoder as below; decoder is a char-level GRU

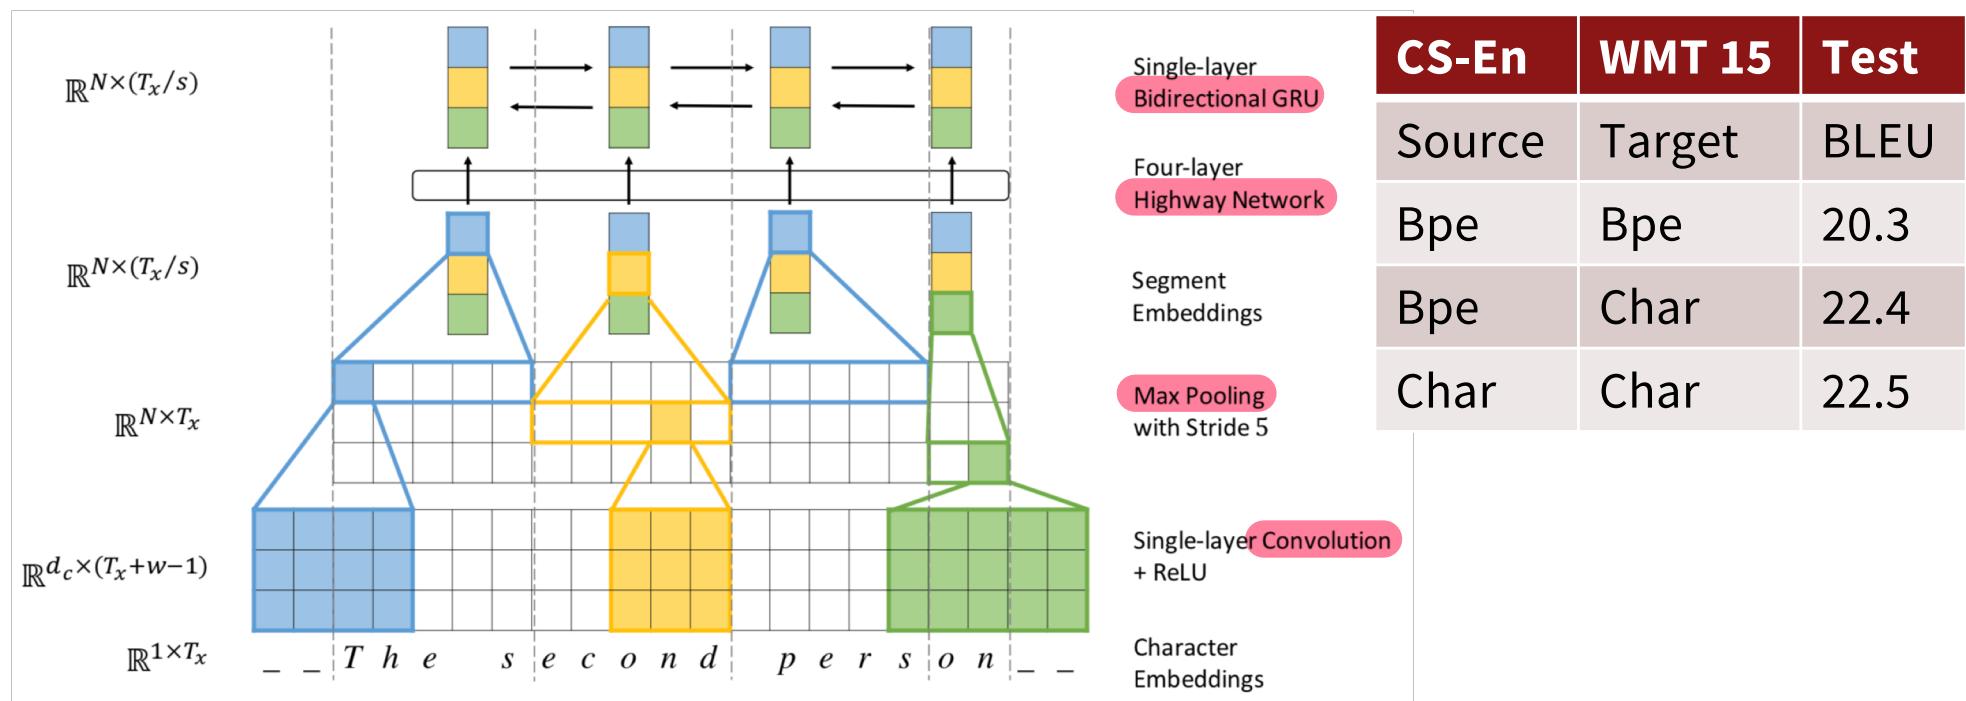

Stronger character results with depth in LSTM seq2seq model

Revisiting Character-Based Neural Machine Translation with Capacity and Compression. 2018.
Cherry, Foster, Bapna, Firat, Macherey, Google AI

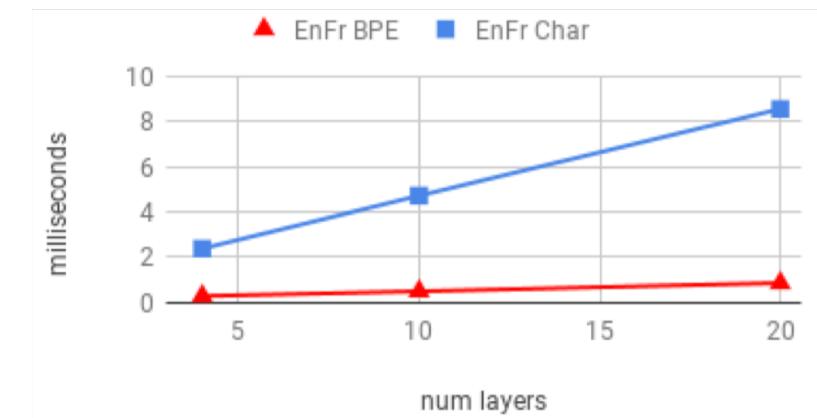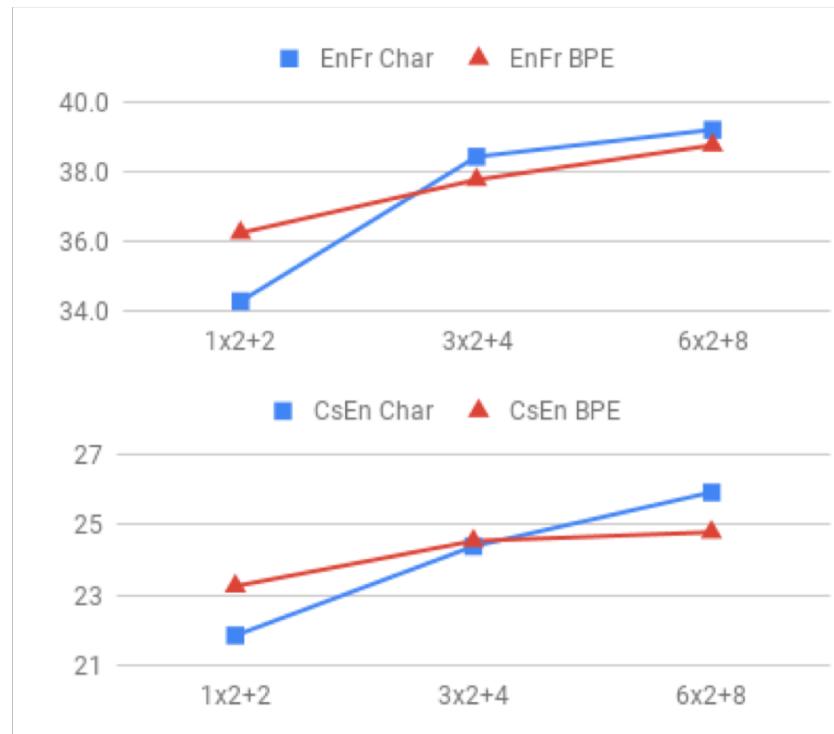

character level
language
, character level
-
char
char
word
, char
가
morphological complexity of the
language
-
char
char
word
, char
가

3. Sub-word models: two trends

- Same architecture as for word-level model:
 - But use smaller units: “word pieces”
 - [Sennrich, Haddow, Birch, ACL’16a], [Chung, Cho, Bengio, ACL’16].
- Hybrid architectures:
 - Main model has *words*; something else for *characters*
 - [Costa-Jussà & Fonollosa, ACL’16], [Luong & Manning, ACL’16].

Byte Pair Encoding

BPE.

word pieces



- Originally a **compression** algorithm:
 - Most frequent **byte** pair \mapsto a new **byte**.

Replace bytes with character ngrams

(though, actually, some people have done interesting things with bytes)

Rico Sennrich, Barry Haddow, and Alexandra Birch. **Neural Machine Translation of Rare Words with Subword Units**. ACL 2016.

<https://arxiv.org/abs/1508.07909>

<https://github.com/rsennrich/subword-nmt>

<https://github.com/EdinburghNLP/nematus>

Byte Pair Encoding

- A word segmentation algorithm:
 - Though done as bottom up clustering.
 - Start with a unigram vocabulary of all (Unicode) characters in data
 - Most frequent ngram pairs \mapsto a new ngram

Byte Pair Encoding

- A word segmentation algorithm:
 - Start with a vocabulary of characters
 - Most frequent ngram pairs \mapsto a new ngram

Dictionary

5 low
2 lower
6 newest
3 widest

Vocabulary

I, o, w, e, r, n, w, s, t, i, d

Start with all characters
in vocab

Byte Pair Encoding

- A word segmentation algorithm:
 - Start with a vocabulary of characters
 - Most frequent ngram pairs \mapsto a new ngram

Dictionary

5 low
2 lower
6 new es t
3 w i d es t

Vocabulary

I, o, w, e, r, n, w, s, t, i, d, es

Add a pair (e, s) with freq 9

Byte Pair Encoding

- A word segmentation algorithm:
 - Start with a vocabulary of characters
 - Most frequent ngram pairs \mapsto a new ngram

Dictionary

5 low
2 lower
6 new **est**
3 wid **est**

Vocabulary

I, o, w, e, r, n, w, s, t, i, d, es, **est**

Add a pair (es, t) with freq 9

Byte Pair Encoding

- A word segmentation algorithm:
 - Start with a vocabulary of characters
 - Most frequent ngram pairs \mapsto a new ngram

ngram 가
. ex. the, ...

Dictionary

5 lo w
2 lo w e r
6 n e w est
3 w i d est

Vocabulary

l, o, w, e, r, n, w, s, t, i, d, es, est, lo

Add a pair (l, o) with freq 7

Byte Pair Encoding

vocab
ex. 8000

- Have a target vocabulary size and stop when you reach it
- Do deterministic longest piece segmentation of words
- Segmentation is only within words identified by some prior tokenizer (commonly Moses tokenizer for MT)
- **Automatically decides vocab for system**
 - No longer strongly “word” based in conventional way

Top places in WMT 2016!
Still widely used in WMT 2018

Wordpiece/Sentencepiece model

- Google NMT (GNMT) uses a variant of this
 - V1: wordpiece model
 - V2: sentencepiece model
- Rather than char n -gram count, uses a greedy approximation to maximizing language model log likelihood to choose the pieces
 - Add n -gram that maximally reduces perplexity


byte pair encoding.

Wordpiece/Sentencepiece model

- Wordpiece model tokenizes inside words
 - Sentencepiece model works from raw text
 - Whitespace is retained as special token (_) and grouped normally
 - You can reverse things at end by joining pieces and recoding them to spaces
-
- <https://github.com/google/sentencepiece>
 - <https://arxiv.org/pdf/1804.10959.pdf>

Wordpiece/Sentencepiece model


- BERT uses a variant of the wordpiece model
 - (Relatively) common words are in the vocabulary:
 - *at, fairfax, 1910s*
 - Other words are built from wordpieces:
 - *hypatia* = *h ##yp ##ati ##a*
- If you're using BERT in an otherwise word based model, you have to deal with this

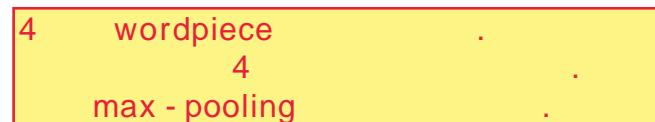


4. Character-level to build word-level

Learning Character-level Representations for Part-of-Speech Tagging (Dos Santos and Zadrozny 2014)

- **Convolution** over characters to generate word embeddings
- Fixed window of word embeddings used for PoS tagging

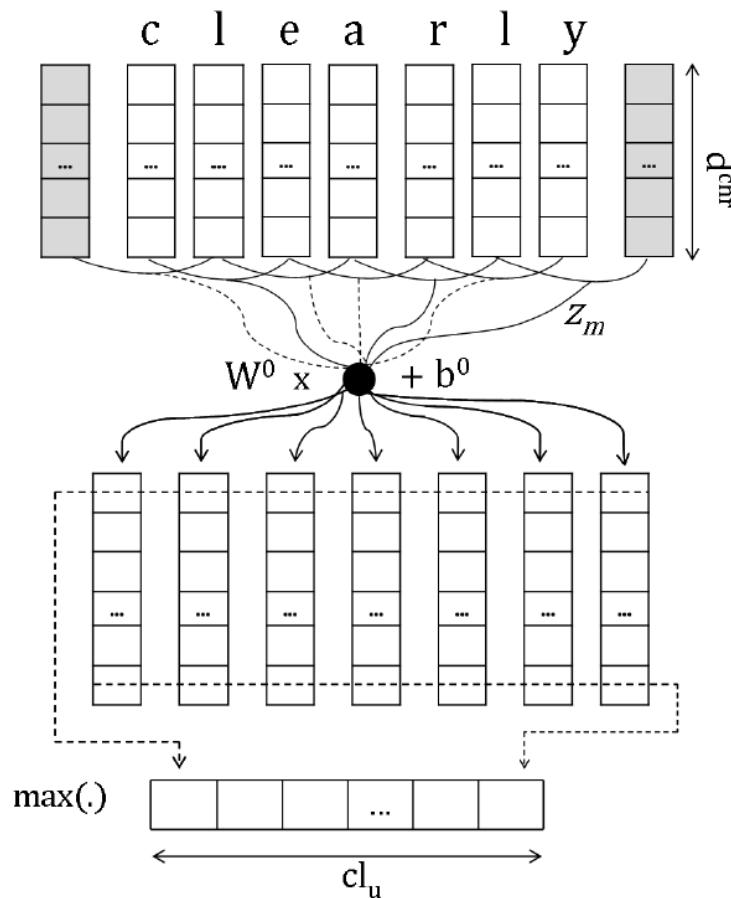

Character-based LSTM to build word rep'ns

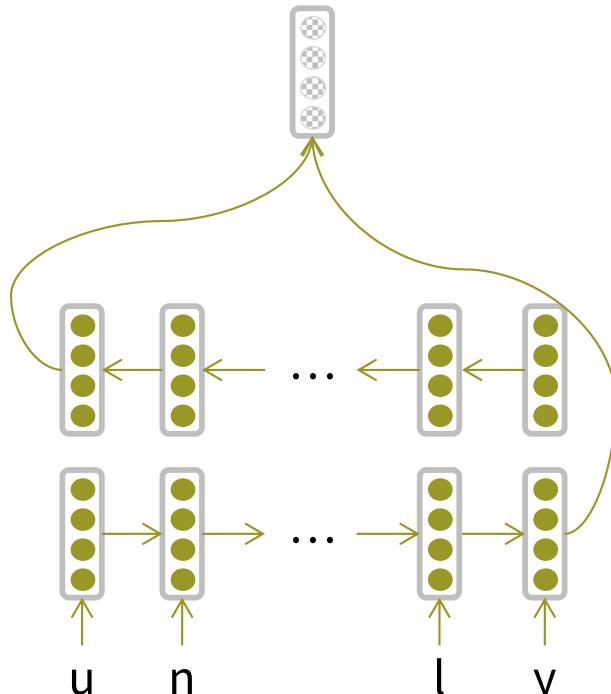


(unfortunately)

Bi-LSTM builds word representations

Ling, Luís, Marujo, Astudillo, Amir, Dyer, Black, Trancoso. **Finding Function in Form: Compositional Character Models for Open Vocabulary Word Representation**. EMNLP'15.

Character-based LSTM

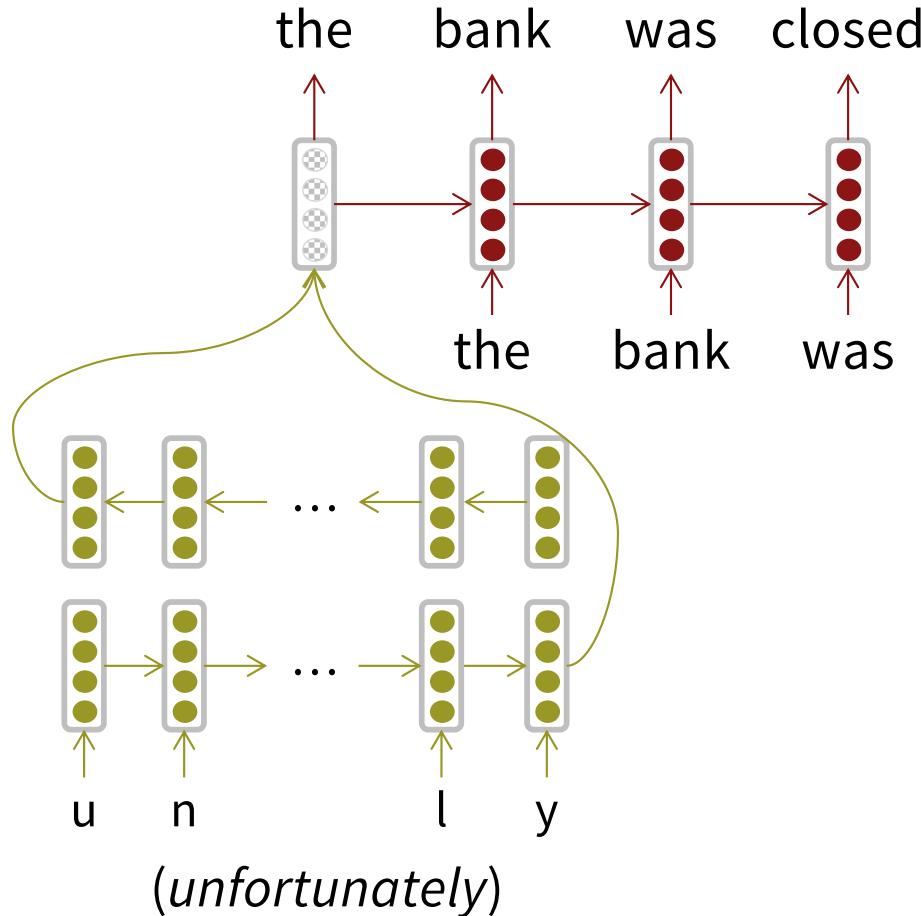

Recurrent Language Model

Bi-LSTM builds word representations

Used as LM and for POS tagging

Ling, Luís, Marujo, Astudillo, Amir, Dyer, Black, Trancoso. **Finding Function in Form: Compositional Character Models for Open Vocabulary Word Representation**. EMNLP'15.

Character-Aware Neural Language Models



Yoon Kim, Yacine Jernite, David Sontag, Alexander M. Rush. 2015

A more complex/sophisticated approach


Motivation

- Derive a powerful, robust language model effective across a variety of languages.
- Encode subword relatedness: *eventful*, *eventfully*, *uneventful*...
- Address rare-word problem of prior models.
- Obtain comparable expressivity with fewer parameters.

Technical Approach

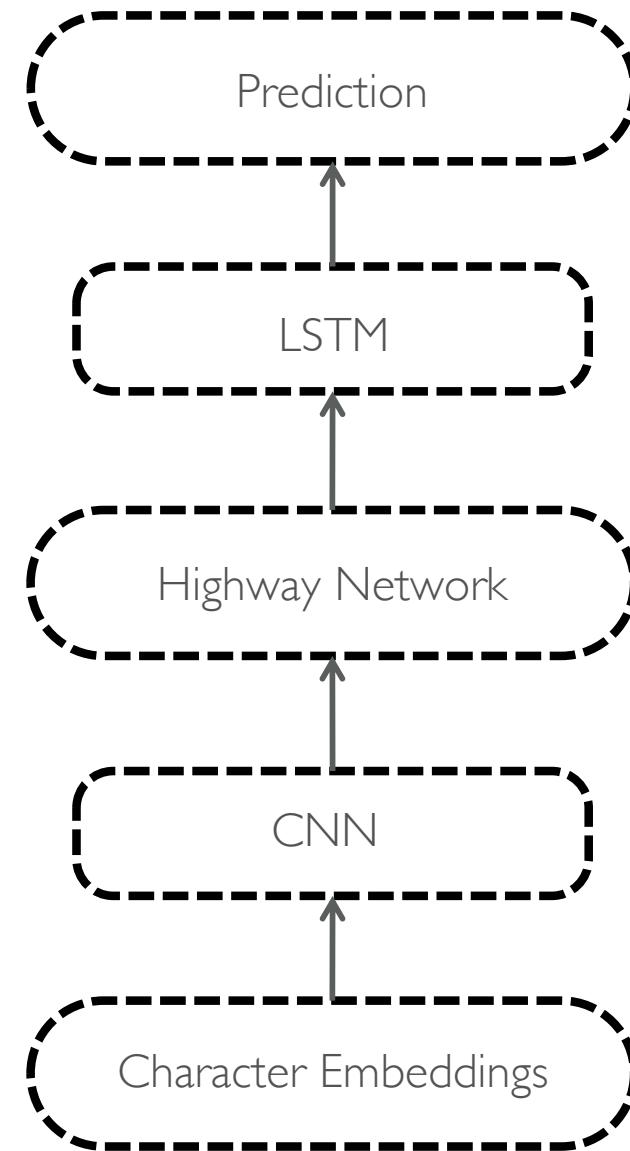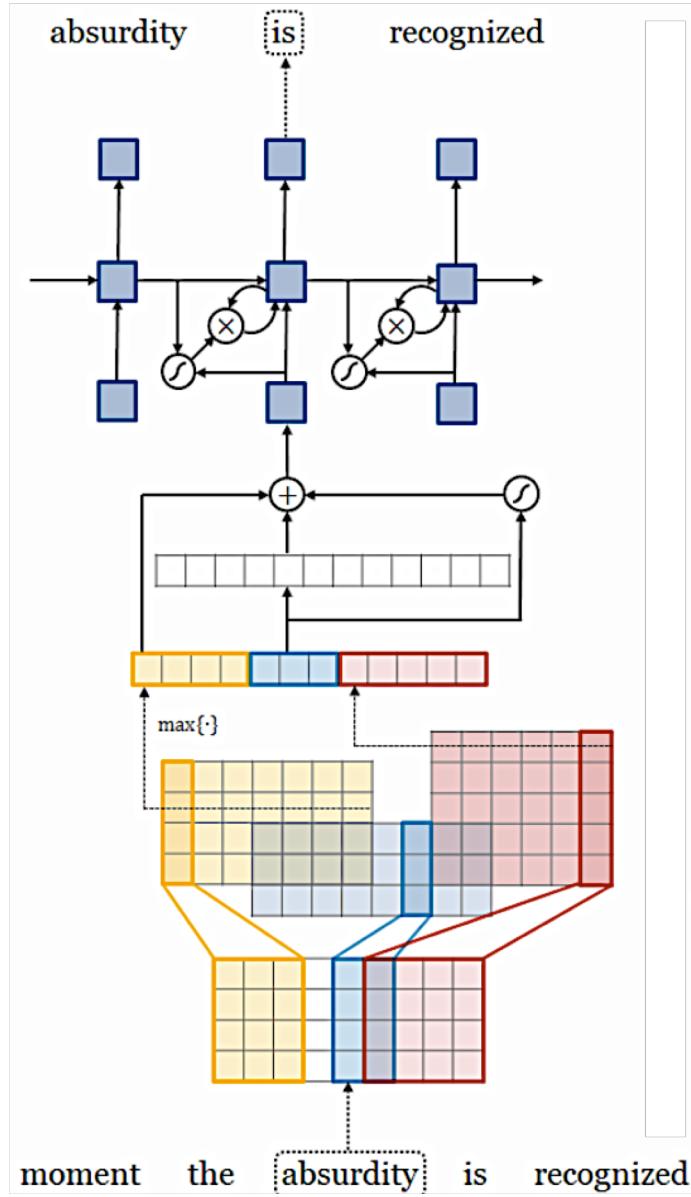

Convolutional Layer

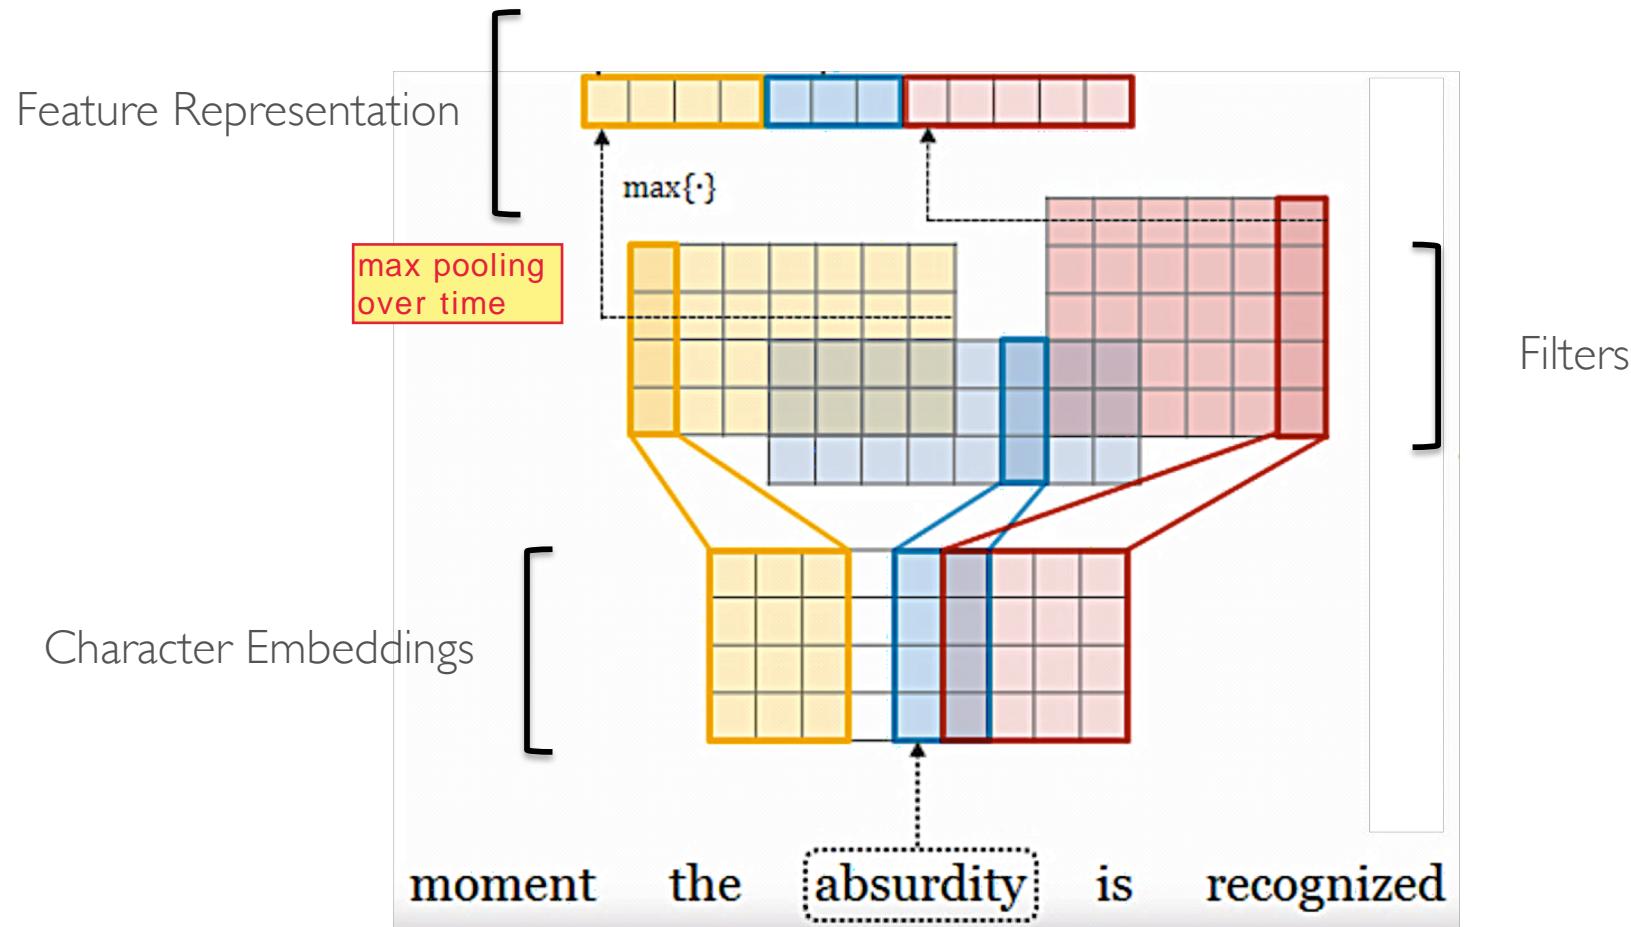

- Convolutions over character-level inputs.
- Max-over-time pooling (effectively n-gram selection).


Highway Network (Srivastava et al. 2015)

word - level


- Model n -gram interactions.
- Apply transformation while carrying over original information.
- Functions akin to an LSTM memory cell.

$$\mathbf{t} = \sigma(\mathbf{W}_T \mathbf{y} + \mathbf{b}_T)$$
$$\mathbf{z} = \mathbf{t} \odot g(\mathbf{W}_H \mathbf{y} + \mathbf{b}_H) + (1 - \mathbf{t}) \odot \mathbf{y}$$

↑ ↑ ↑
Transform Gate Input Carry Gate

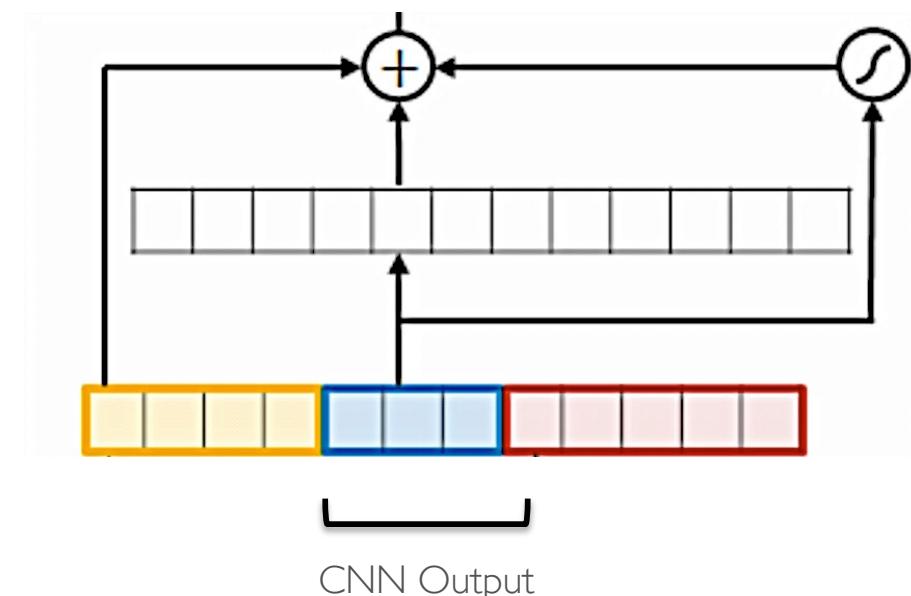

Long Short-Term Memory Network

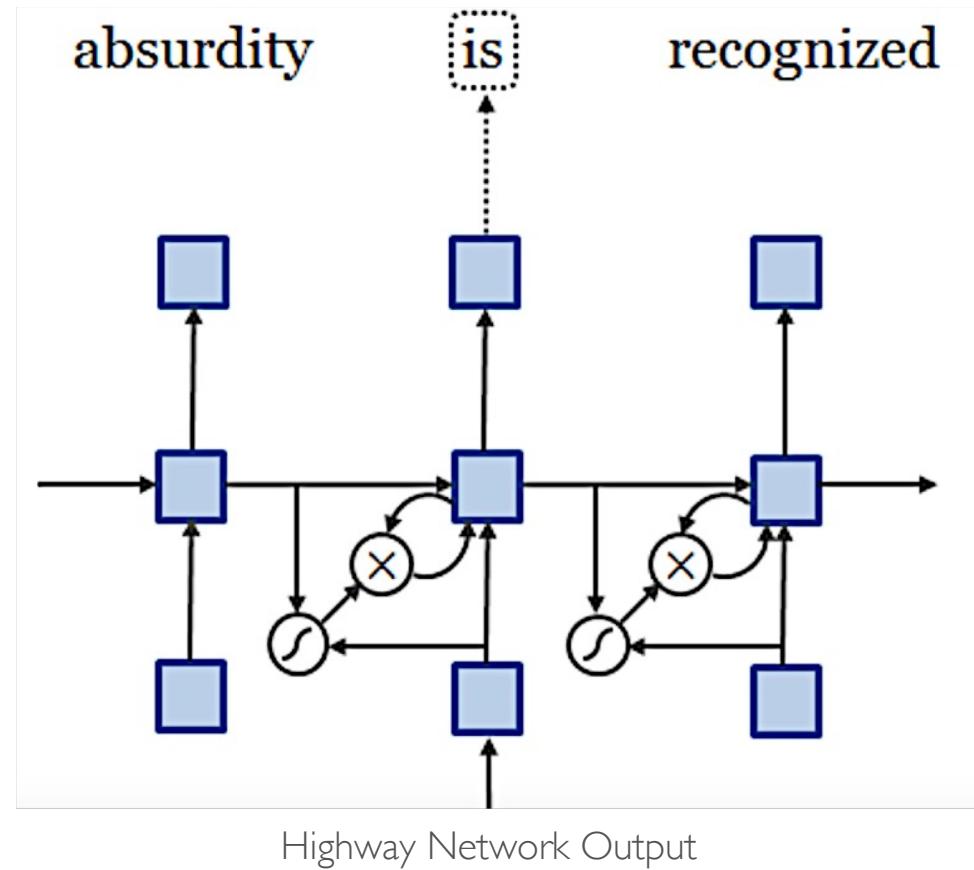

- Hierarchical Softmax to handle large output vocabulary.
- Trained with truncated backprop through time.

Quantitative Results

		DATA-S					
		CS	DE	ES	FR	RU	AR
Botha	KN-4	545	366	241	274	396	323
	MLBL	465	296	200	225	304	-
Small	Word	503	305	212	229	352	216
	Morph	414	278	197	216	290	230
	Char	401	260	182	189	278	196
Large	Word	493	286	200	222	357	172
	Morph	398	263	177	196	271	148
	Char	371	239	165	184	261	148

		DATA-L					
		CS	DE	ES	FR	RU	EN
Botha	KN-4	862	463	219	243	390	291
	MLBL	643	404	203	227	300	273
Small	Word	701	347	186	202	353	236
	Morph	615	331	189	209	331	233
	Char	578	305	169	190	313	216

Comparable performance
with fewer parameters!




	PPL	Size
LSTM-Word-Small	97.6	5 m
LSTM-Char-Small	92.3	5 m
LSTM-Word-Large	85.4	20 m
LSTM-Char-Large	78.9	19 m
KN-5 (Mikolov et al. 2012)	141.2	2 m
RNN [†] (Mikolov et al. 2012)	124.7	6 m
RNN-LDA [†] (Mikolov et al. 2012)	113.7	7 m
genCNN [†] (Wang et al. 2015)	116.4	8 m
FOFE-FNNLM [†] (Zhang et al. 2015)	108.0	6 m
Deep RNN (Pascanu et al. 2013)	107.5	6 m
Sum-Prod Net [†] (Cheng et al. 2014)	100.0	5 m
LSTM-1 [†] (Zaremba et al. 2014)	82.7	20 m
LSTM-2 [†] (Zaremba et al. 2014)	78.4	52 m

Qualitative Insights

	In Vocabulary					similar words.
	<i>while</i>	<i>his</i>	<i>you</i>	<i>richard</i>	<i>trading</i>	
LSTM-Word	<i>although</i>	<i>your</i>	<i>conservatives</i>	<i>jonathan</i>	<i>advertised</i>	
	<i>letting</i>	<i>her</i>	<i>we</i>	<i>robert</i>	<i>advertising</i>	
	<i>though</i>	<i>my</i>	<i>guys</i>	<i>neil</i>	<i>turnover</i>	
	<i>minute</i>	<i>their</i>	<i>i</i>	<i>nancy</i>	<i>turnover</i>	
LSTM-Char (before highway)	<i>chile</i>	<i>this</i>	<i>your</i>	<i>hard</i>	<i>heading</i>	
	<i>whole</i>	<i>hhs</i>	<i>young</i>	<i>rich</i>	<i>training</i>	
	<i>meanwhile</i>	<i>is</i>	<i>four</i>	<i>richer</i>	<i>reading</i>	
	<i>white</i>	<i>has</i>	<i>youth</i>	<i>richter</i>	<i>leading</i>	
LSTM-Char (after highway)	<i>meanwhile</i>	<i>hhs</i>	<i>we</i>	<i>eduard</i>	<i>trade</i>	
	<i>whole</i>	<i>this</i>	<i>your</i>	<i>gerard</i>	<i>training</i>	
	<i>though</i>	<i>their</i>	<i>doug</i>	<i>edward</i>	<i>traded</i>	
	<i>nevertheless</i>	<i>your</i>	<i>i</i>	<i>carl</i>	<i>trader</i>	

highway
word - level


Qualitative Insights

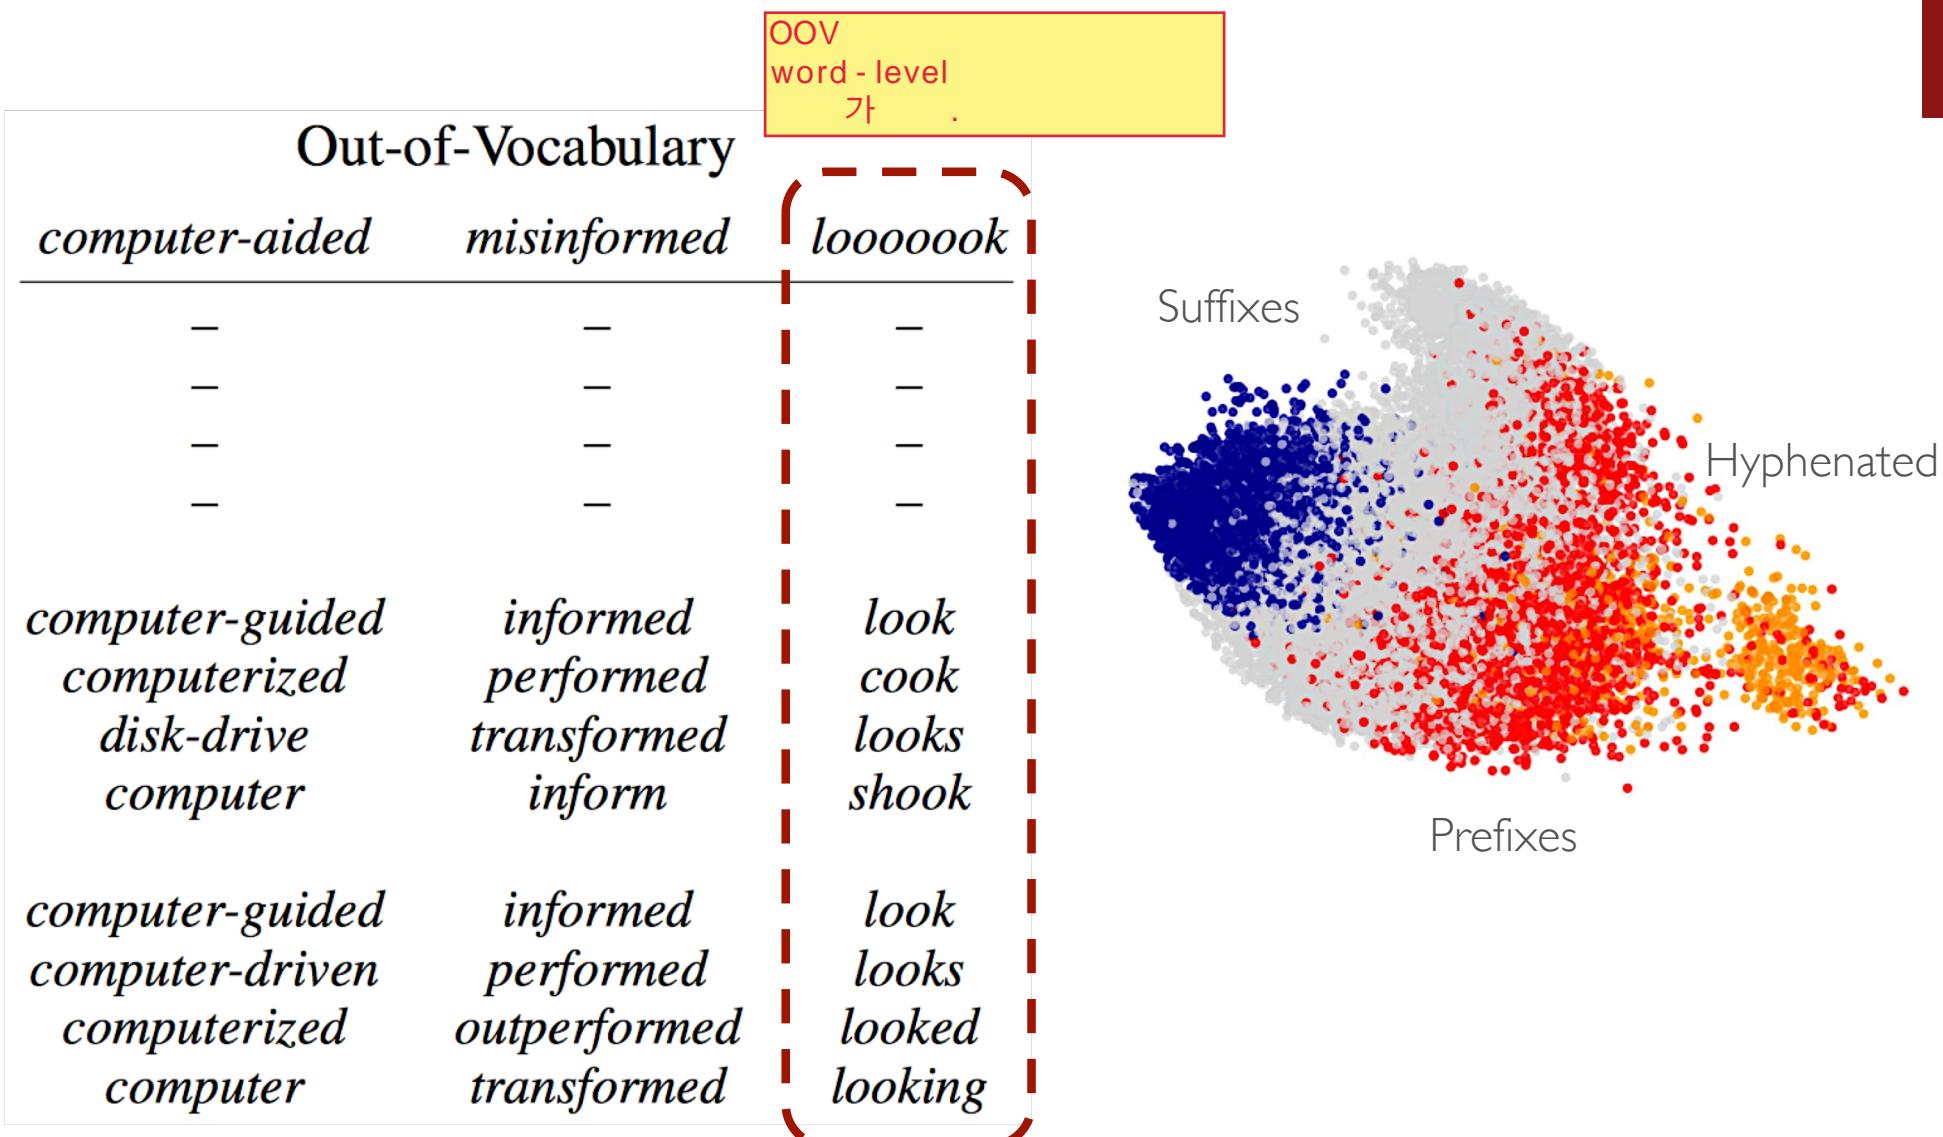

Take-aways

- Paper questioned the necessity of using word embeddings as inputs for neural language modeling.
- CNNs + Highway Network over characters can extract rich semantic and structural information.
- Key thinking: you can compose “building blocks” to obtain nuanced and powerful models!

Hybrid NMT





- A *best-of-both-worlds* architecture:
 - Translate mostly at the **word** level
 - Only go to the **character** level when needed
 - rare word unseen word
character - level .
- More than **2 BLEU** improvement over a copy mechanism to try to fill in rare words

Thang Luong and Chris Manning. Achieving Open Vocabulary Neural Machine Translation with Hybrid Word-Character Models. ACL 2016.

Hybrid NMT

OOV representation character.
<unk>가 , hidden layer
vector 가 character LSTM
char seq .


Word-level
(4 layers)

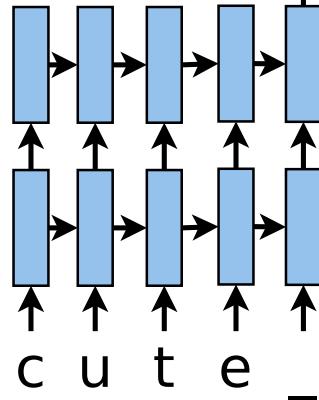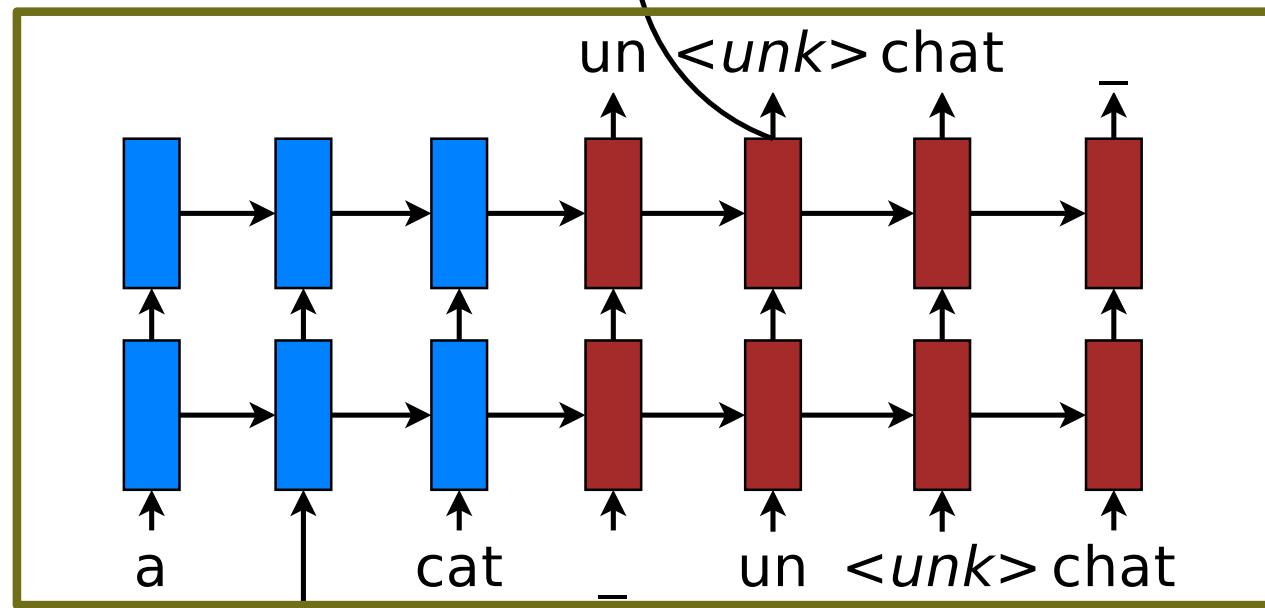

End-to-end training
8-stacking LSTM layers.


2-stage Decoding

- Word-level beam search

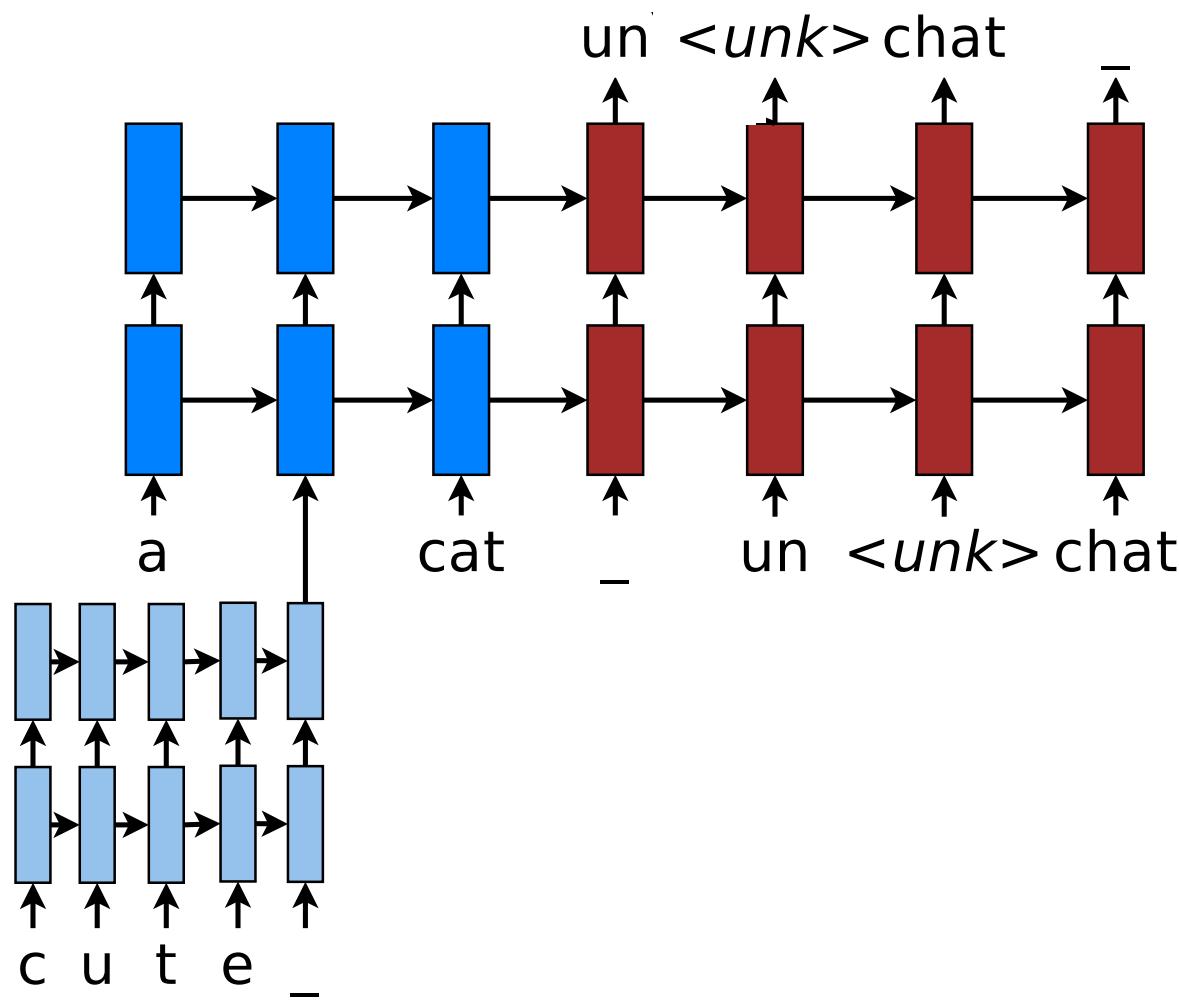

2-stage Decoding

- Word-level beam search
- Char-level beam search for $\langle unk \rangle$

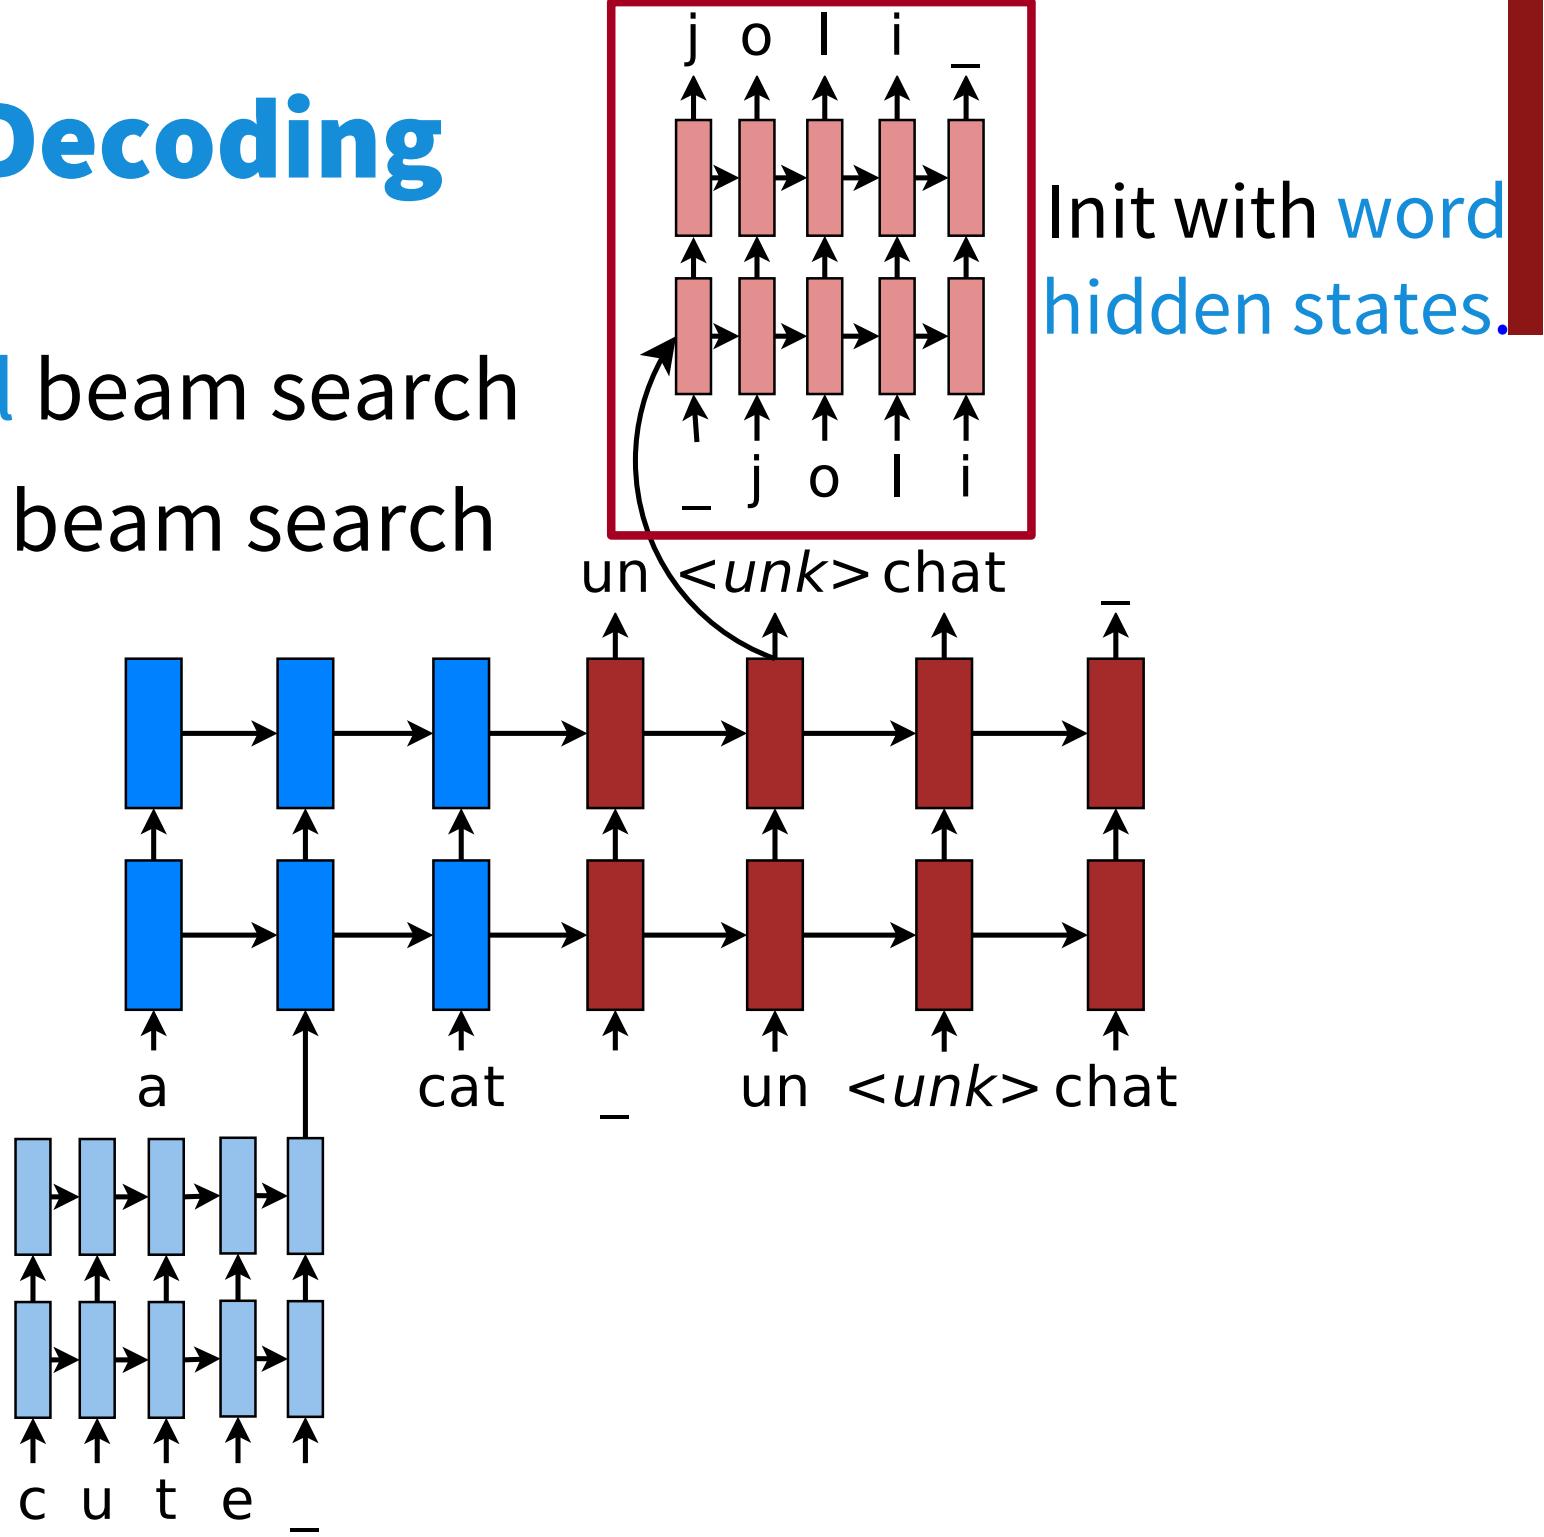

English-Czech Results

- Train on WMT'15 data (12M sentence pairs)
 - newstest2015

Systems	BLEU
Winning WMT'15 (Bojar & Tamchyna, 2015)	18.8
Word-level NMT (Jean et al., 2015)	18.3

30x data
3 systems

Large vocab
+ copy mechanism

English-Czech Results

- Train on WMT'15 data (12M sentence pairs)
 - newstest2015

Systems	BLEU
Winning WMT'15 (Bojar & Tamchyna, 2015)	18.8
Word-level NMT (Jean et al., 2015)	18.3
Hybrid NMT (Luong & Manning, 2016)*	20.7

30x data
3 systems

Large vocab
+ copy mechanism



But cf. Cherry et al. 2018: ~26 BLEU

Sample English-Czech translations

source	The author <i>Stephen Jay Gould</i> died 20 years after <i>diagnosis</i> .
human	Autor Stephen Jay Gould zemřel 20 let po diagnóze .
char	Autor Stepher Stepher zemřel 20 let po diagnóze .
word	Autor Stephen Jay <unk> zemřel 20 let po <unk> .
hybrid	Autor Stephen Jay Gould zemřel 20 let po po .
	Autor Stephen Jay <unk> zemřel 20 let po <unk> .
	Autor Stephen Jay Gould zemřel 20 let po diagnóze .



Sample English-Czech translations

source	The author <i>Stephen Jay Gould</i> died 20 years after <i>diagnosis</i> .
human	Autor Stephen Jay Gould zemřel 20 let po diagnóze .
char	Autor Stepher Stephe zemřel 20 let po diagnóze .
word	Autor Stephen Jay <unk> zemřel 20 let po <unk> .
	Autor Stephen Jay Gould zemřel 20 let po po .
hybrid	Autor Stephen Jay <unk> zemřel 20 let po <unk> .
	Autor Stephen Jay Gould zemřel 20 let po diagnóze .

- *Char*-based: wrong name translation

Sample English-Czech translations

source	The author Stephen Jay Gould died 20 years after diagnosis .
human	Autor Stephen Jay Gould zemřel 20 let po diagnóze .
char	Autor Stepher Stepher zemřel 20 let po diagnóze .
word	Autor Stephen Jay <unk> zemřel 20 let po <unk>. Autor Stephen Jay Gould zemřel 20 let po po .
hybrid	Autor Stephen Jay <unk> zemřel 20 let po <unk>. Autor Stephen Jay Gould zemřel 20 let po diagnóze .

- *Word*-based: incorrect alignment

Sample English-Czech translations

source	The author <i>Stephen Jay Gould</i> died 20 years after <i>diagnosis</i> .
human	Autor Stephen Jay Gould zemřel 20 let po diagnóze .
char	Autor Stepher Stepher zemřel 20 let po diagnóze .
word	Autor Stephen Jay <unk> zemřel 20 let po <unk>.
	Autor Stephen Jay Gould zemřel 20 let po po .
hybrid	Autor Stephen Jay <unk> zemřel 20 let po <unk>.
	Autor Stephen Jay Gould zemřel 20 let po diagnóze .

- *Char*-based & hybrid: correct translation of **diagnóze**

Sample English-Czech translation

source	Her 11-year-old daughter , Shani Bart , said it felt a little bit weird
human	Její jedenáctiletá dcera Shani Bartová prozradila , že je to trochu zvláštní
word	Její <unk> dcera <unk> <unk> řekla , že je to trochu divné
	Její 11-year-old dcera Shani , řekla , že je to trochu divné
hybrid	Její <unk> dcera , <unk> <unk> , řekla , že je to <unk> <unk>
	Její jedenáctiletá dcera , Graham Bart , řekla , že cítí trochu divný

- Word-based: identity copy fails

char - level
, Graham Bart가 Shani
Bartova' ..
Hybrid가 char - level

char - level char - seq
context
hybrid word char repr가 ..

Sample English-Czech translation


source	Her 11-year-old daughter , Shani Bart , said it felt a little bit weird
human	Její jedenáctiletá dcera Shani Bartová prozradila , že je to trochu zvláštní
word	Její <unk> dcera <unk> <unk> řekla , že je to trochu divné
	Její 11-year-old dcera Shani , řekla , že je to trochu divné
hybrid	Její <unk> dcera , <unk> <unk> , řekla , že je to <unk> <unk>
	Její jedenáctiletá dcera , Graham Bart , řekla , že cítí trochu divný

- Hybrid: correct, **11-year-old** – **jedenáctiletá**
- Wrong: **Shani Bartová**

5. Char for word embeddings

A Joint Model for Word Embedding and Word Morphology
(Cao and Rei 2016)

- Same objective as w2v, but using characters
- Bi-directional LSTM to compute embedding
- Model attempts to capture morphology
- Model can infer roots of words

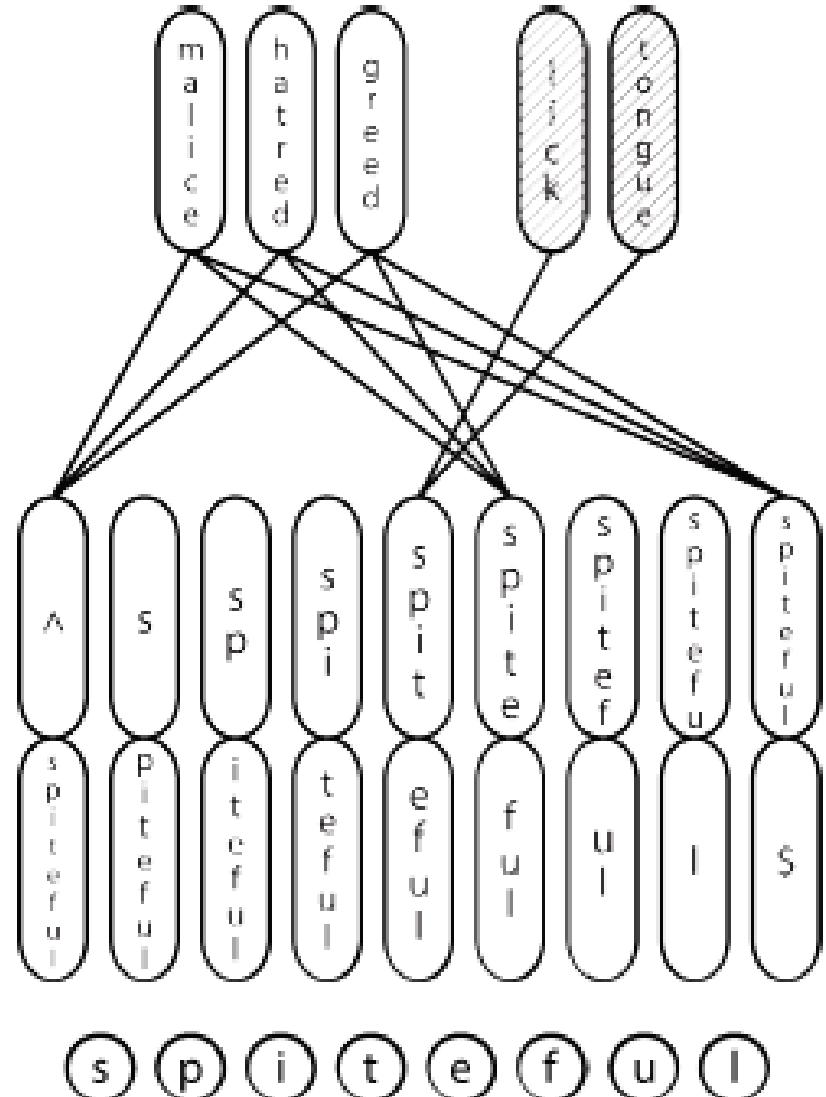

FastText embeddings

Enriching Word Vectors with Subword Information

Bojanowski, Grave, Joulin and Mikolov. FAIR. 2016.

<https://arxiv.org/pdf/1607.04606.pdf> • <https://fasttext.cc>

- Aim: a next generation efficient word2vec-like word representation library, but better for rare words and languages with lots of morphology
- An extension of the w2v skip-gram model with character n -grams

FastText embeddings

- Represent word as char n -grams augmented with boundary symbols and as whole word:
- $\text{where} = \langle wh, whe, her, ere, re \rangle, \langle where \rangle$
 - Note that $\langle her \rangle$ or $\langle her \rangle$ is different from her
 - Prefix, suffixes and whole words are special
- Represent word as sum of these representations.
Word in context score is:
 - $s(w, c) = \sum_{g \in G(w)} \mathbf{z}_g^T \mathbf{v}_c$
 - Detail: rather than sharing representation for all n -grams, use “hashing trick” to have fixed number of vectors

FastText embeddings

Word similarity
dataset scores
(correlations)

		sg	cbow	sisg-	sisg
AR	WS353	51	52	54	55
	GUR350	61	62	64	70
	GUR65	78	78	81	81
DE	ZG222	35	38	41	44
	RW	43	43	46	47
	WS353	72	73	71	71
EN	WS353	57	58	58	59
	RG65	70	69	75	75
Es	WS353	48	52	51	54
	HJ	59	60	60	66
RU					

FastText embeddings

- Differential gains on rare words

	DE		EN		Es	Fr
	GUR350	ZG222	WS353	RW	WS353	RG65
Luong et al. (2013)	-	-	64	34	-	-
Qiu et al. (2014)	-	-	65	33	-	-
Soricut and Och (2015)	64	22	71	42	47	67
sisg	73	43	73	48	54	69
Botha and Blunsom (2014)	56	25	39	30	28	45
sisg	66	34	54	41	49	52