

Layout

◆ Layout

- ◆ `@RenderBody()`
- ◆ `@RenderSection()`
- ◆ `@ViewBag.Property`


◆ Bundles

◆ PartialView

- ◆ `@Html.Action()`
- ◆ `@Html.Partial()`


◆ International web app

◆ Areas

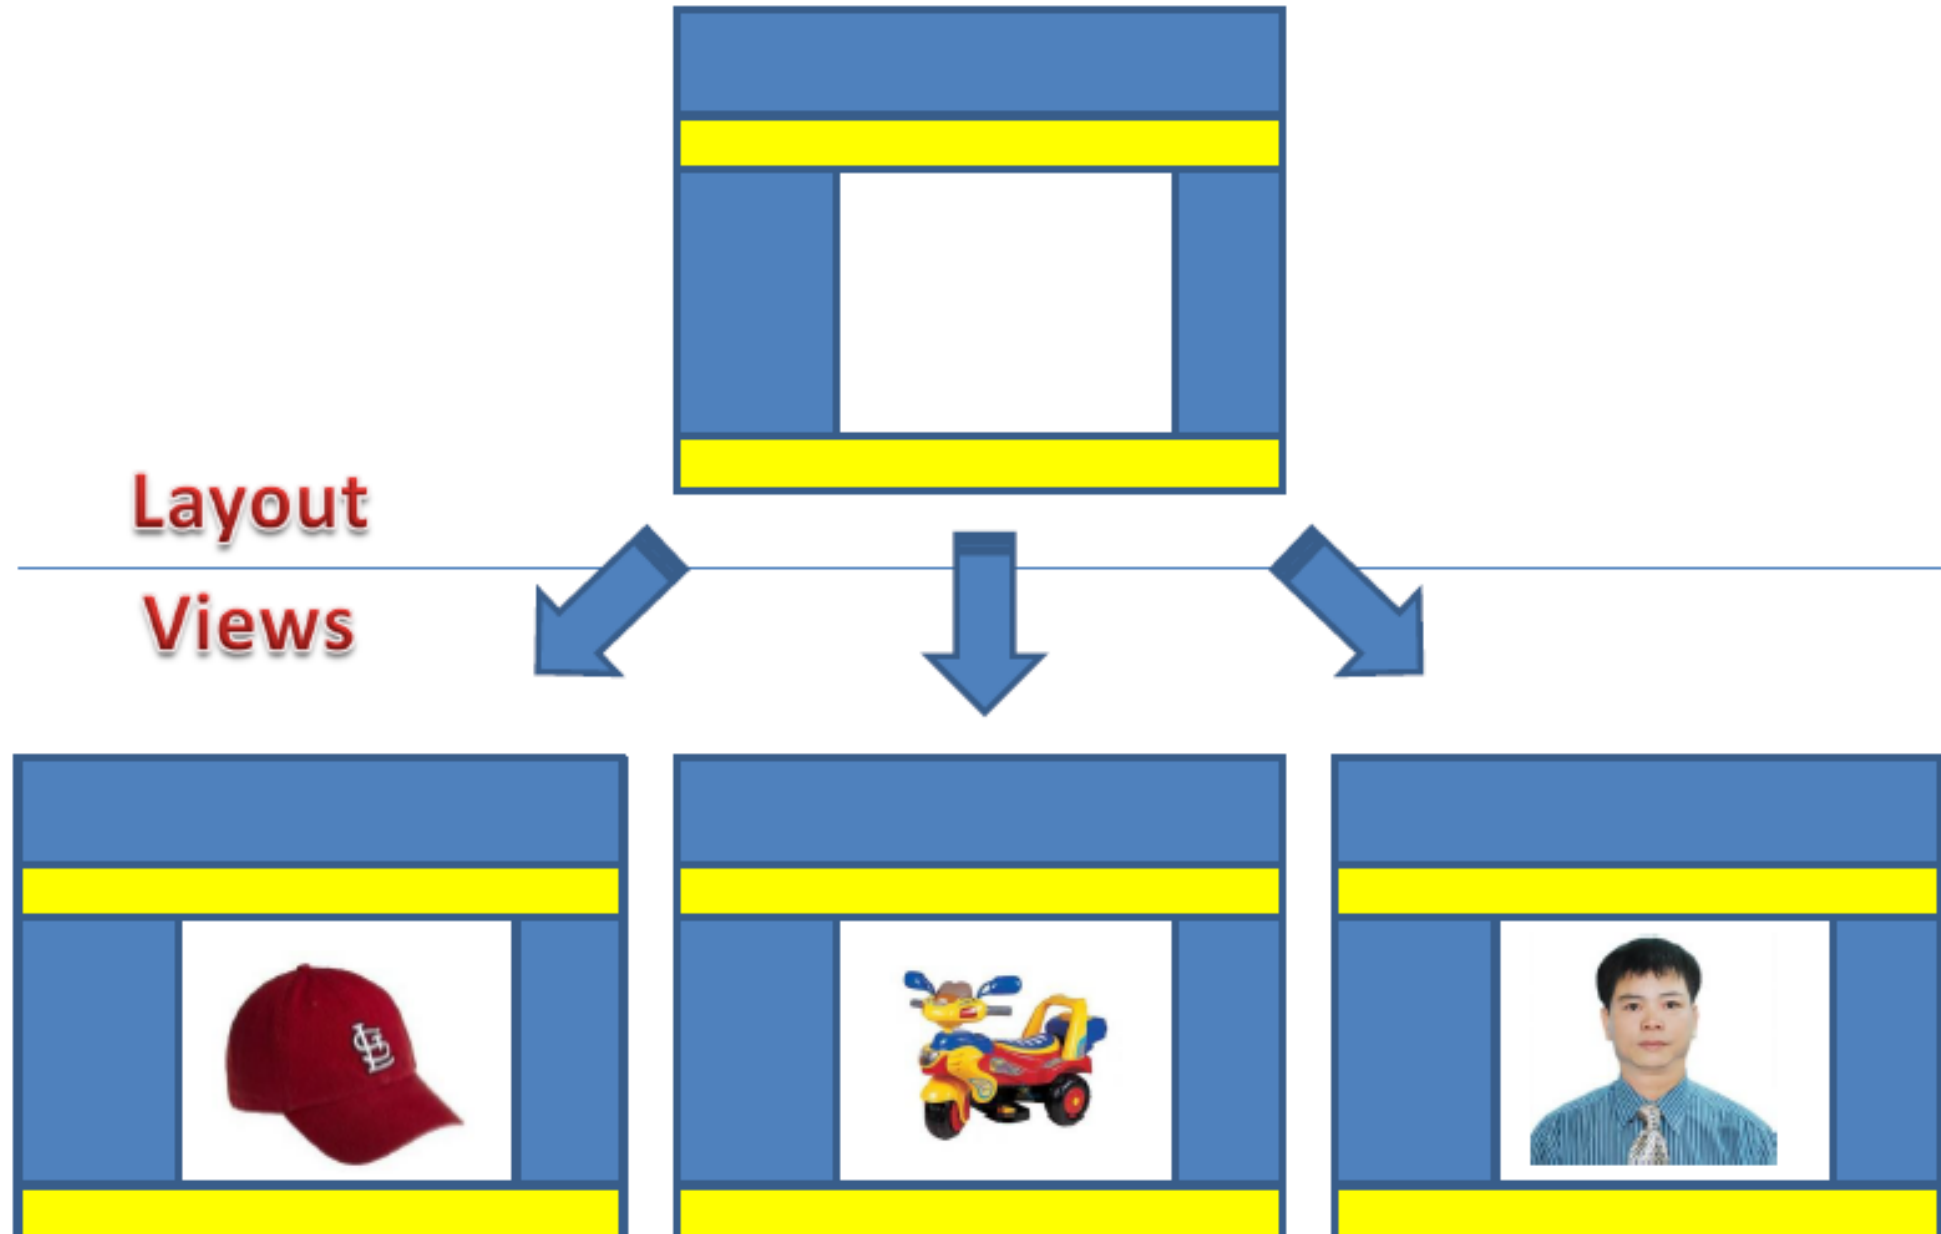

◆ Layout

- ◆ `@RenderBody()`
- ◆ `@RenderSection()`

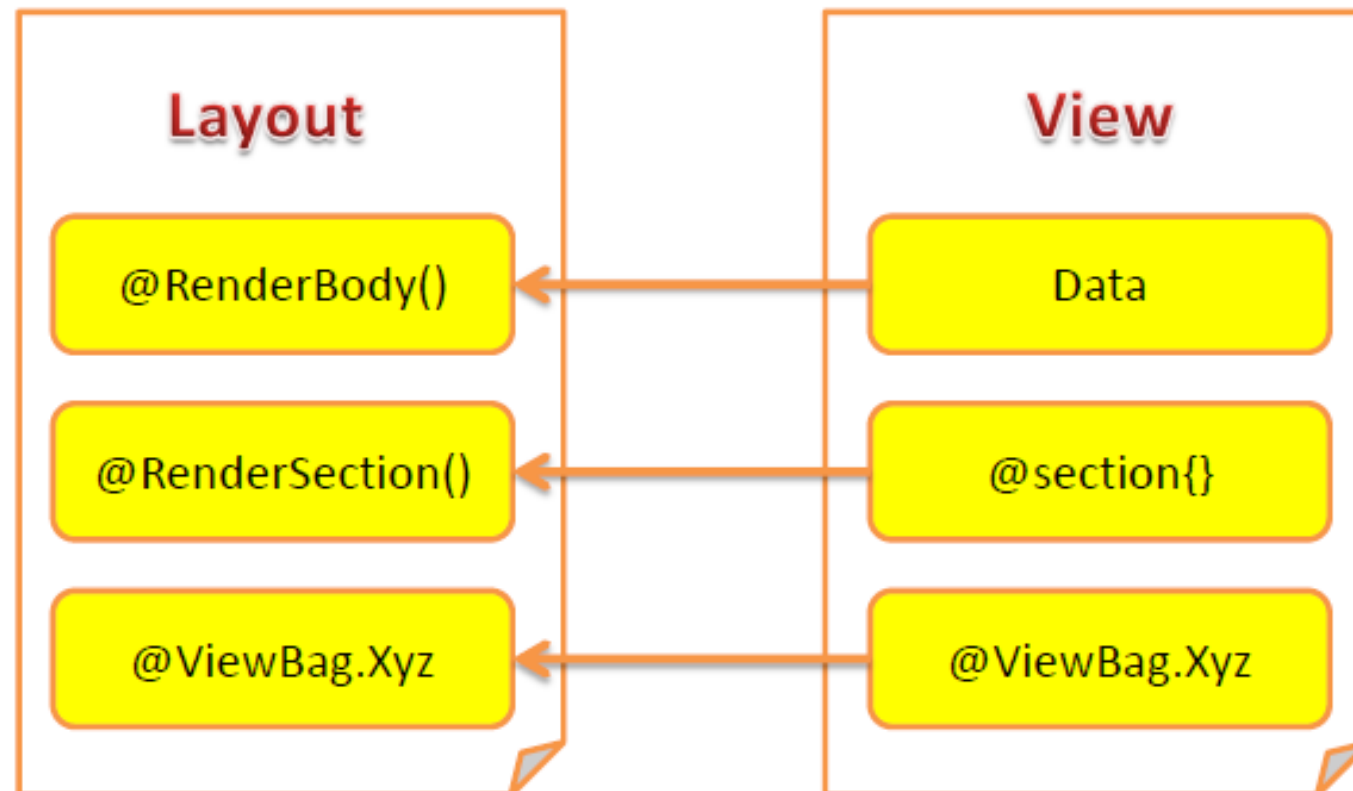

@RenderBody()

Layout (_layout.cshtml)

```
<html>  
<head>  
...
```

@RenderBody()

```
</body>  
</html>
```

View (Index.cshtml)

```
<p>  
Info from Index view  
</p>
```



@RenderSection()

Layout (_layout.cshtml)

```
<html>  
<head></head>  
<body>
```

```
@RenderSection("fred")
```

```
@RenderSection("bob")
```

```
</body>  
</html>
```

View (Index.cshtml)

@section fred

```
{  
<p>I am Fred</p>  
}
```

@section bob

```
{  
<p>I am Bob</p>  
}
```



Layout

_MyLayout.cshtml

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8" />
    <title>@ViewBag.Title</title>
    @RenderSection("scripts", required: false)
  </head>
  <body>
    <h2>ASP.NET MVC4</h2>
    <hr />
    @RenderBody()
  </body>
</html>
```

_ViewStart.cshtml

```
@{
    Layout = "~/Views/Shared/_MyLayout.cshtml";
}
```

MyView.cshtml


```
@{
    ViewBag.Title = "Tiêu đề trang";
}

<h2>Trang chủ</h2>

@section scripts{
    <script>
        alert("Welcome to MVC4");
    </script>
}
```

Database model

- ◆ `_ViewStart.cshtml`
 - ◆ `Layout= "~/Views/Shared/_Layout.cshtml"`
- ◆ Apply layout for View

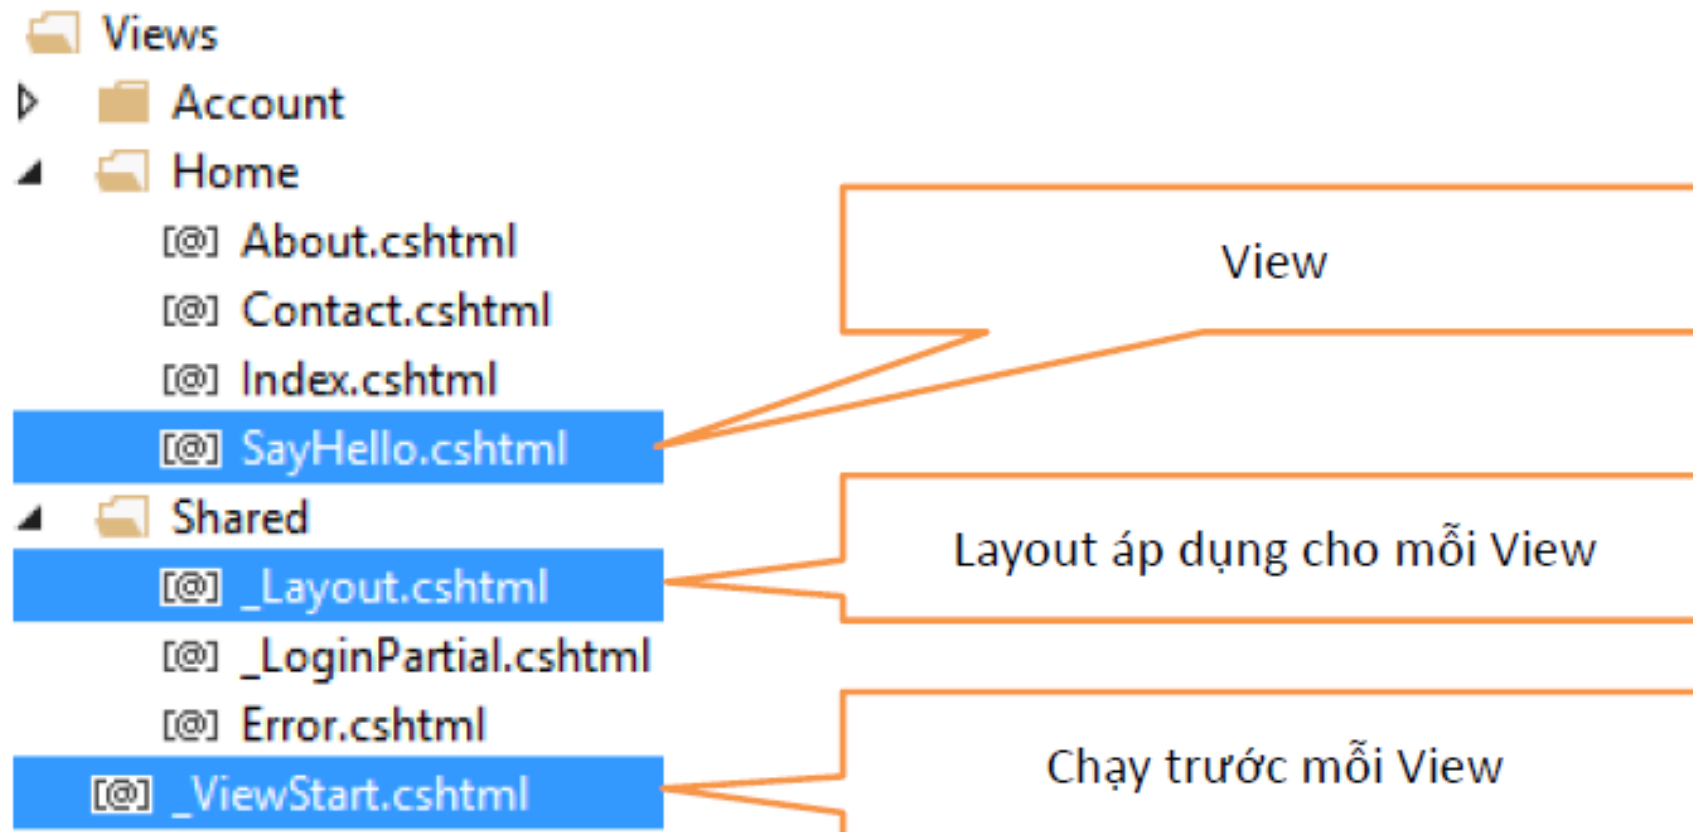

Resource Bundle

BundleConfig.cs

```
bundles.Add(new ScriptBundle("~/bundles/jquery").Include(
    "~/Scripts/jquery-{version}.js"));
```

```
bundles.Add(new ScriptBundle("~/bundles/jqueryval").Include(
    "~/Scripts/jquery.validate*"));
```

```
bundles.Add(new ScriptBundle("~/bundles/modernizr").Include(
    "~/Scripts/modernizr-*"));
```

```
bundles.Add(new ScriptBundle("~/bundles/bootstrap").Include(
    "~/Scripts/bootstrap.js",
    "~/Scripts/respond.js"));
```

```
bundles.Add(new StyleBundle("~/Content/css").Include(
    "~/Content/bootstrap.css",
    "~/Content/site.css"));
```

Layout/view

```
@Styles.Render("~/Content/css")
@Scripts.Render("~/bundles/modernizr")
```

Partial View

NHÓM THEO NHÀ CUNG CẤP

<< < 1 > >>

Aniseed Syrup

Grandma's Boysenberry Spread

Sir Rodney's Scones

Gumbar Gummlibarchen

Filo Mix

Hàng hóa đã xem

Các module giao diện (PartialView)

☐ 1 mặt hàng
☐ 5.0 VNĐ
[Xem giỏ hàng](#)

TÌM KIẾM

Tim kiem

CHUNG LOẠI

- + Đồng hồ đeo tay
- + Máy tính xách tay
- + Máy ảnh
- + Điện thoại
- + Nước hoa
- + Nữ trang
- + Nón thời trang
- + Túi xách du lịch
- + Xe mô tô
- + Quạt cây

HÀNG BÁN CHẠY

Hàng hóa đã xem

PartialView Helper

- ◆ @Html.Action()
- ◆ @Html.Partial()

PartialView Helper

_Layout.cshtml

❑ @Html.Partial("_LoginPartial")



```
_LoginPartial.cshtml  + X
@if (Request.IsAuthenticated) {
    <text>
        Hello, @Html.ActionLink(User.Identity.Name,
        @using (Html.BeginForm("LogOff", "Account",
        @Html.AntiForgeryToken()
        <a href="javascript:document.getElementB
    }
</text>
} else {
    <ul>
        <li>@Html.ActionLink("Register", "Register",
        <li>@Html.ActionLink("Log in", "Login", "Acc
    </ul>
}
```

@Html.Action()

```
<!--vmenu::chúng loại-->  
@Html.Action("Category","Layout")  
<!--/vmenu::chúng loại-->
```

```
LayoutController.cs  X  
eStoreMVC4245.Controllers.LayoutController  db  
[ChildActionOnly]  
public ActionResult Category()  
{  
    return PartialView("_Category", db.Categories);  
}
```

```
_Category.cshtml  X  
@model IEnumerable<Category>  
  
<ul class="art-vmenu">  
    @foreach (var p in Model){  
        <li>  
            <a href="/Product/Search?CategoryId=@p.Id">  
                @p.Name</a>  
        </li>  
    }  
</ul>
```

Practice

The screenshot shows a web browser window with the title "About - My ASP.NET Appl" and the address bar displaying "localhost:49364/Home/About". The page has a dark navigation bar with links: "Application name", "Home", "About", "Contact", "Register", and "Log in". The main content area is titled "About." and contains the text "Your application description page." and "Use this area to provide additional information.".

Two yellow callout boxes with black text are overlaid on the page:

- The first callout box, pointing to the cart information widget, contains the text: `@Html.Partial("_CartInfo")`
- The second callout box, pointing to the categories list, contains the text: `@Html.Action("Category")`

The cart information widget shows a shopping cart icon, "100 items", and "\$ 56.8". The categories list is titled "Categories" and contains the following items:


- Mobiles
- Laptops
- TVs
- Fans
- Others

```
<div class="container body-content">
    <article class="col-md-9">@RenderBody()</article>
    <aside class="col-md-3">
        <br />
        @Html.Partial("_CartInfo")
        @Html.Action("Category", "Home")
    </aside>


    <hr />
    <footer>
        <p>&copy; @DateTime.Now.Year - My ASP.NET Application</p>
    </footer>
</div>
```

```
@Scripts.Render("~/bundles/jquery")
@Scripts.Render("~/bundles/bootstrap")
@RenderSection("scripts", required: false)
```

International web app

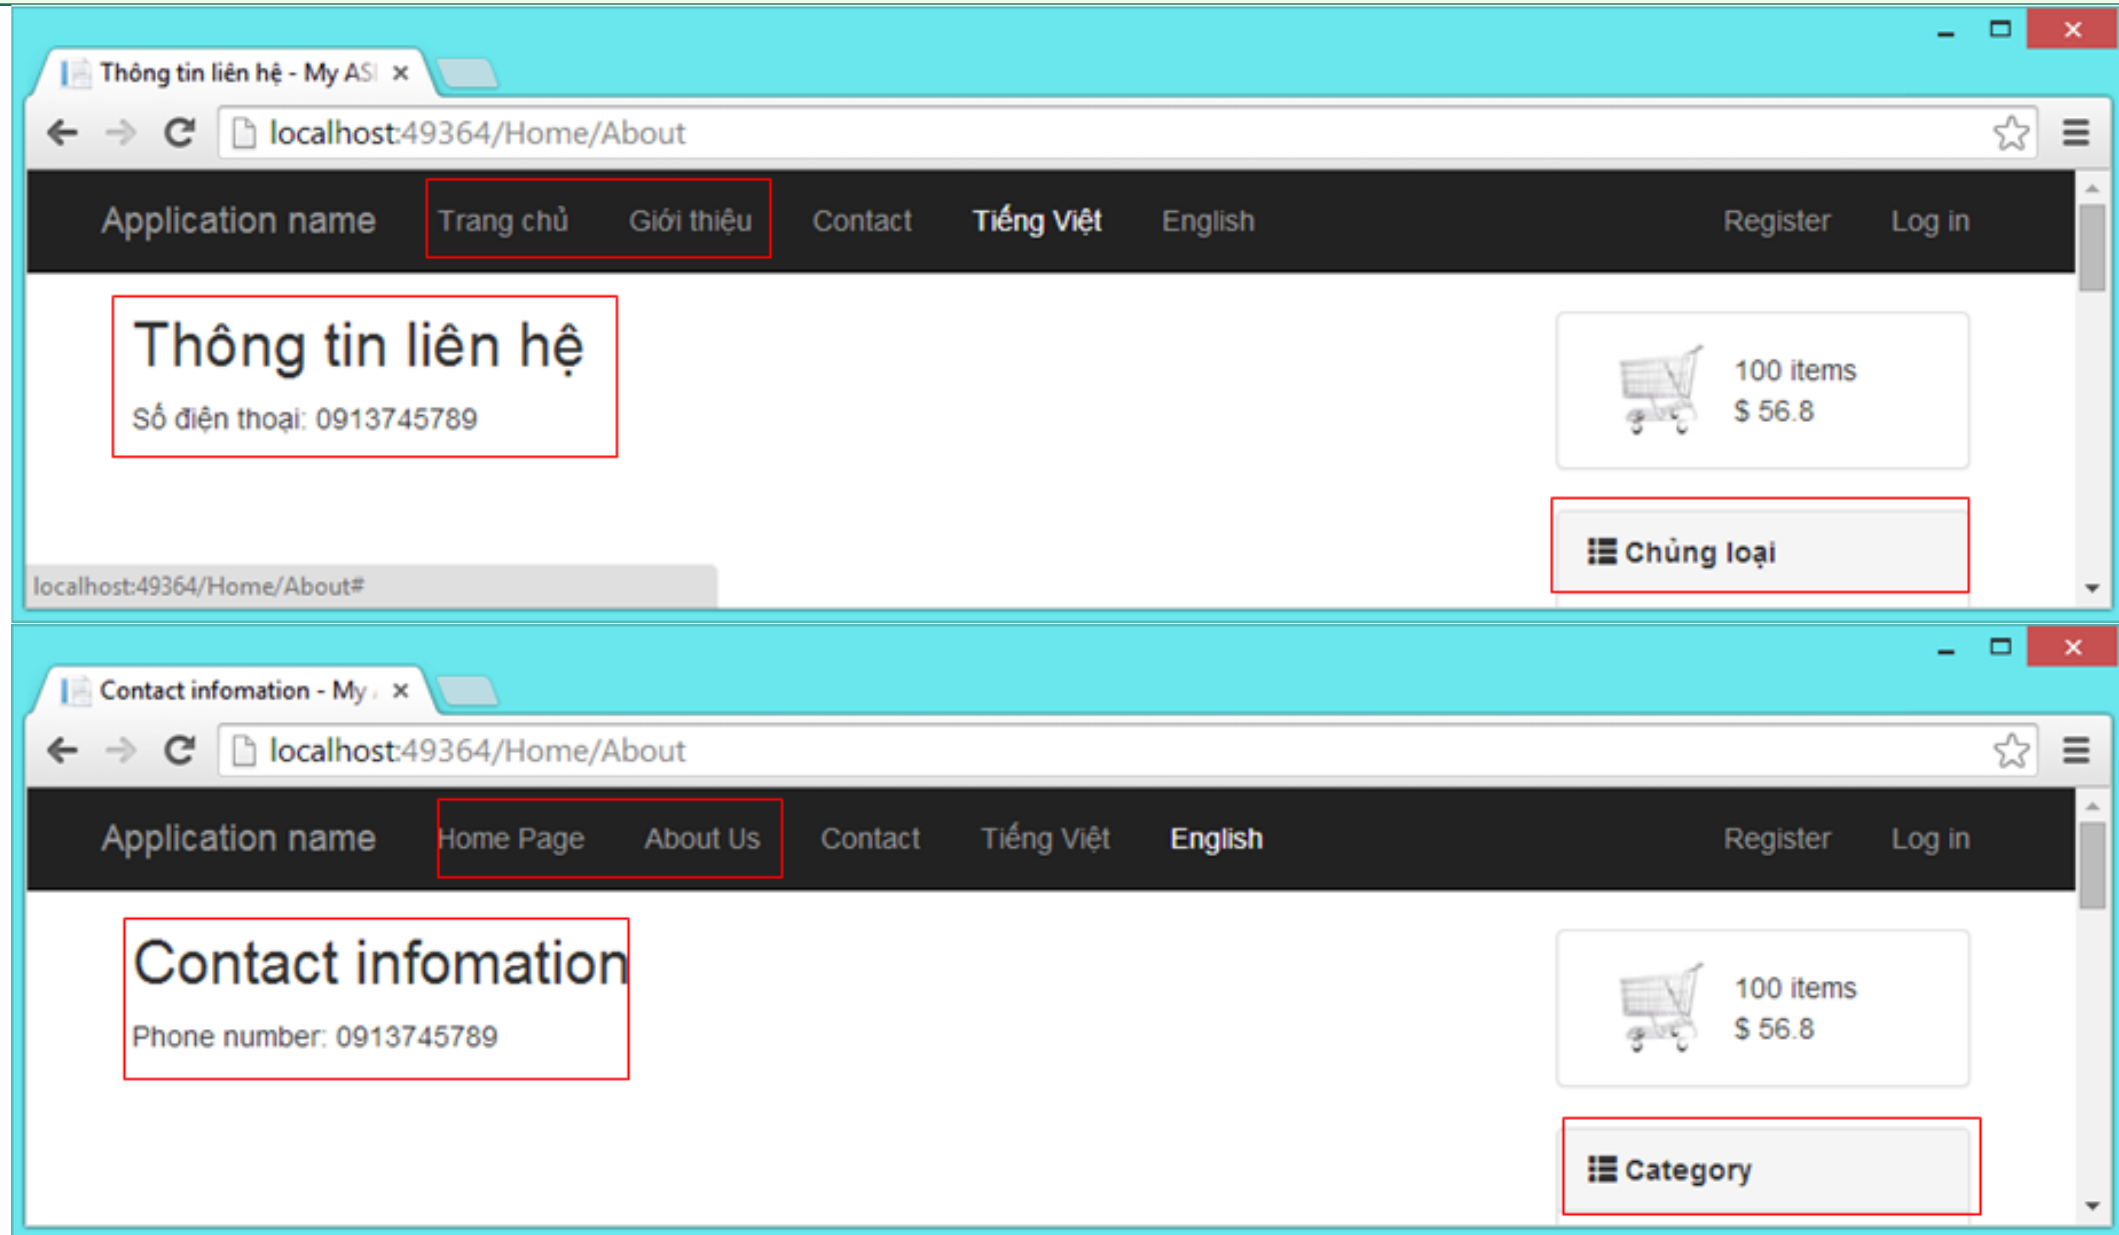

Resource management

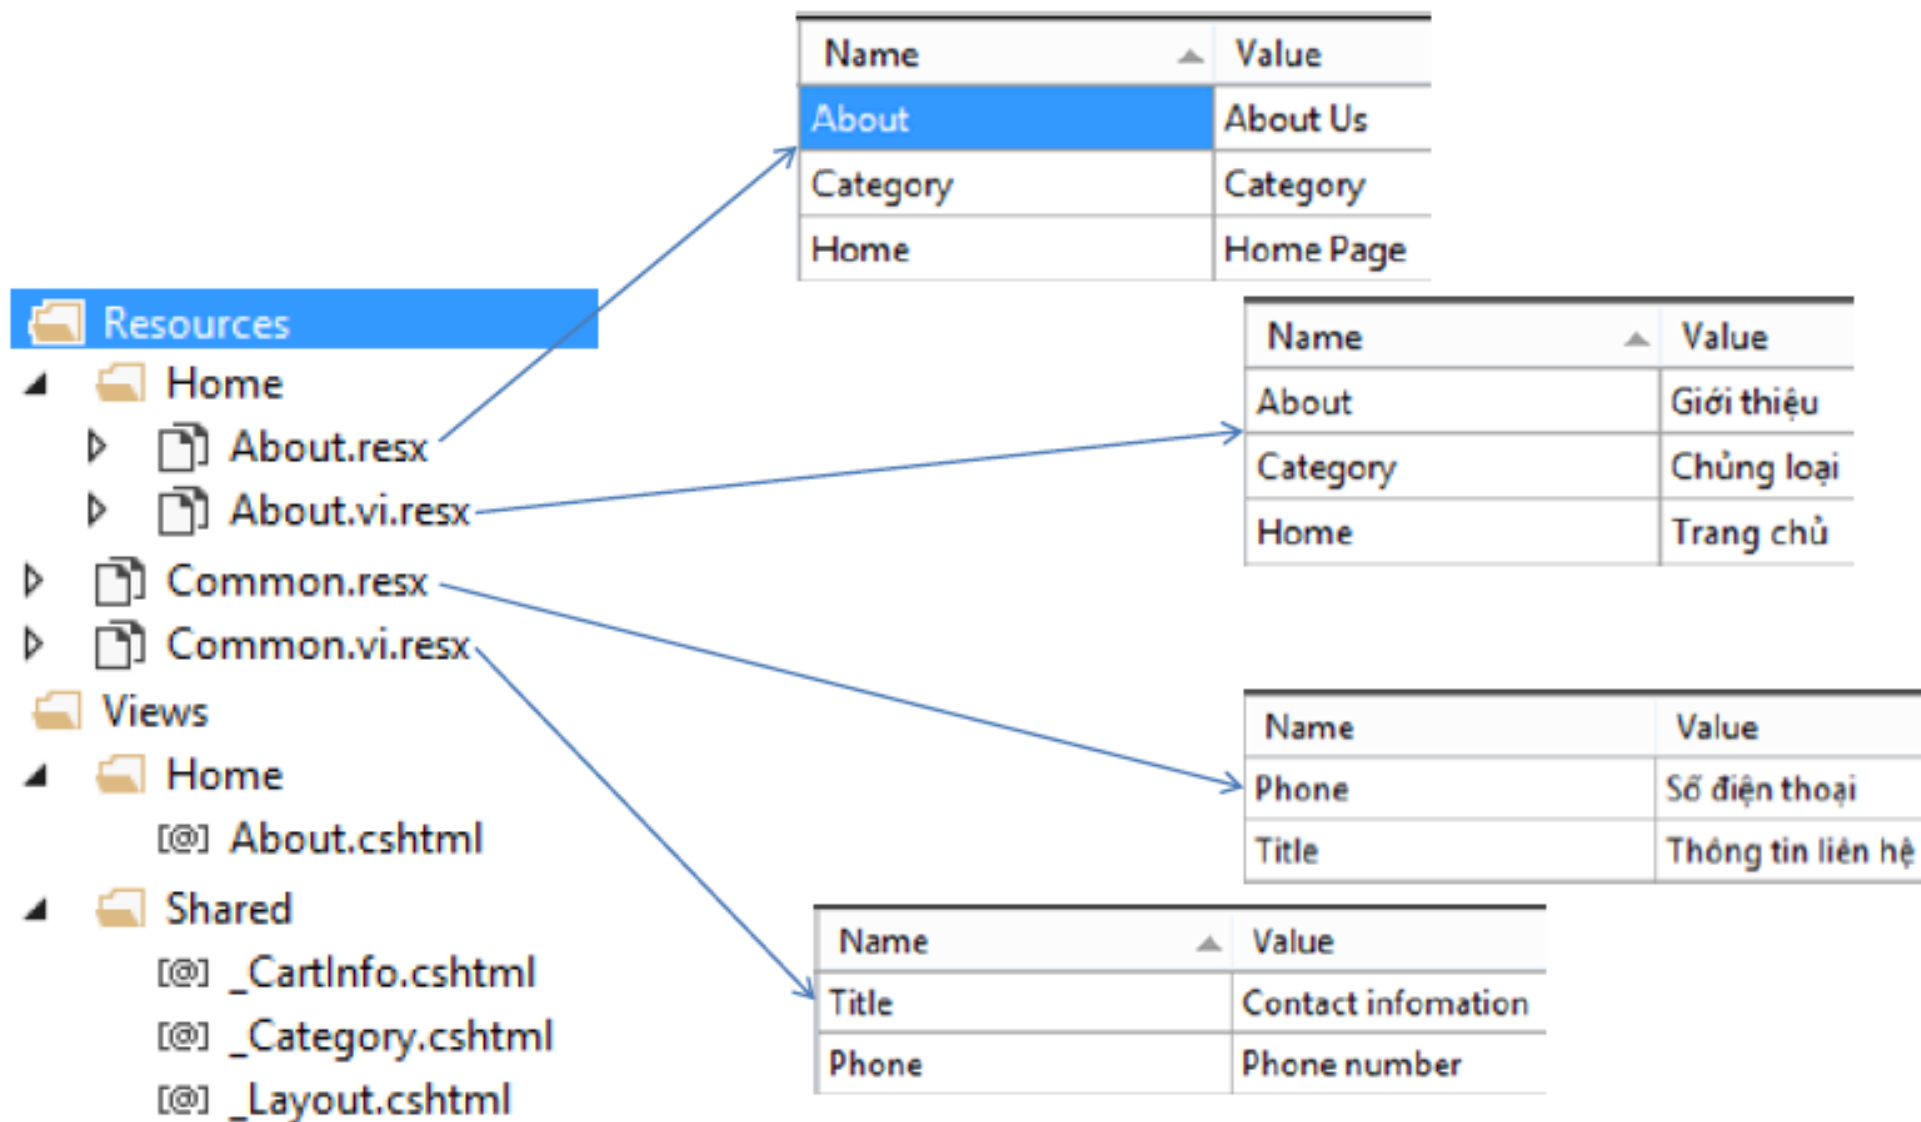

Resource management

```
@using Mvc5Auth.Resources
```

```
...
```

```
<ul class="nav navbar-nav">
```

```
    <li>@Html.ActionLink(Common.Home, "Index", "Home")</li>
```

```
    <li>@Html.ActionLink(Common.About, "About", "Home")</li>
```

```
</ul>
```

```
...
```

```
@using Mvc5Auth.Resources.Home
```

```
@{
```

```
    ViewBag.Title = About.Title;
```

```
}
```

```
<h2>@About.Title</h2>
```

```
@About.Phone: 0913745789
```

```
<li><a href="#" data-lang="vi">Tiếng Việt</a></li>
<li><a href="#" data-lang="en">English</a></li>
<script>
    $(function () {
        $("a[data-lang]").click(function () {
            var expiry = new Date();
            expiry.setDate(expiry.getDate() + 30);
            document.cookie = "lang=" + $(this).attr("data-lang")
                + "; expires=" + expiry.toGMTString() + "; path=/";
            location.reload();
            return false;
        });
    })
</script>
```

```
protected void Application_BeginRequest()
{
    var lang = "vi";

    // Có ngôn ngữ trong cookie ?
    if(Request.Cookies["lang"] != null)
    {
        lang = Request.Cookies["lang"].Value;
    }


    var culture = new CultureInfo(lang);

    Thread.CurrentThread.CurrentCulture = culture;
    Thread.CurrentThread.CurrentUICulture = culture;
}
```

Area

```
public class AdminAreaRegistration : AreaRegistration
{
    public override string AreaName
    {
        get
        {
            return "Admin";
        }
    }

    public override void RegisterArea(AreaRegistrationContext context)
    {
        context.MapRoute(
            "Admin_default",
            "Admin/{controller}/{action}/{id}",
            new { controller="Home", action = "Index", id = UrlParameter.Optional }
        );
    }
}
```

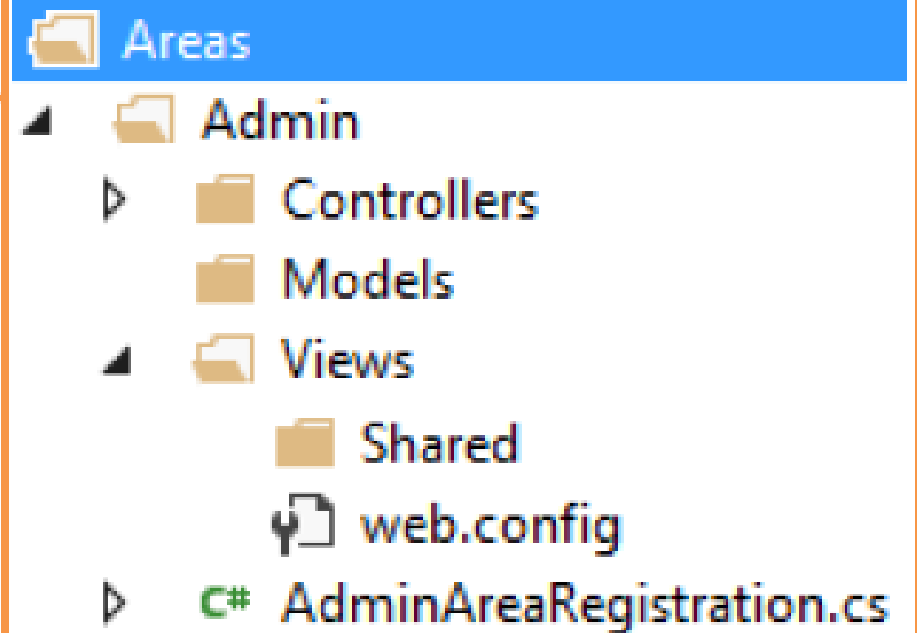

```
public class RouteConfig
{
    public static void RegisterRoutes(RouteCollection routes)
    {
        routes.IgnoreRoute("{resource}.axd/{*pathInfo}");

        routes.MapRoute(
            name: "Default",
            url: "{controller}/{action}/{id}",
            defaults: new { controller="Home", action="Index", id=UrlParameter.Optional },
            namespaces: new string[] { "Mvc5Auth.Controllers" }
        );
    }
}
```

