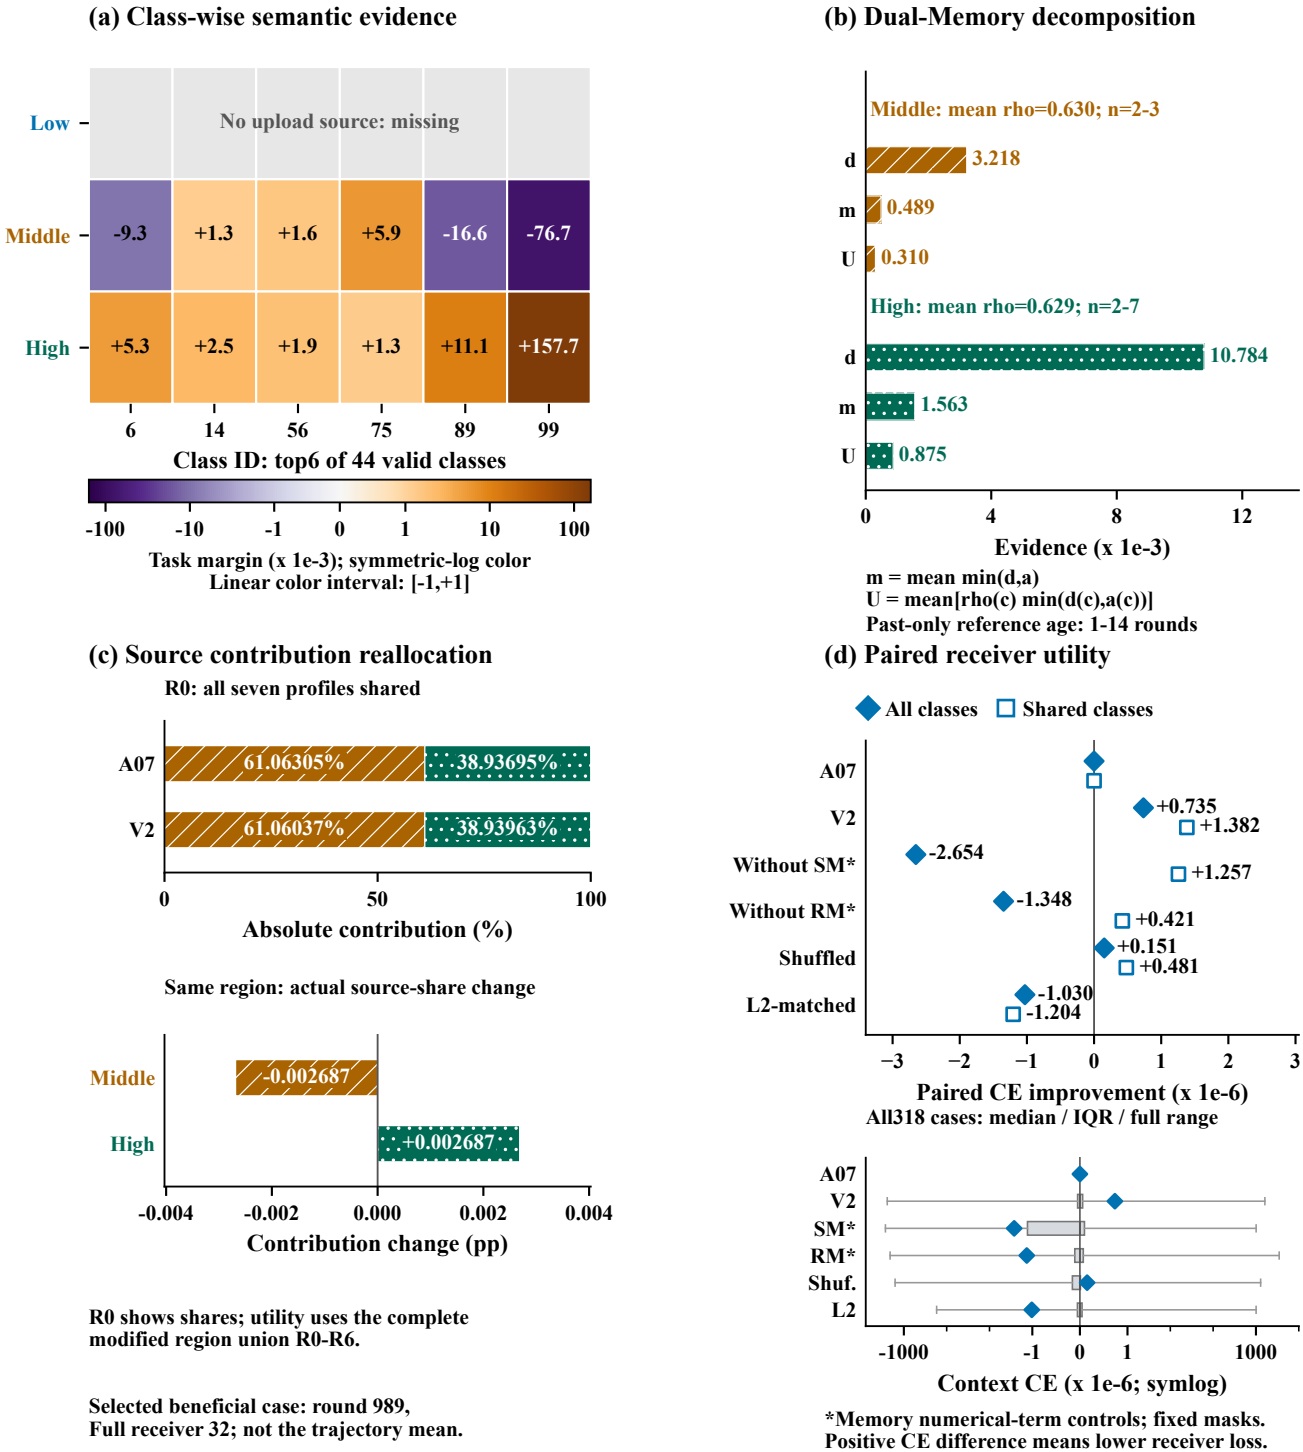

(a) Class-wise semantic evidence
Low
Middle
High
No upload source: missing
-9.3
+1.3
+1.6
+5.9
-16.6
-76.7
+5.3
+2.5
+1.9
+1.3
+11.1
+157.7
6
14
56
75
89
99
Class ID: top6 of 44 valid classes
-100
-10
-1
0
1
10
100
Task margin (x 1e-3); symmetric-log color
Linear color interval: [-1,+1]
(b) Dual-Memory decomposition
Middle: mean rho=0.630; n=2-3
d
3.218
m
0.489
U
0.310
High: mean rho=0.629; n=2-7
d
10.784
m
1.563
U
0.875
0
4
8
12
Evidence (x 1e-3)
m = mean min(d,a)
U = mean[rho(c) min(d(c),a(c))]
Past-only reference age: 1-14 rounds
(c) Source contribution reallocation
R0: all seven profiles shared
A07
61.06305%
38.93695%
V2
61.06037%
38.93963%
0
50
100
Absolute contribution (%)
Same region: actual source-share change
Middle
-0.002687
High
+0.002687
-0.004
-0.002
0.000
0.002
0.004
Contribution change (pp)
R0 shows shares; utility uses the complete modified region union R0-R6.
Selected beneficial case: round 989,
Full receiver 32; not the trajectory mean.
(d) Paired receiver utility
All classes
Shared classes
A07
V2
Without SM*
Without RM*
Shuffled
L2-matched
+0.735
+1.382
-2.654
+1.257
-1.348
+0.421
+0.151
+0.481
-1.030
-1.204
−3
−2
−1
0
1
2
3
Paired CE improvement (x 1e-6)
All318 cases: median / IQR / full range
A07
V2
SM*
RM*
Shuf.
L2
-1000
-1
0
1
1000
Context CE (x 1e-6; symlog)
*Memory numerical-term controls; fixed masks.
Positive CE difference means lower receiver loss.