

Data Flow Diagram — Level 1

BinRazali (CasaClick Mobile) — Property Rental Platform


Generated 2026-05-27

Scope: React Native mobile app (BinRazali) + Symfony REST API (Railway) + MySQL.

Level 1 decomposes the system into authentication, listings, applications, payments, and notification/sync processes with five logical data stores.

See also: docs/DFD_LEVEL1_BINRAZALI.md and docs/API.md

Figure 1 — DFD Level 1

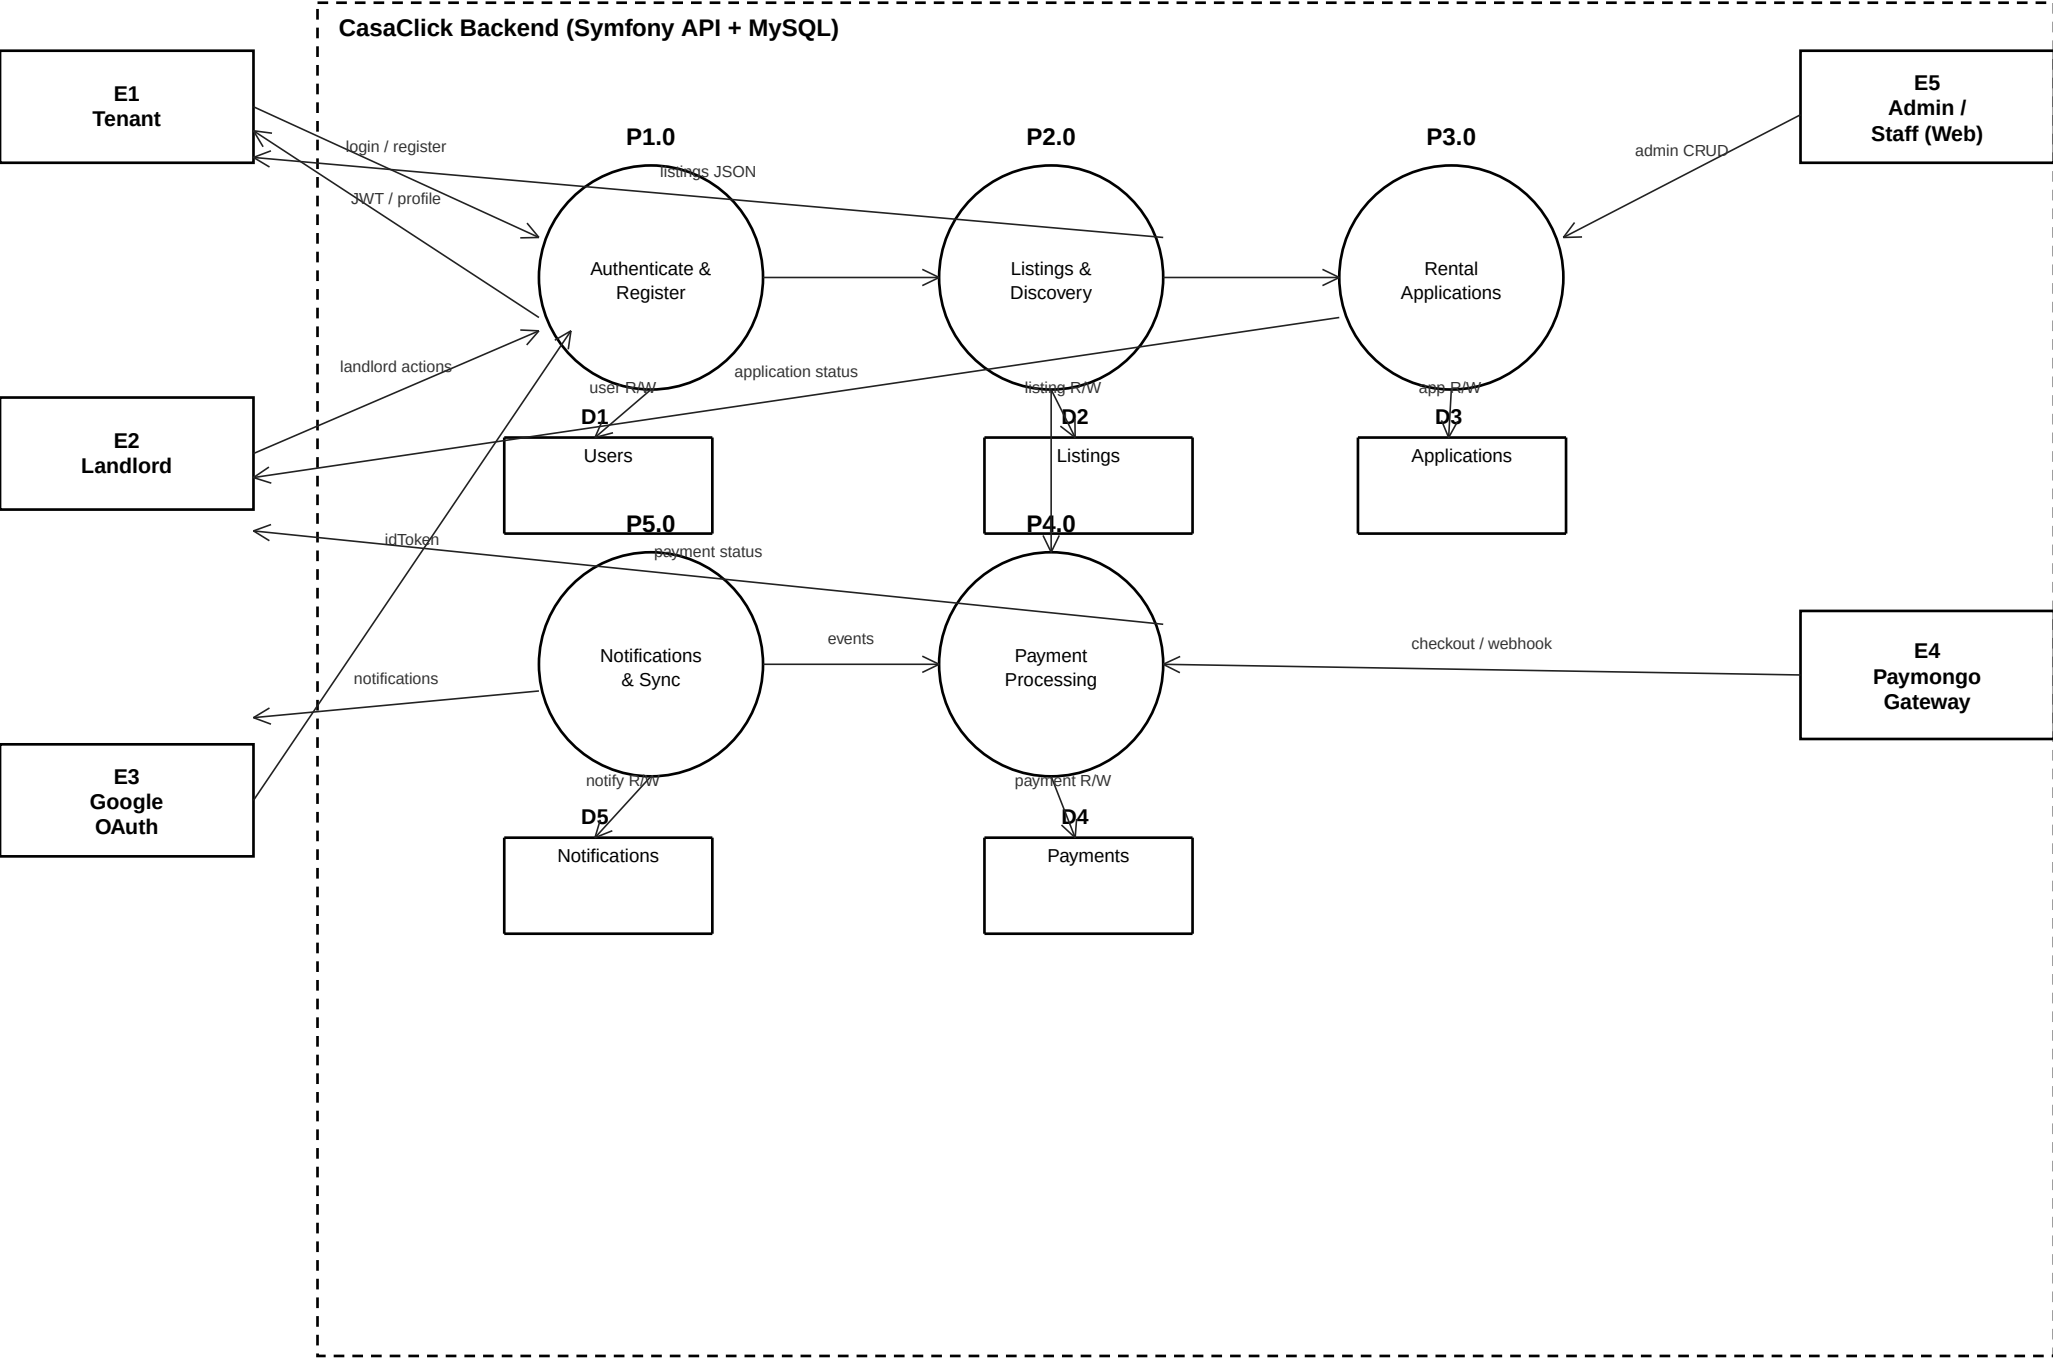

Notation: rectangles = external entities; circles = processes; open-ended boxes = data stores; arrows = labeled data flows.

Process & data store specification

P1.0 Authenticate & Register

POST /api/login_check, /api/mobile/register, /api/auth/google !' JWT

P2.0 Listings & Discovery

GET /api/mobile/listings, /listings/{id}, /my-listings, /categories

P3.0 Rental Applications

POST apply, GET /api/mobile/applications

P4.0 Payment Processing

GET/POST payments, Paymongo checkout + webhook

P5.0 Notifications & Sync

GET /notifications, /sync/revision; optional WS (dev)

D1 Users

MySQL: user accounts, roles, credentials

D2 Listings

MySQL: properties, categories, media paths

D3 Applications

MySQL: tenant applications and status

D4 Payments

MySQL: payment records, gateway refs

D5 Notifications

MySQL: notification rows per user

Mobile client

BinRazali React Native app (com.binrazali) — UI layer for E1 Tenant and E2 Landlord; calls HTTPS API at PRODUCTION_API_ORIGIN (Railway).