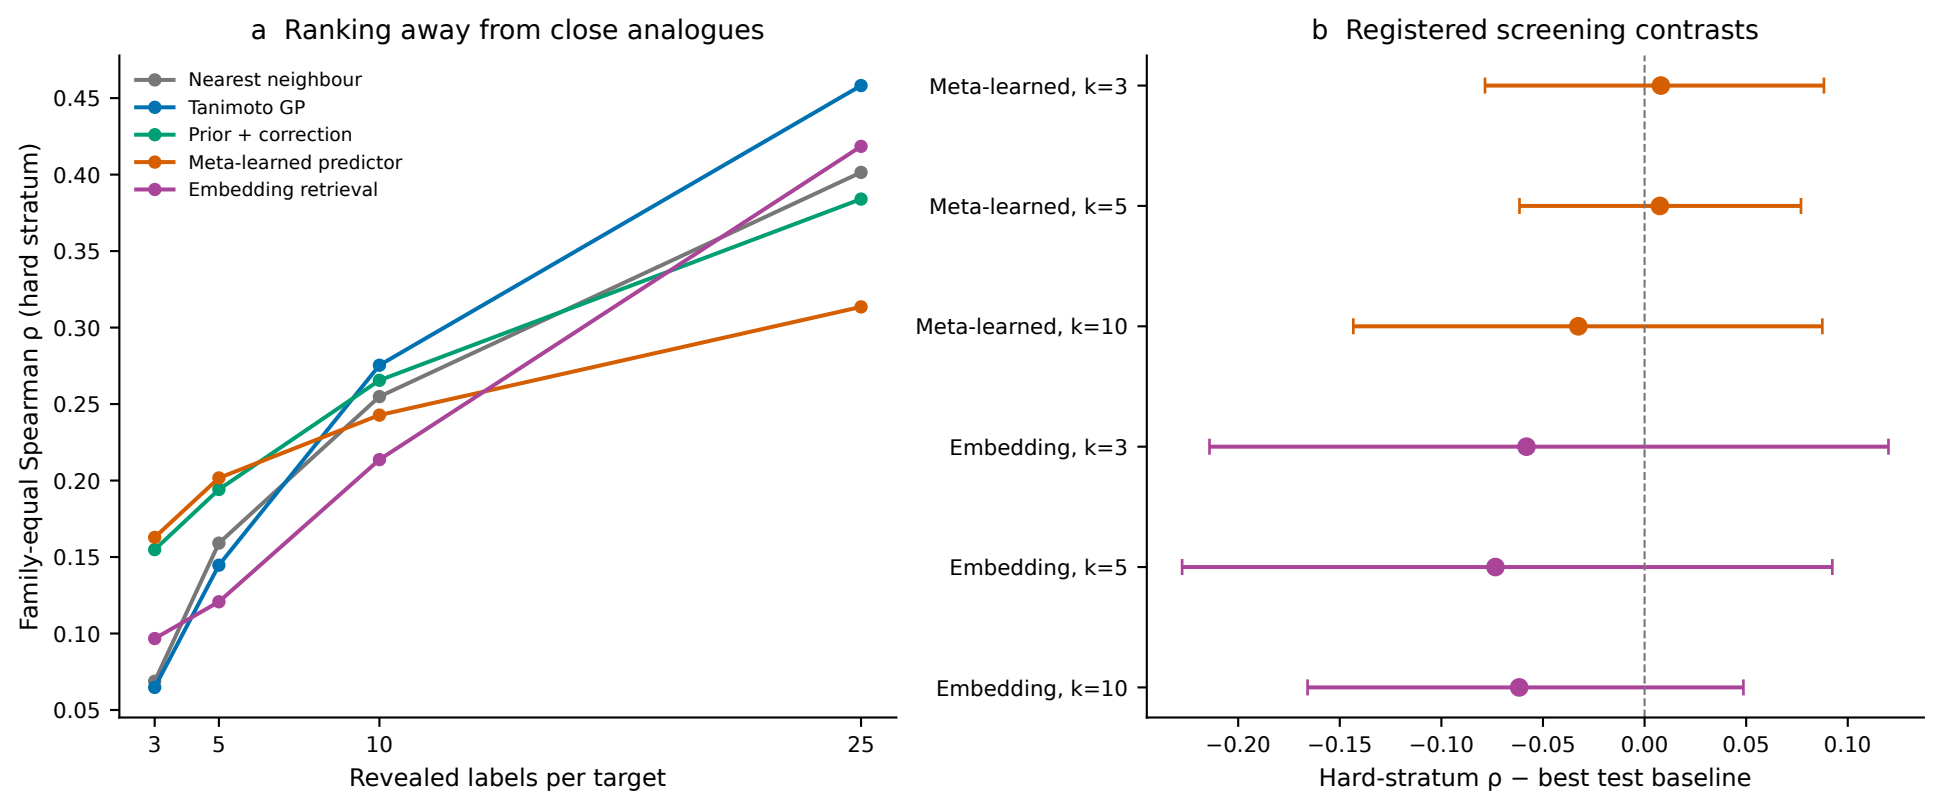
a Ranking away from close analogues
Nearest neighbour
Tanimoto GP
Prior + correction
Meta-learned predictor
Embedding retrieval
Family-equal Spearman ρ (hard stratum)
0.45
0.40
0.35
0.30
0.25
0.20
0.15
0.10
0.05
3
5
10
25
Revealed labels per target
b Registered screening contrasts
Meta-learned, k=3
Meta-learned, k=5
Meta-learned, k=10
Embedding, k=3
Embedding, k=5
Embedding, k=10
−0.20
−0.15
−0.10
−0.05
0.00
0.05
0.10
Hard-stratum ρ − best test baseline