

test_rankings

John Stansfield

November 30, 2017

set up

```
library(readr)
library(data.table)
library(HiCcompare)


## Loading required package: dplyr
##
## Attaching package: 'dplyr'
## The following objects are masked from 'package:data.table':
##
##   between, first, last
## The following objects are masked from 'package:stats':
##
##   filter, lag
## The following objects are masked from 'package:base':
##
##   intersect, setdiff, setequal, union
library(dplyr)
```

Test Rankings

MD plot of p-values using old methods

```
# MD plot of p-values
hic.table <- amygdplfc1[[1]]
MD.plot2(hic.table$adj.M, hic.table$D, hic.table$p.value)
```

MD Plot

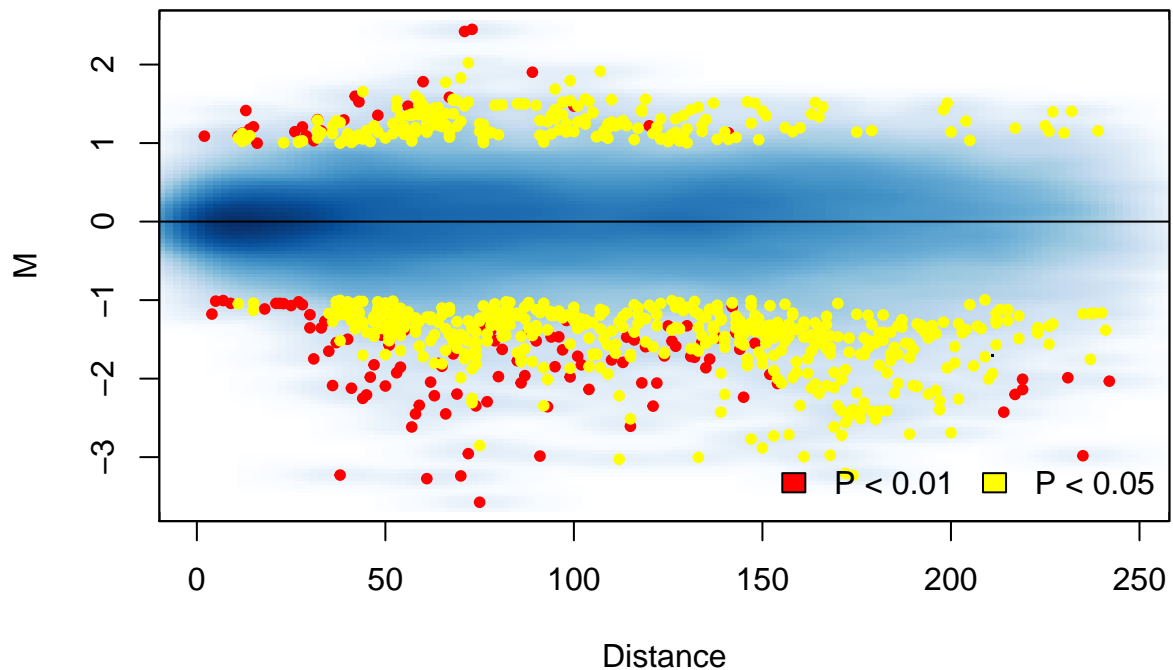


Top 5% max ranks where max is taken from M, raw difference, and Avg expression

```
# set up
alpha <- 0.05
idx <- 1:(nrow(hic.table) * alpha)

# get top 5% of max ranks where max is taken from M, raw difference, and Avg expression
hic.table <- hic.table[order(rnkMax),]
topRanks <- rep(1, nrow(hic.table)) # make indicator for top ranks
topRanks[idx] <- 0 # set top ranking rows to 0 indicator for plotting on MD plot
MD.plot2(hic.table$adj.M, hic.table$D, p.val = topRanks)
```


MD Plot

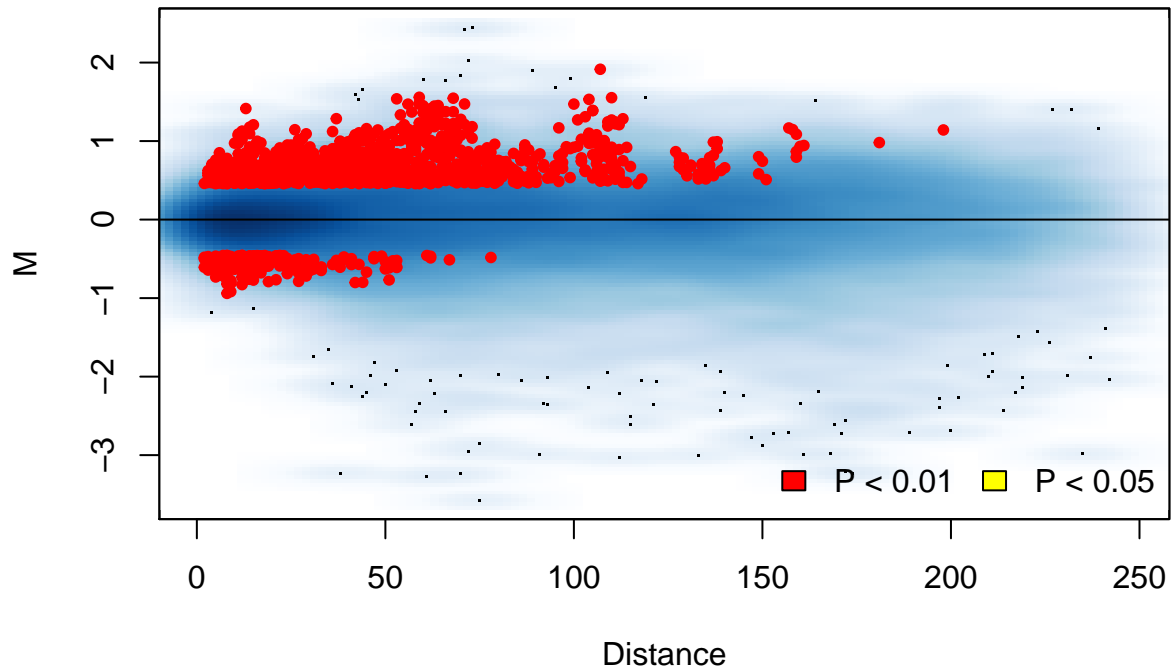

top 5% mean ranks where mean is taken from M, raw difference, and Avg expression

```
# get top 5% of mean ranks
hic.table <- hic.table[order(rnkMean),] # order by mean rank
topRanks <- rep(1, nrow(hic.table)) # make indicator for top ranks
topRanks[idx] <- 0 # set top ranking rows to 0 indicator for plotting on MD plot
MD.plot2(hic.table$adj.M, hic.table$D, p.val = topRanks)
```


MD Plot

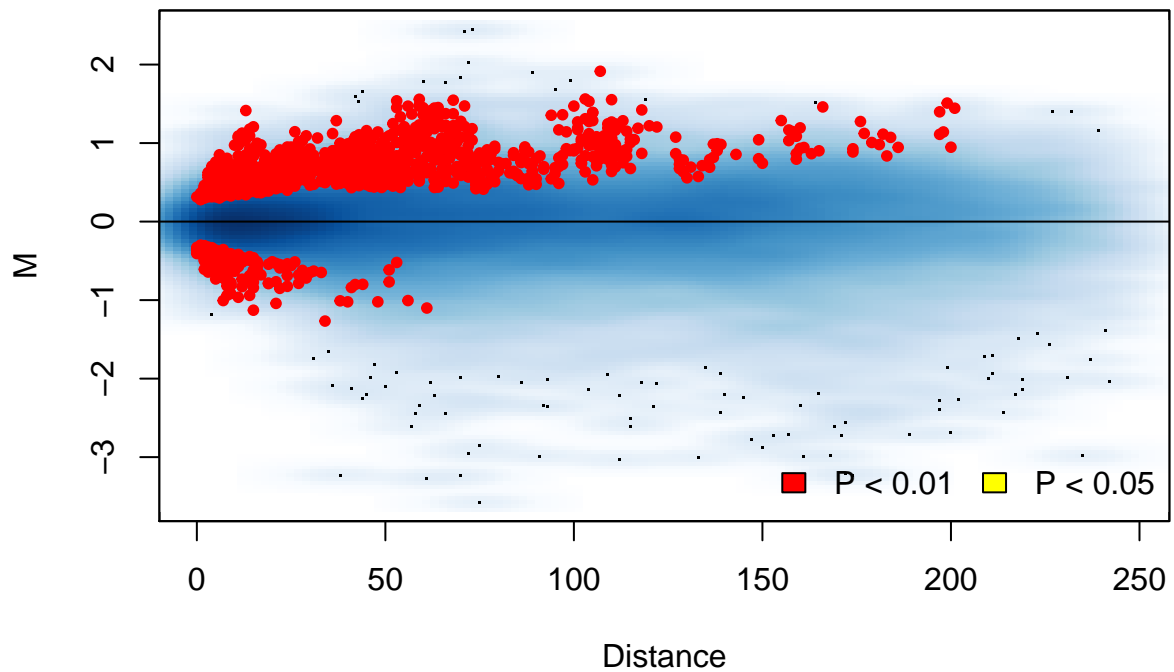

top 5% `rnkM` and `rnkDiff`

```
# by top 5% of rnkM and rnkDiff  
hic.table <- hic.table[order(rnkM, rnkDiff),] # order by mean rank  
topRanks <- rep(1, nrow(hic.table)) # make indicator for top ranks  
topRanks[idx] <- 0 # set top ranking rows to 0 indicator for plotting on MD plot  
MD.plot2(hic.table$adj.M, hic.table$D, p.val = topRanks)
```


MD Plot

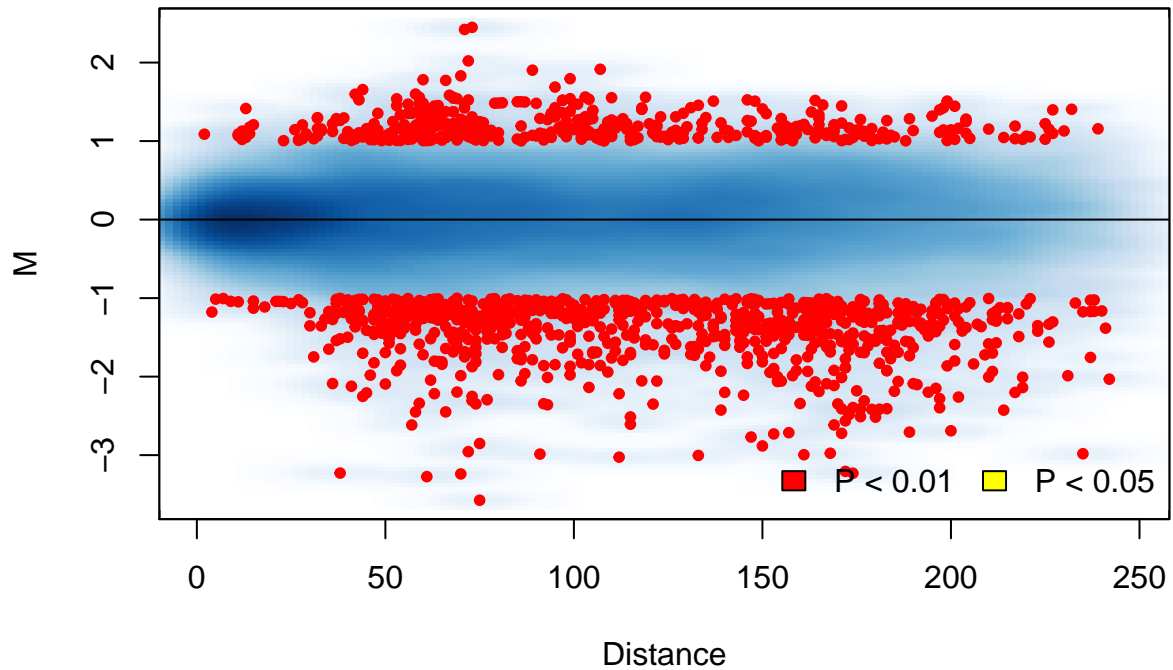

top 5% of rnkDiff


```
# by top 5% of rnkDiff
hic.table <- hic.table[order(rnkDiff),] # order by mean rank
topRanks <- rep(1, nrow(hic.table)) # make indicator for top ranks
topRanks[idx] <- 0 # set top ranking rows to 0 indicator for plotting on MD plot
MD.plot2(hic.table$adj.M, hic.table$D, p.val = topRanks)
```

MD Plot

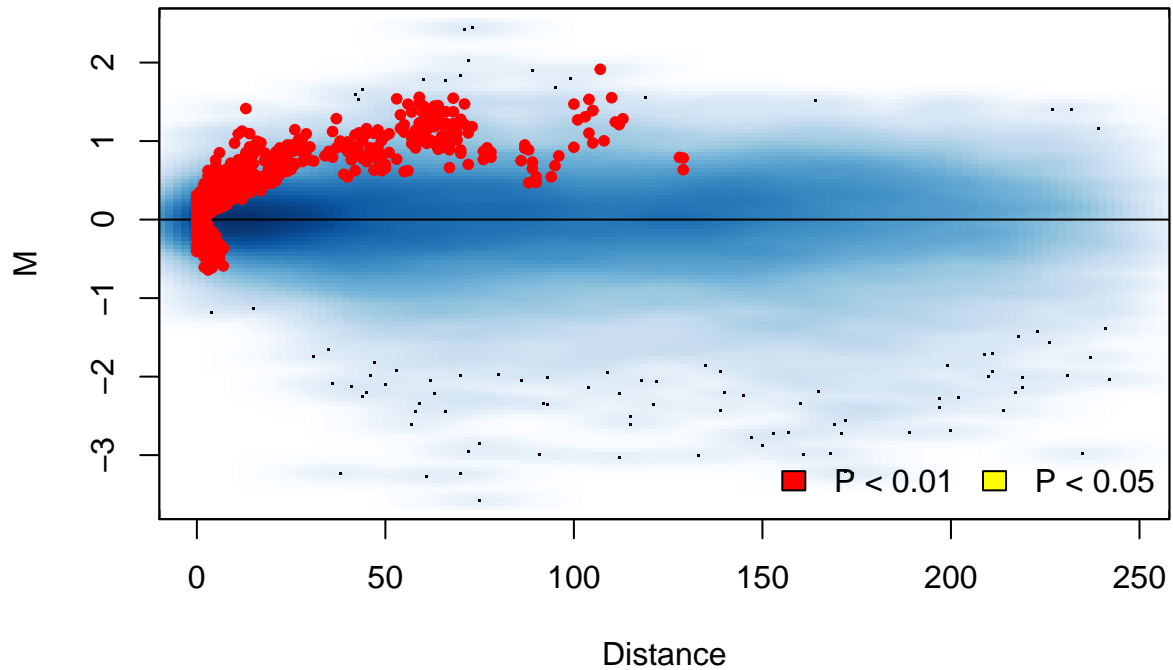

top 5% of $\max(\text{rnkM}, \text{rnkA})$


```
# by top 5% of rnkDiff
max_rank <- hic.table %>% dplyr::select(rnkM, rnkA) %>% as.matrix() %>% apply(., 1, max)
hic.table[, rnkMax := max_rank]
hic.table <- hic.table[order(rnkMax),] # order by mean rank
topRanks <- rep(1, nrow(hic.table)) # make indicator for top ranks
topRanks[idx] <- 0 # set top ranking rows to 0 indicator for plotting on MD plot
MD.plot2(hic.table$adj.M, hic.table$D, p.val = topRanks)
```

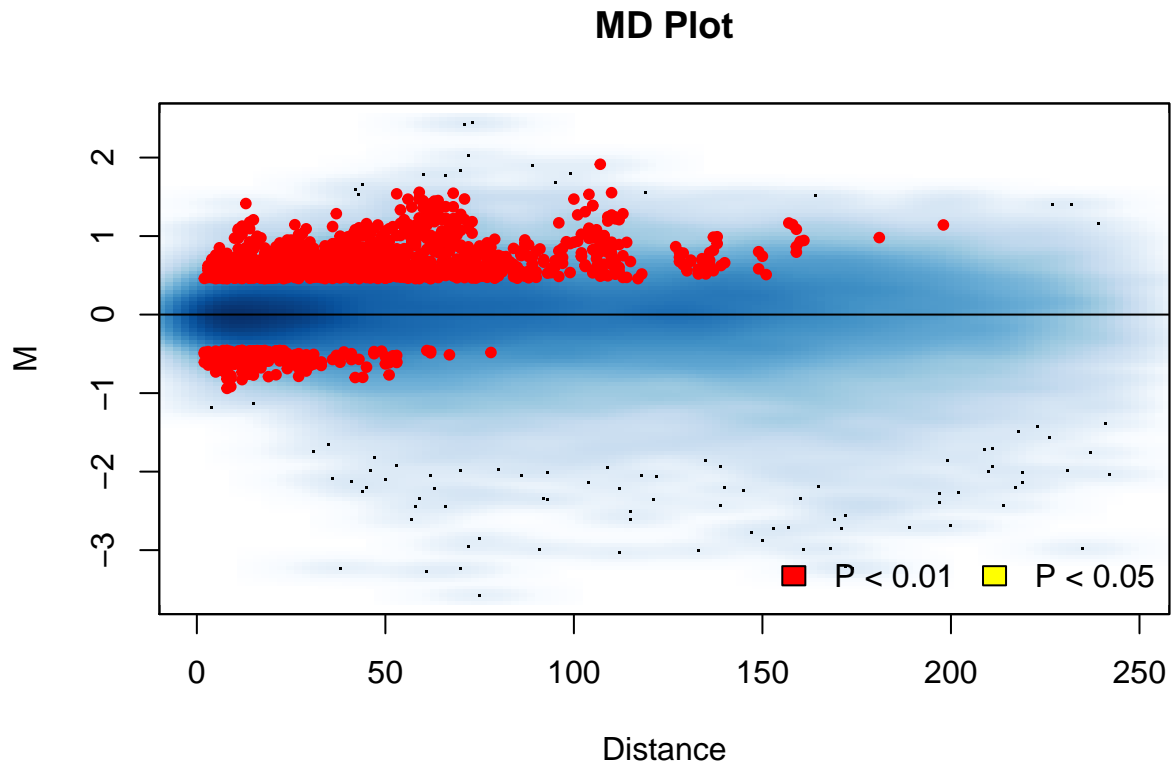

top 5% of $\max(\text{rnkM}, \text{rnkD}, \text{rnkA}, \text{rnkDiff})$

```
# by top 5% of rnkDiff
max_rank <- hic.table %>% dplyr::select(rnkM, rnkA, rnkD, rnkDiff) %>% as.matrix() %>% apply(., 1, max)
hic.table[, rnkMax := max_rank]
hic.table <- hic.table[order(rnkMax),] # order by mean rank
topRanks <- rep(1, nrow(hic.table)) # make indicator for top ranks
topRanks[idx] <- 0 # set top ranking rows to 0 indicator for plotting on MD plot
MD.plot2(hic.table$adj.M, hic.table$D, p.val = topRanks)
```


MD Plot

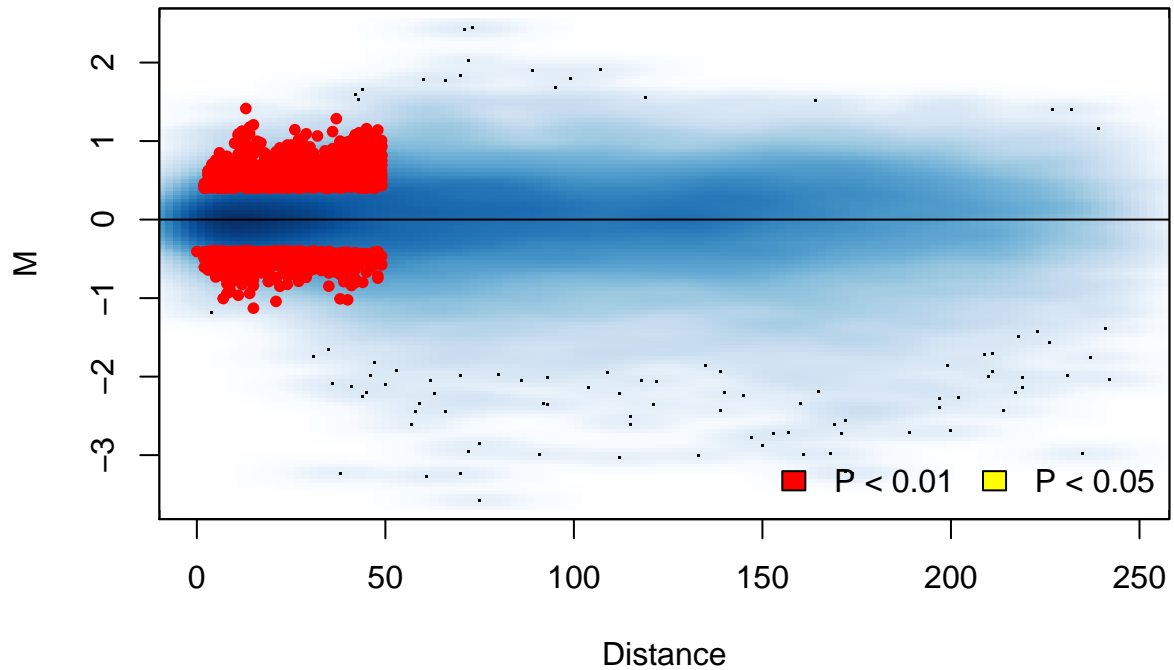

top 5% of `rnkM_D`

```
hic.table <- hic.table[order(rnkM_D),] # order by mean rank
topRanks <- rep(1, nrow(hic.table)) # make indicator for top ranks
topRanks[idx] <- 0 # set top ranking rows to 0 indicator for plotting on MD plot
MD.plot2(hic.table$adj.M, hic.table$D, p.val = topRanks)
```



MD Plot

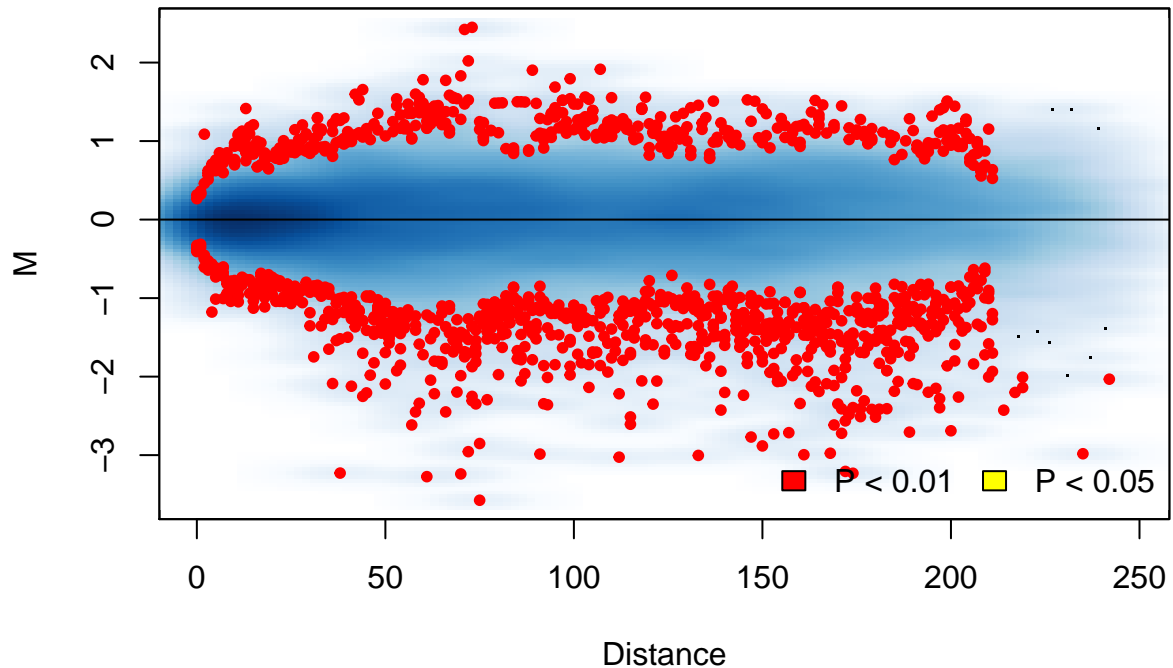

top 5% of $\max(\text{rankM_D}, A, \text{rnkDiff})$

```
# by top 5% of rnkDiff
max_rank <- hic.table %>% dplyr::select(rnkM_D, rnkA, rnkDiff) %>% as.matrix() %>% apply(., 1, max)
hic.table[, rnkMax := max_rank]
hic.table <- hic.table[order(rnkMax),] # order by mean rank
topRanks <- rep(1, nrow(hic.table)) # make indicator for top ranks
topRanks[idx] <- 0 # set top ranking rows to 0 indicator for plotting on MD plot
MD.plot2(hic.table$adj.M, hic.table$D, p.val = topRanks)
```


MD Plot

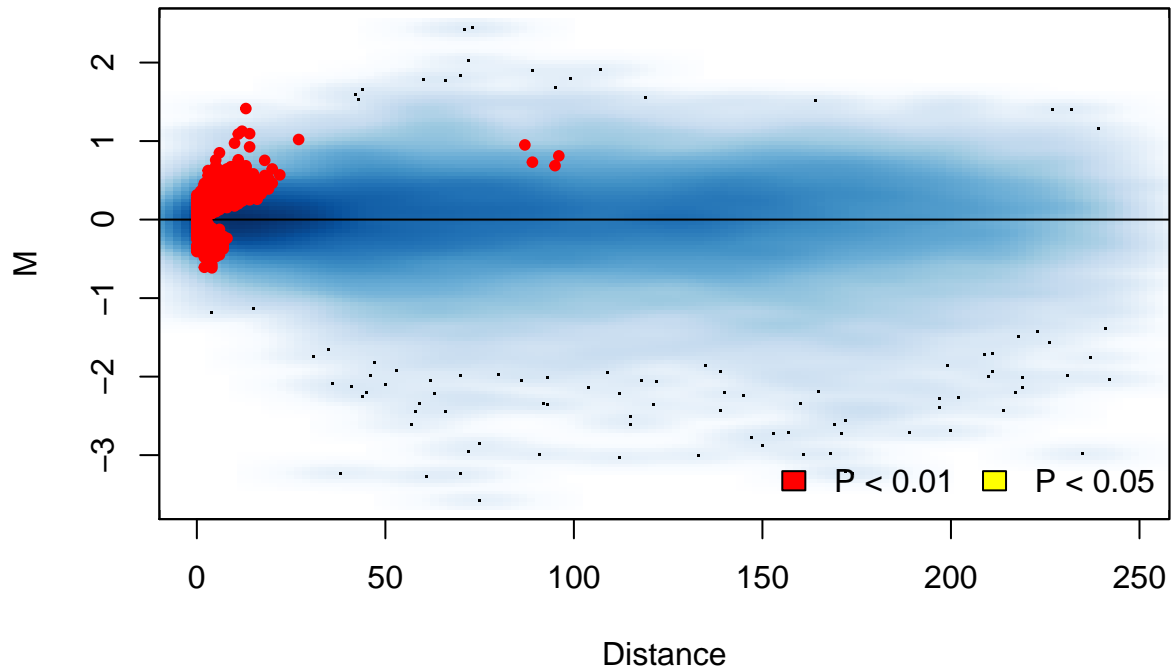

top 5% of max(rankM_D, rnkJDiff)

```
# by top 5% of rnkJDiff
max_rank <- hic.table %>% dplyr::select(rnkM_D, rnkJDiff) %>% as.matrix() %>% apply(., 1, max)
hic.table[, rnkJMax := max_rank]
hic.table <- hic.table[order(rnkJMax),] # order by mean rank
topRanks <- rep(1, nrow(hic.table)) # make indicator for top ranks
topRanks[idx] <- 0 # set top ranking rows to 0 indicator for plotting on MD plot
MD.plot2(hic.table$adj.M, hic.table$D, p.val = topRanks)
```

MD Plot

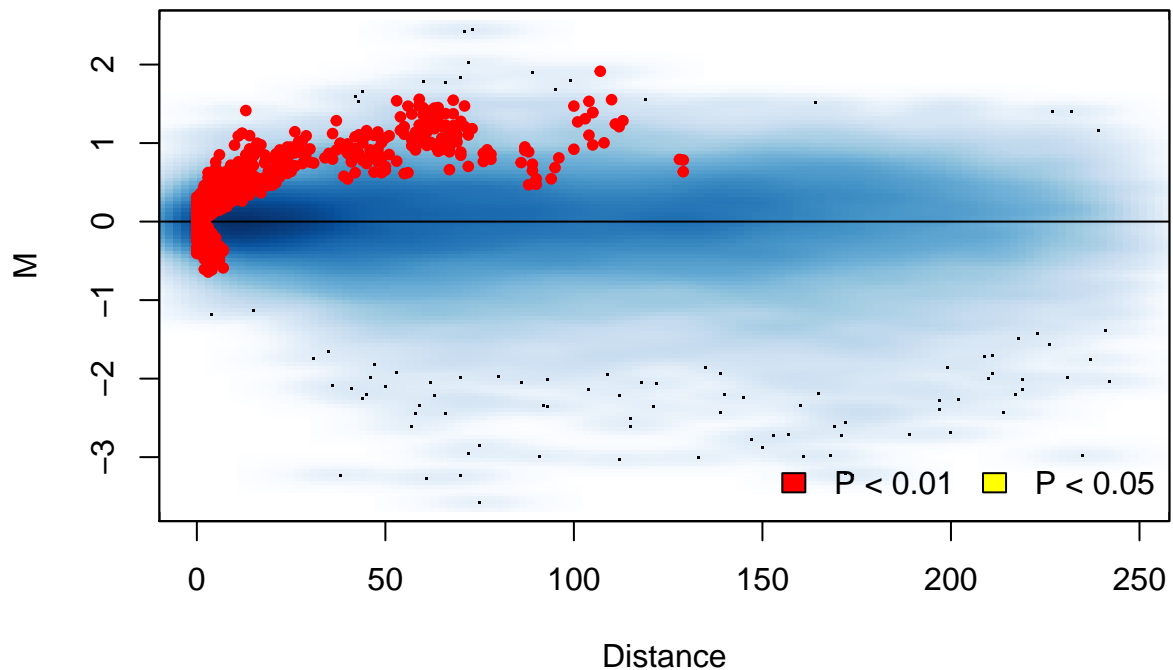

top 5% of max(rankM_D, rnkA)

```
# by top 5% of rnkJdiff
max_rank <- hic.table %>% dplyr::select(rnkM_D, rnkJA) %>% as.matrix() %>% apply(., 1, max)
hic.table[, rnkJMax := max_rank]
hic.table <- hic.table[order(rnkJMax),] # order by mean rank
topRanks <- rep(1, nrow(hic.table)) # make indicator for top ranks
topRanks[idx] <- 0 # set top ranking rows to 0 indicator for plotting on MD plot
MD.plot2(hic.table$adj.M, hic.table$D, p.val = topRanks)
```

MD Plot

