

Canadian Bioinformatics Workshops

www.bioinformatics.ca
bioinformaticsdotca.github.io



CC BY-SA 4.0 DEED

Attribution-ShareAlike 4.0 International

Canonical URL: <https://creativecommons.org/licenses/by-sa/4.0/>

[See the legal code](#)

You are free to:


Share — copy and redistribute the material in any medium or format for any purpose, even commercially.

Adapt — remix, transform, and build upon the material for any purpose, even commercially.

The licensor cannot revoke these freedoms as long as you follow the license terms.

Under the following terms:

 **Attribution** — You must give [appropriate credit](#), provide a link to the license, and [indicate if changes were made](#). You may do so in any reasonable manner, but not in any way that suggests the licensor endorses you or your use.

 **ShareAlike** — If you remix, transform, or build upon the material, you must distribute your contributions under the [same license](#) as the original.

No additional restrictions — You may not apply legal terms or [technological measures](#) that legally restrict others from doing anything the license permits.


Notices:

You do not have to comply with the license for elements of the material in the public domain or where your use is permitted by an applicable [exception or limitation](#).

No warranties are given. The license may not give you all of the permissions necessary for your intended use. For example, other rights such as [publicity, privacy, or moral rights](#) may limit how you use the material.


RNA-Seq Module 2: Alignment vs Assembly vs Pseudoalignment

Malachi Griffith, Obi Griffith, Isabel Risch, Vida Talebian
RNA-seq Analysis 2024. June 17-19, 2024

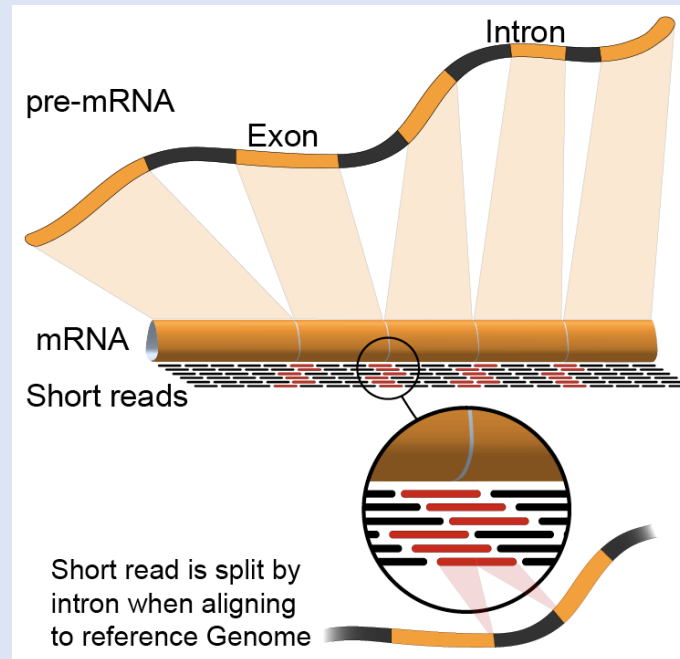

Alignment


- Uses a reference genome/transcriptome to map reads
- Capable of some novel transcript inference
- Relatively fast runtime
- Tools: HISAT2, STAR, GSNAP

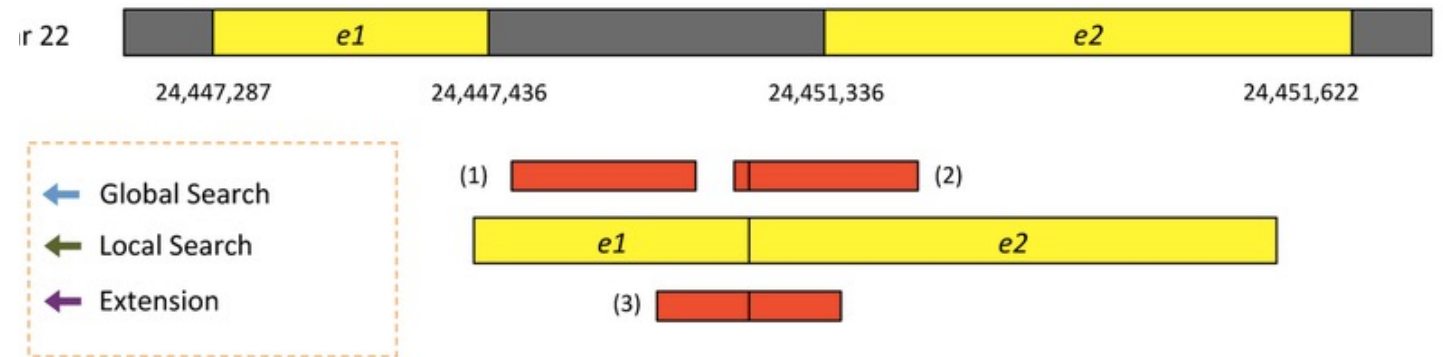

Kim et al. 2015. Nat Methods 12:357–360

Assembly


- Infer transcript structure directly from the data
- Useful when you do not have a reference sequence
- Other uses – highly rearranged genomes (some cancers)
- Computationally expensive
- Tools: Trinity, Velvet, SPAdes

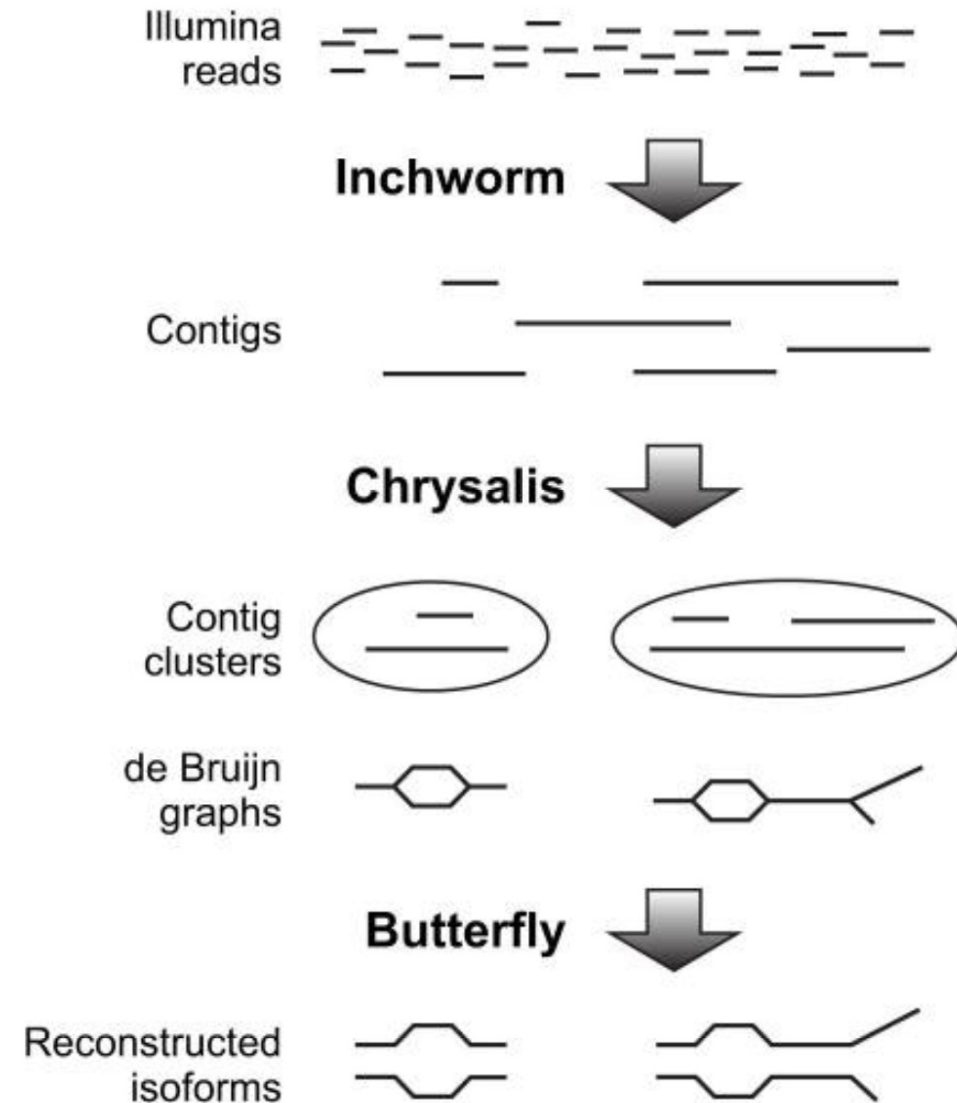

Haas, et al (2013) doi: 10.1038/nprot.2013.084

Pseudoalignment

- Does not determine where in the genome a read lies, only which transcripts it is compatible with
- Very fast!
- Does not produce a bam by default (though pseudo-bams can be created), not useful for variant detection.
- Tools: Kallisto, Sailfish

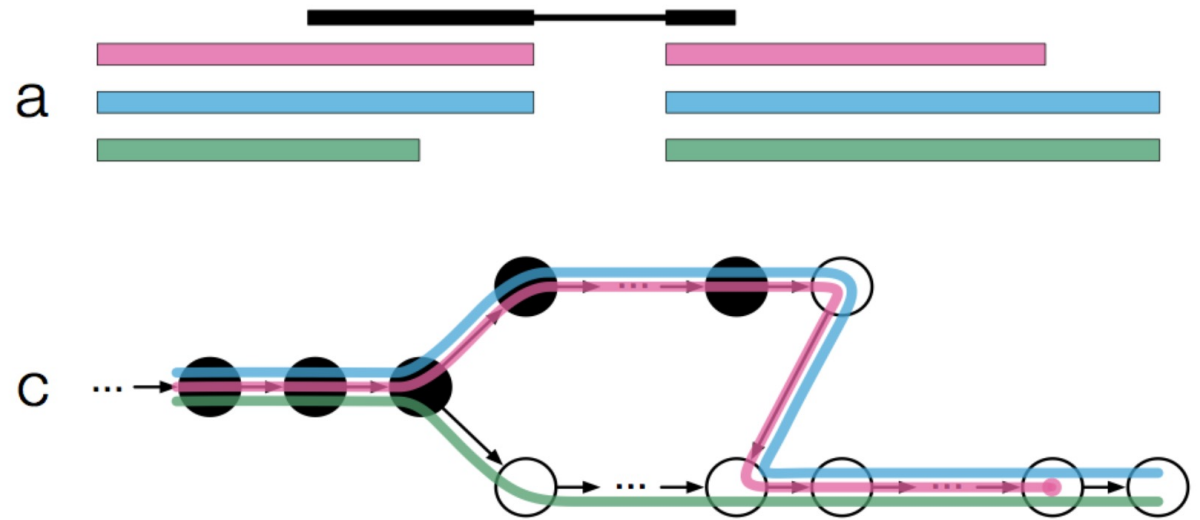

Bray, 2016 doi:10.1038/nbt.3519

<https://tinyheero.github.io/2015/09/02/pseudoalignments-kallisto.html>

We are on a Coffee Break & Networking Session

Workshop Sponsors:



Canadian Centre for
Computational
Genomics



HPC4Health



GenomeCanada