

PIZZA SALES SQL QUERIES

A. KPI'S

1. PIZZA_SALES TABLE

SELECT * FROM pizza_sales

Result Grid Filter Rows: Export: Wrap Cell Content:												
	pizza_id	order_id	pizza_name_id	quantity	order_date	order_time	unit_price	total_price	pizza_size	pizza_category	pizza_ingredients	pizza_name
▶	1	1	hawaiian_m	1	01-01-2015	11:38:36	13.25	13.25	M	Classic	Sliced Ham, Pineapple, Mozzarella Cheese	The Hawaiian Pizza
	2	2	classic_dlx_m	1	01-01-2015	11:57:40	16	16	M	Classic	Pepperoni, Mushrooms, Red Onions, Red Peppe...	The Classic Deluxe Pizza
	3	2	classic_dlx_m	1	01-01-2015	11:57:40	18.5	18.5	L	Veggie	Mozzarella Cheese, Provolone Cheese, Smoked ...	The Five Cheese Pizza
	4	2	ital_supr_l	1	01-01-2015	11:57:40	20.75	20.75	L	Supreme	Calabrese Salami, Capocollo, Tomatoes, Red O...	The Italian Supreme Pizza
	5	2	mexicana_m	1	01-01-2015	11:57:40	16	16	M	Veggie	Tomatoes, Red Peppers, Jalapeno Peppers, Re...	The Mexicana Pizza
	6	2	thai_dkn_l	1	01-01-2015	11:57:40	20.75	20.75	L	Chicken	Chicken, Pineapple, Tomatoes, Red Peppers, T...	The Thai Chicken Pizza
	7	3	ital_supr_m	1	01-01-2015	12:12:28	16.5	16.5	M	Supreme	Calabrese Salami, Capocollo, Tomatoes, Red O...	The Italian Supreme Pizza
	8	3	prsc_argla_l	1	01-01-2015	12:12:28	20.75	20.75	L	Supreme	Prosciutto di San Daniele, Arugula, Mozzarella C...	The Prosciutto and Arugula Pizza
	9	4	ital_supr_m	1	01-01-2015	12:16:31	16.5	16.5	M	Supreme	Calabrese Salami, Capocollo, Tomatoes, Red O...	The Italian Supreme Pizza
	10	5	ital_supr_m	1	01-01-2015	12:21:30	16.5	16.5	M	Supreme	Calabrese Salami, Capocollo, Tomatoes, Red O...	The Italian Supreme Pizza
	11	6	bbq_dkn_s	1	01-01-2015	12:29:36	12.75	12.75	S	Chicken	Barbecued Chicken, Red Peppers, Green Peppe...	The Barbecue Chicken Pizza

2. TOTAL REVENUE

SELECT ROUND(SUM(total_price) ,2) AS TOTAL_REVENUE
FROM pizza_sales;

Result Grid Filter Rows: E	
	TOTAL_REVENUE
▶	817860.05


3. AVERAGE ORDER VALUE

SELECT ROUND(SUM(total_price)/COUNT(DISTINCT Order_id) ,2) AS
AVERAGE_ORDER_VALUE
FROM pizza_sales;

Result Grid Filter Rows: Export:	
	AVERAGE_ORDER_VALUE
▶	38.31

4. TOTAL PIZZA SOLD

```
SELECT SUM(QUANTITY) AS TOTAL_PIZZA_SOLD  
FROM PIZZA_SALES;
```

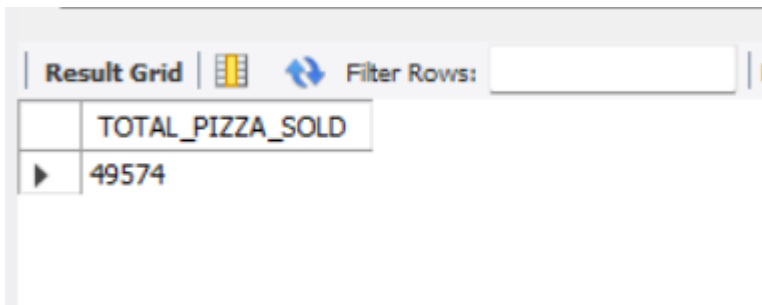


The screenshot shows a database query result grid. At the top, there is a header bar with 'Result Grid', a grid icon, a refresh icon, and a 'Filter Rows:' input field. Below this, the query result is displayed in a table with one column named 'TOTAL_PIZZA_SOLD' and one row with the value '49574'.

TOTAL_PIZZA_SOLD
49574

5. TOTAL ORDERS

```
SELECT COUNT(DISTINCT(Order_id)) AS TOTAL_OEDERS  
FROM PIZZA_SALES;
```

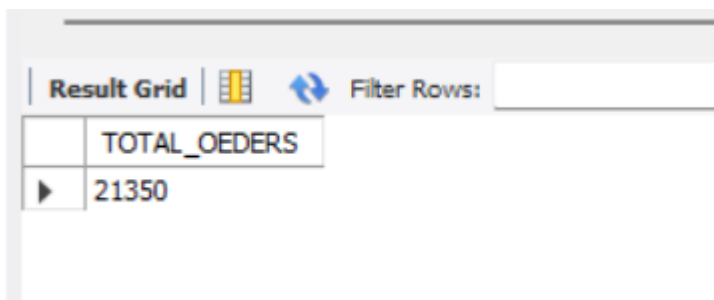


The screenshot shows a database query result grid. At the top, there is a header bar with 'Result Grid', a grid icon, a refresh icon, and a 'Filter Rows:' input field. Below this, the query result is displayed in a table with one column named 'TOTAL_OEDERS' and one row with the value '21350'.

TOTAL_OEDERS
21350

6. AVERAGE PIZZAS PER ORDER

```
SELECT ROUND(SUM(QUANTITY)/CAST(COUNT(DISTINCT Order_id) AS  
DECIMAL),2) AS TOTAL_PIZZAS_PER_ORDER  
FROM PIZZA_SALES;
```

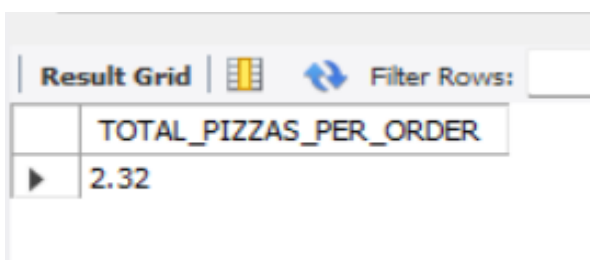

The screenshot shows a database query result grid. At the top, there is a header bar with 'Result Grid', a grid icon, a refresh icon, and a 'Filter Rows:' input field. Below this, the query result is displayed in a table with one column named 'TOTAL_PIZZAS_PER_ORDER' and one row with the value '2.32'.

TOTAL_PIZZAS_PER_ORDER
2.32

B. DAILY TREND FOR ORDERS (FROM PostgreSQL)

```
SELECT to_char(order_date,'Day') AS DAY, COUNT(DISTINCT order_id) AS  
Total_orders  
FROM pizza_sales  
GROUP BY to_char(order_date,'Day')  
ORDER BY total_orders DESC
```

Data Output Messages Notifications

	day text	total_orders bigint
1	Friday	3538
2	Thursday	3239
3	Saturday	3158
4	Wednesday	3024
5	Tuesday	2973
6	Monday	2794
7	Sunday	2624

c. HOURLY TREND FOR ORDERS


```
SELECT EXTRACT(HOUR FROM order_time) AS ORDER_HOUR,  
COUNT(DISTINCT order_id) as TOTAL_ORDERS FROM pizza_sales  
GROUP BY EXTRACT(HOUR FROM order_time)  
ORDER BY EXTRACT(HOUR FROM order_time);
```

	ORDER_HOUR	TOTAL_ORDERS
▶	9	1
	10	8
	11	1231
	12	2520
	13	2455
	14	1472
	15	1468
	16	1920
	17	2336
	18	2399
	19	2009

Result 2 x

D. PERCENTAGE OF SALES BY PIZZA CUTEGORY

```
SELECT pizza_category, ROUND(SUM(total_price), 2) AS TOTAL_SALES,  
ROUND((SUM(total_price) / (SELECT SUM(total_price) FROM pizza_sales  
) * 100, 2) AS PCT  
FROM pizza_sales  
GROUP BY pizza_category;
```

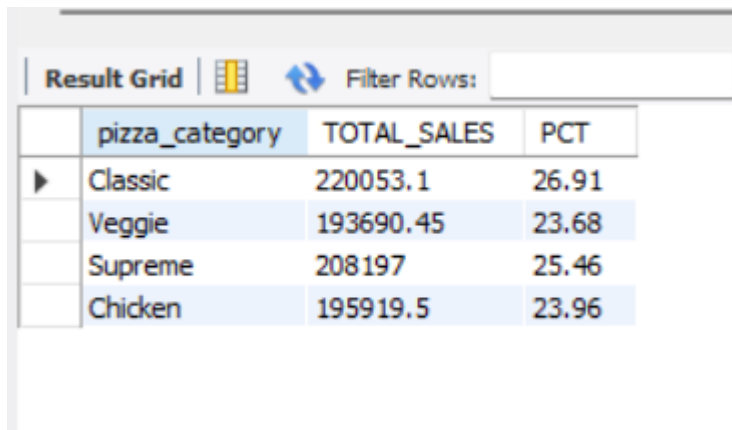


The screenshot shows a 'Result Grid' with a 'Filter Rows' input field. The table contains four rows of data, each representing a pizza category with its total sales and percentage of total sales.

	pizza_category	TOTAL_SALES	PCT
▶	Classic	220053.1	26.91
	Veggie	193690.45	23.68
	Supreme	208197	25.46
	Chicken	195919.5	23.96

E. PERCENTAGE OF sales BY PIZZA SIZE

```
SELECT pizza_size, ROUND(SUM(total_price), 2) AS Total_sales,  
ROUND((SUM(total_price) / (  
    SELECT SUM(total_price) FROM pizza_sales  
    WHERE QUARTER(STR_TO_DATE(order_date, '%Y-%m-%d')) = 4  
)) * 100, 2) AS PCT  
FROM pizza_sales  
WHERE QUARTER(STR_TO_DATE(order_date, '%Y-%m-%d')) = 4  
GROUP BY pizza_size  
ORDER BY PCT DESC;
```

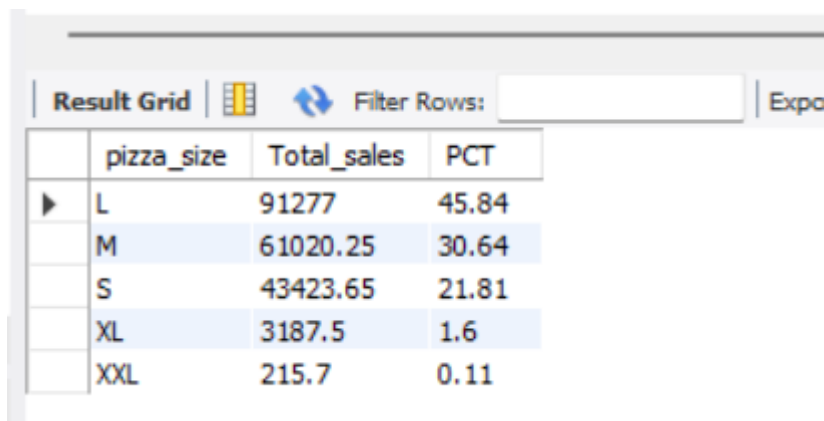


The screenshot shows a 'Result Grid' with a 'Filter Rows' input field and an 'Export' button. The table contains five rows of data, each representing a pizza size with its total sales and percentage of total sales for the fourth quarter.

	pizza_size	Total_sales	PCT
▶	L	91277	45.84
	M	61020.25	30.64
	S	43423.65	21.81
	XL	3187.5	1.6
	XXL	215.7	0.11

F. TOTAL PIZZA SOLD BY PIZZA_CATEGORY

```
SELECT pizza_category, SUM(quantity) AS NO_OF_PIZZA_SOLD
FROM pizza_sales
GROUP BY pizza_category;
```

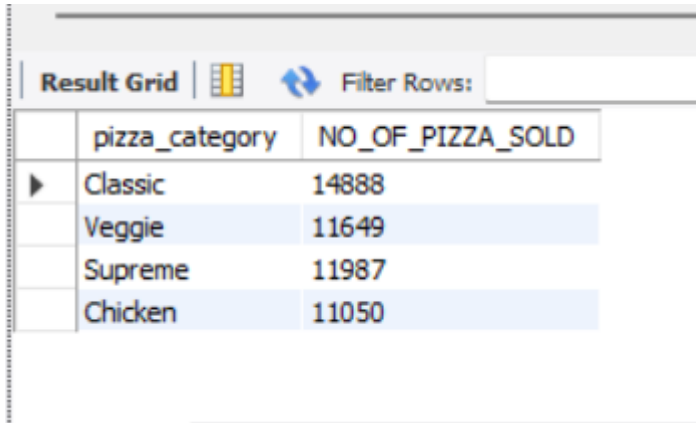


The screenshot shows a database interface with a 'Result Grid' tab. It displays a table with two columns: 'pizza_category' and 'NO_OF_PIZZA_SOLD'. The data is as follows:

pizza_category	NO_OF_PIZZA_SOLD
Classic	14888
Veggie	11649
Supreme	11987
Chicken	11050

G. TOP 5 BEST PIZZA SELLERS BY TOTAL PIZZA SOLD

⇒ Top 5 best pizza sellers (for 1st month i.e. January)

```
SELECT pizza_name, SUM(quantity) AS TOTAL_PIZZA_SOLD
FROM pizza_sales
WHERE MONTH(STR_TO_DATE(order_date,'%d-%m-%y'))=1
GROUP BY pizza_name
ORDER BY TOTAL_PIZZA_SOLD DESC
LIMIT 5;
```

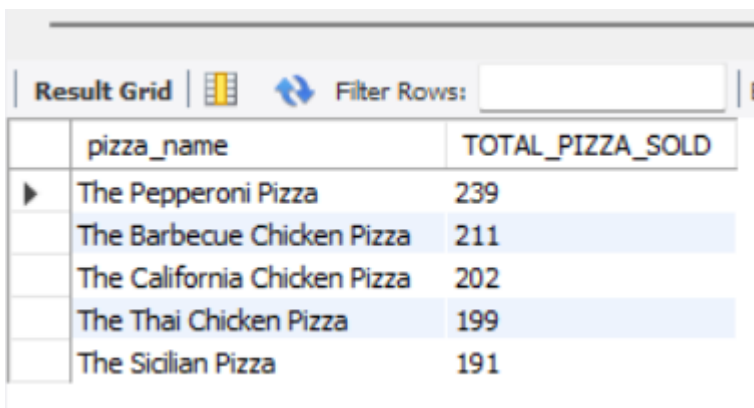

The screenshot shows a database interface with a 'Result Grid' tab. It displays a table with two columns: 'pizza_name' and 'TOTAL_PIZZA_SOLD'. The data is as follows:

pizza_name	TOTAL_PIZZA_SOLD
The Pepperoni Pizza	239
The Barbecue Chicken Pizza	211
The California Chicken Pizza	202
The Thai Chicken Pizza	199
The Sicilian Pizza	191

H. BOTTOM 5 WORST SELLERS BY TOTAL PIZZA_SOLD

➡ FOR THE MONTH OF JANUARY

```
SELECT pizza_name, SUM(quantity) AS TOTAL_PIZZA_SOLD
FROM pizza_sales
WHERE MONTH(STR_TO_DATE(order_date,'%d-%m-%y'))=1
GROUP BY pizza_name
ORDER BY TOTAL_PIZZA_SOLD ASC
LIMIT 5;
```

Result Grid			Filter Rows:
	pizza_name	TOTAL_PIZZA_SOLD	
▶	The Brie Carre Pizza	35	
	The Calabrese Pizza	67	
	The Mediterranean Pizza	68	
	The Green Garden Pizza	75	
	The Spinach Pesto Pizza	77	