



Figure 3. First-order undirected RefQ structure and seed-sensitive algorithmic modular neighborhood view

A Undirected structure

nodes = 6,506
undirected edges = 9,547
components = 55 | isolates = 30
LCC = 6,367 nodes, 9,462 edges
clustering = 0.04226
transitivity = 0.00805
canonical communities = 35
modularity = 0.796922

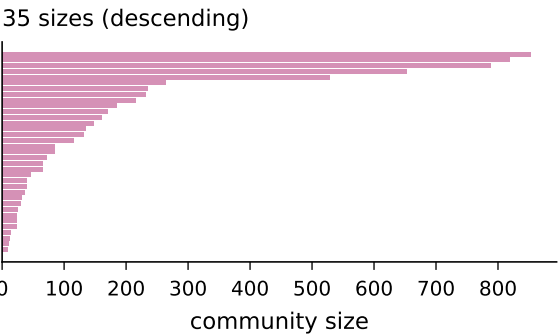

B Observation-boundary sensitivity (separate metric scales)

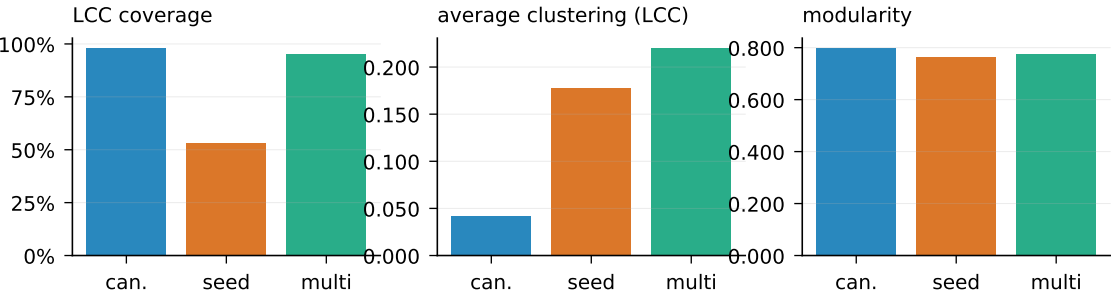

C Seed sensitivity of the algorithmic modular neighborhood view

