

C FUNDAMENTALS - CONSTANTS/INPUT/NAMES/LAYOUT

CSC100 Introduction to programming in C/C++ Spring 2024

Marcus Birkenkrahe

Time-stamp: *<2024-02-13 Tue 18:40>*

Contents

1	README	2
2	Constants	2
3	Macro definition with #define	3
4	Library definitions with #include	4
5	Type definition with const	6
6	Reading input	7
7	Naming conventions	8
8	Naming rules	9
9	Program Layout	10
10	Let's practice!	13
11	Summary	13
12	Code summary	14
13	Glossary	14
14	References	15

1 README

- This script summarizes and adds to the treatment by King (2008), chapter 2, C Fundamentals - see also slides (GDrive).
- To **code along during the lecture** using Emacs and Org-mode,
 1. download **the raw file** from GitHub: tinyurl.com/5-codealong-org
 2. save it as **5-codealong.org** and open it to code alongside me.
- There is a separate Org-mode file available for *practice after the lecture, at tinyurl.com/5-practice-org.

2 Constants



- Constants are values that do not change (ever?)
- In C, you can define them with: macros, libraries, or as `const` type
- They have different degrees of permanency

3 Macro definition with #define

- If you don't want a value to change, you can define a **constant**. There are different ways of doing that.
- The code below shows a declarative constant definition for the pre-processor that blindly substitutes the value everywhere in the program. This is also called a **macro definition**¹.

```
#define PI 3.141593
printf("PI is %f\n",PI);

PI is 3.141593
```

- Can you see what mistake I made in the next code block?²

```
#define PI = 3.141593
printf("PI is %f\n", PI);
```

- Can you see what went wrong in the next code block? If you don't see it at once, check the compiler error output!

```
#define PI 3.141593;
printf("PI is %f\n", PI);
```

- It's easy to make mistakes with user-defined constants. For one thing, "constants" declared with **#define** can be redefined (so they aren't really constant at all).
- The next program demonstrates how a constant declared with **#define** can be redefined later with a second **#define** declaration.

```
#define WERT 1.0
printf("Constant is %.2f\n", WERT);

#define WERT 2.0
printf("Constant is %.2f\n", WERT);
```

¹As an aside, "Emacs" was originally named EMACS as an akronym for "Editor MACroS" because of its extensibility through macros - the word comes from the Greek meaning "large" or "prominent", as in "macroscopic" or "macro economy".

²Answer: Instead of "3.141593", the expression "= 3.141593" is substituted for PI everywhere - the program will not compile.

```
Constant is 1.00
Constant is 2.00
```

- However, `gcc` is warning us about it!

4 Library definitions with `#include`

- Since mathematical constants are so important in scientific computing, there is a library that contains them, `math.h`.
- Below, it is included at the start to give us the value of Pi as the constant `M_PI` with much greater precision than before³:

```
#include <stdio.h>
#include <math.h>
int main(void) {
    printf("PI is %f\n", M_PI);
    printf("PI is %.16f\n", M_PI);
    return 0;
}
```

```
PI is 3.141593
PI is 3.1415926535897931
```

- Do you remember what happens if your precision `p` is greater than the precision delivered by the computer?⁴
- You can redefine the value of any constant using `#define`:

```
#include <stdio.h>
#include <math.h>
#define ... M_PI    // from now on, M_PI is called ...
int main(void) {
    printf("PI is %f\n", ...);
    printf("PI is %.16f\n", ...);
    return 0;
}
```

³In the tangled `.C` file, you can see that this `#include` statement is inside the `main` bracketed area!

⁴If the formatting precision that you ask for is greater than the precision of the stored constant, the computer will simply make digits up (which is not good).

- Inside Emacs with Org-mode, you can include the math header file `math.h` as a code block header argument (then you don't have to include it explicitly in your code block):

```
printf("PI is %f\n",M_PI);
printf("PI is %.16f\n",M_PI);
```

```
PI is 3.141593
PI is 3.1415926535897931
```

- Here is more information on C header files and on how `#include` works. This online tutorial isn't half bad by the way, if you can ignore the flood of ads.
- In Linux, `math.h` and the other header files sit in `/usr/include/`. The screenshot shows the math constant section of `math.h`.

```
/* Some useful constants. */
#ifdef __USE_MISC || defined __USE_XOPEN
# define M_E 2.7182818284590452354 /* e */
# define M_LOG2E 1.4426950408889634074 /* log_2 e */
# define M_LOG10E 0.43429448190325182765 /* log_10 e */
# define M_LN2 0.69314718055994530942 /* log_e 2 */
# define M_LN10 2.30258509299404568402 /* log_e 10 */
# define M_PI 3.14159265358979323846 /* pi */
# define M_PI_2 1.57079632679489661923 /* pi/2 */
# define M_PI_4 0.78539816339744830962 /* pi/4 */
# define M_1_PI 0.31830988618379067154 /* 1/pi */
# define M_2_PI 0.63661977236758134308 /* 2/pi */
# define M_2_SQRTPI 1.12837916709551257390 /* 2/sqrt(pi) */
# define M_SQRT2 1.41421356237309504880 /* sqrt(2) */
# define M_SQRT1_2 0.70710678118654752440 /* 1/sqrt(2) */
#endif
```

Figure 1: Mathematical constants in `/usr/include/math.h`

- Where is `math.h` in Windows⁵? Where in MacOS? Find the file, open and look at it in Emacs (the file is read-only).
- In the file, look for `M_PI` (using the incremental search `C-s`). You also find the definition of the Euler number `e` there⁶.
- Use it in a `#define` statement to define `e` and print `e` with 16-digit precision, including 15 decimal places:

```
#include <math.h>
#define e M_E
printf("%.15f\n", e);
```

```
2.718281828459045
```

- It may be that you can do better than that on your computer (mine begins to make numbers up after that even though the constant is defined to a higher accuracy)⁷.

5 Type definition with `const`

- Modern C has the `const` identifier to protect constants. In the code, `double` is a higher precision floating point number type.

```
const double TAXRATE_CONST = 0.175f;
double revenue = 200.0f;
double tax;

tax = revenue * TAXRATE_CONST;

printf("Tax on revenue %.2f is %.2f", revenue, tax);
```

⁵If you installed the MinGW compiler (GCC for Windows), look for it in the MinGW directory - there's an `/include` subdirectory that contains many header/library files `.h`. If you have Cygwin, you'll find it in `c:/Cygwin/usr/include/`. If you have MSYS2, look in `C:\msys64\usr\include`.

⁶Want to know more about this peculiar number `e` that occurs in beautiful formulas like "Euler's identity" ($e^i\pi + 1 = 0$? See 3Blue1Brown (2017). I added it to our class YouTube channel.

⁷This is due to inherent limitations of floating-point representation (IEEE 754 standard): double precision numbers use 64 bits of storage, with 52 bits for the fraction (mantissa), 11 bits for the exponent, and 1 bit for the sign - this allows for 15 to 17 bits of precision.

```
Tax on revenue 200.00 is 35.00
```

- What happens if you try to redefine the constant `TAXRATE_CONST` after the type declaration?
- Modify the previous code block by adding `TAXRATE_CONST = 0.2f` before the `tax` is computed, and run it:

```
const double TAXRATE_CONST = 0.175f;
double revenue = 200.0f;
double tax;

TAXRATE_CONST = 0.2f;
tax = revenue * TAXRATE_CONST;

printf("Tax on revenue %.2f is %.2f", revenue, tax);
```

6 Reading input

- Before you can print output with `printf`, you need to tell the computer, which format it should prepare for.
- Just like `printf`, the input function `scanf` needs to know what format the input data will come in, otherwise it will print nonsense (or rather, memory fragments from God knows where).
- The following statement reads an `int` value and stores it in the variable `i`. The input comes from the file `./data/input`⁸.

```
int i;
puts("Enter an integer!");
scanf("%d", &i); // note the strange symbol &i
printf("You entered %d\n", i);
```

- To input a floating-point (`float`) variable, you need to specify the format with `%f` **both** in the `scanf` **and** in the `printf` statement. We'll learn more about format specifiers soon.

⁸Alas, you cannot enter input in an Org-mode file interactively. You either have to tangle the code and compile/run it on the command line, or redirect the input using the `:cmdline < file header argument`, where `file` contains the input.

- To see how input works on the command line, **tangle** the code above as `scanf.c` (add `:tangle scanf.c` in the code block header), and run the file on the command line: `C-u C-c C-v t`

```
gcc scanf.c -o iscan    ## compiles source code to executable
iscan < input    ## feed input to the executable
```

7 Naming conventions

- Use upper case letters for CONSTANTS

```
const double TAXRATE;
```

- Use lower case letters for variables

```
int tax;
```

- Use lower case letters for function names

```
hello();
```

- If names consist of more than one word, separate with `_` or insert capital letters:

```
hello_world();
helloWorld(); // this is C++ style "camelCase"
```

- Name according to function! In the next code block, both functions are identical from the point of view of the compiler, but one can be understood, the other one cannot.

```
const int SERVICE_CHARGE;
int v;

int myfunc(int z) {
    int t;
    t = z + v;
    return t;
}
```



```
int calculate_grand_total(int subtotal) {
    int grand_total;
    grand_total = subtotal + SERVICE_CHARGE;
    return grand_total;
}
```

8 Naming rules

- What about rules? The compiler will tell you if one of your names is a mistake! However, why waste the time, and the rules are interesting, too, at least syntactically, to a nerd.
- Names are sensitive towards spelling and capitalization: `helloWorld` is different from `HELLOWORLD` or `HelloWorld`. Confusingly, you could use all three in the same program, and the compiler would distinguish them.
- Names cannot begin with a number, and they may not contain dashes/minus signs. These are all illegal:

```
10times  get-net-char
```

These are good:

```
times10    get_next_char
```

- There is no limit to the length of an identifier, so this name, presumably by a German programmer, is okay:

```
Voreingenommenheit_bedeutet_bias_auf_Deutsch // allowed crazy German identifier
```

- The keywords in the table have special significance to the compiler and cannot be used as identifiers:

<code>auto</code>	<code>enum</code>	<code>restrict</code>	<code>unsigned</code>	<code>break</code>	<code>extern</code>
<code>return</code>	<code>void</code>	<code>case</code>	<code>float</code>	<code>short</code>	<code>volatile</code>
<code>char</code>	<code>for</code>	<code>signed</code>	<code>while</code>	<code>const</code>	<code>goto</code>
<code>sizeof</code>	<code>_Bool</code>	<code>continue</code>	<code>if</code>	<code>static</code>	<code>_Complex</code>
<code>_Imaginary</code>	<code>default</code>	<code>union</code>	<code>struct</code>	<code>do</code>	<code>int</code>
<code>switch</code>	<code>double</code>	<code>long</code>	<code>typedef</code>	<code>else</code>	<code>register</code>

- Your turn: name some illegal identifiers and see what the compiler says!

```
int void = 1;
float float = 3.14;
```

- If Windows complains about the app, close the screen dialog to see the debugger:

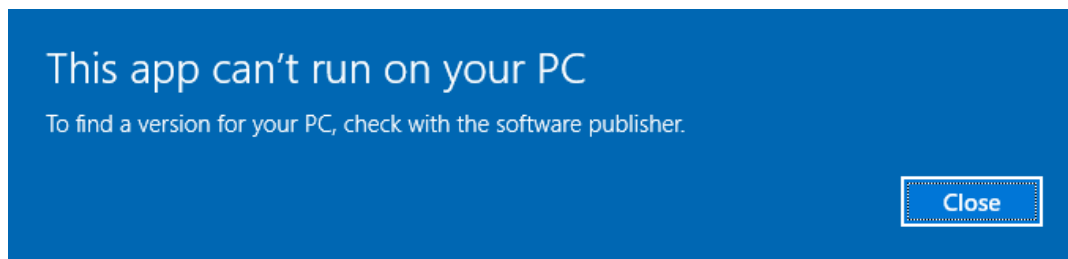


Figure 2: Windows screen dialog

```

/Users/BIRKEN~1/AppData/Local/Temp/babel-vr0uI0/C-src-6B45nn.c: In function 'main':
c:/Users/BIRKEN~1/AppData/Local/Temp/babel-vr0uI0/C-src-6B45nn.c:9:5: error: two or more data types in declaration specifiers
  9 | int void = 1;
    |      ^~~~~
c:/Users/BIRKEN~1/AppData/Local/Temp/babel-vr0uI0/C-src-6B45nn.c:9:10: error: expected identifier or '(' before '=' token
  9 | int void = 1;
    |          ^
c:/Users/BIRKEN~1/AppData/Local/Temp/babel-vr0uI0/C-src-6B45nn.c:10:7: error: two or more data types in declaration specifiers
 10 | float float = 3.14;
    |      ^~~~~~
c:/Users/BIRKEN~1/AppData/Local/Temp/babel-vr0uI0/C-src-6B45nn.c:10:13: error: expected identifier or '(' before '=' token
 10 | float float = 3.14;
    |             ^
[ Babel evaluation exited with code 1 ]
Access is denied.
[ Babel evaluation exited with code 1 ]
2 U\*- *Org-Babel Error Output* All L1 (Compilation)

```

Figure 3: Org-babel error output buffer

9 Program Layout

- You can think of a program statement as a series of tokens⁹:

⁹The tokenization is an important sub-process of natural language processing, a data science discipline that is responsible for language assistants like Siri, robotic calls, auto-coding and machine translation (like Google translate), and bots like ChatGPT.

```
printf ( "Height: %d\n"    ,    height ) ;
  1      2          3          2      5      6  7
```

	TOKEN	MEANING
1	identifier	protected C keyword (function)
2	punctuation	function call begins
3	string literal	text + formatting + escape character
4	punctuation	separator
5	identifier	integer variable
6	punctuation	function call ends
7	punctuation	statement closure

- You can have any amount of white (empty) space between program tokens (this is not so for all programming languages¹⁰).
- As an example, here is a version of `dweight.c` that works just as well, on one line, with almost all whitespace deleted. Only in one place, the space is needed. Can you see where?

```
int height,length,width,volume,weight;height=8;length=12;width=10;volume=height*length
```

```
Dimensions: 12x10x8
Volume (cubic inches): 960
Dimensional weight (pounds): 6
```

- Another exception are the preprocessor directives (beginning with #): they need to be on a line of their own¹¹.

```
#include <stdio.h>
#define CONSTANT 5
```

- You can divide statements over any number of lines as long as you don't divide keywords or tokens. This works:

¹⁰Python e.g. is white-space sensitive: the indentation level is significant, it denotes code blocks, and needs to be consistent. The same goes for Org-mode markdown and code blocks.

¹¹The `<...>` brackets indicate that the file in between the brackets can be found in the system PATH. If a local file is included, use double apostrophes `".."`.

```

int
height
= 5
;
printf
(
    "height %d\n" ,
    height)
;

height 5

```

- But this does not:

```

int
hei ght
= 5
;
print f
(
    "height
%d\n" ,
    height)
;

```

1. The variable `height` is not declared
2. The `printf` function is not recognized
3. The string literal is not complete

- Good practice:

- Space between tokens makes identification easier
- Indentation makes nesting easier to spot
- Blank lines can divide a program into logical units

- Practice: improve the layout of this program then run it:

```

int var1=1;int var2;var2=
    var1

```

```

                                *100;
printf (    "Variable1=%d,variable2=%d\n",
            var1,

            var2
            );

```

```
Variable1=1,variable2=100
```

10 Let's practice!

Download the raw Org-mode practice file, complete the second batch of exercises, then upload the completed file to Canvas:

1. Defining constants
2. Standard math library
3. Reading input with `scanf`
4. Naming identifiers
5. Program layout

../img/3_practice1.gif

11 Summary

- C programs must be compiled and linked
- Programs consist of directives, functions, and statements
- C directives begin with a hash mark (`#`)
- C statements end with a semicolon (`;`)
- C functions begin and end with parentheses `{` and `}`
- C programs should be readable
- Input and output has to be formatted correctly

12 Code summary

CODE	EXPLANATION
<code>#include</code>	directive to include other programs
<code>stdio.h</code>	standard input/output header file
<code>main(int argc, char **argv)</code>	main function with two arguments
<code>return</code>	statement (successful completion)
<code>void</code>	empty argument - no value
<code>printf</code>	printing function
<code>\n</code>	escape character (new-line)
<code>/* ... */ //...</code>	comments
<code>scanf</code>	input pattern function
<code>main(void)</code>	main function without argument

13 Glossary

CONCEPT	EXPLANATION
Compiler	translates source code to object code
Linker	translates object code to machine code
Syntax	language rules
Debugger	checks syntax
Directive	starts with # , one line only, no delimiter
Preprocessor	processes directives
Statement	command to be executed, e.g. return
Delimiter	ends a statement (in C: semicolon - ;)
Function	a rule to compute something with arguments
String	Sequence of <i>character</i> values like hello
String literal	Unchangeable, like the number 8 or the string hello
Constant	Set value that is not changed
Variable	A named memory placeholder for a value, e.g. int i
Data type	A memory storage instruction like int for integer
Comment	Region of code that is not executed
Format specifier	Formatting symbol like %d or %f
Data type	Tells the computer to reserve memory, e.g. int for integer numbers
Type declaration	Combination of type and variable name - e.g. int height;
int	C type for integer numbers, e.g. 2
float	C type for floating point numbers, e.g. 3.14
char	C type for characters, like "joey"
Formatting	Tells the computer how to print, e.g. %d for int types
%d	Format for integers
%f and %.pf	Format for floating point numbers (with p digits after the point)
#define	Define a constant with the preprocessor, e.g. #define PI 3.14
math.h	Math library, contains mathematical constants & functions
stdio.h	Input/Output library, enables printf and scanf
const	Constant identifier, e.g. const double PI = 3.14;

14 References

- Collingbourne (2019). The Little Book of C (Rev. 1.2). Dark Neon.
- King (2008). C Programming. Norton. URL: knking.com.