

Contents

1 Plotting practice: histograms	1
1.1 Make a histogram and customize it	1
1.2 Compute and draw a line for the point average	6
1.3 Subplots	10

1 Plotting practice: histograms

Plot challenge: make a histogram of the results for Test 1 and for Test 2. Draw the average of each test as a straight dashed line.

1.1 Make a histogram and customize it

1. Open a new Colab notebook and name it `PlottingPractice.ipynb`.
2. Define two lists `test_1` and `test_2`:

```
test_1 = [18.17, 21, 21.5, 21.67, 23.17, 24]
test_2 = [14.17, 17.67, 17.83, 19.17, 19.5, 23]
```

3. Import the library `matplotlib.pyplot` as `plt`:

```
import matplotlib.pyplot as plt
```


4. Look up the documentation for the `pyplot` module.

```
plt?
```

5. Enter and run the first example provided in the help.


```
import numpy as np
x = np.arange(0,5,0.1)
y = np.sin(x)

plt.plot(x,y) # line plot
```

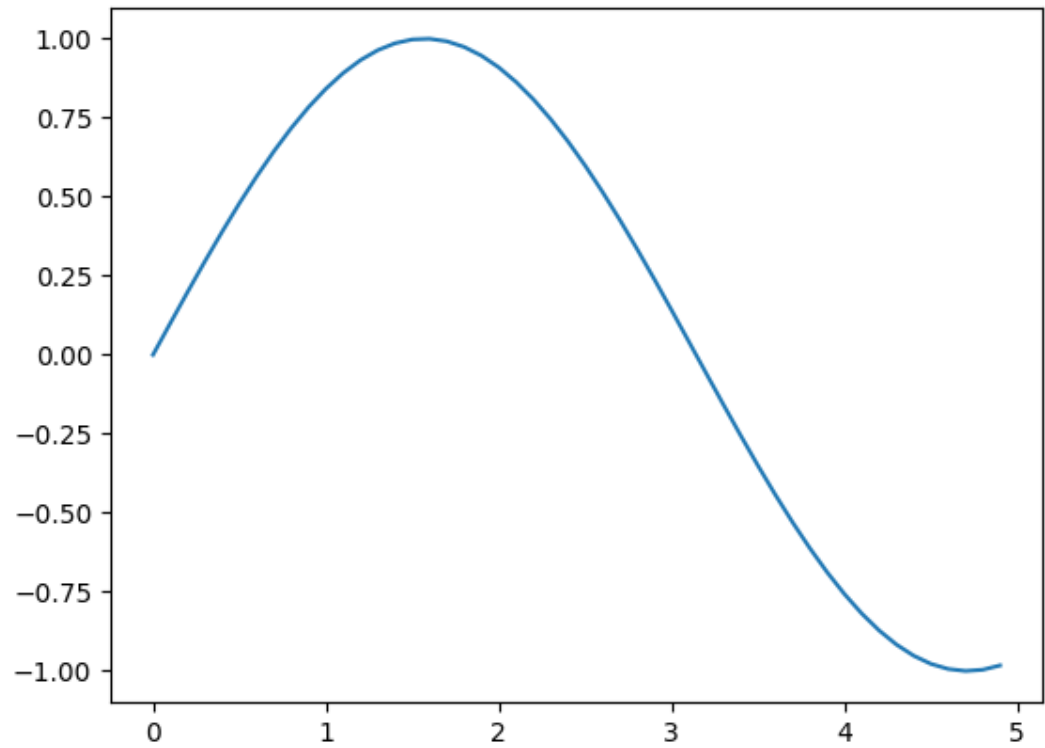

6. We're after something else: a frequency distribution of a single numeric variable (test points). We use the `plt.hist` method for that - without any bells and whistles at first:


```
plt.hist(test_1)
plt.show()
```

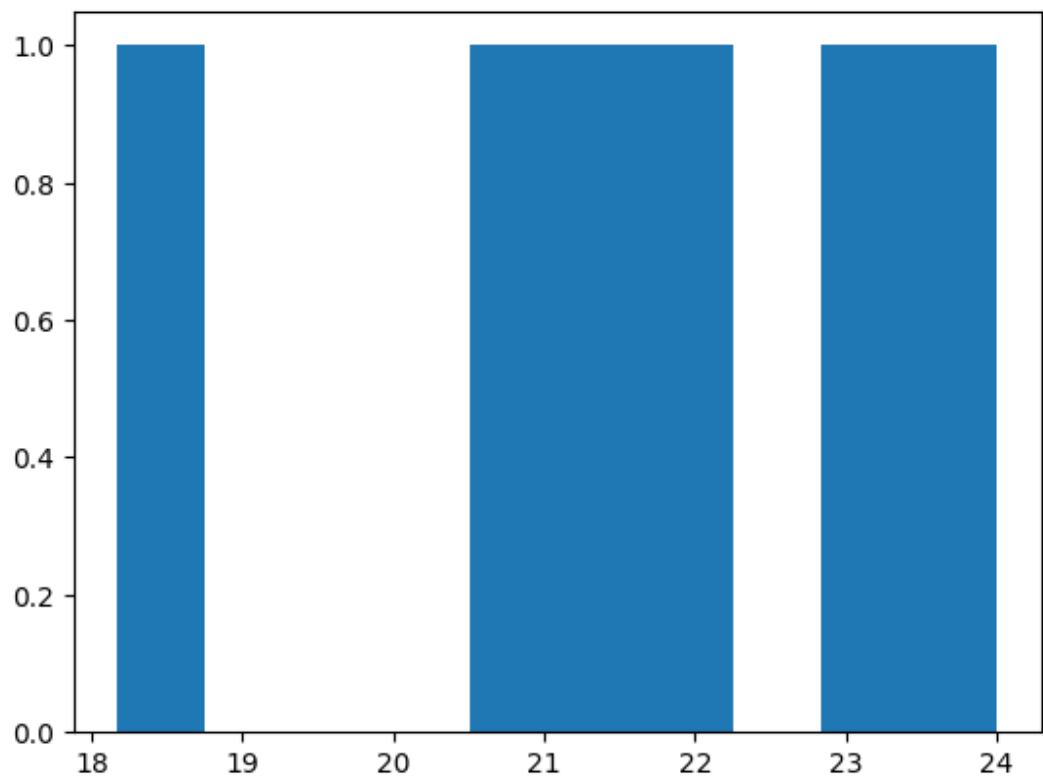

7. Add some customization:


- (a) `plt.hist()` is the function that creates the histogram. The first argument is the data you want to plot.
- (b) The `bins` argument is set to `'auto'` (determine number of bins based on the dataset).
- (c) The `alpha` argument sets the transparency of the bars (1 is opaque, 0 is transparent).
- (d) The `rwidth` argument sets the relative width of the bars as a fraction of the bin width.

```
plt.hist(test_1, bins='auto', alpha=0.7, rwidth=0.85)
plt.show()
```

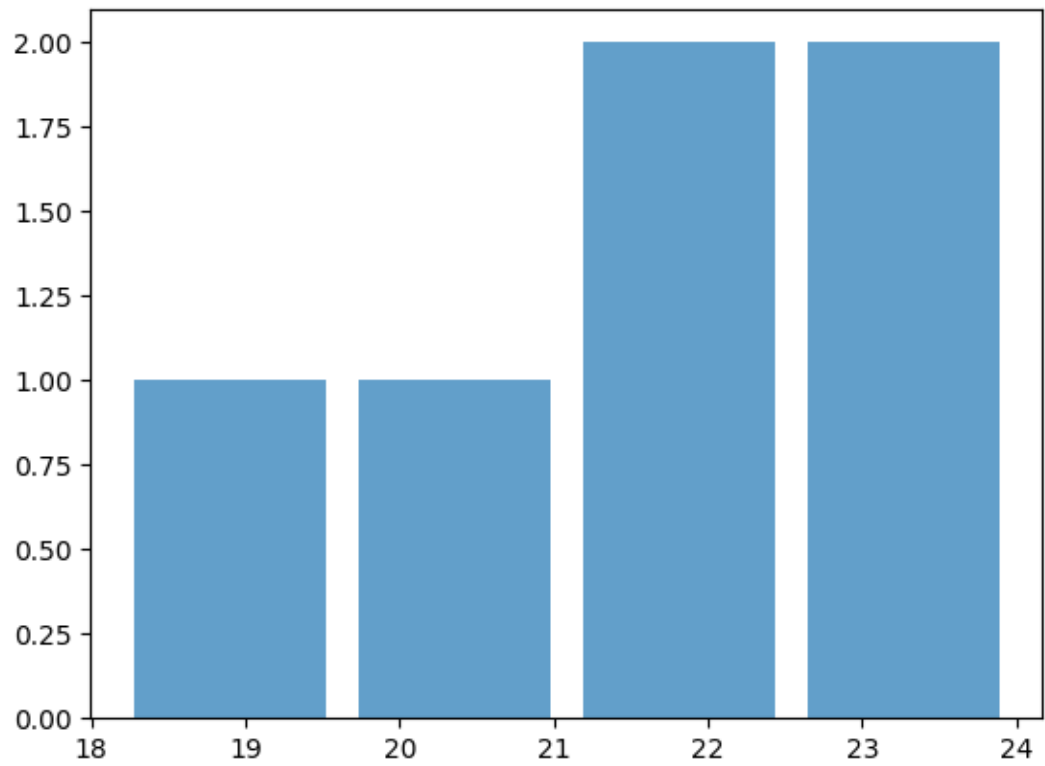


8. Add a title and axis labels:

```
plt.hist(test_1, bins='auto', alpha=0.7, rwidth=0.85)
plt.xlabel('Points')
plt.ylabel('Frequency')
plt.title('Histogram of Test 1 results')
plt.show()
```

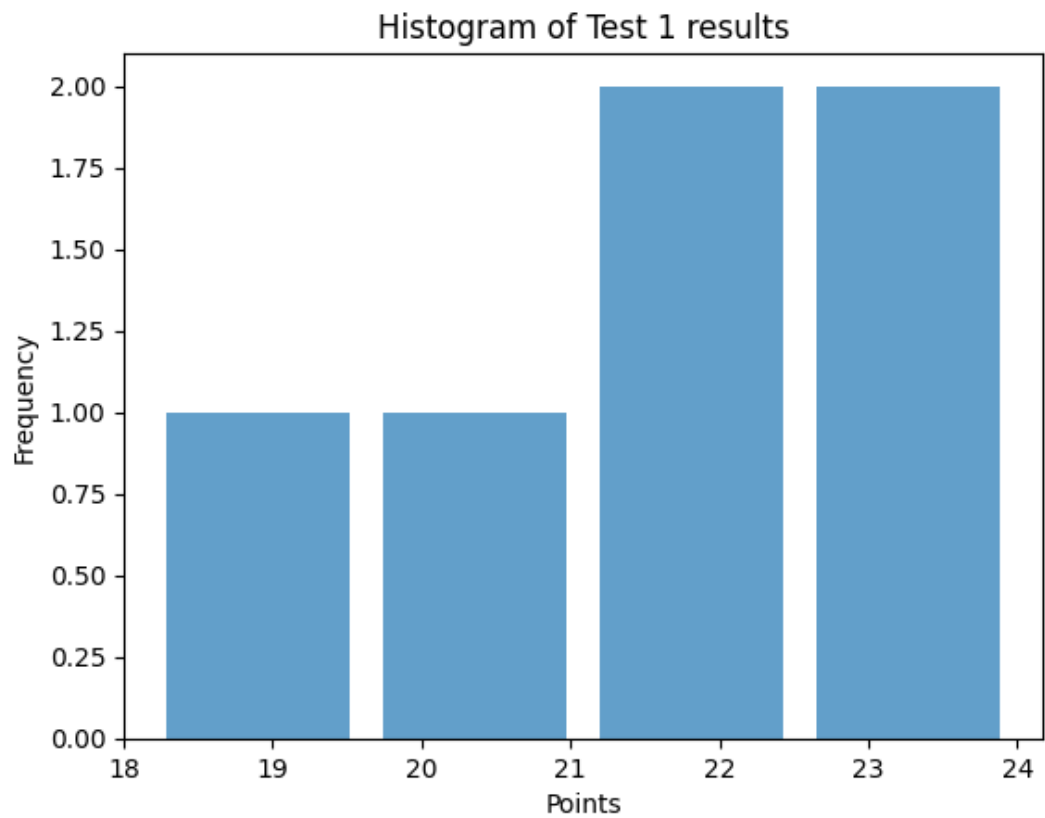

9. Finally, put a grid behind the plot to ease readability:

```
plt.hist(test_1, bins='auto', alpha=0.7, rwidth=0.85)
plt.xlabel('Points')
plt.ylabel('Frequency')
plt.title('Histogram of Test 1 results')
plt.grid(True)
plt.show()
```

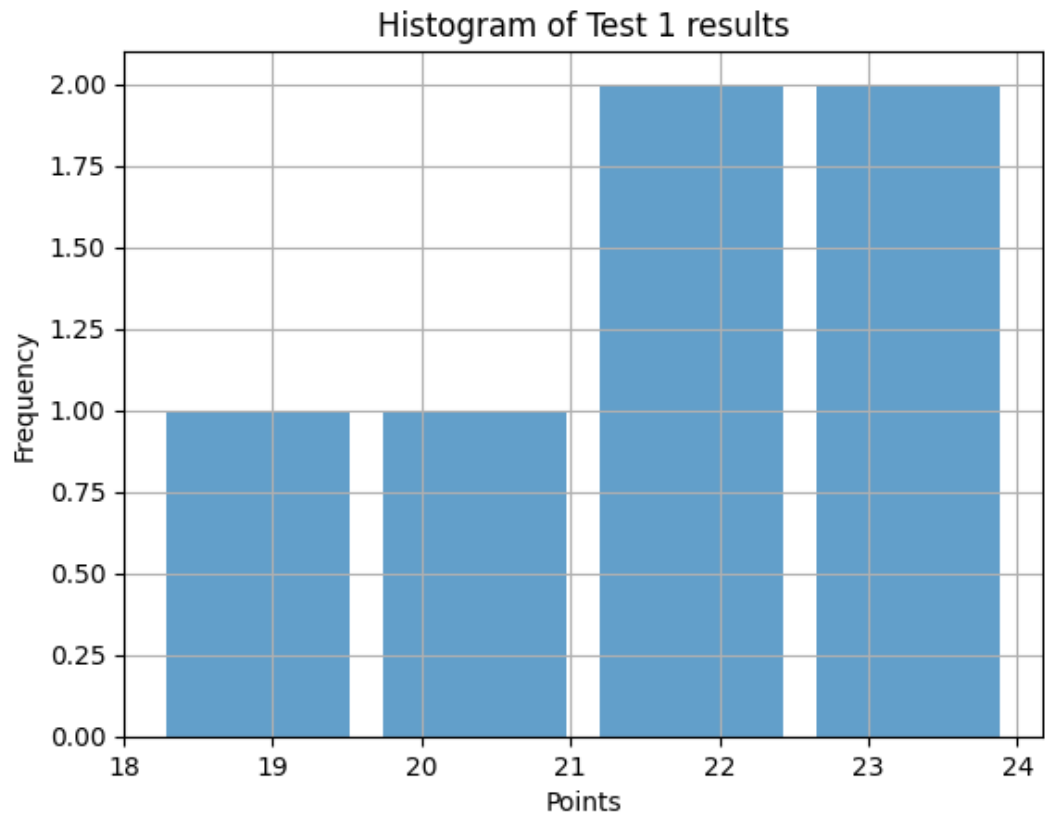

10. All of these functions are *methods* of the `pyplot` module.

1.2 Compute and draw a line for the point average

1. Import the NumPy package as `np`.

```
import numpy as np
```

2. Compute the average of the `test_1` and the `test_2` results as `avg_1` and `avg_2` and print them with two digits after the decimal point:

```
avg_1 = np.mean(test_1)
avg_2 = np.mean(test_2)
print(f'Average Test 1: {avg_1:.2f}\nAverage Test 2: {avg_2:.2f}')
```

3. Since I already use NumPy, I can do this with an array in one go:

```
data = np.array([test_1, test_2])
print(data)
```


4. To compute the average along the rows, use the `axis=1` parameter:

```
avg = np.mean(data,axis=1)
print(f'Average Test 1: {avg[0]:.2f}\nAverage Test 2: {avg[1]:.2f}')
```

```
Average Test 1: 21.58
Average Test 2: 18.56
```


5. We can use `plt.axvline` to print the average as a dashed line into the histogram:

```
plt.hist(test_1, bins='auto', alpha=0.7, rwidth=0.85)
plt.axvline(avg[0], color='r', linestyle='dashed',linewidth=2)
plt.xlabel('Points')
plt.ylabel('Frequency')
plt.title('Histogram of Test 1 results')
plt.grid(True)
plt.show()
```

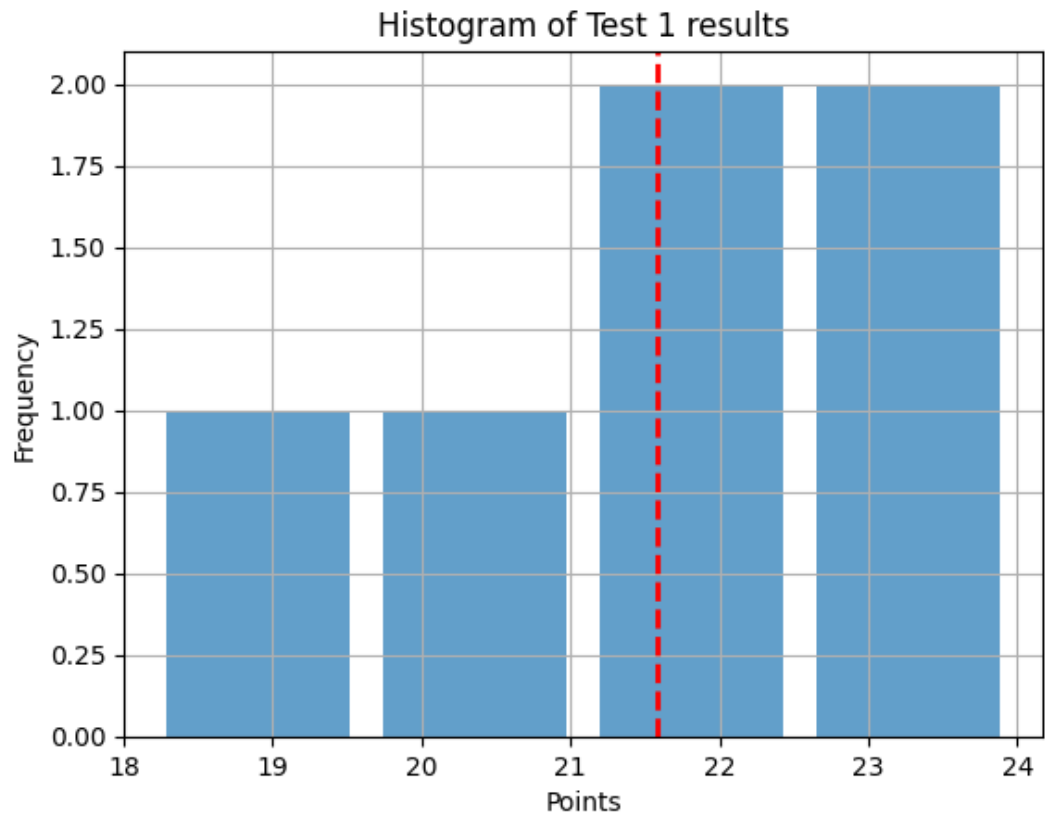


6. Finally, add a legend in the plot itself to identify the average:

```
plt.hist(test_1, bins='auto', alpha=0.7, rwidth=0.85)
plt.axvline(avg[0], color='r', linestyle='dashed', linewidth=2,
            label=f'Test 1 average: {avg[0]:.2f}')
plt.legend()
plt.xlabel('Points')
plt.ylabel('Frequency')
plt.title('Histogram of Test 1 results')
plt.grid(True)
plt.show()
```

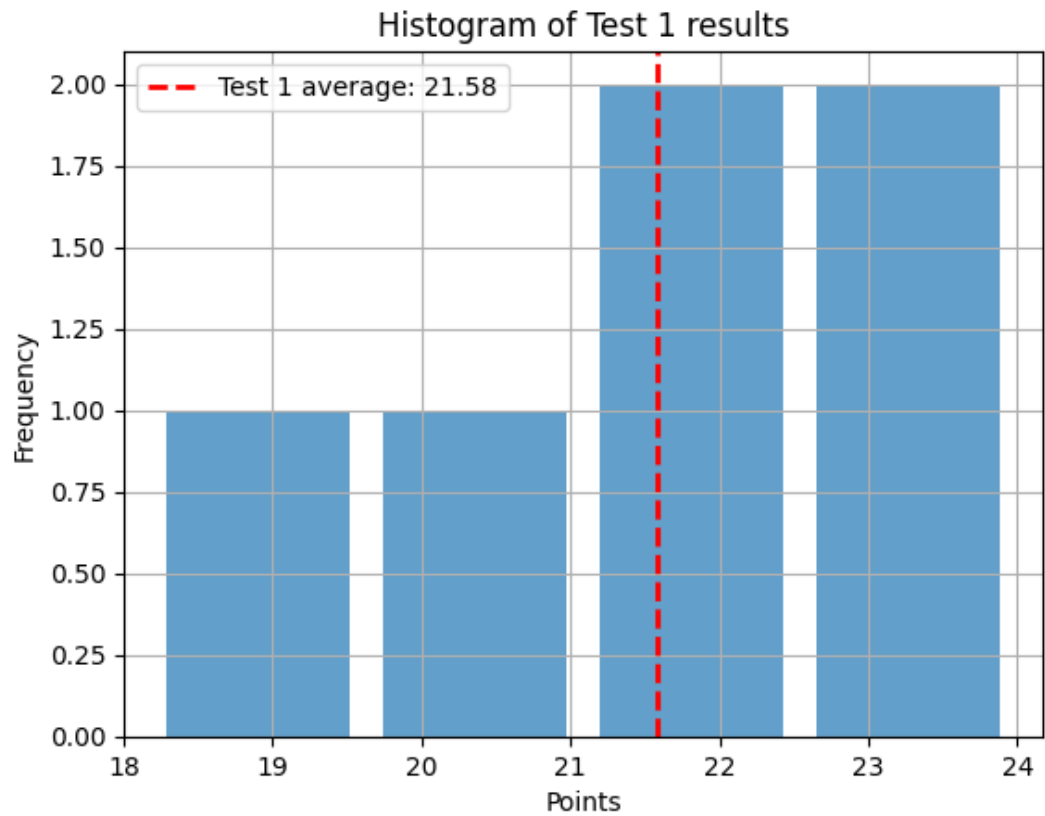- Repeat this procedure for the second set of data points and create a similar histogram:

```
plt.hist(test_2, bins='auto', alpha=0.7, rwidth=0.85)
plt.axvline(avg[1], color='r', linestyle='dashed', linewidth=2,
            label=f'Test 2 average: {avg[1]:.2f}')
plt.legend()
plt.xlabel('Points')
plt.ylabel('Frequency')
plt.title('Histogram of Test 2 results')
plt.grid(True)
plt.show()
```

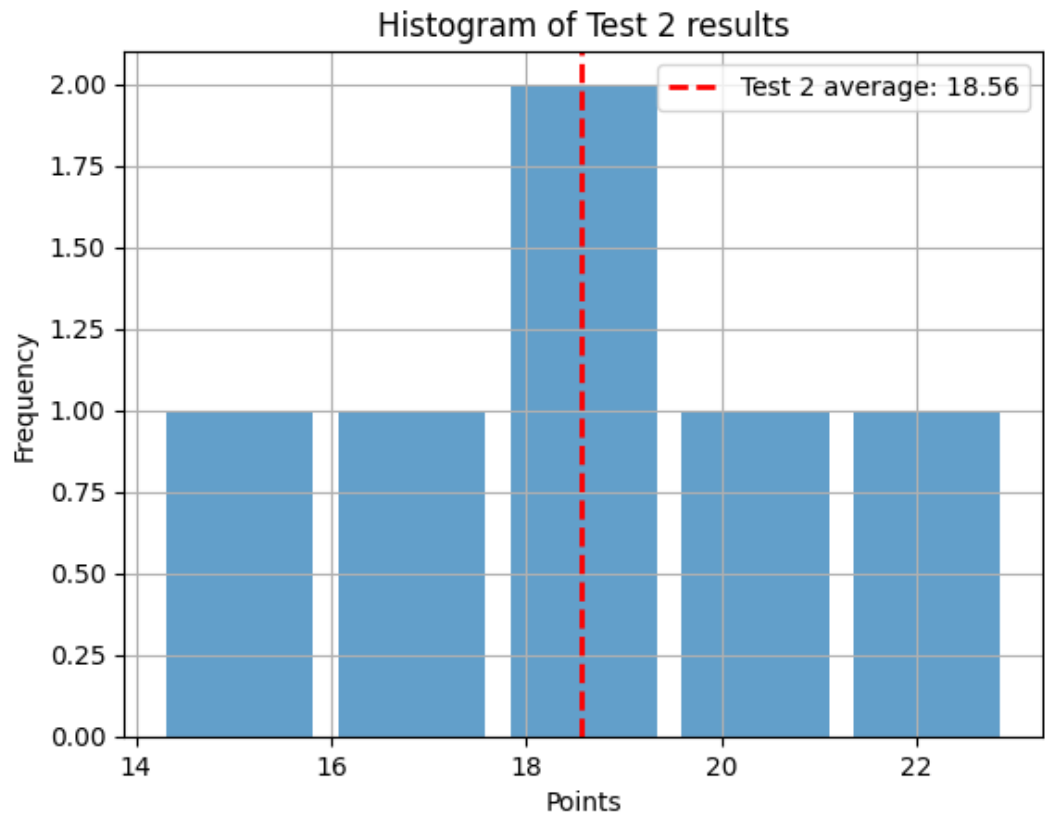


1.3 Subplots

We want to put the two histogram plots next to one another on two panels. To do this, we need to use the `plt.subplots` method.

1. Create a figure and a set of two subplots (for each dataset):
 - `plt.subplots(2)` creates a new figure `fig` and returns a NumPy array `axs` containing the created subplot objects.
 - `fig` is the whole window or page that everything is drawn on.
 - `axs` is an array of length 2 containing the axes for the subplots. In this case, since you're creating 2 subplots, `axs` will be an array of length 2. Each item in the array is a separate set of axes, which you can think of as an individual plot. You can draw on these axes (i.e., create a plot) by calling methods on them.

```
fig, axs = plt.subplots(2)
```

2. When you run the code you should see two empty plot panels. You can experiment with these to find out more about `plt` after looking at `plt.subplots?`:

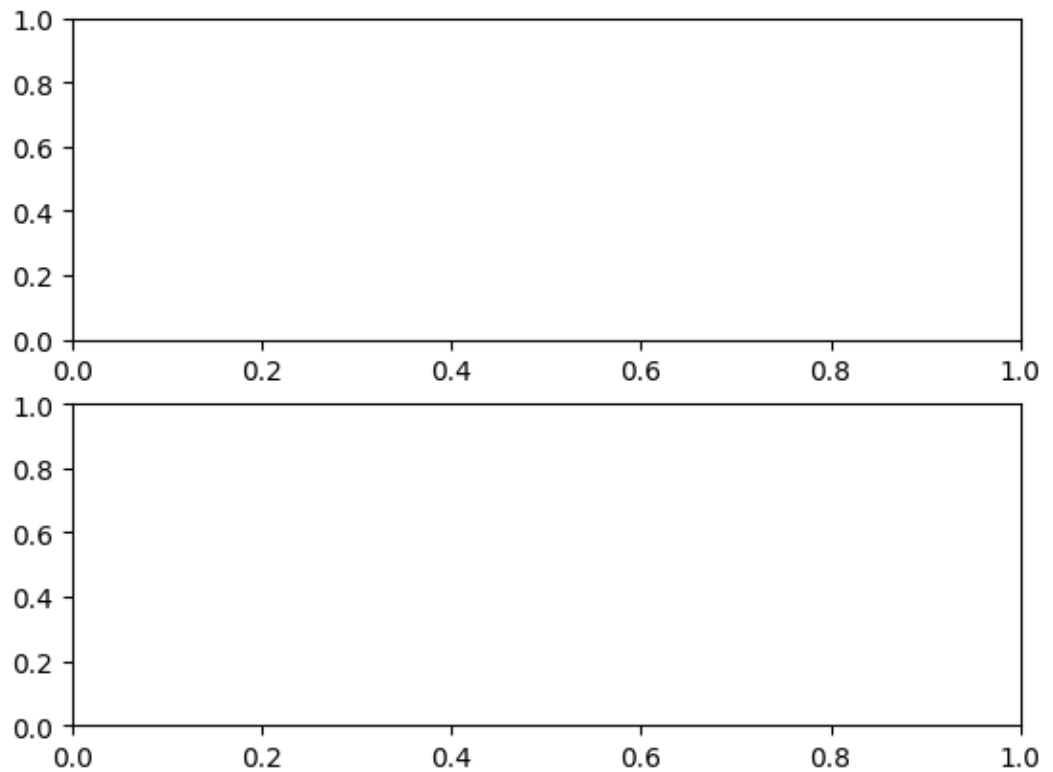

3. To plot a histogram of your data on a subplot `N` of your figure, you call `axs[N].hist()`. Do this now for `N=0` only:


```
# Create a figure and a set of subplots
fig, axs = plt.subplots(2)

# Create a histogram for test_1
axs[0].hist(test_1,
             bins='auto',
```

```

        color='b',
        alpha=0.7,
        edgecolor='black')
    axs[0].set_title('Histogram of test_1')

```

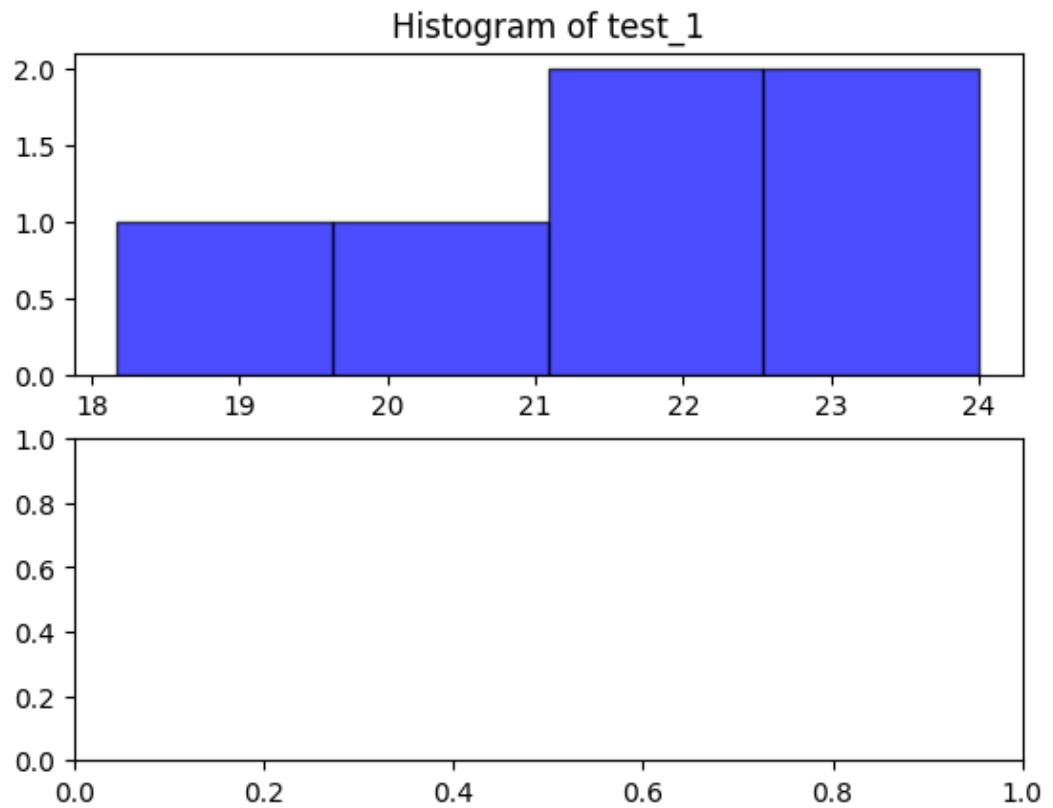

1. And then add the code for the second histogram below it, adapting the values accordingly:

```

import matplotlib.pyplot as plt
import numpy as np

# input data as lists
test_1 = [18.17, 21, 21.5, 21.67, 23.17, 24]
test_2 = [14.17, 17.67, 17.83, 19.17, 19.5, 23]


```

```
# Create a figure and a set of subplots
fig, axs = plt.subplots(2)

# Create a histogram for test_1
axs[0].hist(test_1,
            bins=3,
            color='b',
            alpha=0.7,
            edgecolor='black')
axs[0].set_title('Histogram of test_1')

# Create a histogram for test_2
axs[1].hist(test_2, bins=3, color='r', alpha=0.7, edgecolor='black')
axs[1].set_title('Histogram of test_2')

# Display the plot
plt.tight_layout()
plt.show()
```

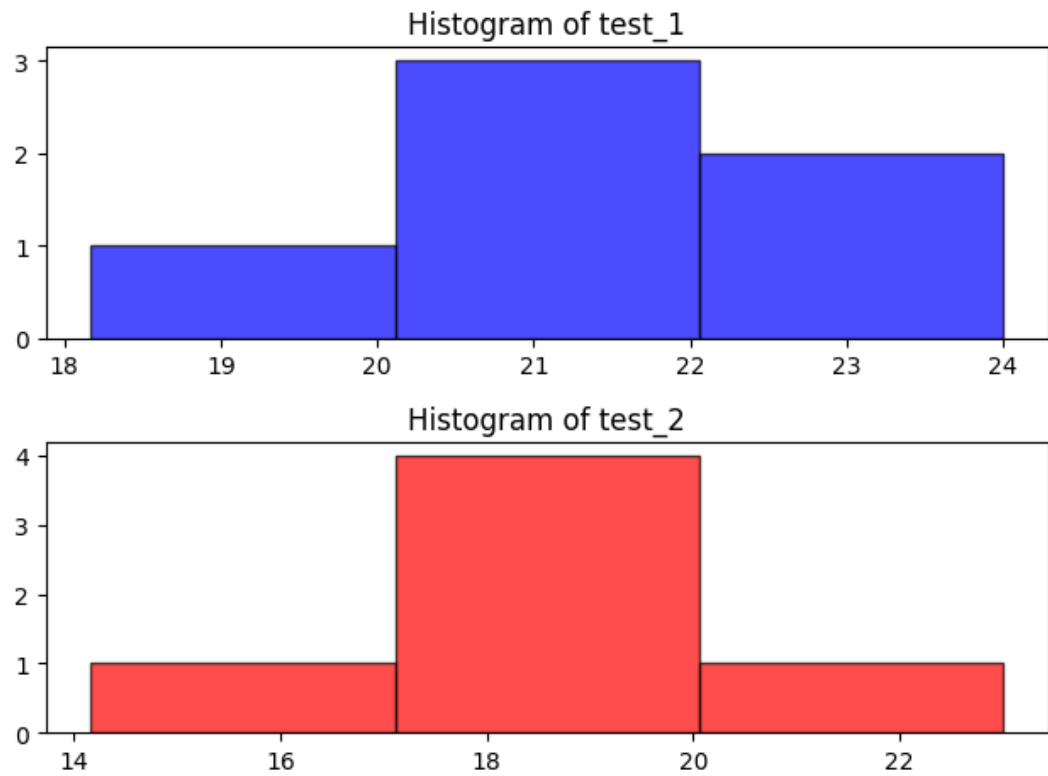

- Here, `plt.tight_layout()` automatically adjusts subplot parameters so that the subplot fits the panels nicely. Take it out and re-plot to see the effect.