

CS 246: Artificial Intelligence



Instructor: Br. Tamal Mj

Image credit
<https://futureoflife.org/>


[slides adapted from Dan Klein, Pieter Abbeel, Sergey Levine & Stuart Russel (University of California, Berkeley)]



Om Saha Naav[au]-Avatu
Saha Nau Bhunaktu
Saha Viiryam Karavaavahai
Tejasvi Naav[au]-Adhiitam-
Astu Maa Vidvissaavahai
Om Shaantih Shaantih
Shaantih

Om, May we all be protected
May we all be nourished
May we work together with great energy
May our intellect be sharpened (may our study be effective)
Let there be no Animosity amongst us
Om, peace (in me), peace (in nature), peace (in divine forces)

Bayes' Nets: Inference

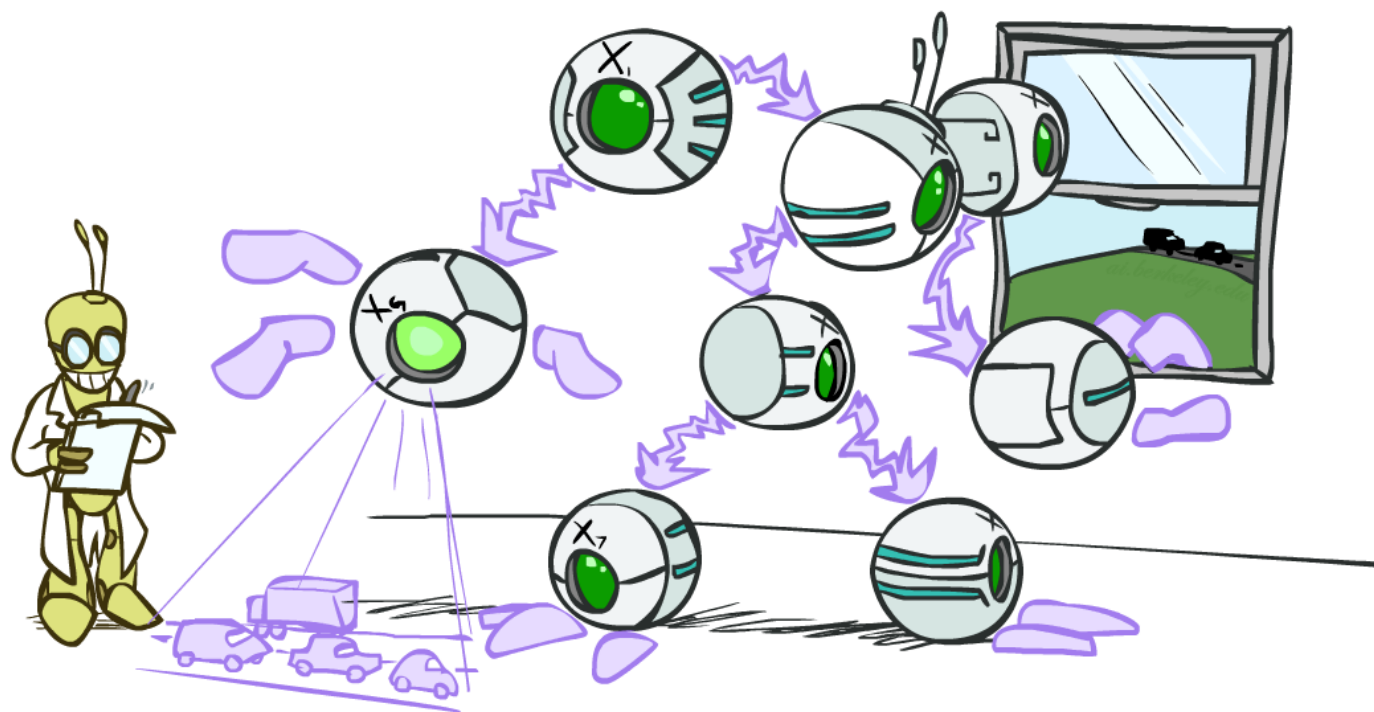



Bayes' Net Representation

- A directed, acyclic graph, one node per random variable
- A conditional probability table (CPT) for each node
 - A collection of distributions over X , one for each combination of parents' values

$$P(X|a_1 \dots a_n)$$


- Bayes' nets implicitly encode joint distributions
 - As a product of local conditional distributions
 - To see what probability a BN gives to a full assignment, multiply all the relevant conditionals together:

$$P(x_1, x_2, \dots, x_n) = \prod_{i=1}^n P(x_i | \text{parents}(X_i))$$

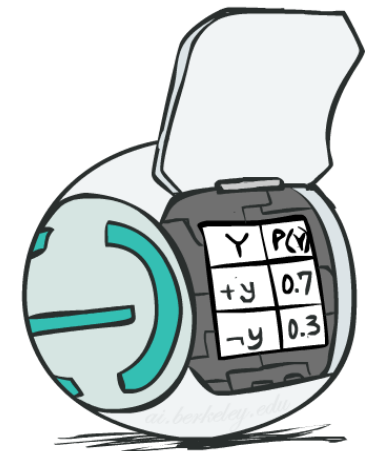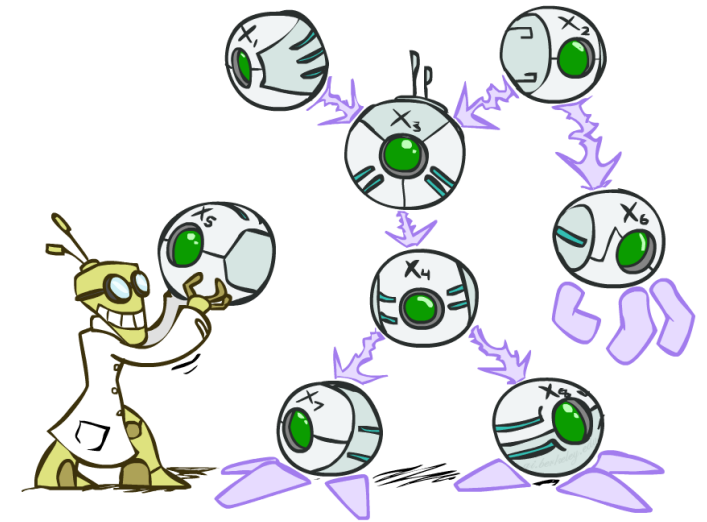


Example: Alarm Network

B	P(B)
+b	0.001
-b	0.999

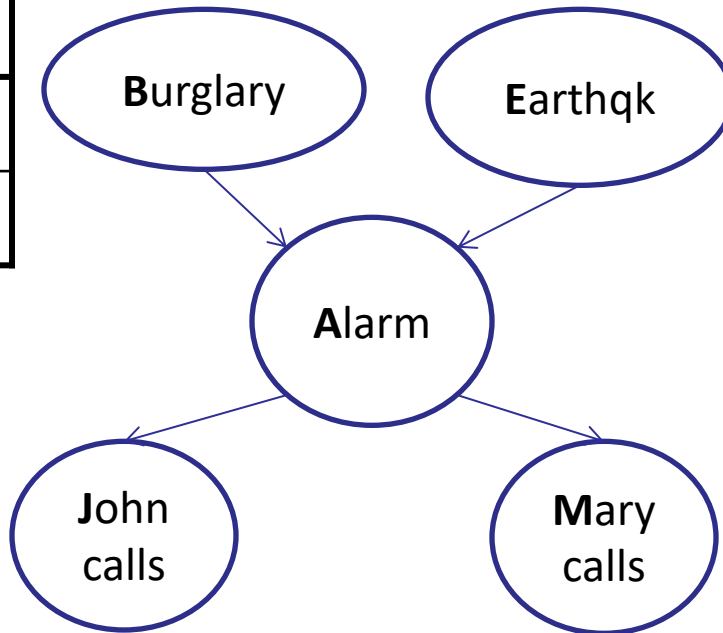

E	P(E)
+e	0.002
-e	0.998

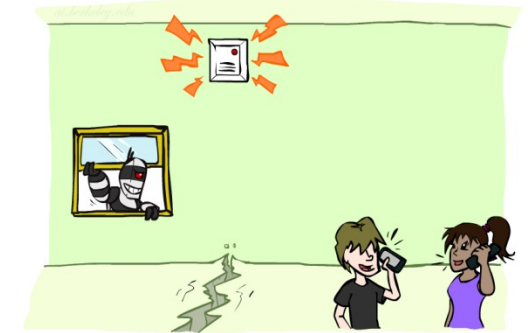

A	J	P(J A)
+a	+j	0.9
+a	-j	0.1
-a	+j	0.05
-a	-j	0.95

A	M	P(M A)
+a	+m	0.7
+a	-m	0.3
-a	+m	0.01
-a	-m	0.99

B	E	A	P(A B,E)
+b	+e	+a	0.95
+b	+e	-a	0.05
+b	-e	+a	0.94
+b	-e	-a	0.06
-b	+e	+a	0.29
-b	+e	-a	0.71
-b	-e	+a	0.001
-b	-e	-a	0.999



Example: Alarm Network

B	P(B)
+b	0.001
-b	0.999

E	P(E)
+e	0.002
-e	0.998

A	J	P(J A)
+a	+j	0.9
+a	-j	0.1
-a	+j	0.05
-a	-j	0.95

A	M	P(M A)
+a	+m	0.7
+a	-m	0.3
-a	+m	0.01
-a	-m	0.99

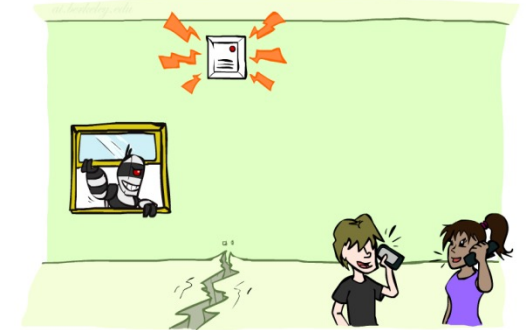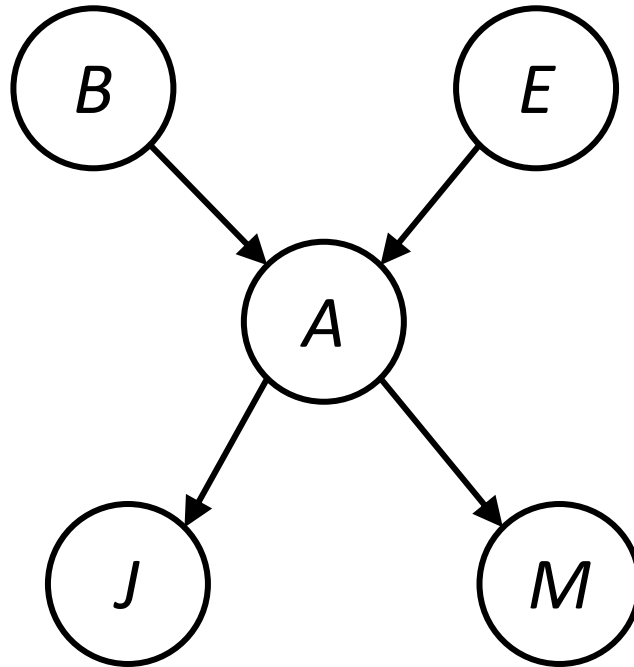


B	E	A	P(A B,E)
+b	+e	+a	0.95
+b	+e	-a	0.05
+b	-e	+a	0.94
+b	-e	-a	0.06
-b	+e	+a	0.29
-b	+e	-a	0.71
-b	-e	+a	0.001
-b	-e	-a	0.999

$$P(+b, -e, +a, -j, +m) =$$

$$P(+b)P(-e)P(+a|+b, -e)P(-j|+a)P(+m|+a) =$$


Example: Alarm Network

B	P(B)
+b	0.001
-b	0.999

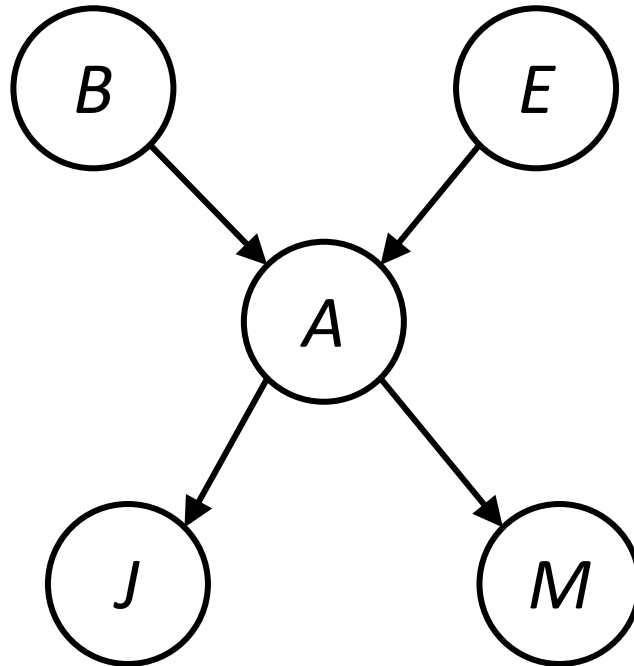

E	P(E)
+e	0.002
-e	0.998

A	M	P(M A)
+a	+m	0.7
+a	-m	0.3
-a	+m	0.01
-a	-m	0.99

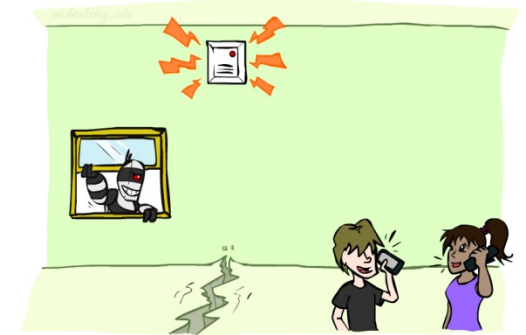

A	J	P(J A)
+a	+j	0.9
+a	-j	0.1
-a	+j	0.05
-a	-j	0.95

B	E	A	P(A B,E)
+b	+e	+a	0.95
+b	+e	-a	0.05
+b	-e	+a	0.94
+b	-e	-a	0.06
-b	+e	+a	0.29
-b	+e	-a	0.71
-b	-e	+a	0.001
-b	-e	-a	0.999

$$\begin{aligned}
 P(+b, -e, +a, -j, +m) &= \\
 P(+b)P(-e)P(+a|+b, -e)P(-j|+a)P(+m|+a) &= \\
 0.001 \times 0.998 \times 0.94 \times 0.1 \times 0.7 &
 \end{aligned}$$

Bayes' Nets

- ✓ Representation
- ✓ Conditional Independences
- Probabilistic Inference
 - Enumeration (exact, exponential complexity)
 - Variable elimination (exact, worst-case exponential complexity, often better)
 - Inference is NP-complete
 - Sampling (approximate)
- Learning Bayes' Nets from Data

Inference

- Inference: calculating some useful quantity from a joint probability distribution




- Examples:

- Posterior probability

$$P(Q|E_1 = e_1, \dots, E_k = e_k)$$

- Most likely explanation:

$$\operatorname{argmax}_q P(Q = q|E_1 = e_1 \dots)$$

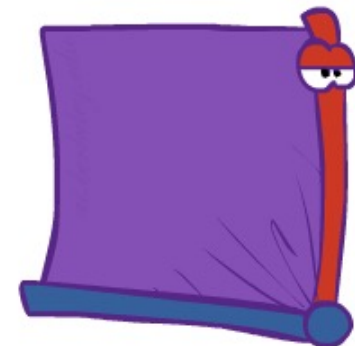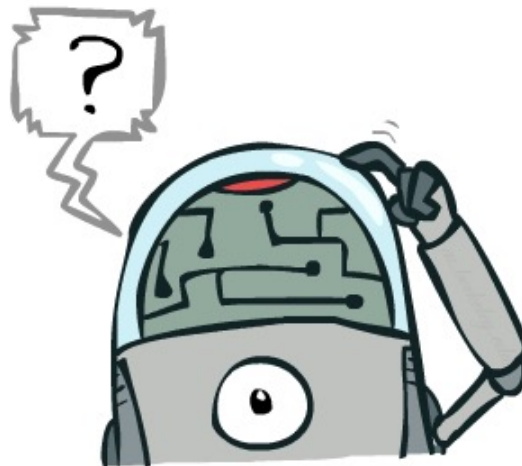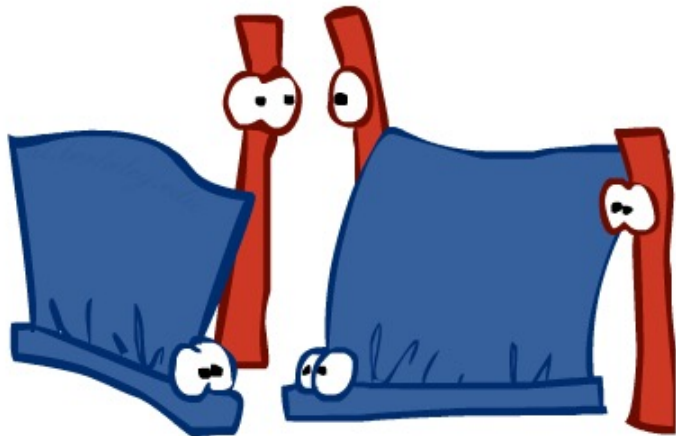

Inference by Enumeration

- General case:


- Evidence variables: $E_1 \dots E_k = e_1 \dots e_k$
 - Query* variable: Q
 - Hidden variables: $H_1 \dots H_r$
- $$\left. \begin{array}{l} E_1 \dots E_k = e_1 \dots e_k \\ Q \\ H_1 \dots H_r \end{array} \right\} \begin{array}{l} X_1, X_2, \dots X_n \\ \text{All variables} \end{array}$$

- We want:

* Works fine with multiple query variables, too

$$P(Q|e_1 \dots e_k)$$


- Step 1: Select the entries consistent with the evidence



x	P(x)
-3	0.05
-1	0.25
0	0.07
1	0.2
5	0.01

2 0.15

- Step 2: Sum out H to get joint of Query and evidence

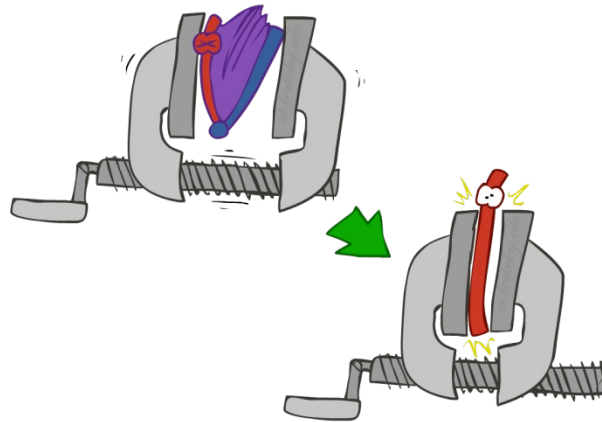

- Step 3: Normalize

$$\times \frac{1}{Z}$$

$$Z = \sum_q P(Q, e_1 \dots e_k)$$

$$P(Q|e_1 \dots e_k) = \frac{1}{Z} P(Q, e_1 \dots e_k)$$

$$P(Q, e_1 \dots e_k) = \sum_{h_1 \dots h_r} \underbrace{P(Q, h_1 \dots h_r, e_1 \dots e_k)}_{X_1, X_2, \dots X_n}$$


Inference by Enumeration in Bayes' Net

- Given unlimited time, inference in BNs is easy
- Reminder of inference by enumeration by example:

$$P(B \mid +j, +m) \propto_B P(B, +j, +m)$$


$$= \sum_{e,a} P(B, e, a, +j, +m)$$

$$= \sum_{e,a} P(B)P(e)P(a|B, e)P(+j|a)P(+m|a)$$

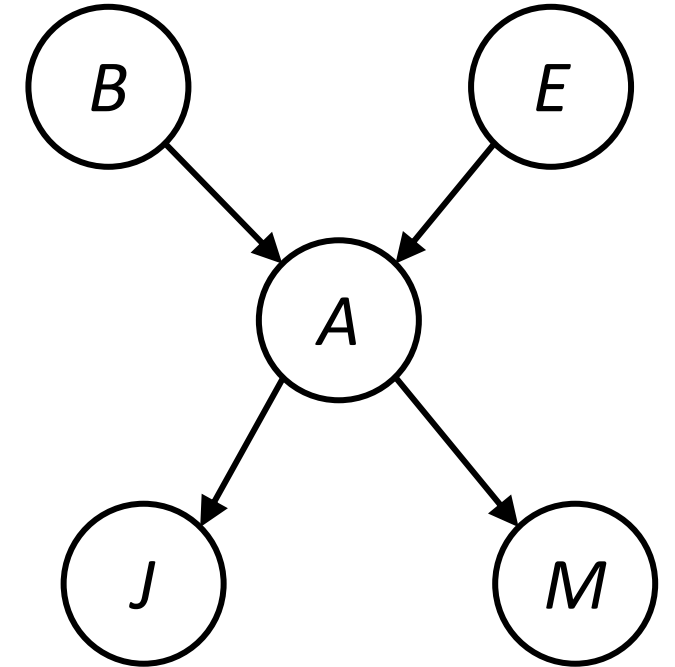

$$\begin{aligned} = & P(B)P(+e)P(+a|B, +e)P(+j|+a)P(+m|+a) + P(B)P(+e)P(-a|B, +e)P(+j|-a)P(+m|-a) \\ & P(B)P(-e)P(+a|B, -e)P(+j|+a)P(+m|+a) + P(B)P(-e)P(-a|B, -e)P(+j|-a)P(+m|-a) \end{aligned}$$


Inference by Enumeration?

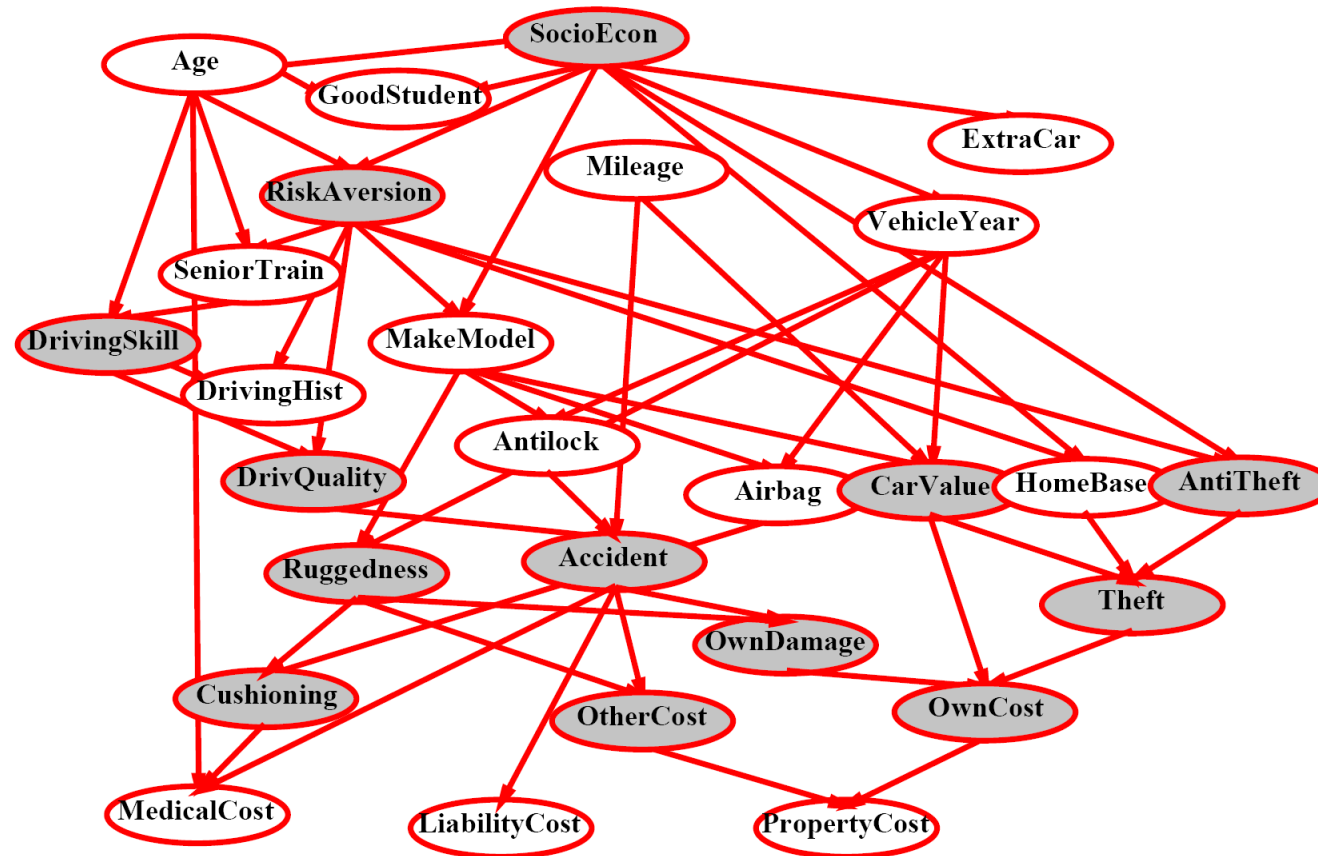

Inference by Enumeration vs. Variable Elimination


- Why is inference by enumeration so slow?

- You join up the whole joint distribution before you sum out the hidden variables

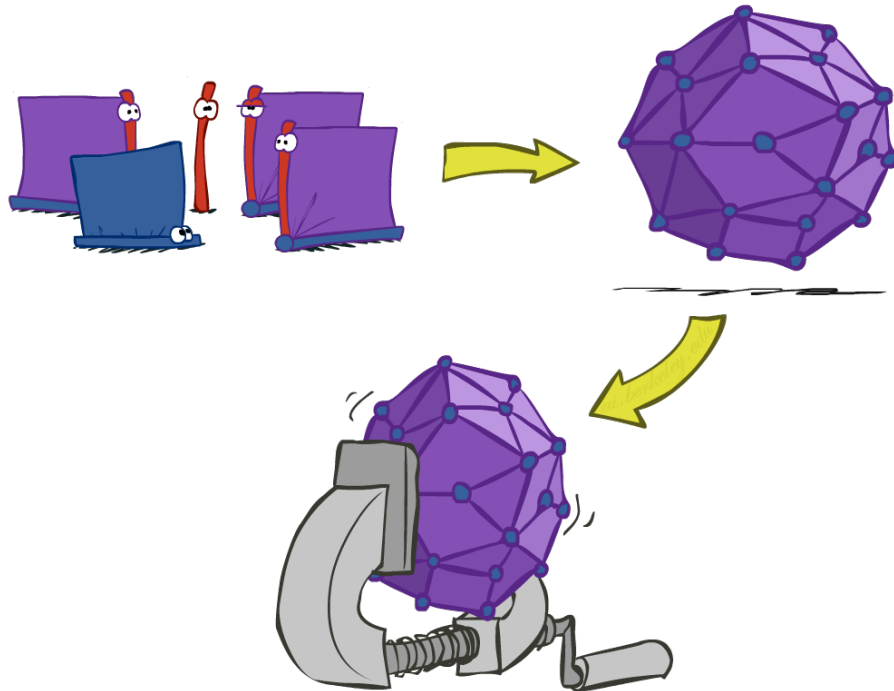


- Idea: interleave joining and marginalizing!

- Called “Variable Elimination”
- Still NP-hard, but usually much faster than inference by enumeration

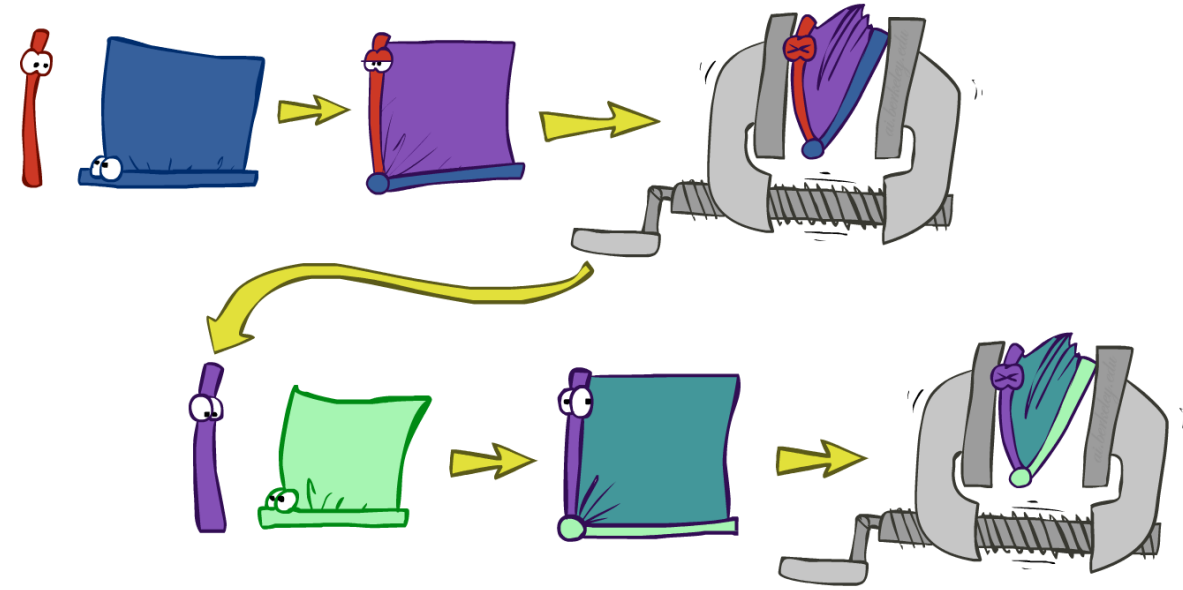

- First we'll need some new notation: factors

Factor Zoo

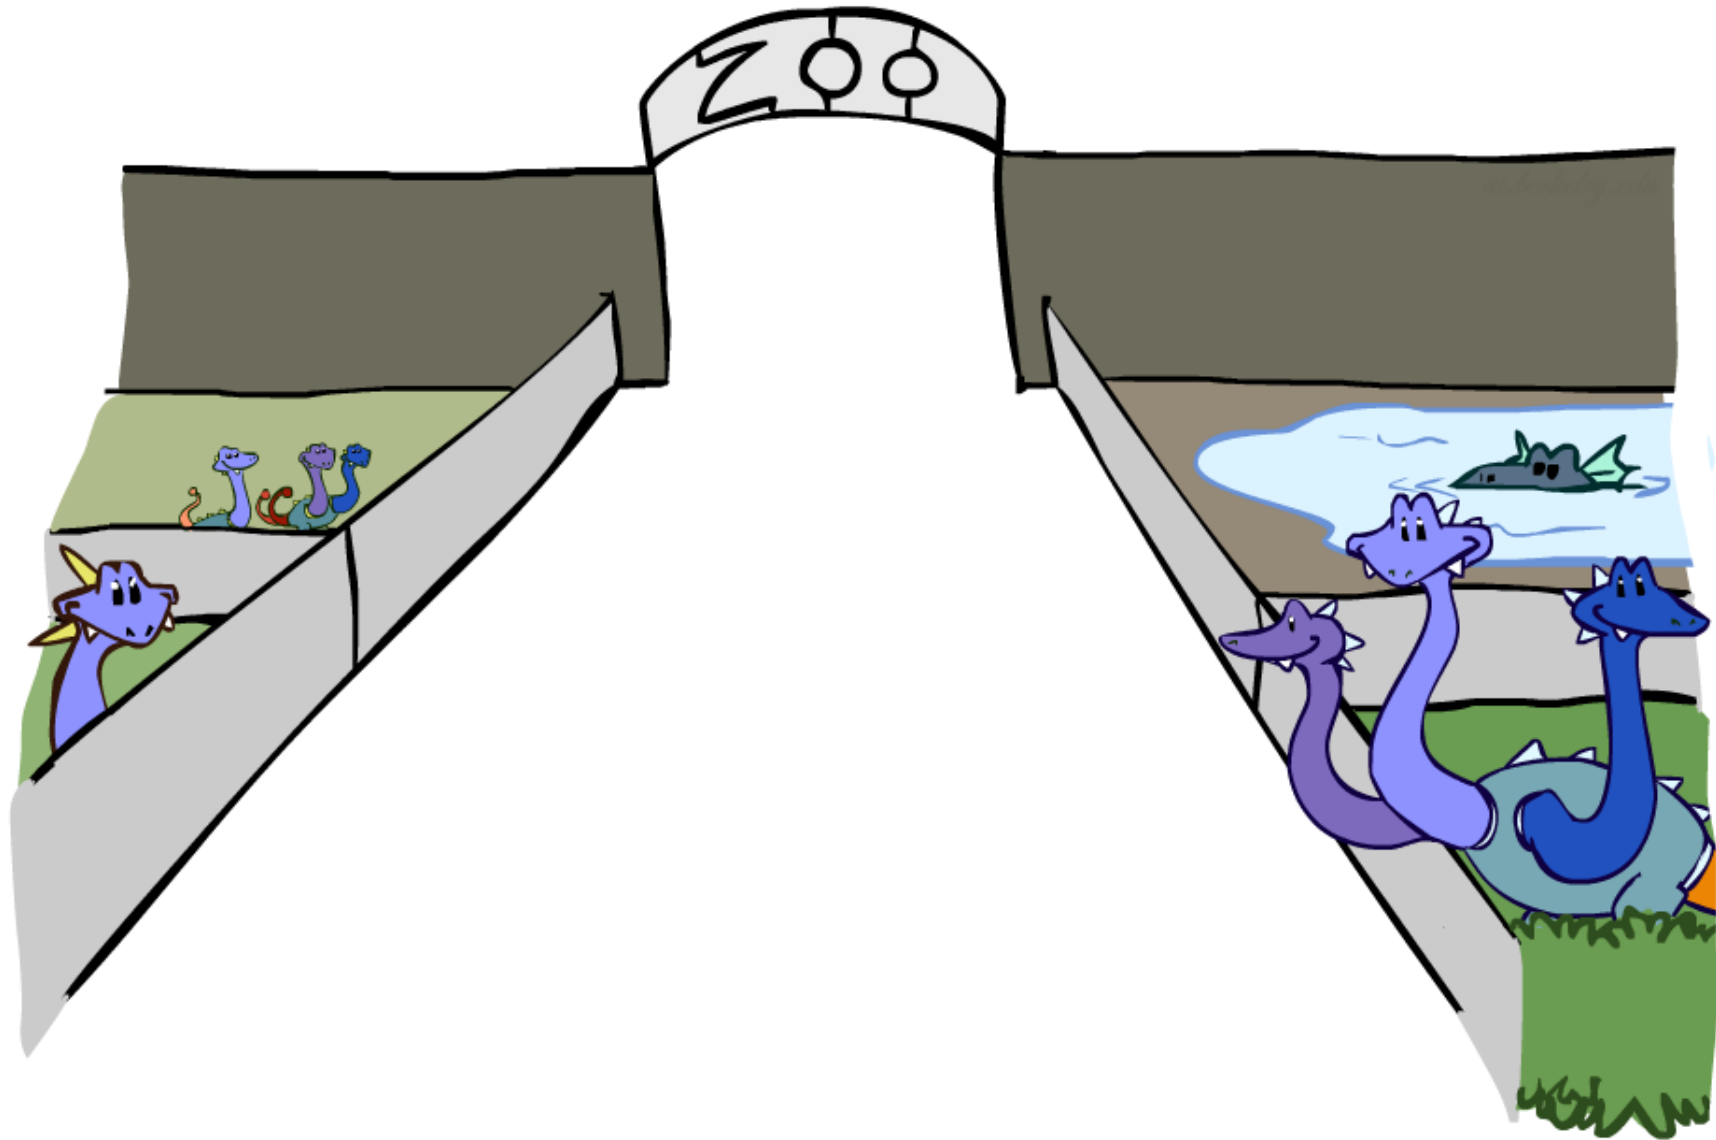

Factor Zoo I


- Joint distribution: $P(X,Y)$
 - Entries $P(x,y)$ for all x, y
 - Sums to 1
- Selected joint: $P(x,Y)$
 - A slice of the joint distribution
 - Entries $P(x,y)$ for fixed x , all y
 - Sums to $P(x)$
- Number of capitals = dimensionality of the table

$P(T, W)$

T	W	P
hot	sun	0.4
hot	rain	0.1
cold	sun	0.2
cold	rain	0.3

$P(\text{cold}, W)$


T	W	P
cold	sun	0.2
cold	rain	0.3

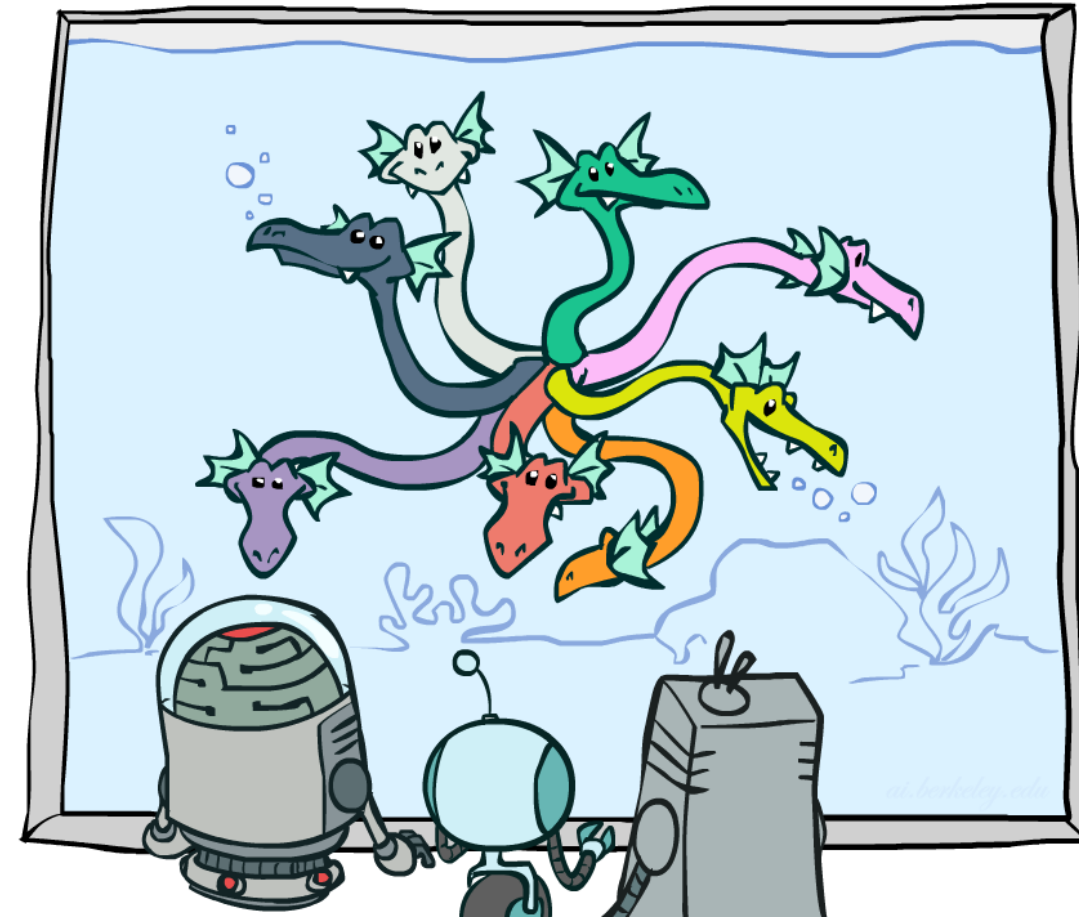

Factor Zoo II

- Single conditional: $P(Y \mid x)$

- Entries $P(y \mid x)$ for fixed x , all
- Sums to 1

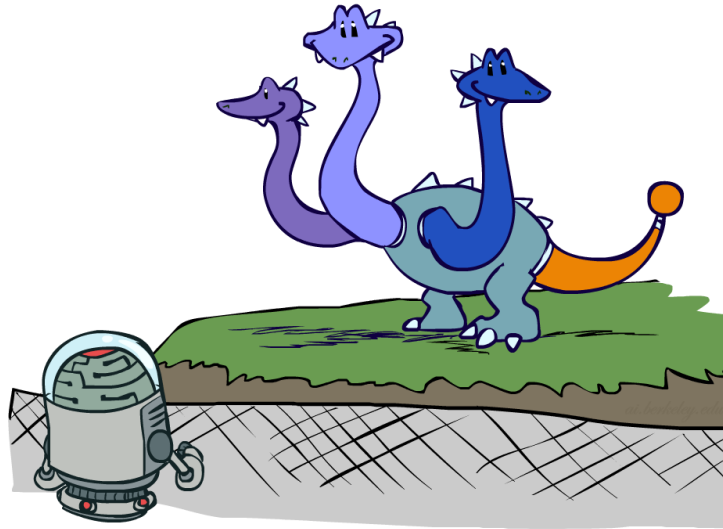


$$P(W \mid cold)$$

T	W	P
cold	sun	0.4
cold	rain	0.6

- Family of conditionals:
 $P(Y \mid X)$

- Multiple conditionals
- Entries $P(y \mid x)$ for all x, y
- Sums to $|X|$

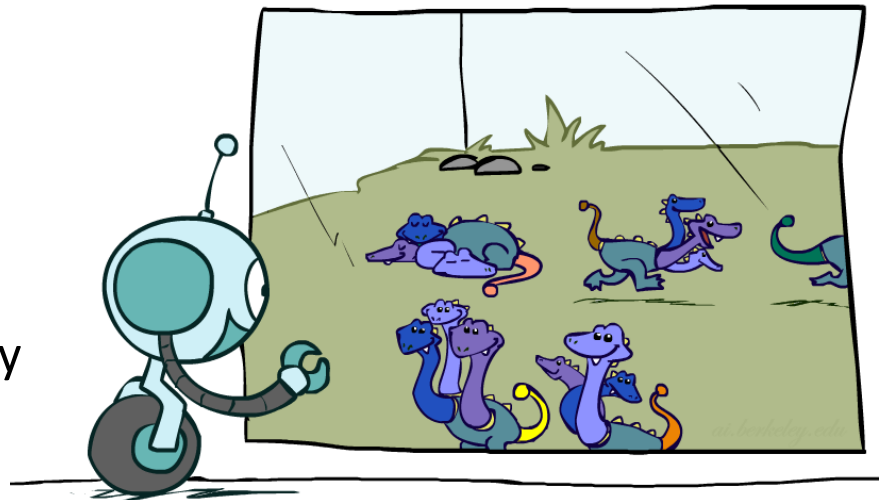

$$P(W \mid T)$$

T	W	P
hot	sun	0.8
hot	rain	0.2
cold	sun	0.4
cold	rain	0.6

$$P(W \mid hot)$$

$$P(W \mid cold)$$

Factor Zoo III

- Specified family: $P(y \mid X)$


- Entries $P(y \mid x)$ for fixed y , but for all x
- Sums to ... who knows!

$$P(\text{rain} \mid T)$$

T	W	P
hot	rain	0.2
cold	rain	0.6





$$\left. \begin{array}{c} \\ \end{array} \right\} P(\text{rain} \mid \text{hot})$$

$$\left. \begin{array}{c} \\ \end{array} \right\} P(\text{rain} \mid \text{cold})$$

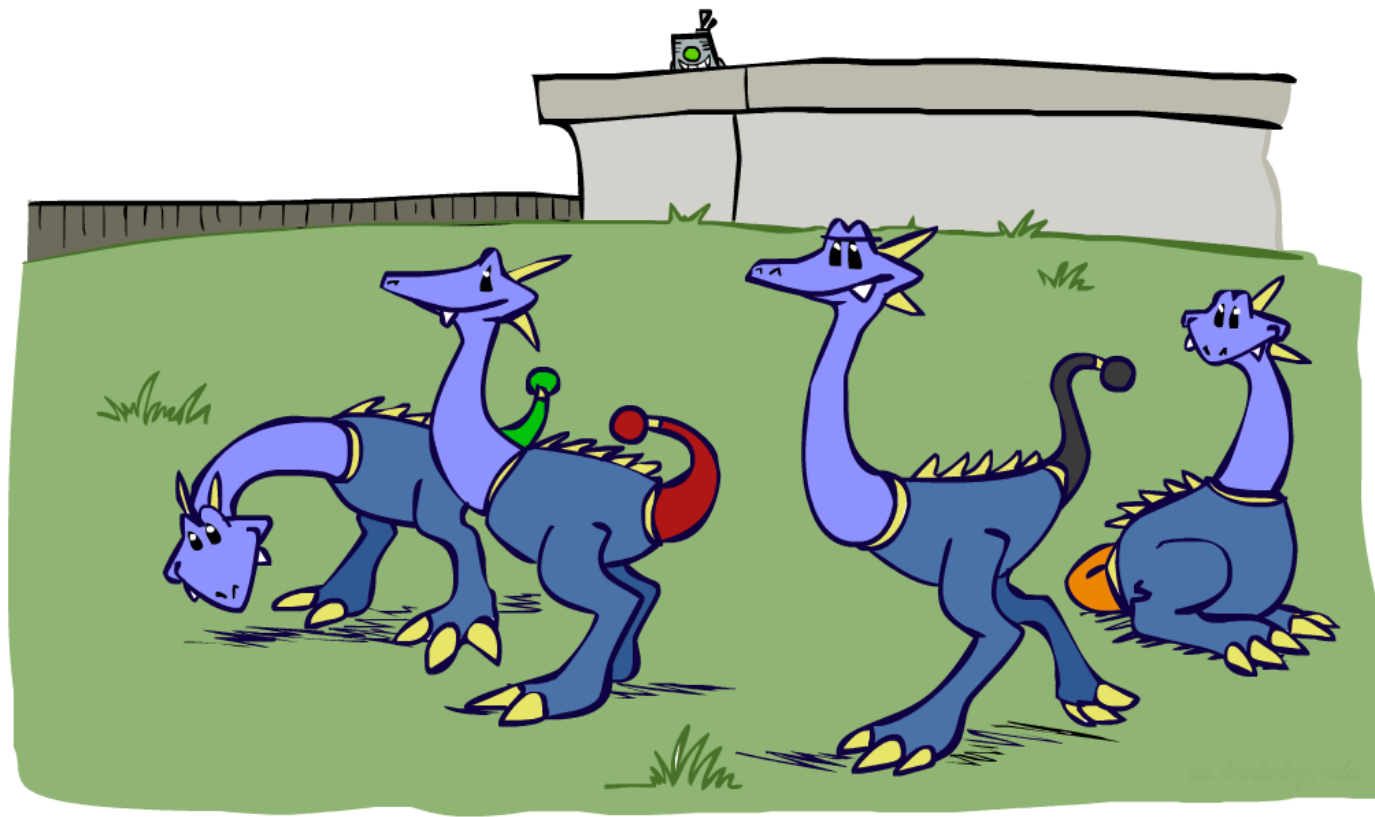

Factor Zoo Summary

- In general, when we write $P(Y_1 \dots Y_N \mid X_1 \dots X_M)$
 - It is a “factor,” a multi-dimensional array
 - Its values are $P(y_1 \dots y_N \mid x_1 \dots x_M)$
 - Any assigned (=lower-case) X or Y is a dimension missing (selected) from the array

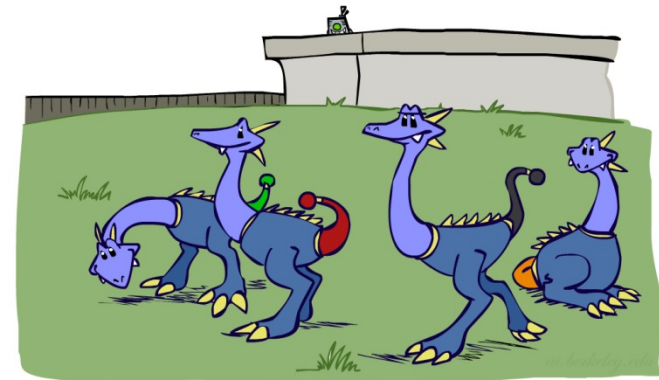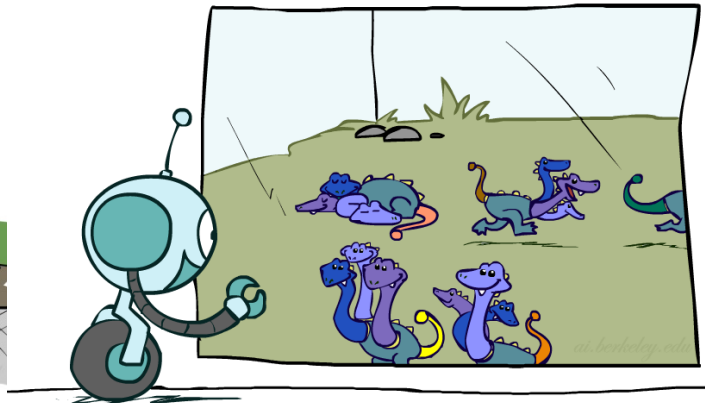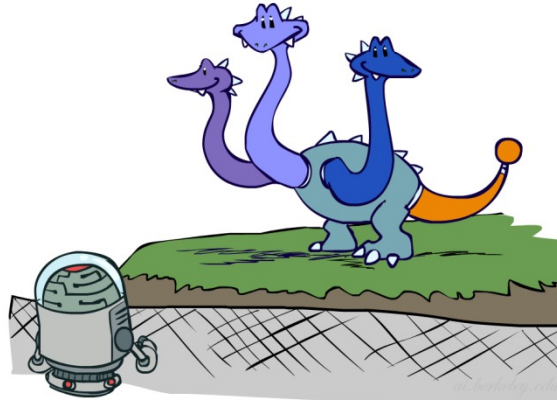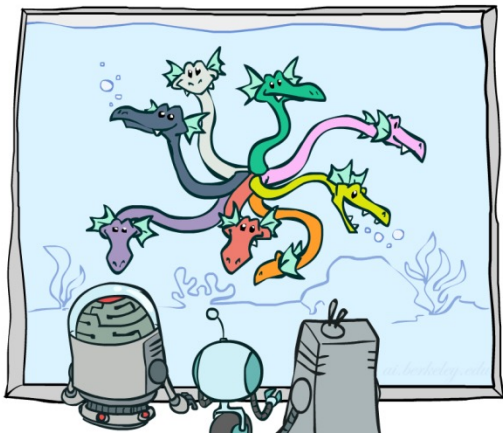

Example: Traffic Domain


■ Random Variables

- R: Raining
- T: Traffic
- L: Late for class!

$$P(L) = ?$$

$$= \sum_{r,t} P(r, t, L)$$

$$= \sum_{r,t} P(r)P(t|r)P(L|t)$$



$$P(R)$$

+r	0.1
-r	0.9

$$P(T|R)$$

+r	+t	0.8
+r	-t	0.2
-r	+t	0.1
-r	-t	0.9

$$P(L|T)$$

+t	+l	0.3
+t	-l	0.7
-t	+l	0.1
-t	-l	0.9

Inference by Enumeration: Procedural Outline

- Track objects called **factors**
- Initial factors are local CPTs (one per node)

$$P(R)$$

+r	0.1
-r	0.9

$$P(T|R)$$

+r	+t	0.8
+r	-t	0.2
-r	+t	0.1
-r	-t	0.9

$$P(L|T)$$

+t	+l	0.3
+t	-l	0.7
-t	+l	0.1
-t	-l	0.9

- Any known values are selected
 - E.g. if we know $L = +\ell$, the initial factors are

$$P(R)$$

+r	0.1
-r	0.9


$$P(T|R)$$

+r	+t	0.8
+r	-t	0.2
-r	+t	0.1
-r	-t	0.9

$$P(+\ell|T)$$



+t	+l	0.3
-t	+l	0.1

- Procedure: Join all factors, eliminate all hidden variables, normalize

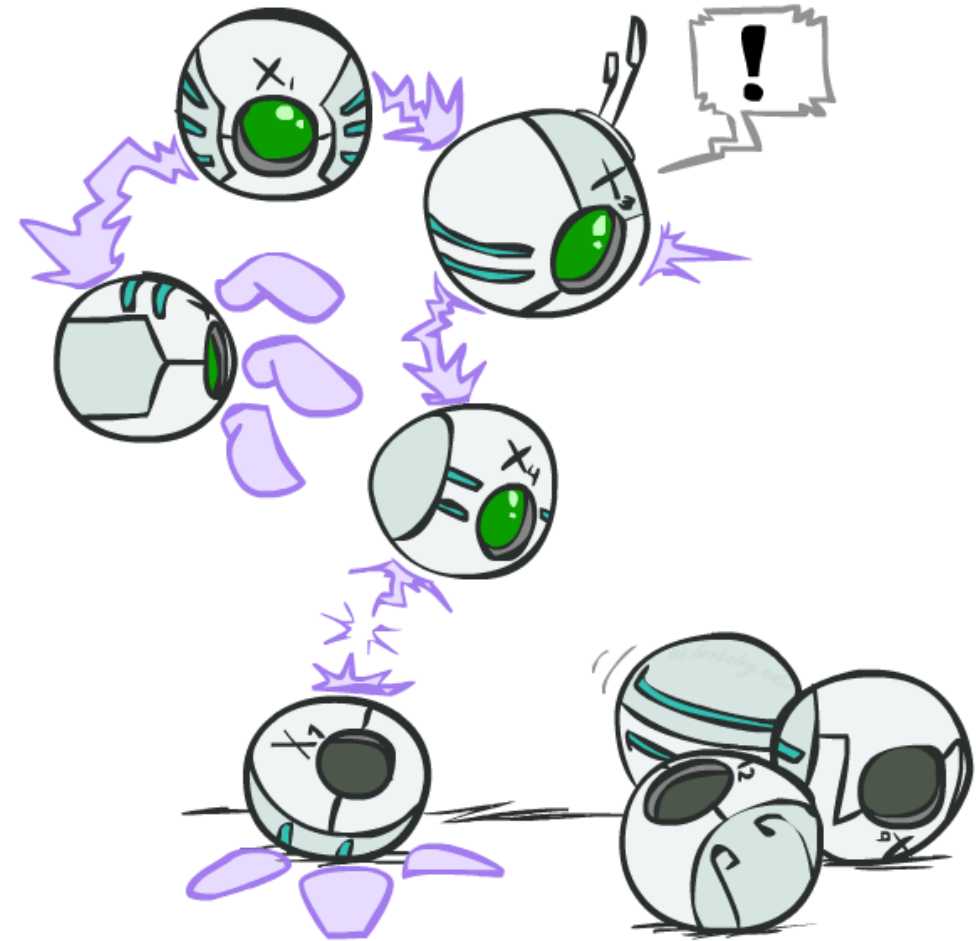


Operation 1: Join Factors

- First basic operation: **joining factors**
- Combining factors:
 - Just like a database join**
 - Get all factors over the joining variable
 - Build a new factor over the union of the variables involved
- Example: Join on R

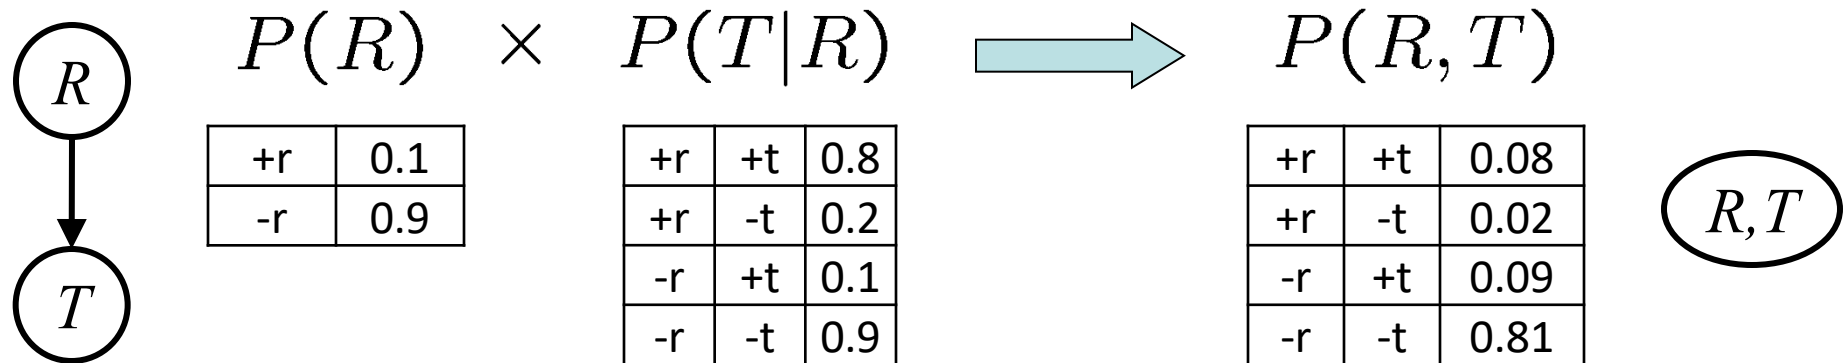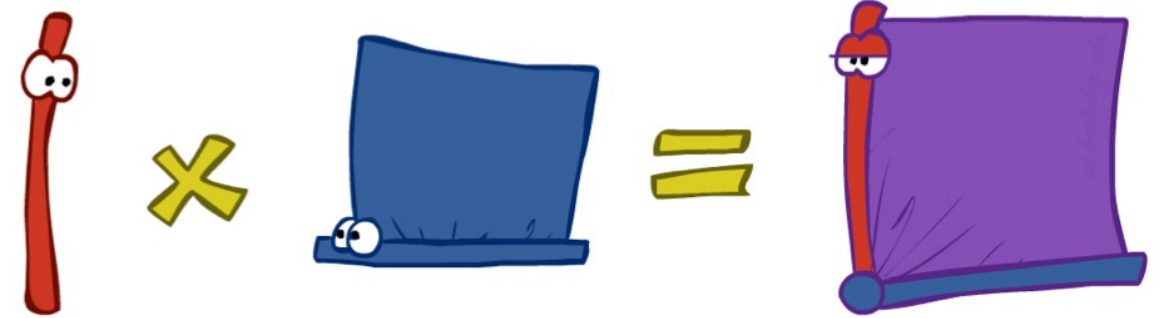


- Computation for each entry: pointwise products $\forall r, t : P(r, t) = P(r) \cdot P(t|r)$

Example: Multiple Joins

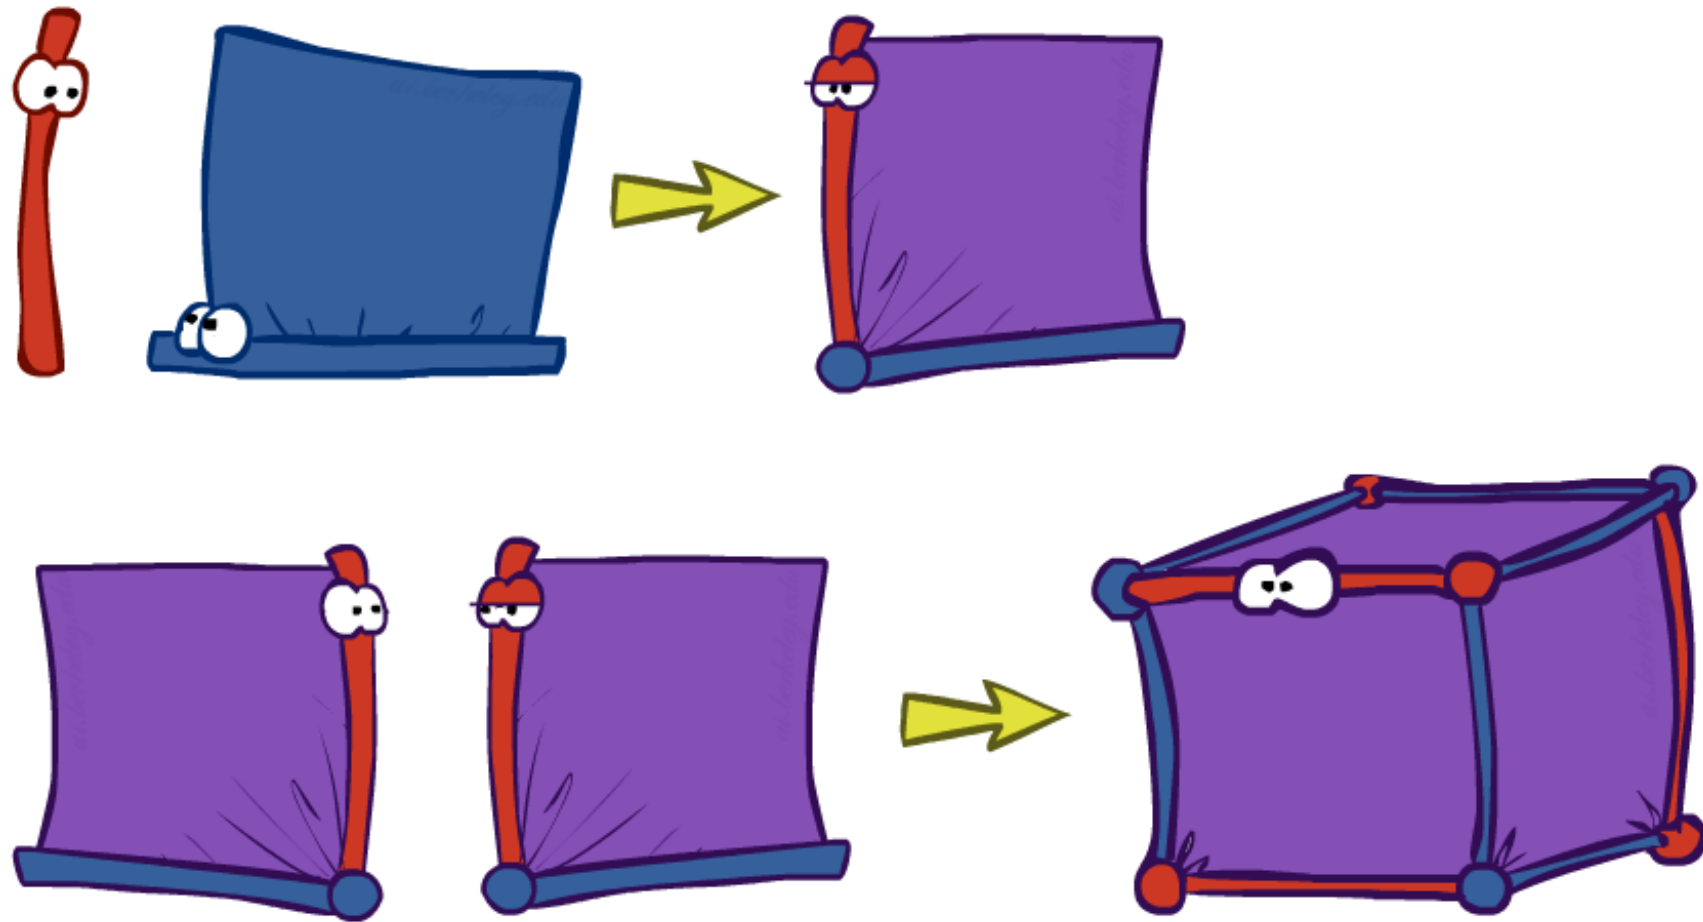

Example: Multiple Joins



$P(R)$

+r	0.1
-r	0.9

$P(T|R)$

+r	+t	0.8
+r	-t	0.2
-r	+t	0.1
-r	-t	0.9

$P(L|T)$

+t	+l	0.3
+t	-l	0.7
-t	+l	0.1
-t	-l	0.9

Join R




$P(R, T)$

+r	+t	0.08
+r	-t	0.02
-r	+t	0.09
-r	-t	0.81

$P(L|T)$

+t	+l	0.3
+t	-l	0.7
-t	+l	0.1
-t	-l	0.9

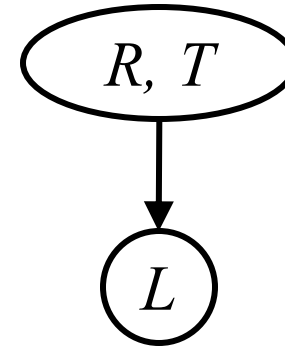


Join T



R, T, L

$P(R, T, L)$

+r	+t	+l	0.024
+r	+t	-l	0.056
+r	-t	+l	0.002
+r	-t	-l	0.018
-r	+t	+l	0.027
-r	+t	-l	0.063
-r	-t	+l	0.081
-r	-t	-l	0.729

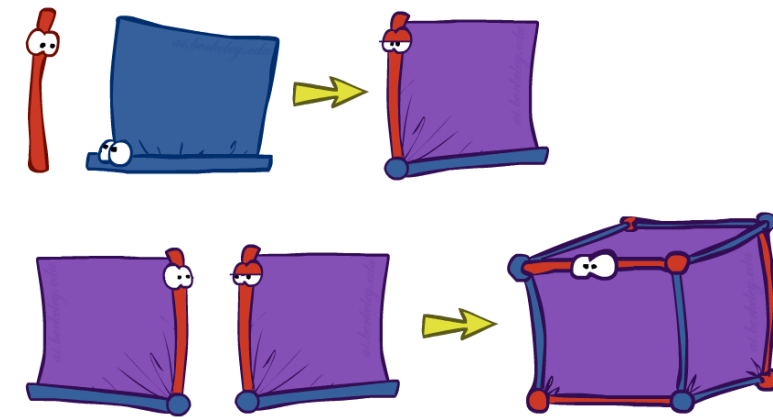

Operation 2: Eliminate

- Second basic operation: **marginalization**
- Take a factor and sum out a variable
 - Shrinks a factor to a smaller one
 - A **projection** operation
- Example:


$$P(R, T)$$

+r	+t	0.08
+r	-t	0.02
-r	+t	0.09
-r	-t	0.81

sum R


$$P(T)$$

+t	0.17
-t	0.83

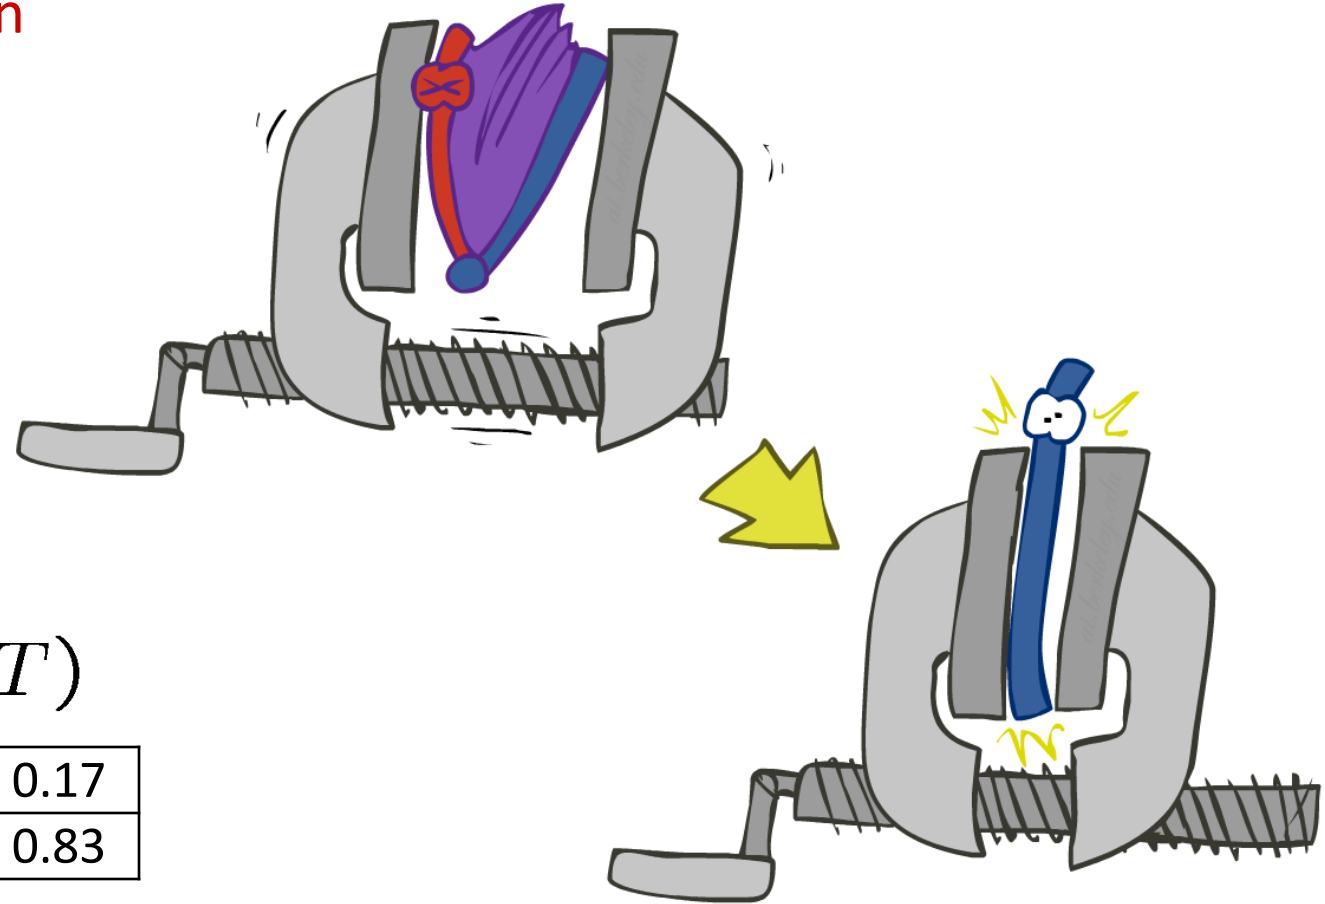

Multiple Elimination

$P(R, T, L)$

R, T, L			
+r	+t	+l	0.024
+r	+t	-l	0.056
+r	-t	+l	0.002
+r	-t	-l	0.018
-r	+t	+l	0.027
-r	+t	-l	0.063
-r	-t	+l	0.081
-r	-t	-l	0.729

Sum
out R

→

$P(T, L)$


+t	+l	0.051
+t	-l	0.119
-t	+l	0.083
-t	-l	0.747

Sum
out T


→

$P(L)$


L	
+l	0.134
-l	0.886

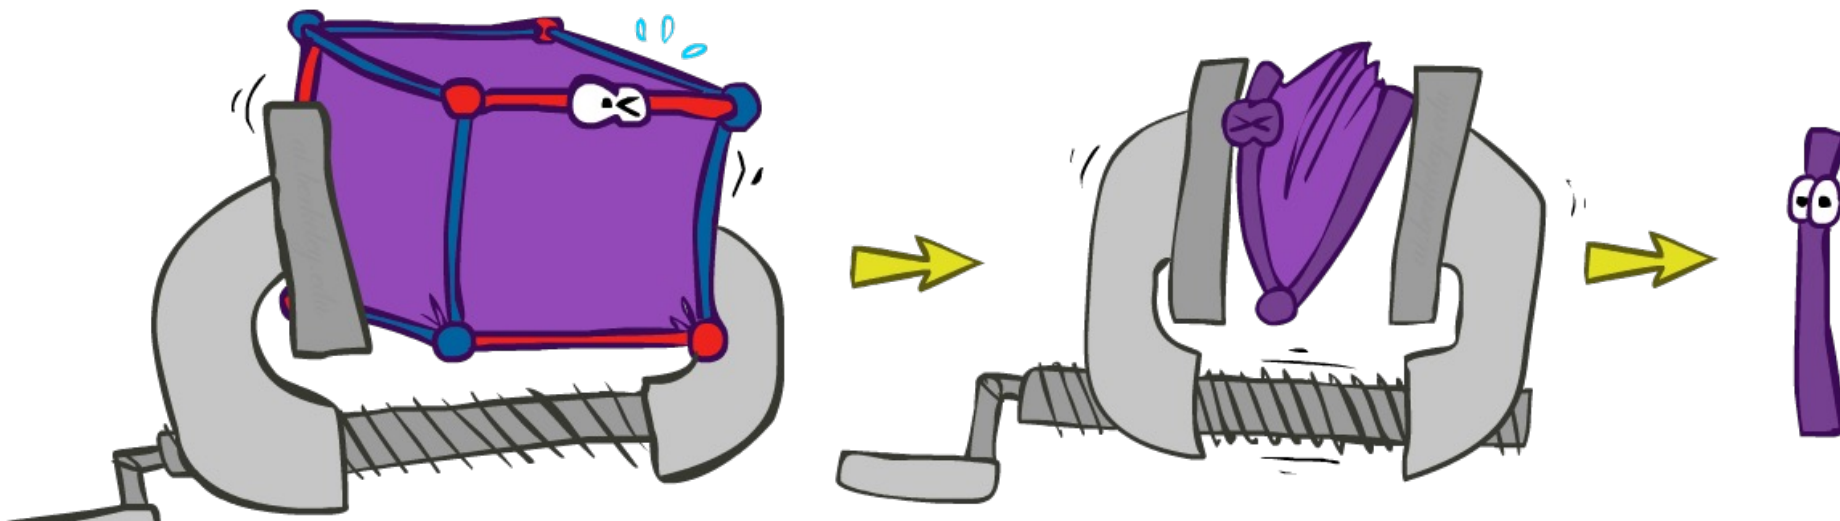


Thus Far: Multiple Join, Multiple Eliminate (= Inference by Enumeration)

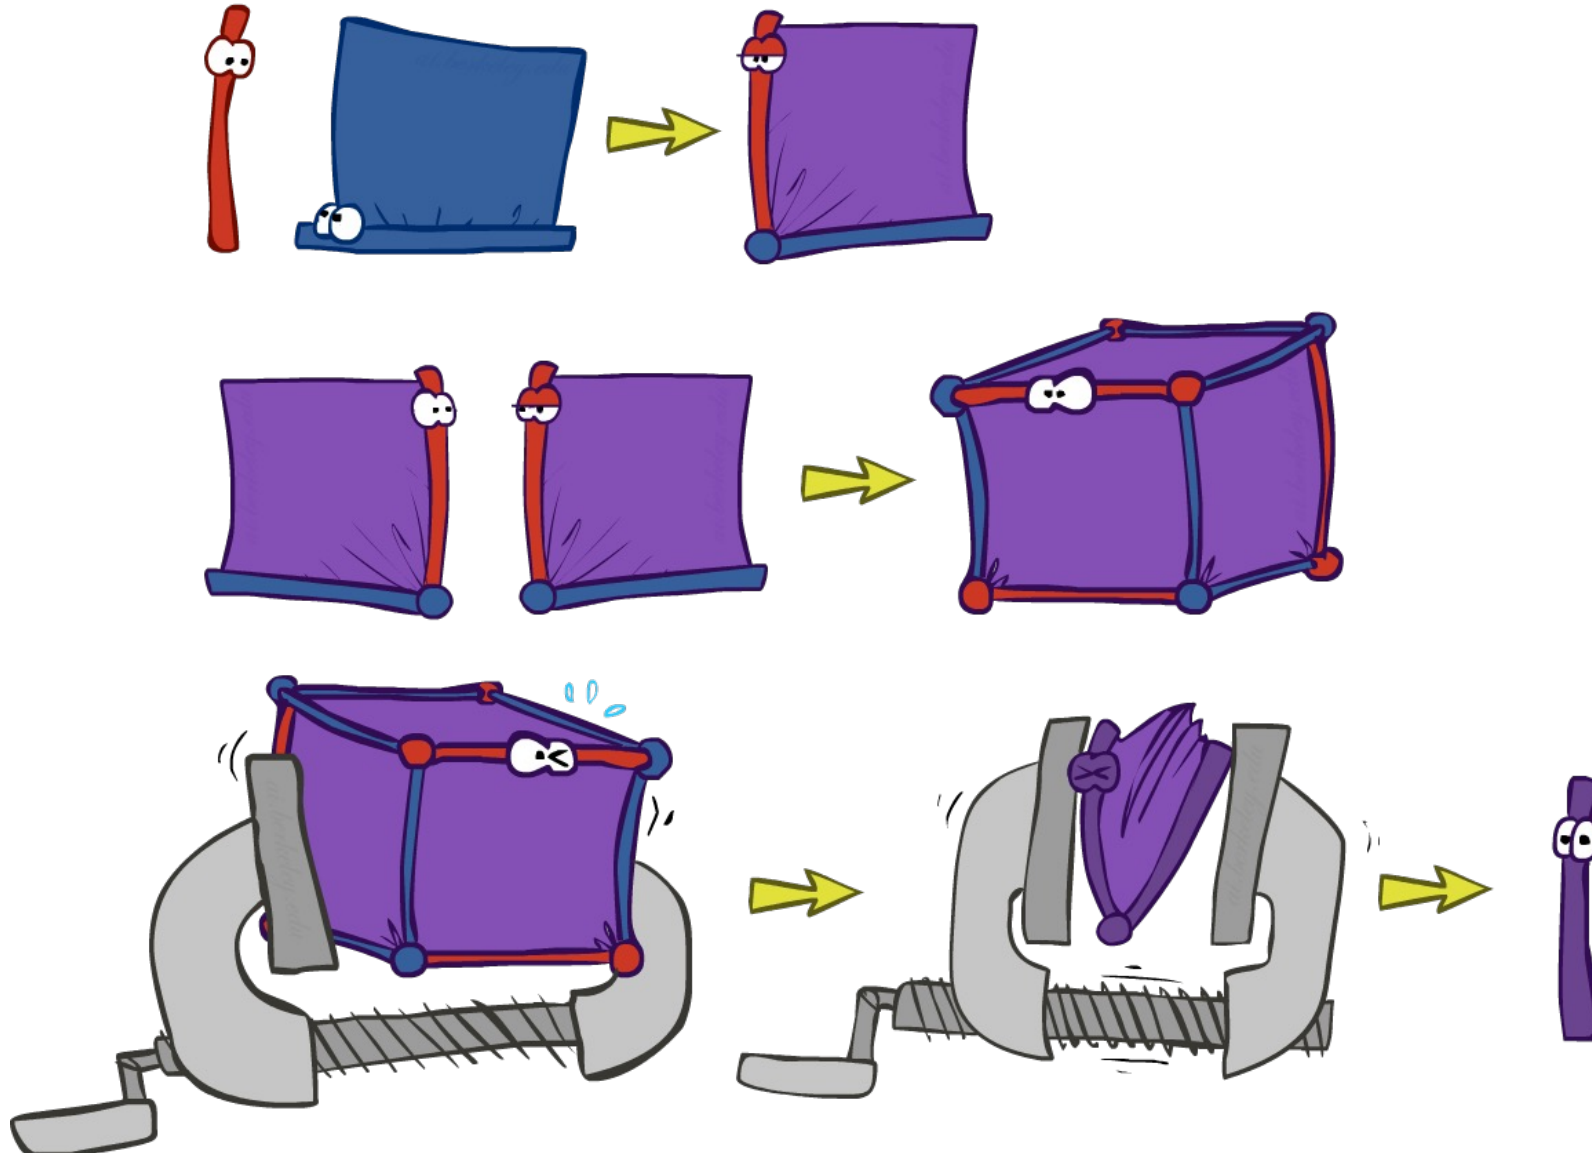

Marginalizing Early (= Variable Elimination)

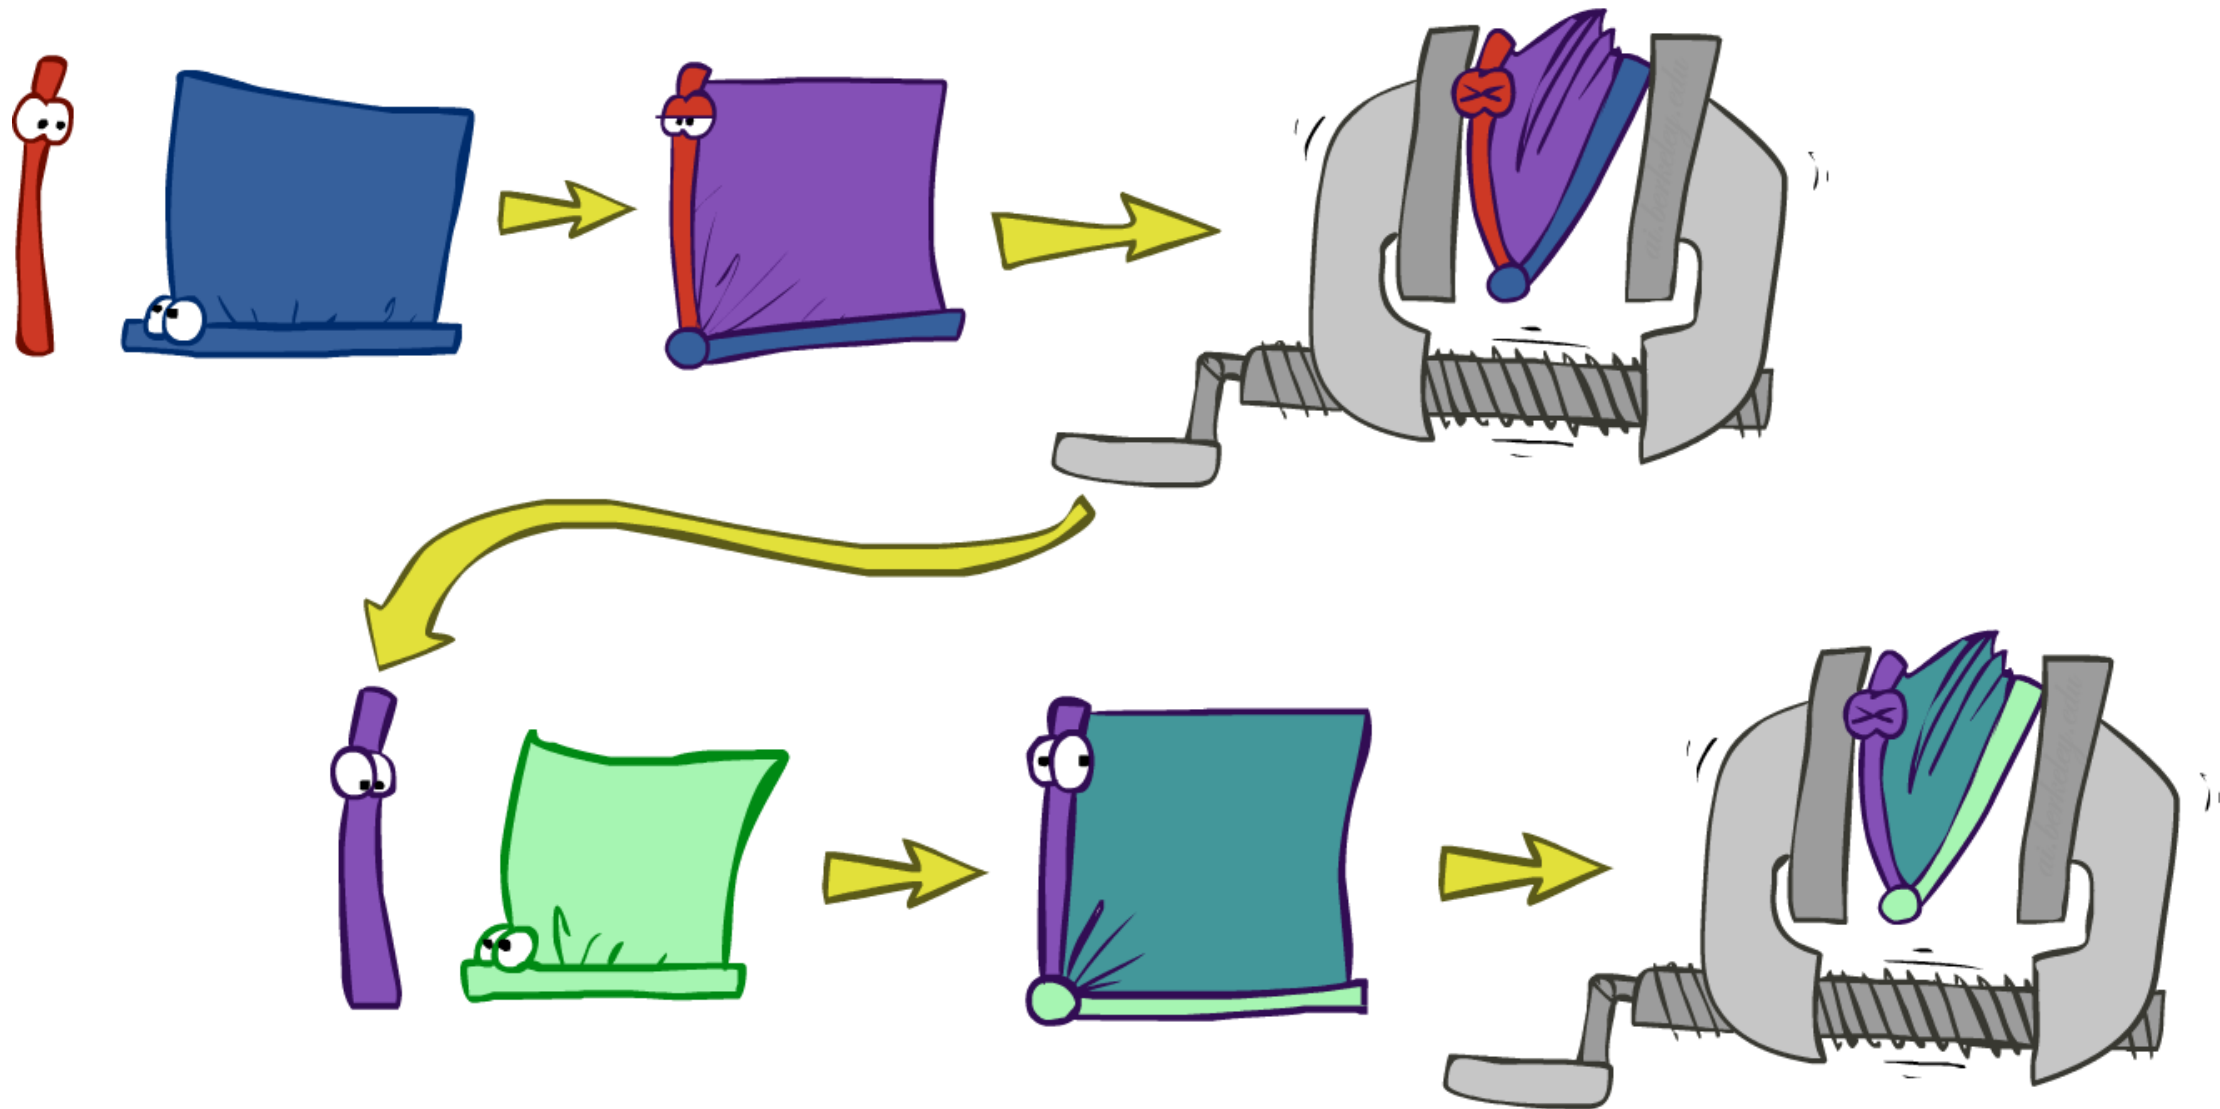

Traffic Domain



$$P(L) = ?$$


■ Inference by Enumeration

$$= \sum_t \sum_r \underbrace{P(L|t)P(r)P(t|r)}_{\text{Join on } r} \underbrace{}_{\text{Join on } t} \underbrace{}_{\text{Eliminate } r} \underbrace{}_{\text{Eliminate } t}$$

■ Variable Elimination

$$= \sum_t P(L|t) \underbrace{\sum_r P(r)P(t|r)}_{\text{Join on } r} \underbrace{}_{\text{Eliminate } r} \underbrace{}_{\text{Join on } t} \underbrace{}_{\text{Eliminate } t}$$

Marginalizing Early! (aka VE)

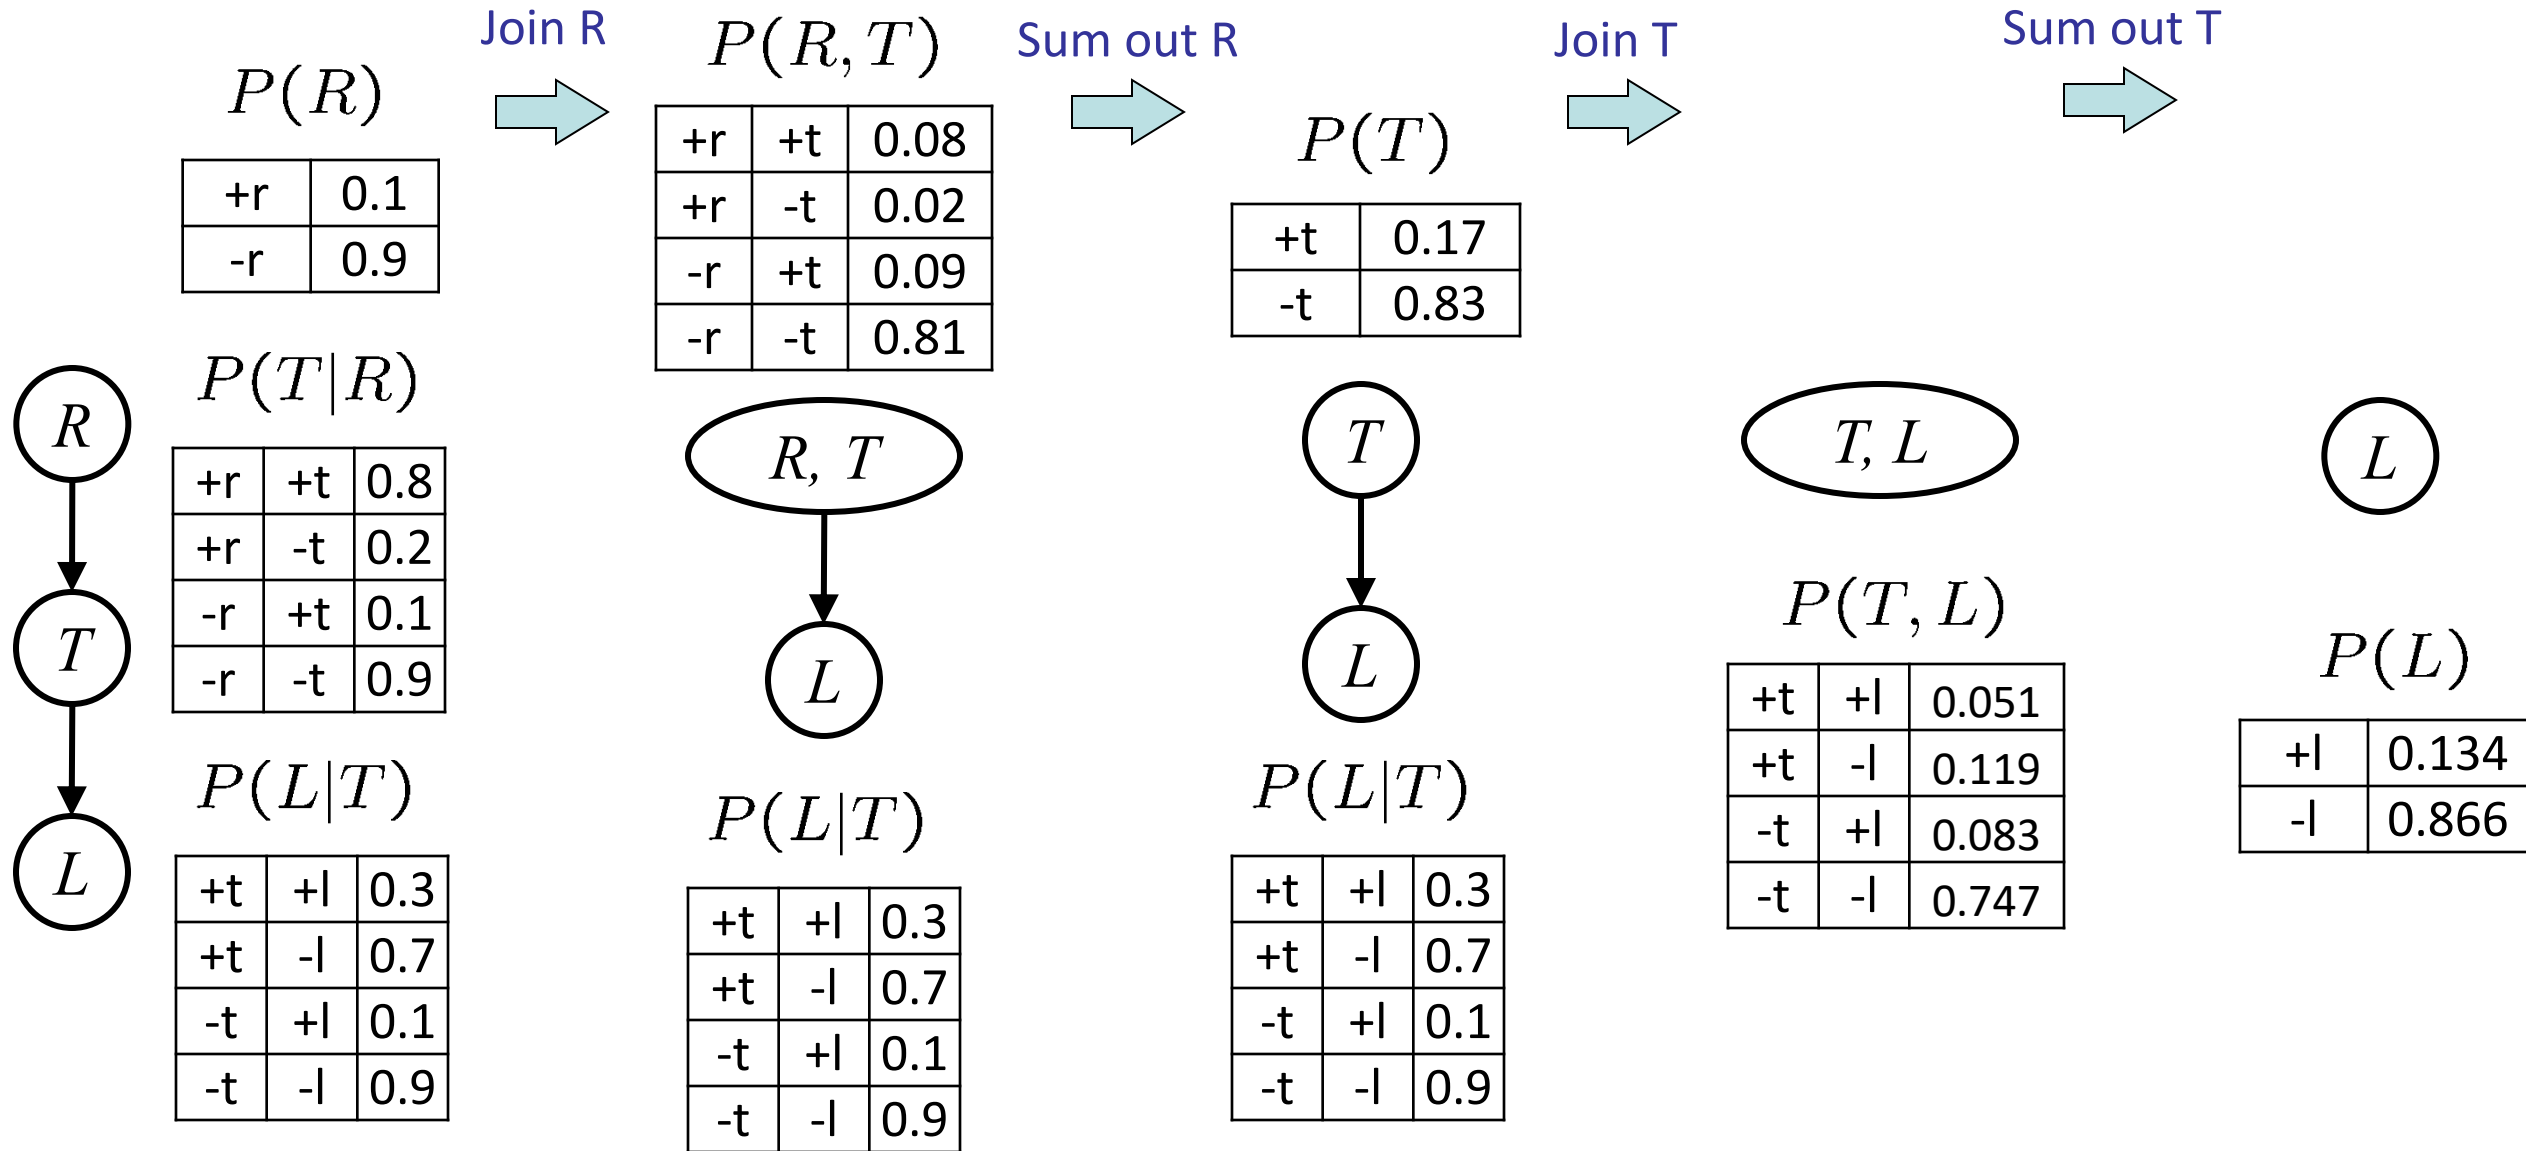

Evidence

- If evidence, start with factors that select that evidence

- No evidence uses these initial factors:

$$P(R)$$

+r	0.1
-r	0.9

$$P(T|R)$$

+r	+t	0.8
+r	-t	0.2
-r	+t	0.1
-r	-t	0.9

$$P(L|T)$$

+t	+l	0.3
+t	-l	0.7
-t	+l	0.1
-t	-l	0.9

- Computing $P(L|+r)$ the initial factors become:

$$P(+r)$$

+r	0.1
----	-----


$$P(T|+r)$$

+r	+t	0.8
+r	-t	0.2

$$P(L|T)$$

+t	+l	0.3
+t	-l	0.7
-t	+l	0.1
-t	-l	0.9

- We eliminate all vars other than query + evidence

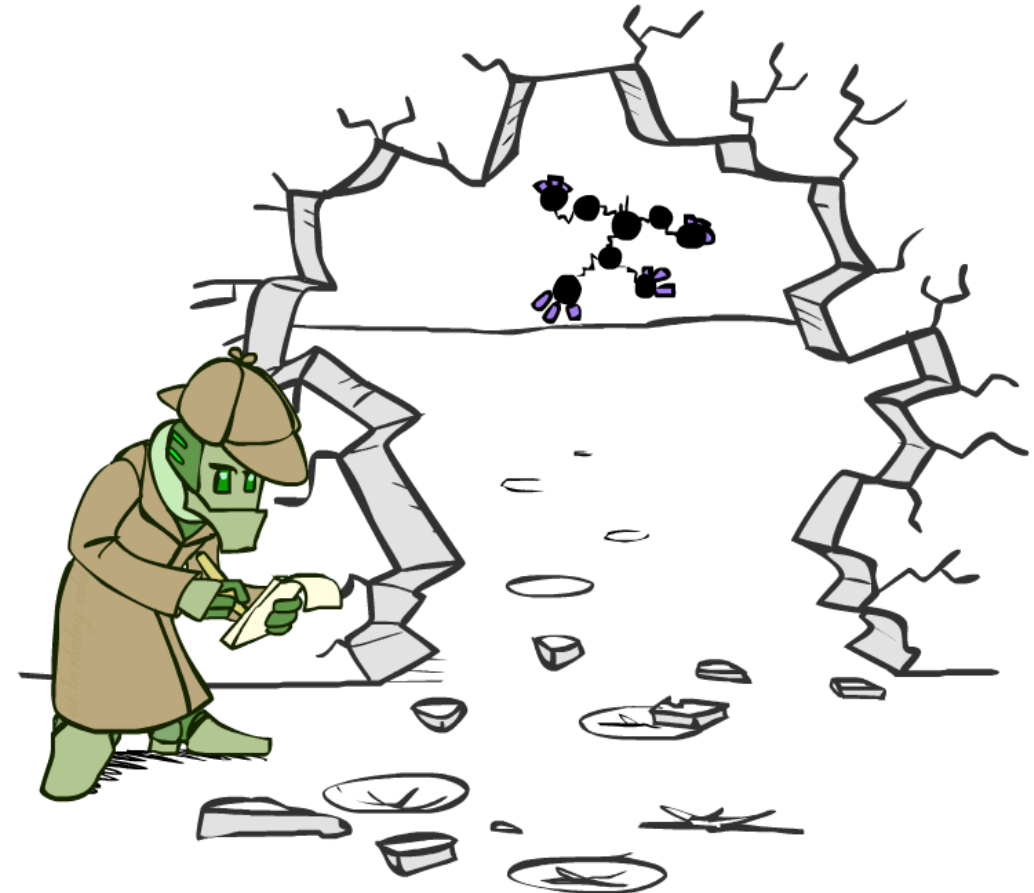

Evidence II

- Result will be a selected joint of query and evidence
 - E.g. for $P(L \mid +r)$, we would end up with:

$$P(+r, L)$$

+r	+l	0.026
+r	-l	0.074


Normalize



$$P(L \mid +r)$$


+l	0.26
-l	0.74

- To get our answer, just normalize this!
- That's it!

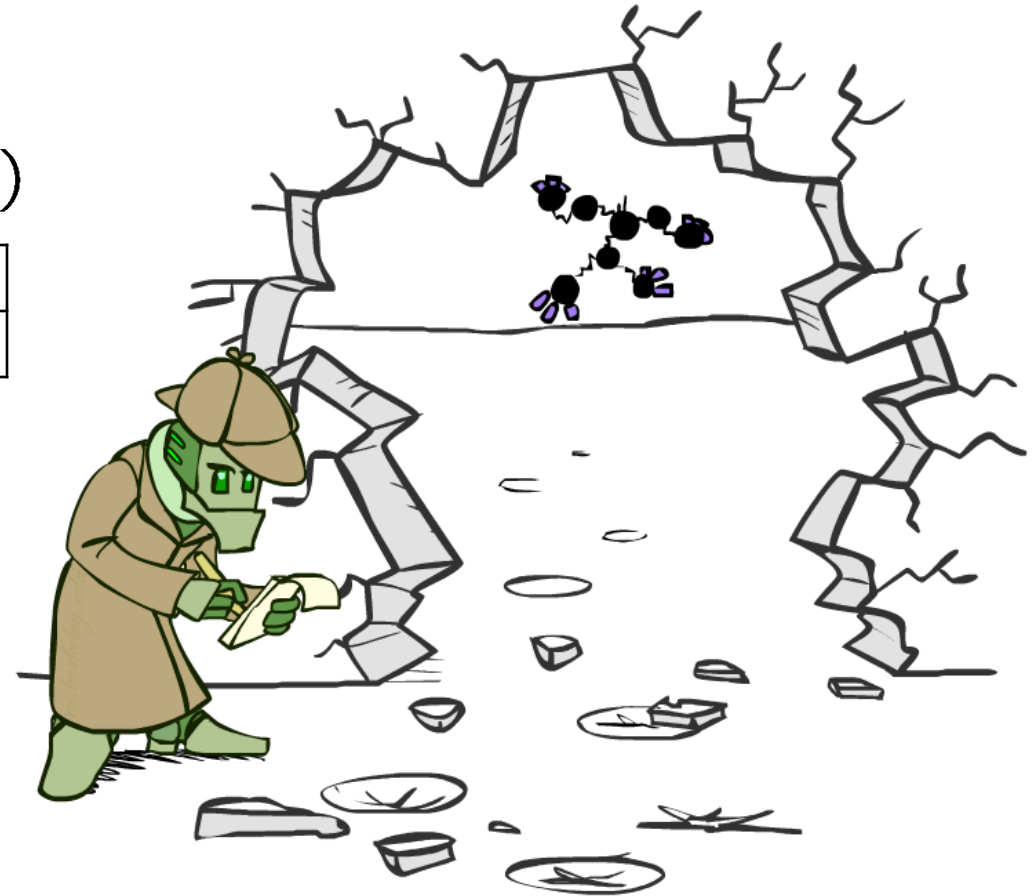



General Variable Elimination

- Query: $P(Q|E_1 = e_1, \dots, E_k = e_k)$
- Start with initial factors:
 - Local CPTs (but instantiated by evidence)
- While there are still hidden variables (not Q or evidence):
 - Pick a hidden variable H
 - Join all factors mentioning H
 - Eliminate (sum out) H
- Join all remaining factors and normalize

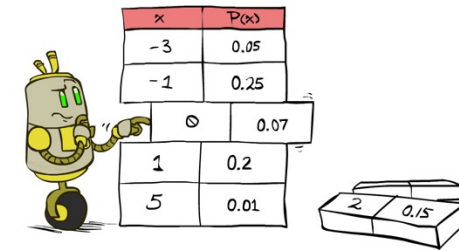

x	P(x)
-3	0.05
-1	0.25
0	0.07
1	0.2
5	0.01

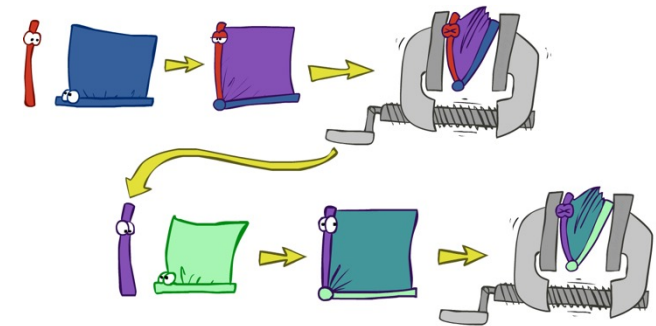


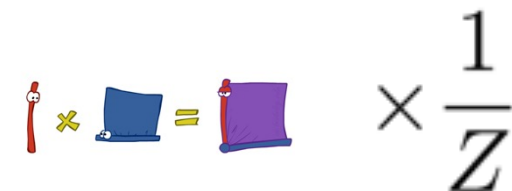
$$\text{stick} \times \text{blue square} = \text{purple square} \times \frac{1}{Z}$$

Example

$$P(B|j, m) \propto P(B, j, m)$$

$P(B)$	$P(E)$	$P(A B, E)$	$P(j A)$	$P(m A)$
--------	--------	-------------	----------	----------

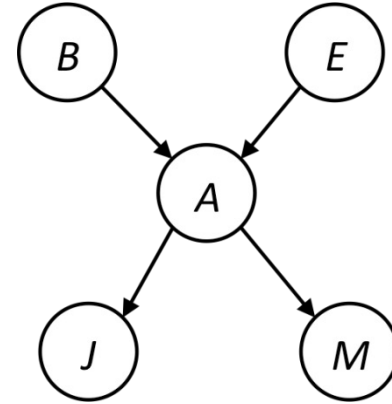


Choose A


$$P(A|B, E)$$

$$P(j|A)$$

$$P(m|A)$$



$$P(j, m, A|B, E)$$



$$P(j, m|B, E)$$

$P(B)$	$P(E)$	$P(j, m B, E)$
--------	--------	----------------

Example

$P(B)$	$P(E)$	$P(j, m B, E)$
--------	--------	----------------


Choose E

$$\begin{array}{l} P(E) \\ P(j, m|B, E) \end{array} \xrightarrow{\times} P(j, m, E|B) \xrightarrow{\Sigma} P(j, m|B)$$

$P(B)$	$P(j, m B)$
--------	-------------

Finish with B


$$\begin{array}{l} P(B) \\ P(j, m|B) \end{array} \xrightarrow{\times} P(j, m, B) \xrightarrow{\text{Normalize}} P(B|j, m)$$

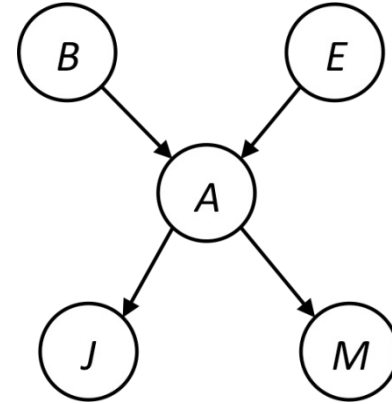

Same Example in Equations

$$P(B|j, m) \propto P(B, j, m)$$

$P(B)$	$P(E)$	$P(A B, E)$	$P(j A)$	$P(m A)$
--------	--------	-------------	----------	----------

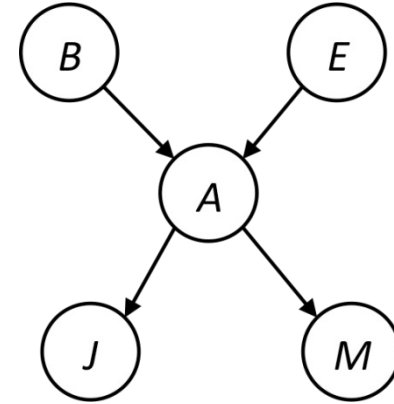

$$\begin{aligned}
 P(B|j, m) &\propto P(B, j, m) \\
 &= \sum_{e, a} P(B, j, m, e, a) \\
 &= \sum_{e, a} P(B)P(e)P(a|B, e)P(j|a)P(m|a) \\
 &= \sum_e P(B)P(e) \sum_a P(a|B, e)P(j|a)P(m|a) \\
 &= \sum_e P(B)P(e)f_1(B, e, j, m) \\
 &= P(B) \sum_e P(e)f_1(B, e, j, m) \\
 &= P(B)f_2(B, j, m)
 \end{aligned}$$

marginal obtained from joint by summing out

use Bayes' net joint distribution expression

use $x^*(y+z) = xy + xz$

joining on a, and then summing out gives f_1


use $x^*(y+z) = xy + xz$

joining on e, and then summing out gives f_2

All we are doing is exploiting $uwv + uwz + uxy + uxz + vwy + vwz + vxy + vxz = (u+v)(w+x)(y+z)$ to improve computational efficiency!

Variable Elimination Ordering

- For the query $P(X_n | y_1, \dots, y_n)$ work through the following two different orderings as done in previous slide: Z, X_1, \dots, X_{n-1} and X_1, \dots, X_{n-1}, Z . What is the size of the maximum factor generated for each of the orderings?

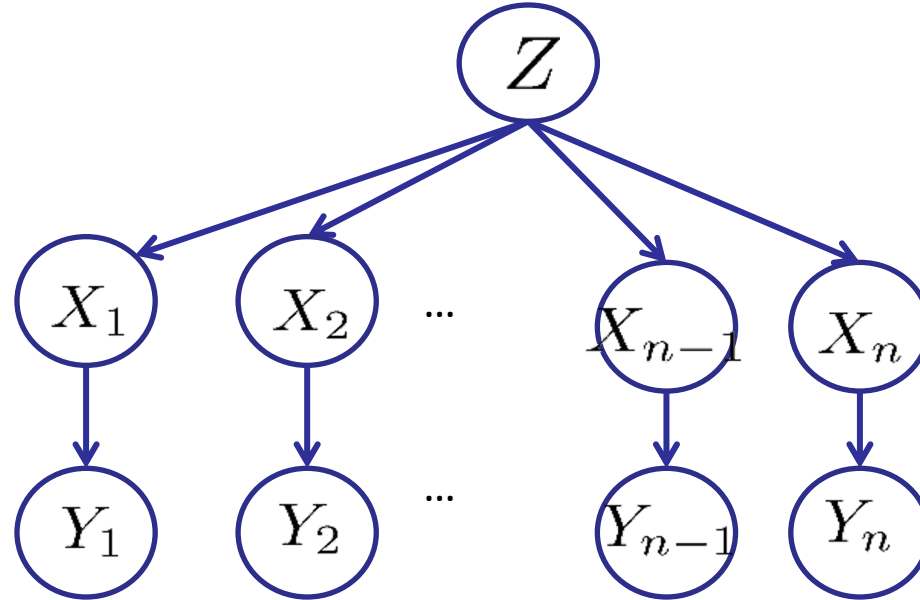

- Answer: 2^{n+1} versus 2^2 (assuming binary)
- In general: the ordering can greatly affect efficiency.

VE: Computational and Space Complexity

- The computational and space complexity of variable elimination is determined by the largest factor
- The elimination ordering can greatly affect the size of the largest factor.
 - E.g., previous slide's example 2^{n+1} vs. 2
- Does there always exist an ordering that only results in small factors?
 - No!

Bayes' Nets

- ✓ Representation
- ✓ Conditional Independences
- Probabilistic Inference
 - ✓ Enumeration (exact, exponential complexity)
 - ✓ Variable elimination (exact, worst-case exponential complexity, often better)
 - ✓ Inference is NP-complete
 - Sampling (approximate)
- ✓ Learning Bayes' Nets from Data