

概要

- PhpStorm + WSL + Docker でXdebugを使用


PhpStormの設定



- インタプリターはコンテナ（docker-compose.yml の app）の php を使用




- リモートPHPを選択し各設定を入力

設定項目	設定内容	備考
接続方式	Docker Compose	
サーバー	docker	新規作成
構成ファイル	/var/www/bc.develop/docker/docker-compose.yml	
サービス	app	
環境変数	COMPOSE_PROJECT_NAME=bc-draft _WSL_COMPOSE_PROJECT_DIR=bc.draft	docker-compose.yml で使用する.envの内容

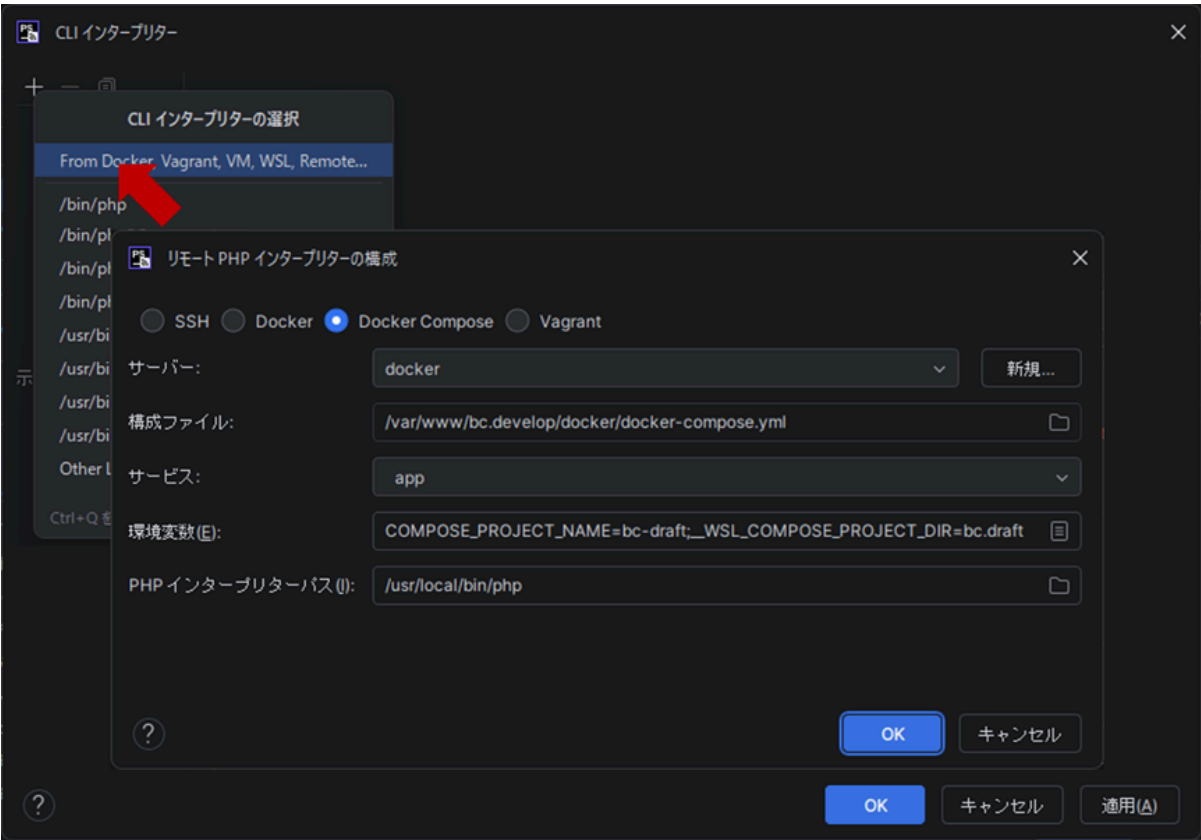


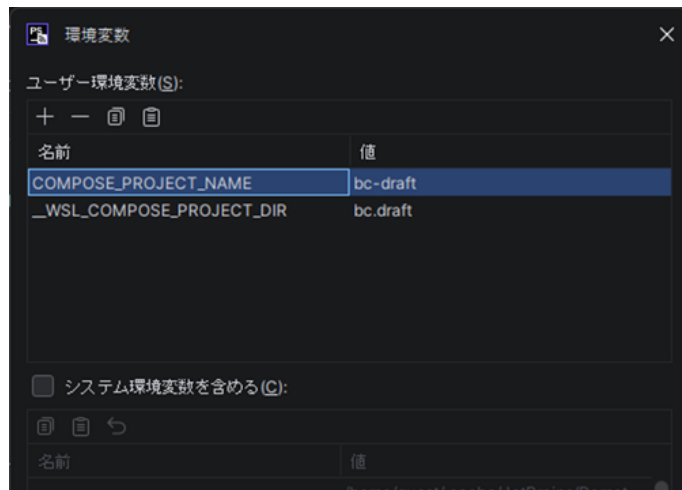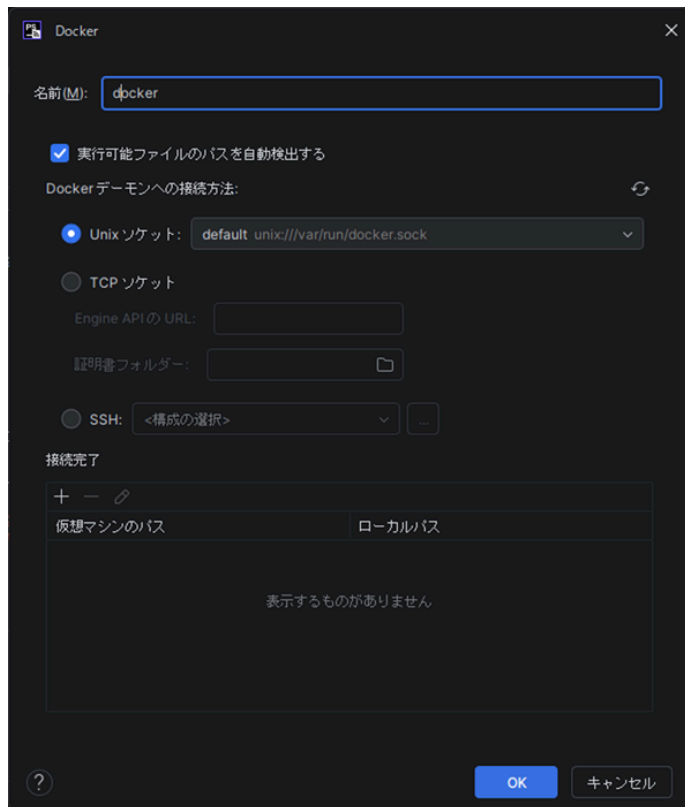


3. 稼働中のコンテナを選択

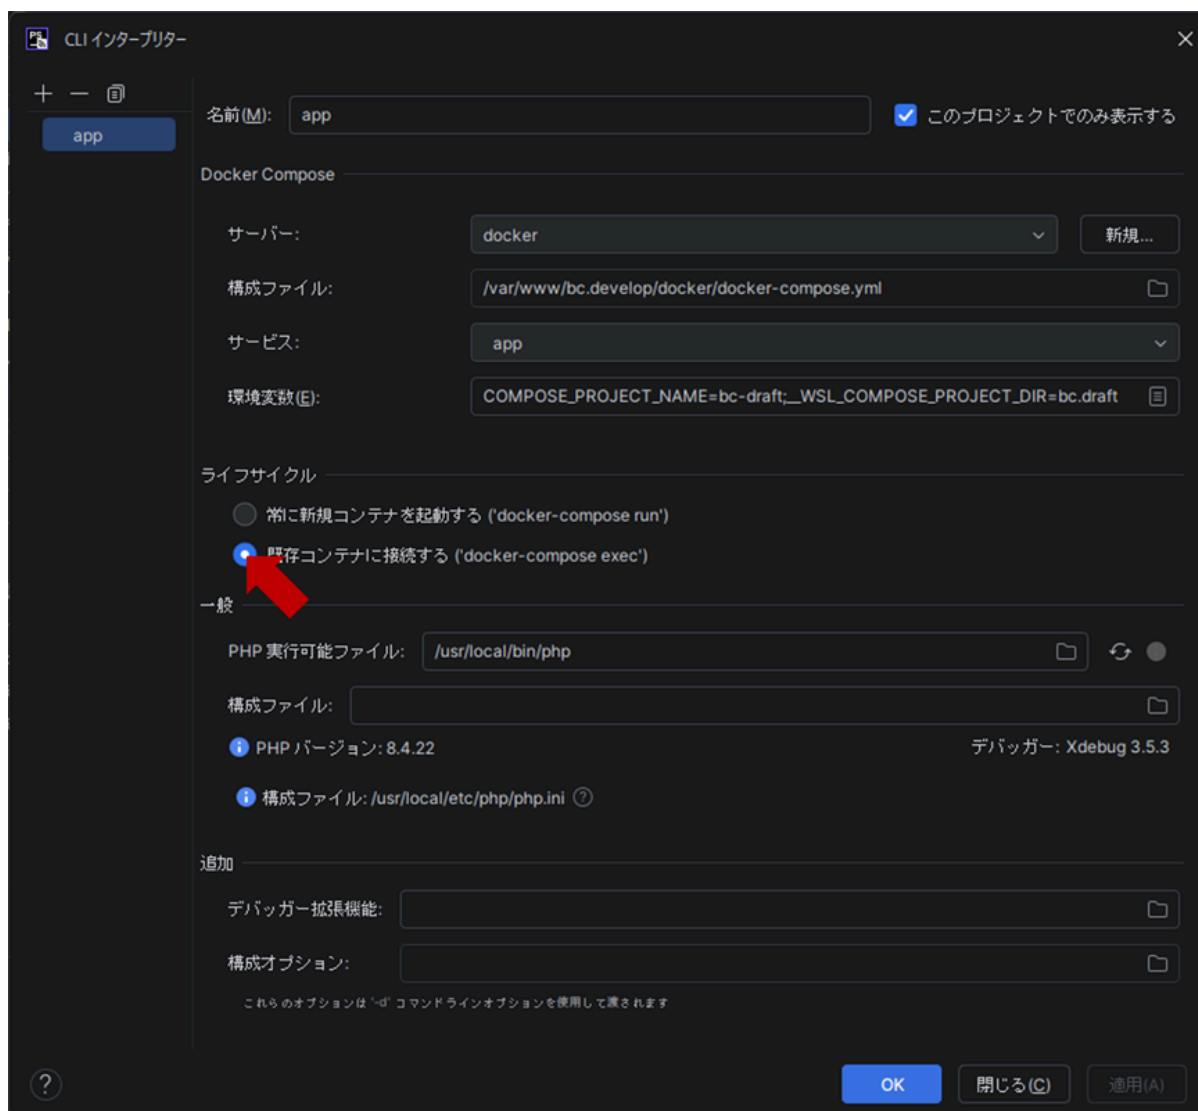

4. プロジェクトパスマッピング

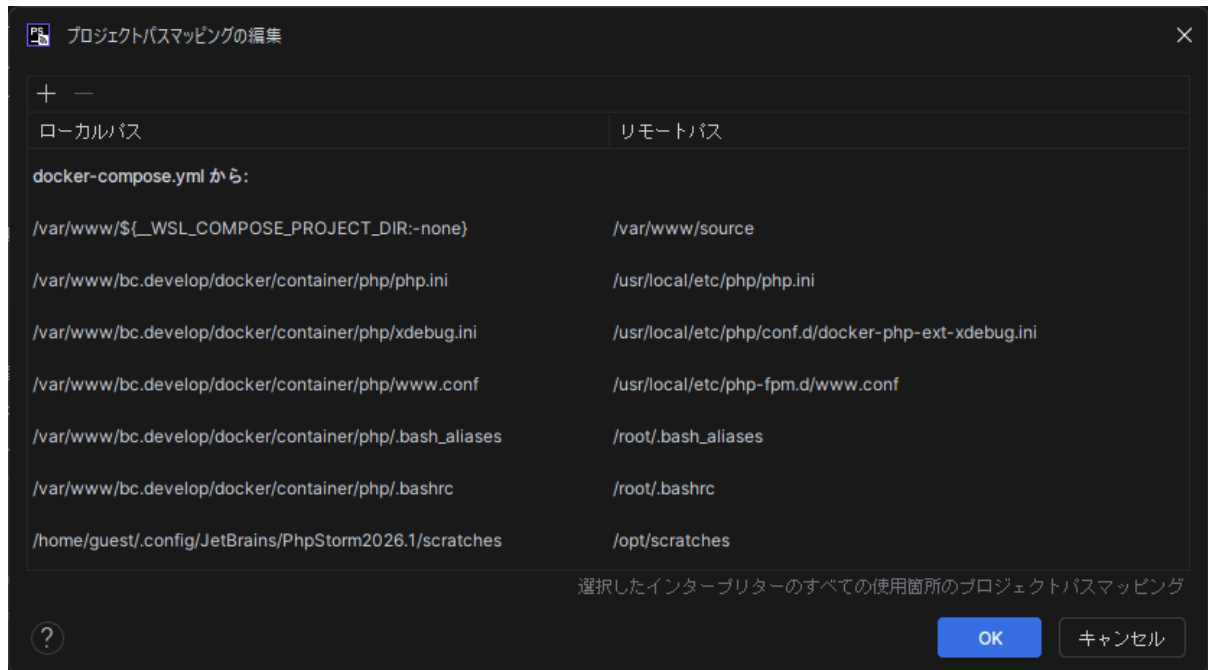

5. サーバーの設定

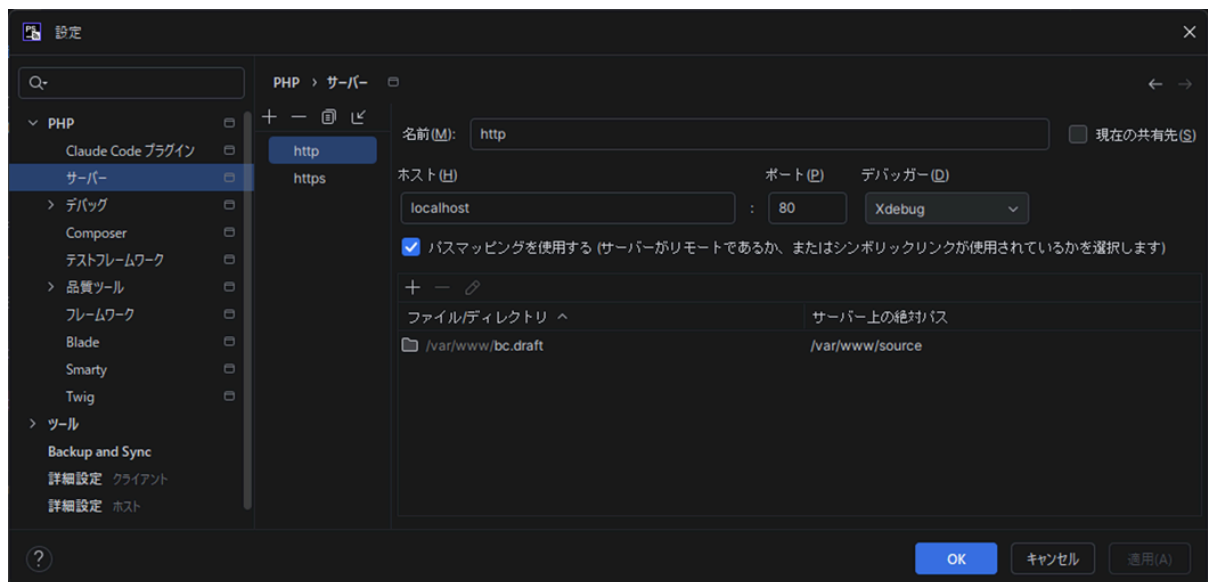

ApiDogから実行（ブレイクポイントで止まる事を確認）

The image shows two screenshots illustrating the process of running an API call from ApiDog and debugging it in PhpStorm.

Top Screenshot (ApiDog):

- The interface shows a GET request to `http://localhost /api/user/info`.
- The **送信** (Send) button is highlighted with a red arrow, indicating the action to execute the request.
- Below the request bar, tabs for **パラメータ** (Parameters), **ボディ** (Body), **ヘッダー** (Headers), **Cookies**, **認証** (Authentication), **前処理** (Pre-request), **後処理** (Post-request), and **設定** (Settings) are visible.

Bottom Screenshot (PhpStorm):

- The IDE shows the `index.php` file with the following code snippet highlighted:

```
13 // Register the Composer autoloader...
14 require __DIR__.'../vendor/autoload.php';
15
16 // Bootstrap Laravel and handle the request...
17 /** @var Application $app */
18 $app = require_once __DIR__.'../bootstrap/app.php'; $app: Illuminate\Foundation\Ap
19
20 $app->handleRequest(Request::capture()); $app: Illuminate\Foundation\Application
21
```

A red arrow points to the **実行** (Run) button in the PhpStorm toolbar.

デバッグ (Debug) Panel:

- The **index.php:20, {main}()** frame is selected.
- The **スレッドと変数** (Threads and Variables) tab is active, showing the current state of the application:

- `$_composer_autoload_files` = (bool[38]) [1, 1, 1, 1, 1, +33 more]
- `$app` = (Illuminate\Foundation\Application)
- `$maintenance` = "/var/www/source/public/./storage/framework/maintenance.php"
- `$_COOKIE` = (string[1]) ["PHPSTORM"]
- `$_ENV` = (string[48]) ["e88c0b5b5a39", "/usr/local/etc/...", "/var/www", "-Wl,-O1 -pie", "-fstack-protect...", +43 more]
- `$_REQUEST` = (string[1]) ["PHPSTORM"]
- `$_SERVER` = (array[53])
- 定数** (Constants)

The status bar at the bottom indicates the file path: `bc.draft > public > index.php` and the PHP version: `PHP: 8.4 20:1 LF UTF-8 4 スペース`.