

- Rcmdr

, , ,

2022-04-16

Contents

Chapter 1

(R) 2021 . John Fox
Rcmdr 10 (R) Rcmdr
bookdown
Rcmdr
R GUI , , R Commander
, R Commander . Command Line ,
R Commander . John Fox
R / R Commander
, 10 R Commander , (R Commander Help
> About Rcmdr) [Translations: Korean, Chel Hee Lee, Dae-Heung Jang,
and Shin Jong-Hwa] 10 R Commander


- Rcmdr : R Commander
- CRAN Rcmdr
- John Fox Rcmdr
- FOSSER_Ricoop

Chapter 2


Chapter 3

/ Help

- 3.1 Commander help (0)
- 3.2 Introduction to the R Comma.. (0)
- 3.3 R Commander website (0)
- 3.4 About Rcmdr (0)
- 3.5 R Commander hex sticker

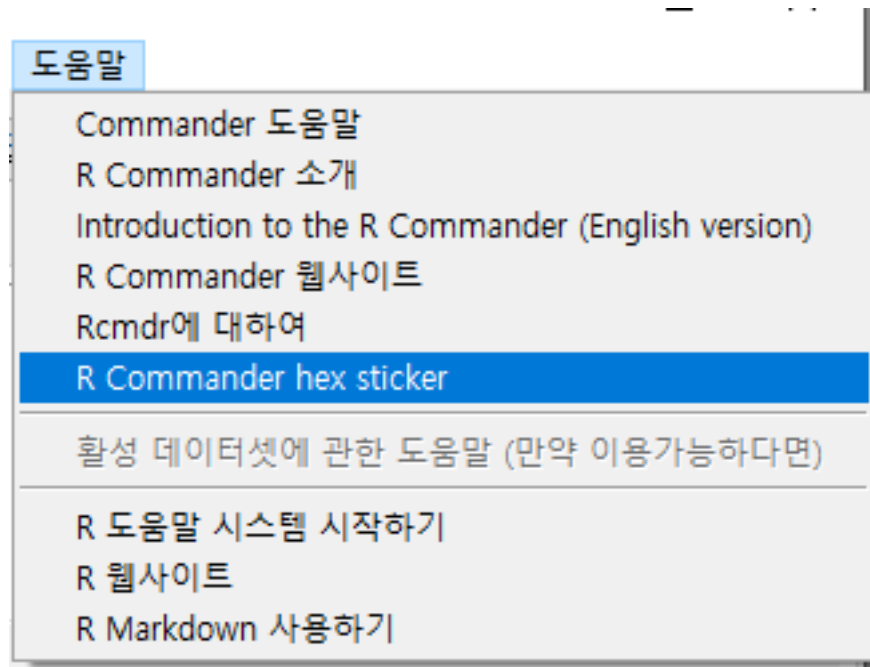

:

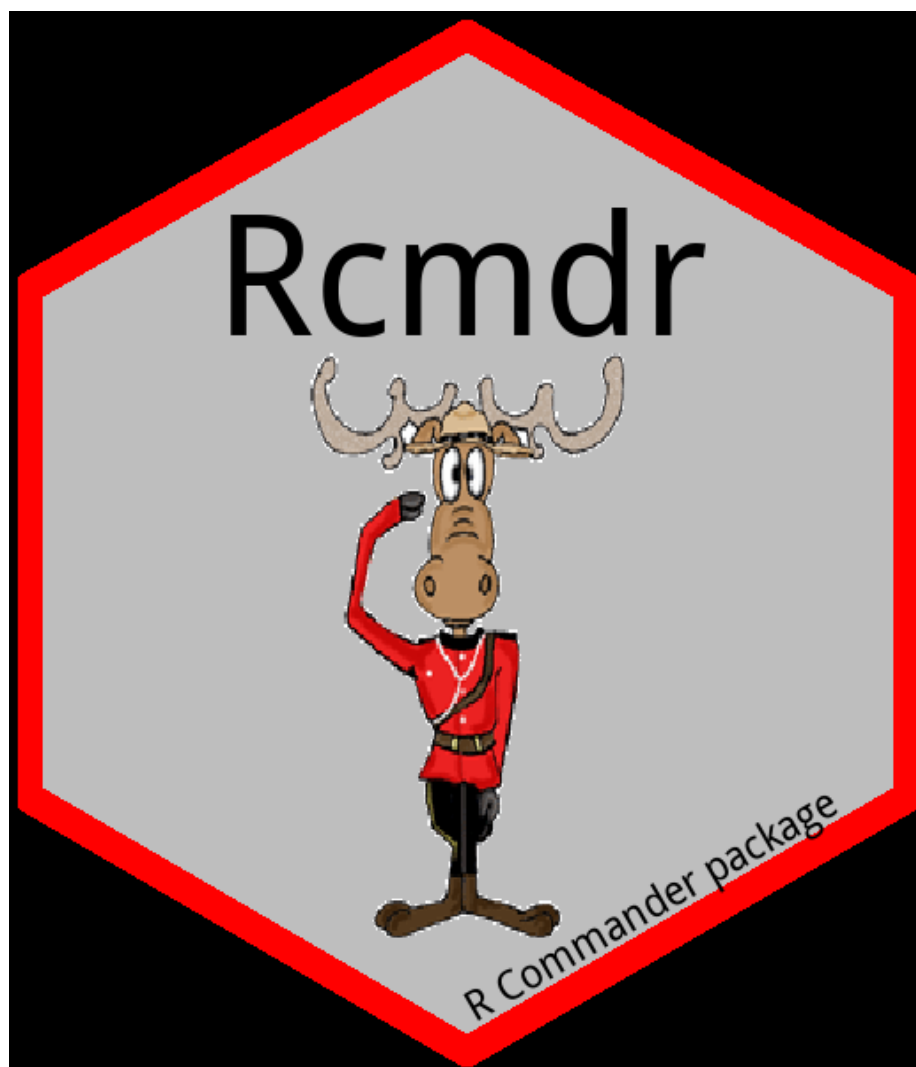

3.6 Help on active data set (if.. (0)

3.7 Start R help system (0)


3.8 R website (0)

3.9 Using R Markdown (0)

Chapter 4


/ datasets

4.1 Prestige - carData > Prestige

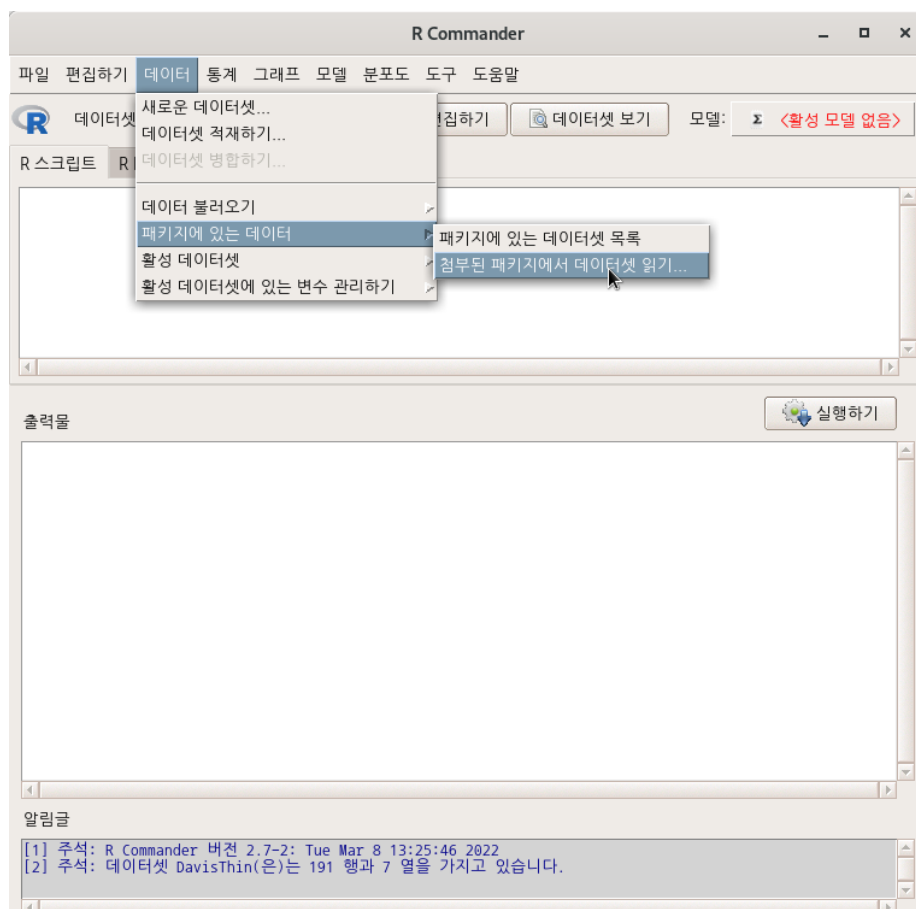



```
data(Prestige, package="carData")
```

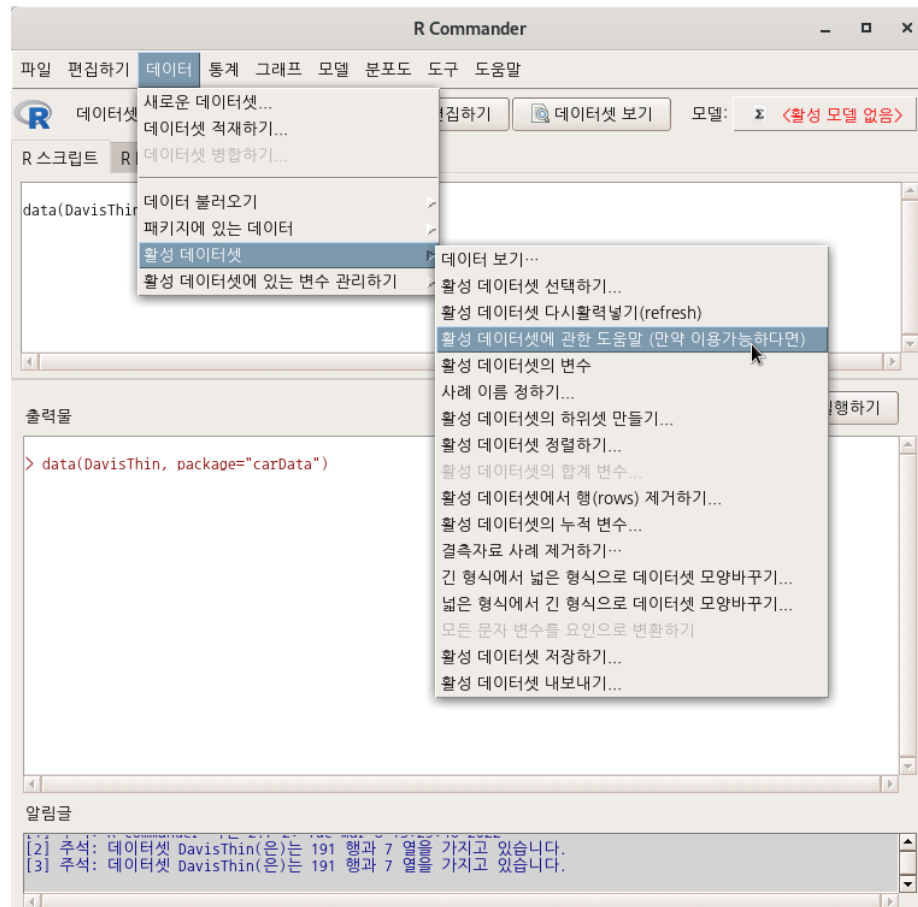



```
help("Prestige")
```

```
carData      Prestige      .csv      .
```


```
:
```


4.2 Moore - carData > Moore

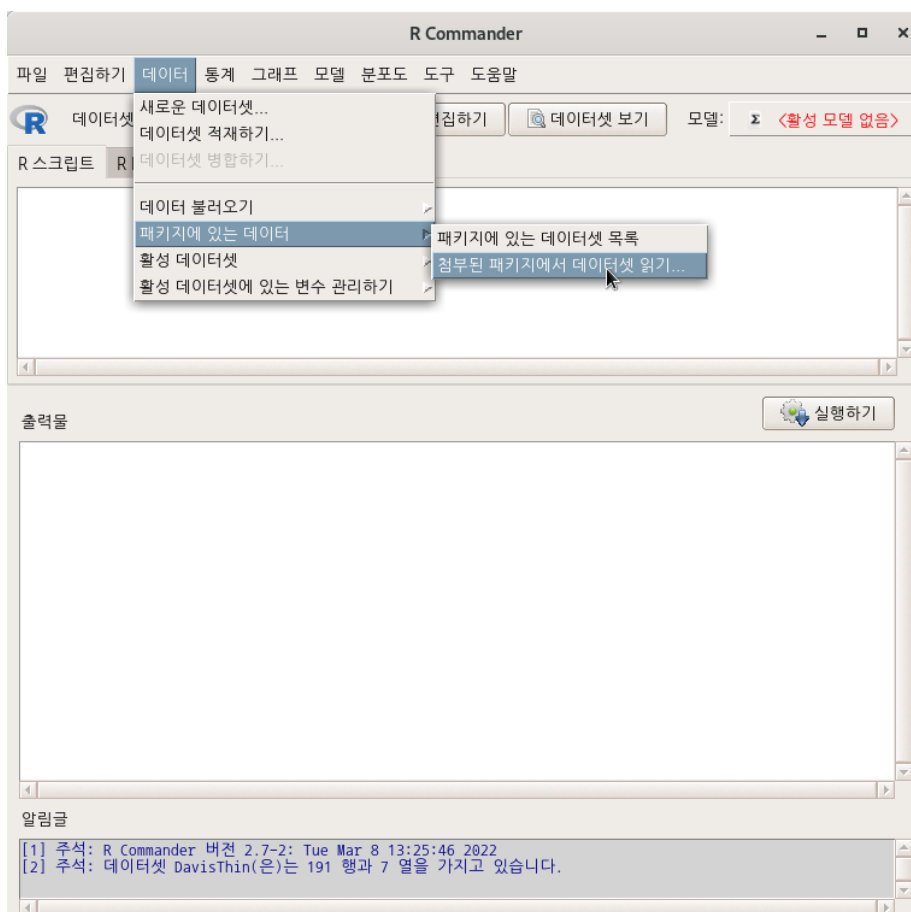

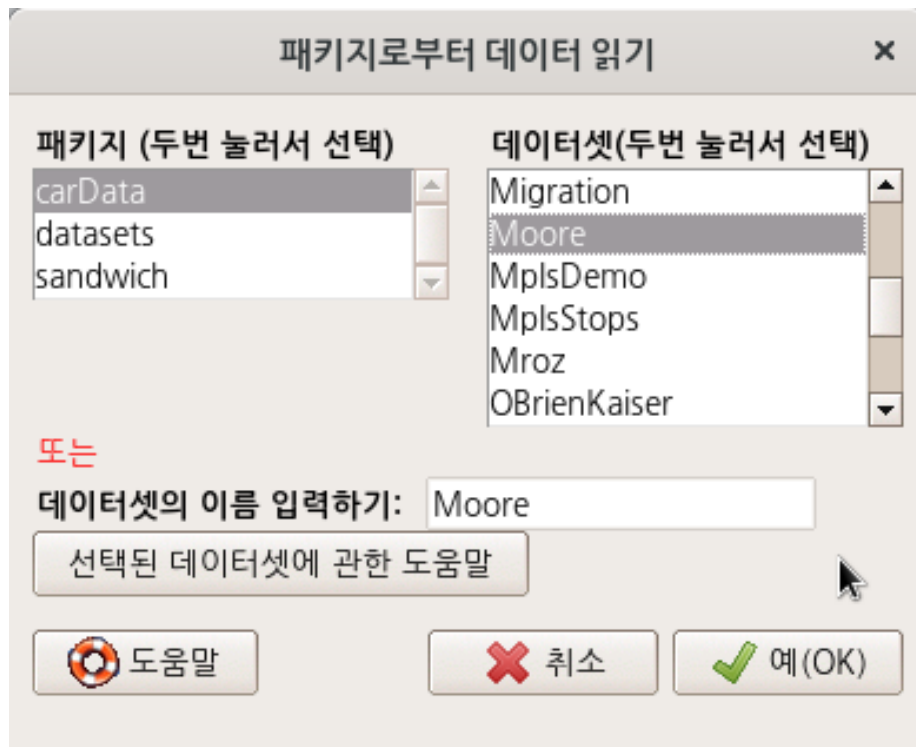

```
data(Moore, package="carData")
```

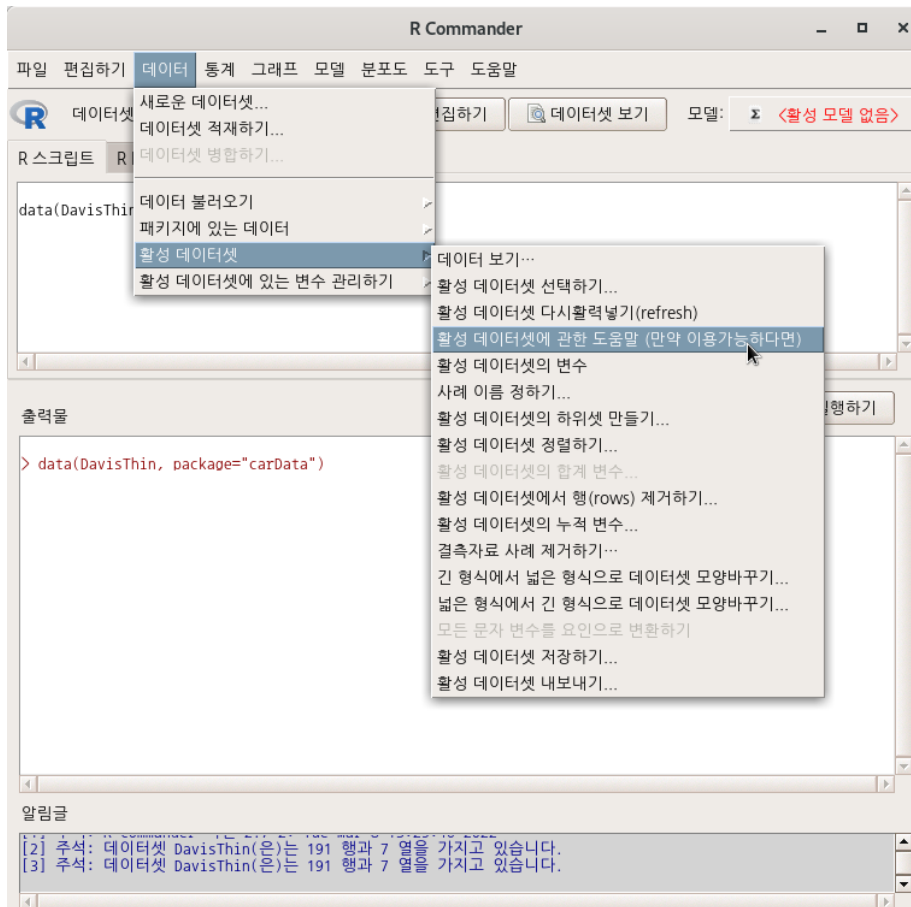

```
help("Moore")
```

Moore

Moore {carData}

R Documentation

Status, Authoritarianism, and Conformity

Description

The Moore data frame has 45 rows and 4 columns. The data are for subjects in a social-psychological experiment, who were faced with manipulated disagreement from a partner of either of low or high status. The subjects could either conform to the partner's judgment or stick with their own judgment.

Usage

Format