

- Rcmdr

, , ,

2022-04-16

Contents

| | |
|---|-----------|
| 1 | 5 |
| 2 | 7 |
| 3 / Help | 9 |
| 3.1 Commander help (0) | 10 |
| 3.2 Introduction to the R Comma.. (0) | 10 |
| 3.3 R Commander website (0) | 10 |
| 3.4 About Rcmdr (0) | 10 |
| 3.5 R Commander hex sticker | 10 |
| 3.6 Help on active data set (if.. (0) | 12 |
| 3.7 Start R help system (0) | 12 |
| 3.8 R website (0) | 12 |
| 3.9 Using R Markdown (0) | 12 |
| 4 / datasets | 13 |
| 4.1 Prestige - <code>carData > Prestige</code> | 14 |
| 4.2 Moore - <code>carData > Moore</code> | 17 |
| 4.3 OBrienKaiser (2) | 19 |
| 4.4 OBrienKaiserLong (1) | 19 |
| 4.5 airquality (2) | 19 |
| 4.6 Bfox (1) | 19 |
| 4.7 sleep (1) | 19 |
| 4.8 DavisThin (1) | 19 |

| | | |
|------|----------------|----|
| 4.9 | USArrests (1) | 19 |
| 4.10 | birthwt (1) | 19 |
| 4.11 | Friendly (1) | 19 |
| 4.12 | Cowles (1) | 19 |
| 4.13 | Adler (1) | 19 |
| 4.14 | warpbreaks (1) | 19 |

Chapter 1

(R) Rcmdr 10 2021 (R) Rcmdr John Fox
bookdown
Rcmdr
R GUI , R Commander
, R Commander . Command Line ,
R Commander John Fox
R / R Commander
, 10 R Commander , (R Commander Help
> About Rcmdr) [Translations: Korean, Chel Hee Lee, Dae-Heung Jang,
and Shin Jong-Hwa] 10 R Commander

- Rcmdr : R Commander
- CRAN Rcmdr
- John Fox Rcmdr
- FOSSER_Ricoop

Chapter 2

Chapter 3

/ Help


3.1 Commander help (0)

3.2 Introduction to the R Comma.. (0)


3.3 R Commander website (0)

3.4 About Rcmdr (0)

3.5 R Commander hex sticker

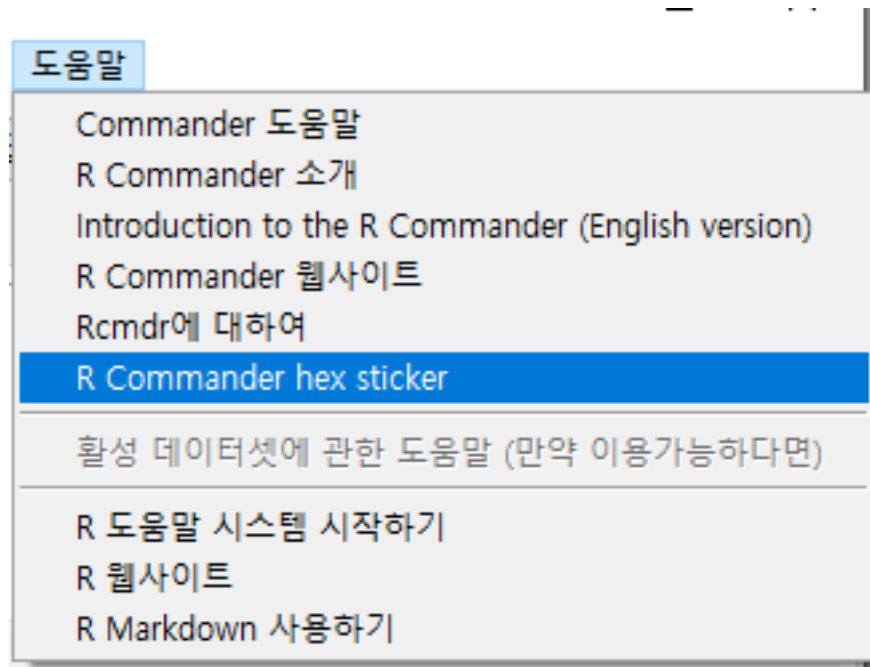

:

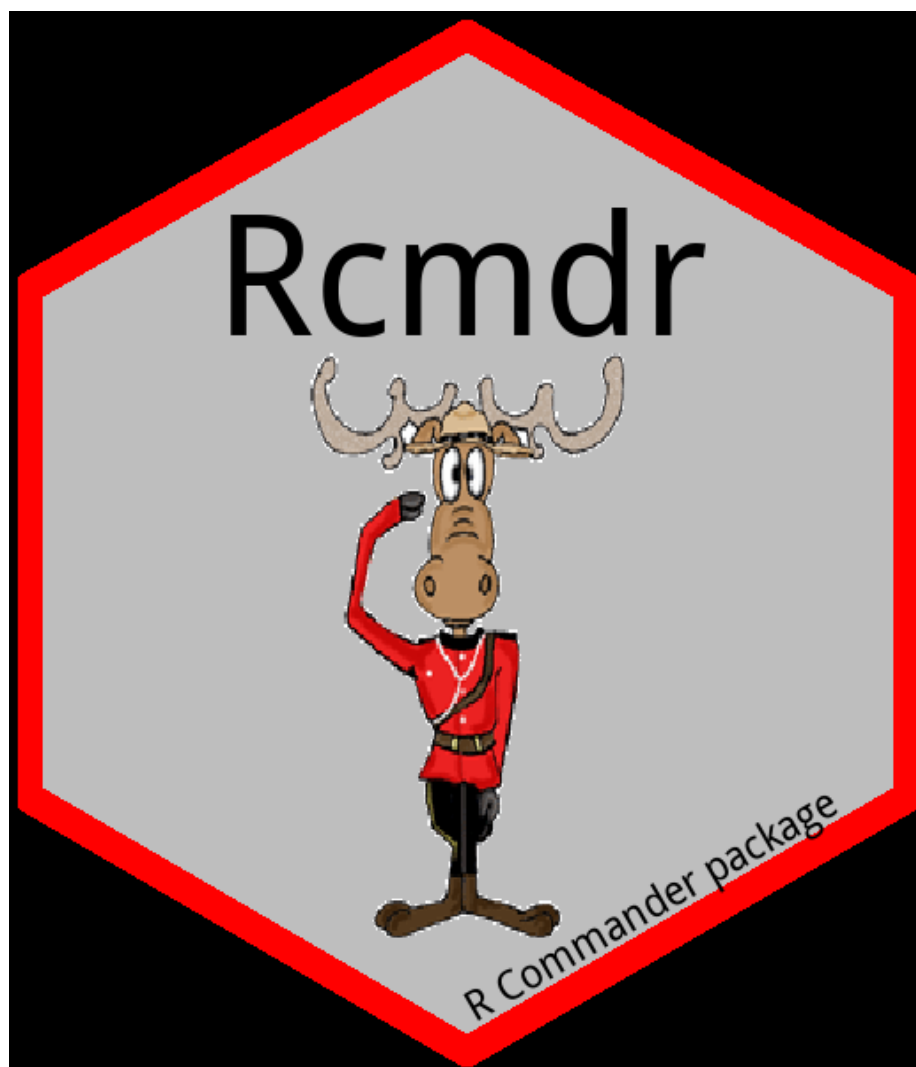

3.6 Help on active data set (if.. (0)

3.7 Start R help system (0)


3.8 R website (0)

3.9 Using R Markdown (0)

Chapter 4


/ datasets

4.1 Prestige - carData > Prestige

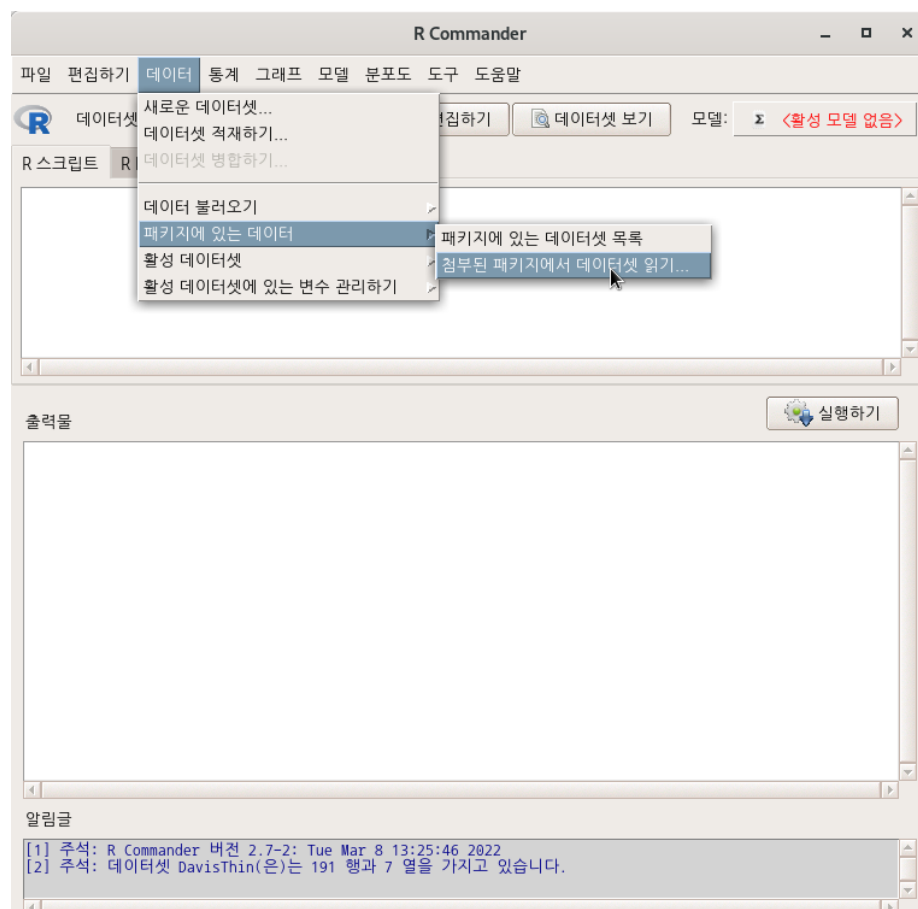



```
data(Prestige, package="carData")
```

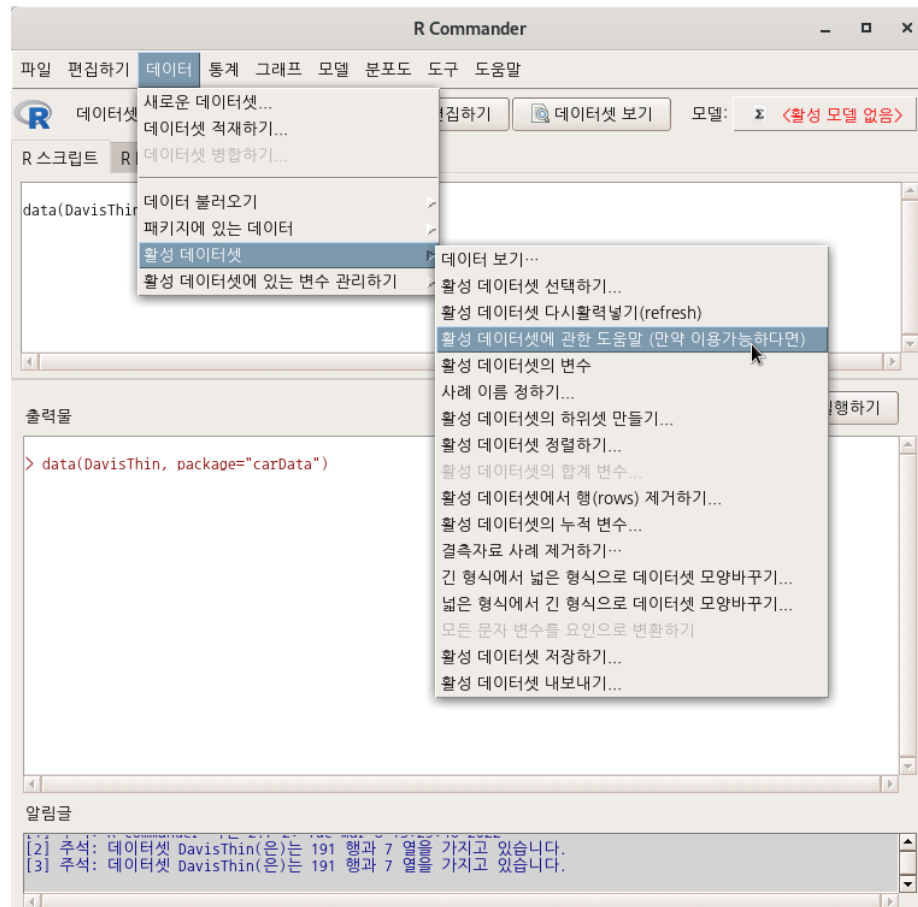


```
help("Prestige")
```

```
carData      Prestige      .csv      .
```

```
:
```


4.2 Moore - carData > Moore

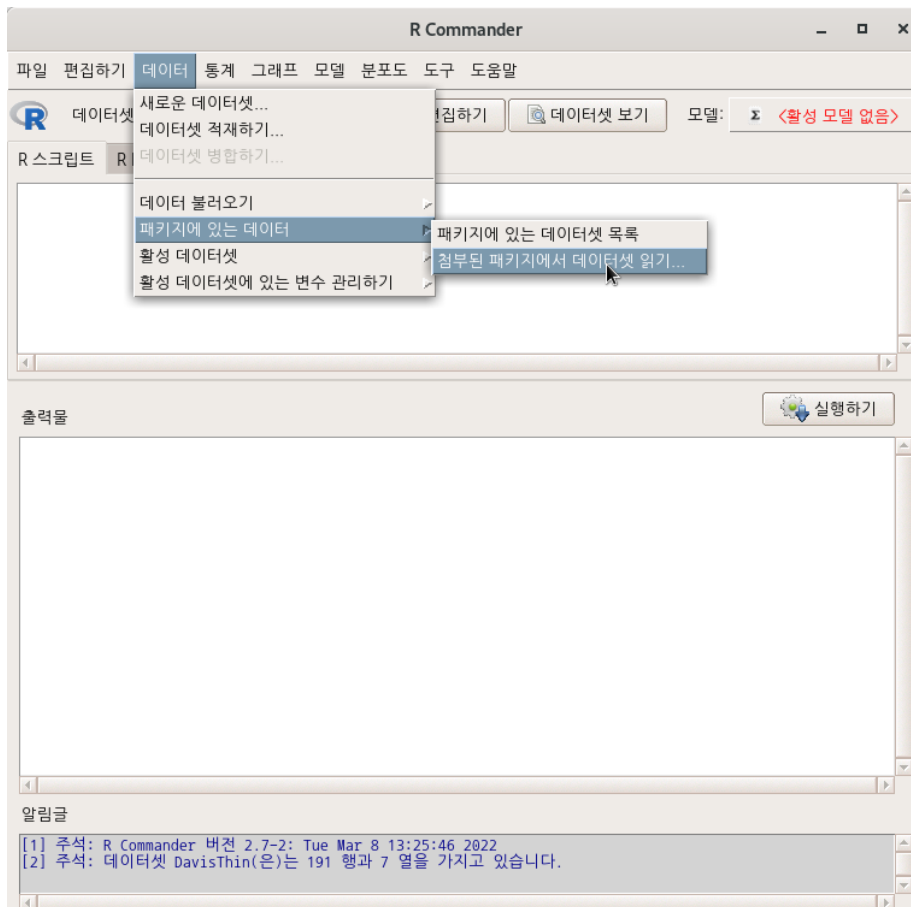

Moore {carData}

R Documentation

Status, Authoritarianism, and Conformity

Description

The Moore data frame has 45 rows and 4 columns. The data are for subjects in a social-psychological experiment, who were faced with manipulated disagreement from a partner of either of low or high status. The subjects could either conform to the partner's judgment or stick with their own judgment.

Usage

Format

This data frame contains the following columns:

partner.status

Partner's status. A factor with levels: high, low.

conformity

Number of conforming responses in 40 critical trials.

fcategory

F-Scale Categorized. A factor with levels (note levels out of order): high, low, medium.

fscore

Authoritarianism: F-Scale score.

Source

Moore, J. C., Jr. and Krupat, E. (1971) Relationship between source status, authoritarianism and conformity in a social setting. *Sociometry* 34, 122–134.

Personal communication from J. Moore, Department of Sociology, York University.

References

Fox, J. (2016) *Applied Regression Analysis and Generalized Linear Models*, Third Edition. Sage.

Fox, J. and Weisberg, S. (2019) *An R Companion to Applied Regression*, Third Edition, Sage.

[Package carData version 3.0-5 Index]

4.3 OBrienKaiser (2)

4.4 OBrienKaiserLong (1)

4.5 airquality (2)

4.6 Bfox (1)

4.7 sleep (1)

4.8 DavisThin (1)

4.9 USArrests (1)

4.10 birthwt (1)

4.11 Friendly (1)

4.12 Cowles (1)

4.13 Adler (1)

4.14 warpbreaks (1)