




kox hox hox IN HAND < pox >0 < box > < hx > 2 62> L) Noisy section 50 (JML)



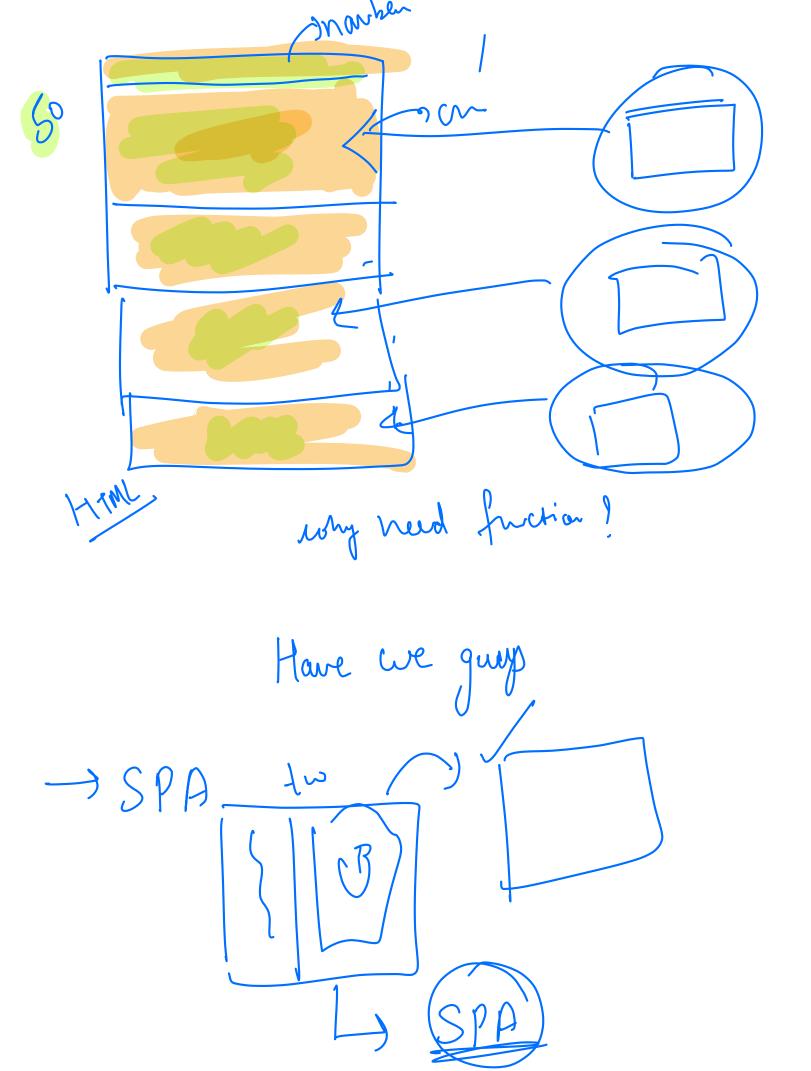

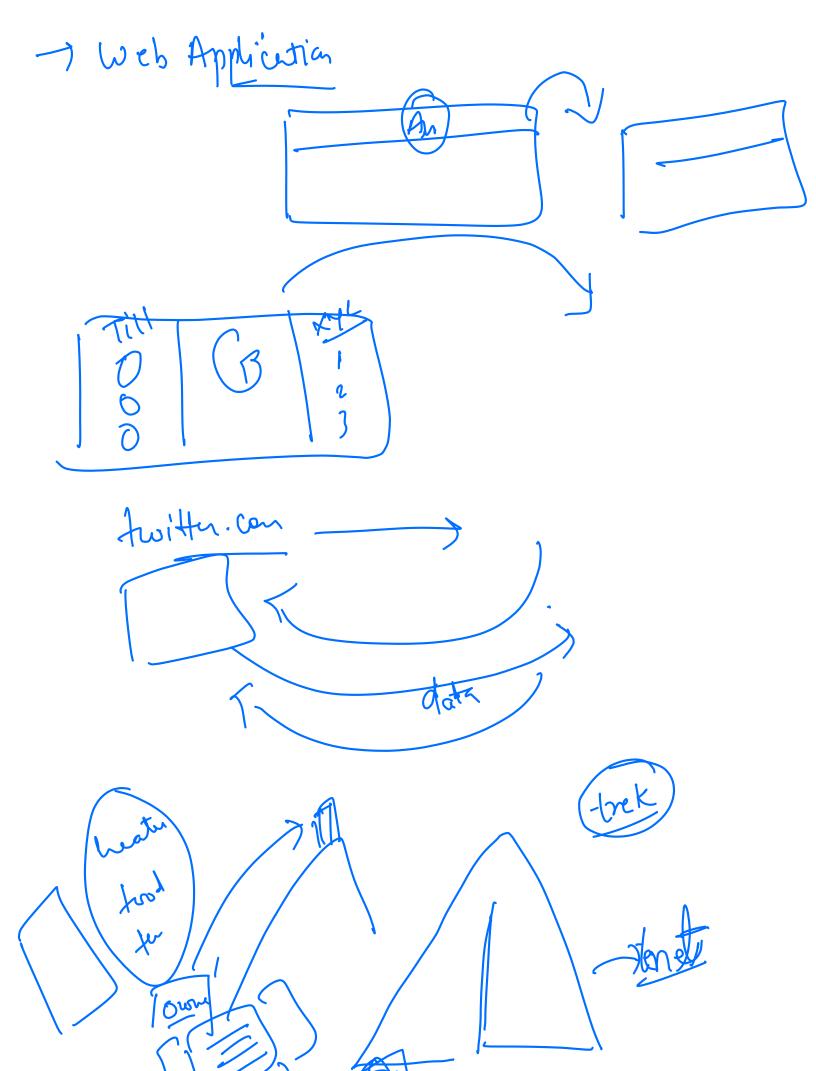

Sending dates feart helper

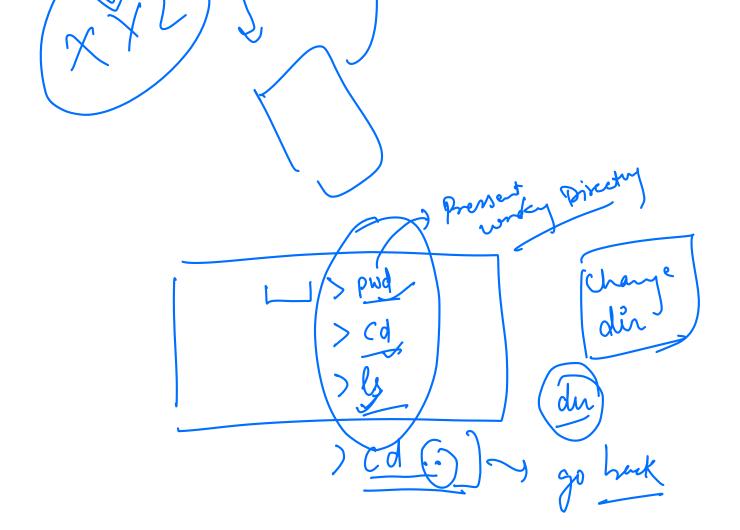


heart


Public folds + emages


index. html


begos -) Src CHTM) > Edity under. Why (14thl) < div ud= mot) &



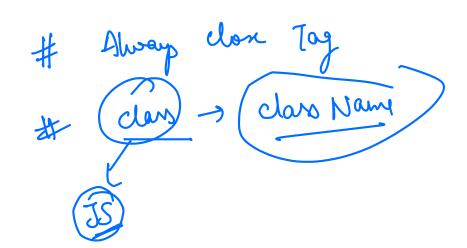

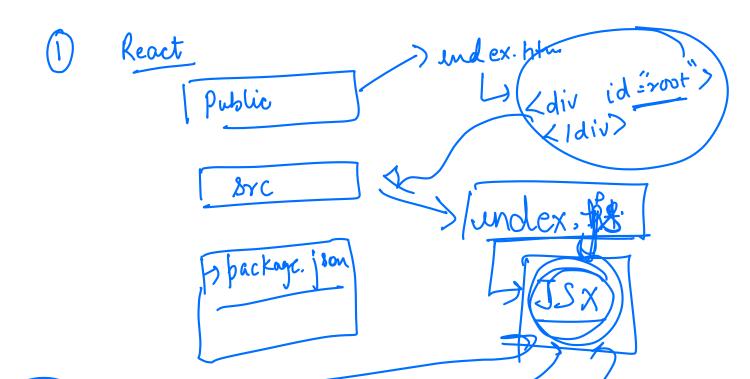

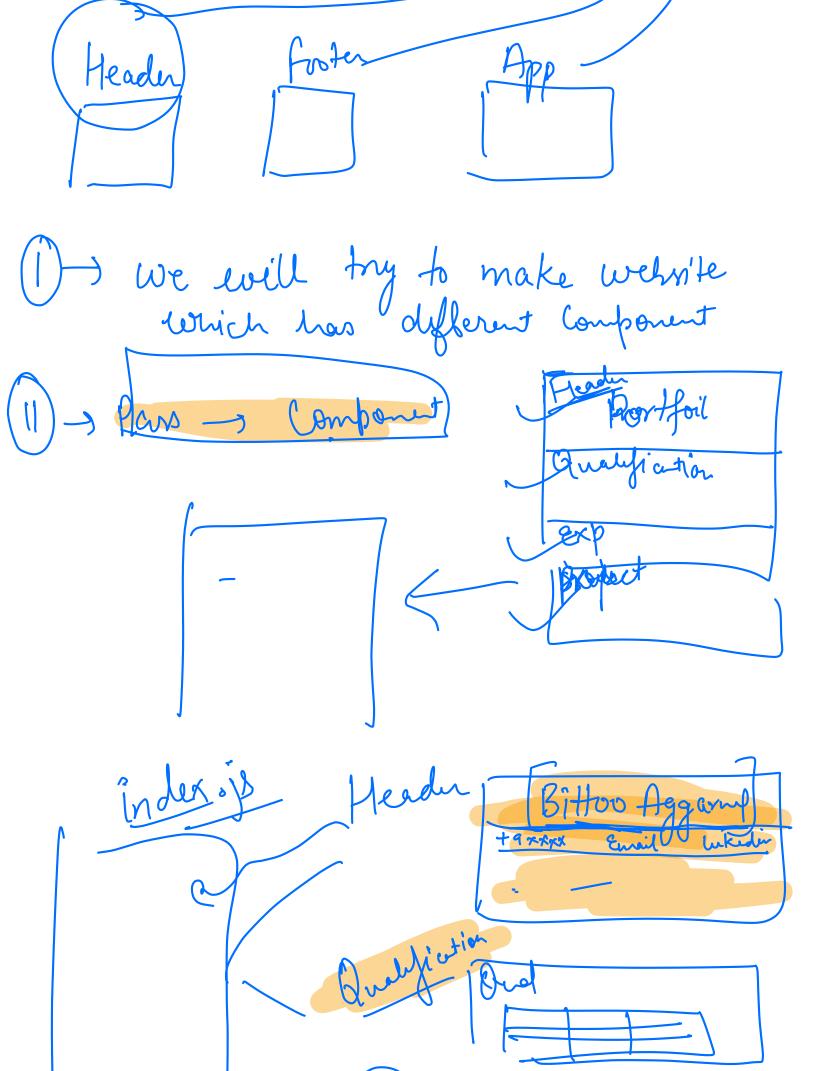

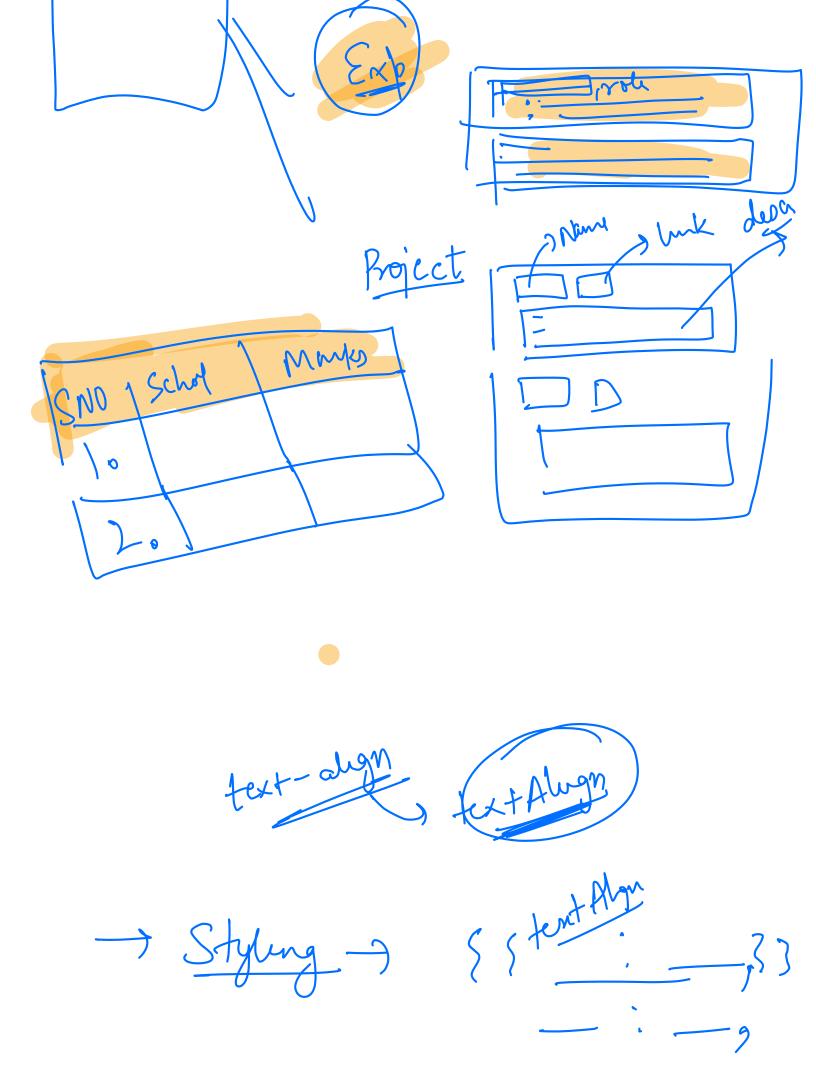

1 <h1 style={{textAlign:"center"}} Bittoo Aggarwal</h1> Somethi Slanet 2 div

3 | Elevent component

Second way to add CSS

Furport in js

15 min break

Compan 0 Experiend < work expen

Experion vor Kexpenienc ompany getting this data in component function > (unput penameter function abl

Company: how data is passed from 1 Component to other. min & lets try to pars data from 1 corponent to other.

do we want to try this?