


Scheduler.Start(2, [5,8])

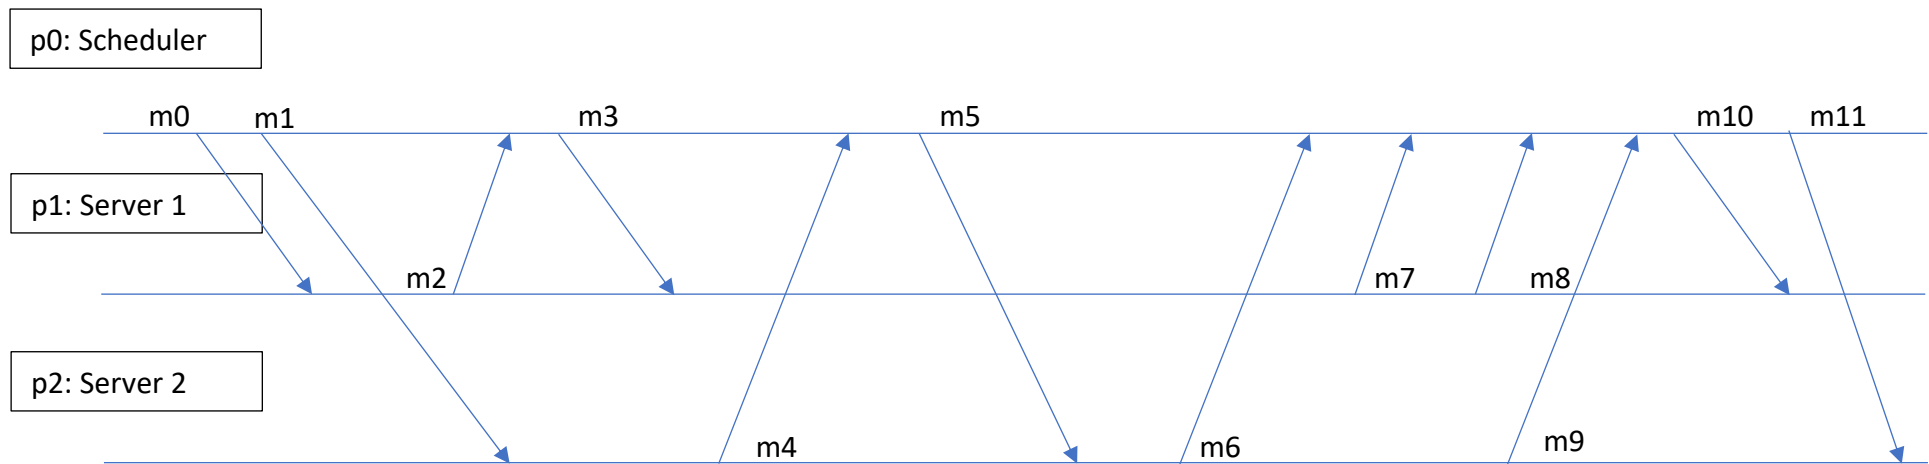

Messages:

m0 = spawn server 1
m1 = spawn server 2
m2 = {:ready, PID} (it's own process ID)
m3 = {:compute, 5, PID} (scheduler's ID)
m4 = {:ready, PID} (it's own process ID)
m5 = {:compute, 8, PID} (scheduler's ID)
m6 = {:answer, 8, 21}

m7 = {:answer, 5, 8}
m8 = {:ready, PID} (it's own process ID)
m9 = {:ready, PID} (it's own process ID)
m10 = {:shutdown}
m11 = {:shutdown}