SHODWE
Pizza Resto

PIZZA RESTO

WHERE EVERY SLICE TELLS A STORY

SHODWE
Pizza Resto

Home | About | Contact

ABOUT US

Data Analytics project using SQL. Performed business analysis on pizza sales data using joins, aggregations, and window functions to extract insights.

SHODWE

Pizza Resto

Home About Contact

PROJECT OVERVIEW

This project analyzes a Pizza Sales dataset using SQL to answer business-related questions.
The dataset contains orders, pizzas, pizza types, and order details.
The goal was to practice SQL joins, aggregations, window functions, and subqueries while uncovering useful business insights such as revenue, top-selling pizzas, and order trends.

SHODWE

Pizza Resto

Home About Contact

TOOLS & CONCEPTS USED

- Joins (INNER JOIN)
- Aggregate Functions (SUM, COUNT, AVG)
- Grouping & Sorting (GROUP BY, ORDER BY)
- Window Functions (RANK(), SUM() OVER)
- Subqueries & Aliases

SHODWE
Pizza Resto

Home About Contact

BUSINESS QUESTIONS & SQL QUERIES

/* 1. Retrieve the total number of orders placed */

```
SELECT COUNT(order_id) AS total_orders
FROM orders;
```

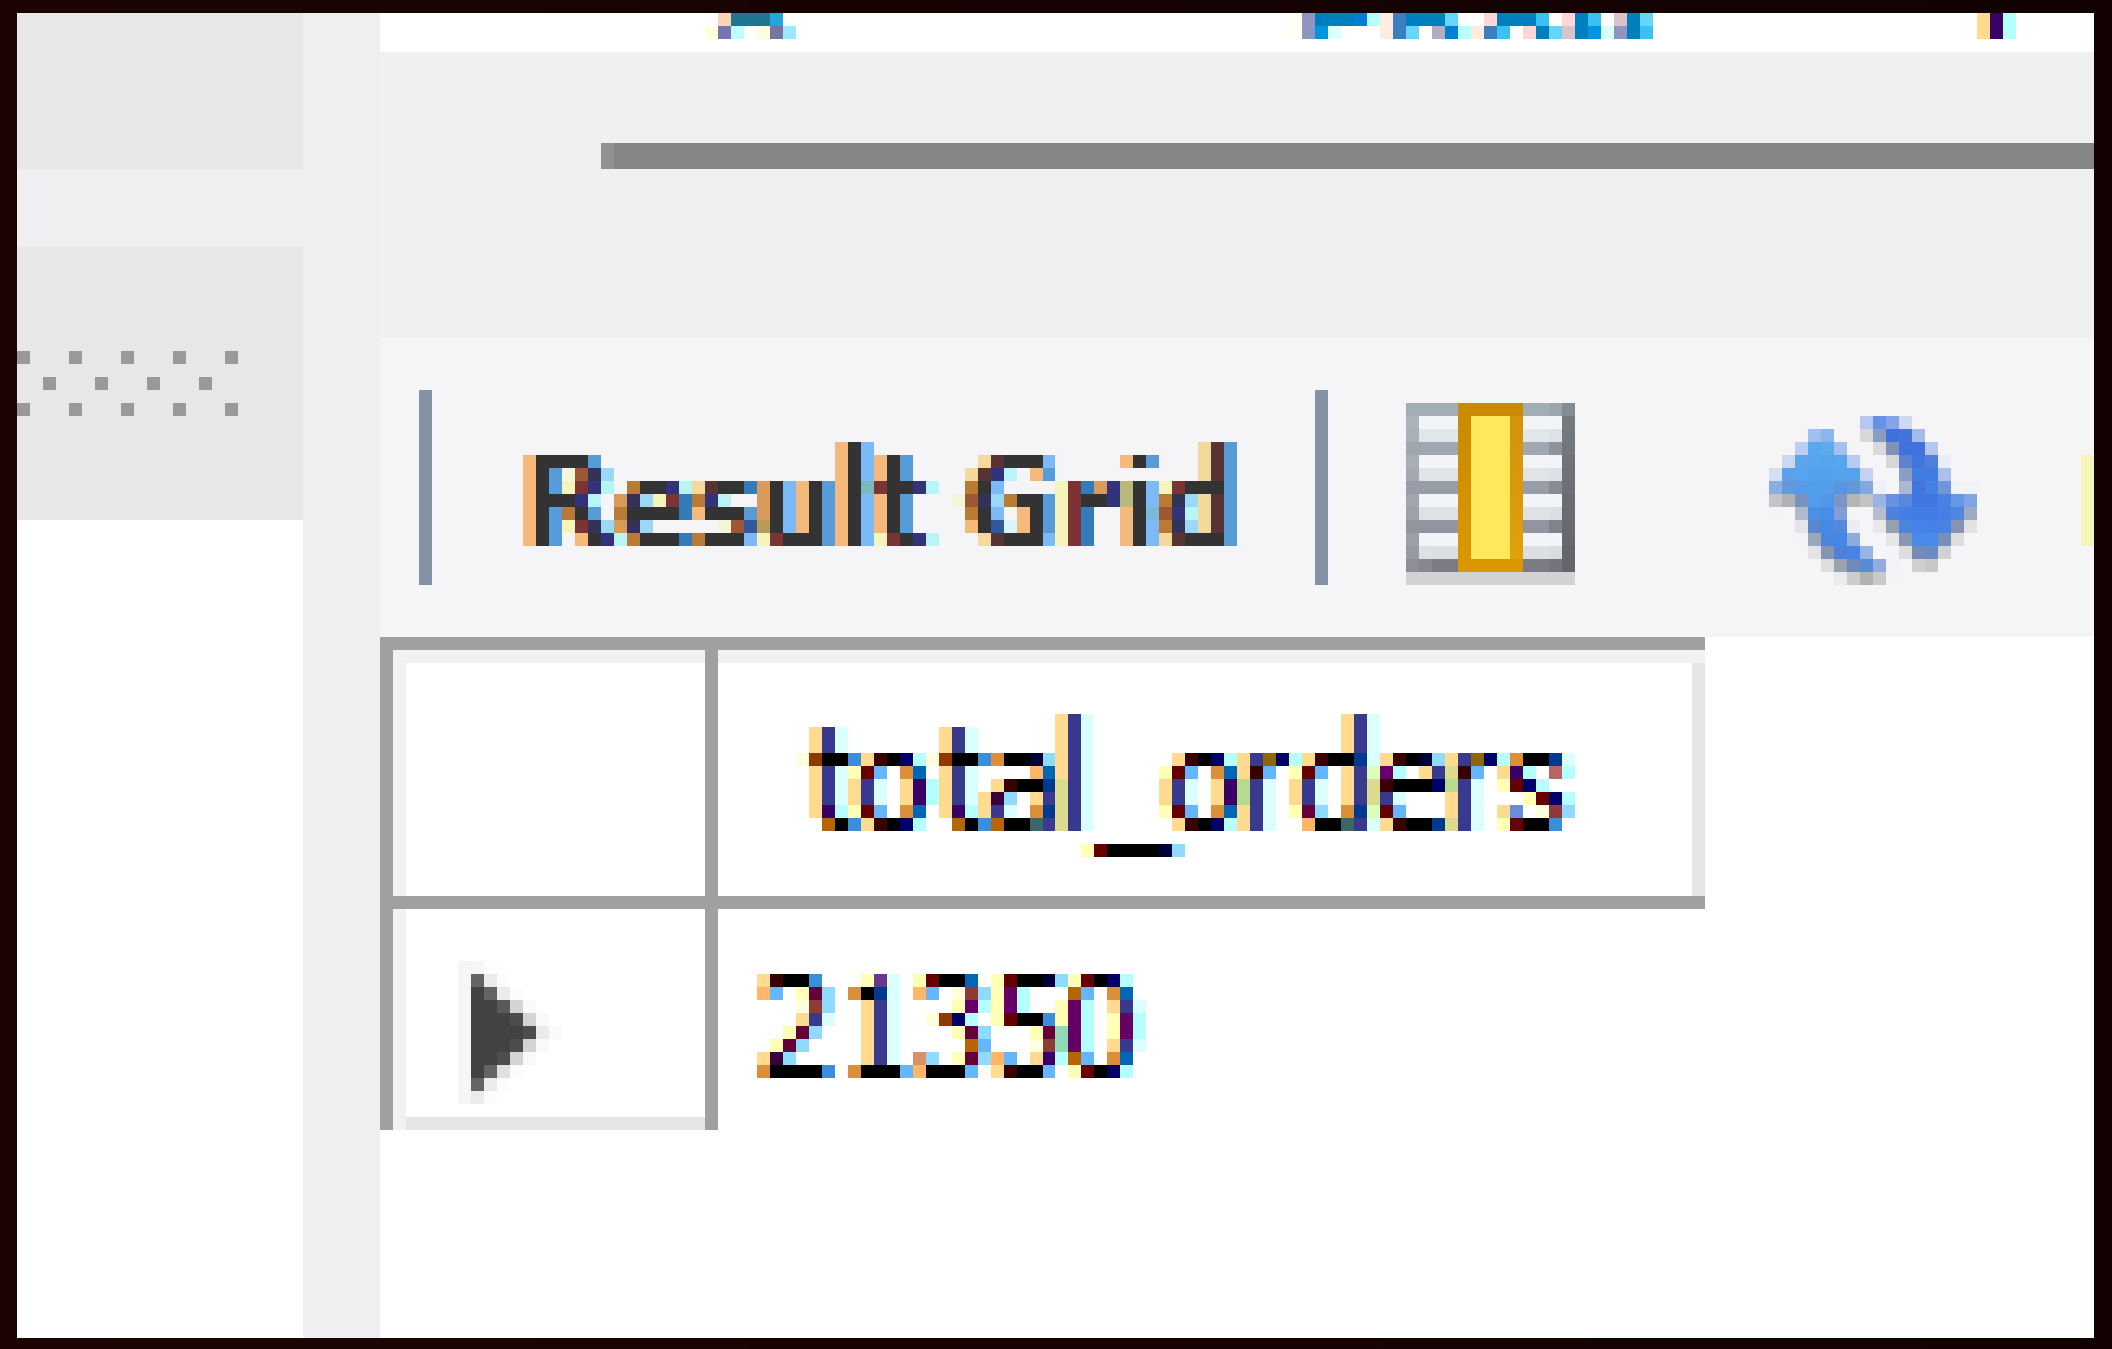

```sql
/* 2. Calculate the total revenue generated from pizza sales */
SELECT
    ROUND(SUM(order_details.quantity * pizzas.price), 2) AS total_revenue
FROM order_details
JOIN pizzas ON order_details.pizza_id = pizzas.pizza_id;
```

Result Grid

total_revenue
817860.05

```sql
/* 3. Identify the highest-priced pizza */
SELECT pizza_types.name, pizzas.price
FROM pizzas
JOIN pizza_types ON pizzas.pizza_type_id = pizza_types.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1;
```

Result Grid | Filter Rows:

name	price
The Greek Pizza	35.95

```sql
/* 4. Identify the most common pizza size ordered */
SELECT pizzas.size, COUNT(order_details.order_details_id) AS order_count
FROM order_details
JOIN pizzas ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC
LIMIT 1;
```

Result Grid | Filter Ro

size	order_count
L	18526

```sql
/* 5. List the top 5 most ordered pizza types along with their quantities */
SELECT pizza_types.name, SUM(order_details.quantity) AS total_ordered
FROM order_details
JOIN pizzas ON order_details.pizza_id = pizzas.pizza_id
JOIN pizza_types ON pizzas.pizza_type_id = pizza_types.pizza_type_id
GROUP BY pizza_types.name
ORDER BY total_ordered DESC
LIMIT 5;
```

Result Grid | Filter Rows:

name	total_ordered
The Classic Deluxe Pizza	2453
The Barbecue Chicken Pizza	2432
The Hawaiian Pizza	2422
The Pepperoni Pizza	2418
The Thai Chicken Pizza	2371

```sql
/* 6. Find the total quantity of each pizza category ordered */
SELECT pizza_types.category, SUM(order_details.quantity) AS total_quantity
FROM order_details
JOIN pizzas ON order_details.pizza_id = pizzas.pizza_id
JOIN pizza_types ON pizzas.pizza_type_id = pizza_types.pizza_type_id
GROUP BY pizza_types.category
ORDER BY total_quantity DESC;
```

category	total_quantity
Classic	14888
Supreme	11987
Veggie	11649
Chicken	11050

```sql
/* 7. Determine the distribution of orders by hour of the day */
SELECT HOUR(order_time) AS order_hour, COUNT(order_id) AS total_orders
FROM orders
GROUP BY HOUR(order_time)
ORDER BY order_hour;
```

Result Grid | Filter Rows:

order_hour	total_orders
9	1
10	8
11	1231
12	2520
13	2455
14	1472
15	1468
16	1920
17	2336
18	2399
19	2009

```sql
/* 8. Find the category-wise distribution of pizzas */
select category,count(name) from pizza_types
group by category;
```

category	count(name)
Chicken	6
Classic	8
Supreme	9
Veggie	9

```sql
/* 9. Group the order by date and calculate the average number of pizzas order per day */
select avg(quantity) from
(select orders.order_date, sum(order_details.quantity) as quantity
from orders join order_details
on orders.order_id = order_details.order_id
group by orders.order_date) as order_quantity;
```

Result Grid | Filte

avg(quantity)
138.4749

```sql
/* 10. Determine the top 3 most ordered pizza types based on revenue */
select pizza_types.name,
sum(order_details.quantity * pizzas.price) as revenue
from pizza_types join pizzas
on pizzas.pizza_type_id = pizza_types.pizza_type_id
join order_details
on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.name order by revenue desc limit 3;
```

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5

```
/* 11. Calculate the percentage contribution of each pizza type to tatal revenue */
select pizza_types.category,
(sum(order_details.quantity * pizzas.price) / (SELECT
    ROUND(SUM(order_details.quantity * pizzas.price), 2) AS total_revenue
FROM order_details
JOIN pizzas ON order_details.pizza_id = pizzas.pizza_id))*100 AS revenue
from pizza_types join pizzas
on pizzas.pizza_type_id = pizza_types.pizza_type_id
join order_details
on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.category order by revenue desc;
```

category	revenue
Classic	26.9059602556967
Supreme	25.4563112600986
Chicken	23.955137556847287
Veggie	23.682590927384577

```sql
/* 11. Analyze the cumulative revenue generated over time*/
select order_date,sum(revenue) over(order by order_date) as cum_revenue
from
(select orders.order_date,
sum(order_details.quantity*pizzas.price) as revenue
from order_details join pizzas
on order_details.pizza_id = pizzas.pizza_id
join orders
on orders.order_id = order_details.order_id
group by orders.order_date) as sale;
```

Result Grid | Filter Rows:

order_date	cum_revenue
2015-01-01	2713.8500000000004
2015-01- 2015-01-01	[illegible]
2015-01-03	8108.15
2015-01-04	9863.6
2015-01-05	11929.55
2015-01-06	14358.5
2015-01-07	16560.7
2015-01-08	19399.05
2015-01-09	21526.4
2015-01-10	23990.350000000002
2015-01-11	25862.65

SHODWE
Pizza Resto

Home About Contact

THANK YOU

FOR ATTENTION

2025 PIZZA RESTO PRESENTATION