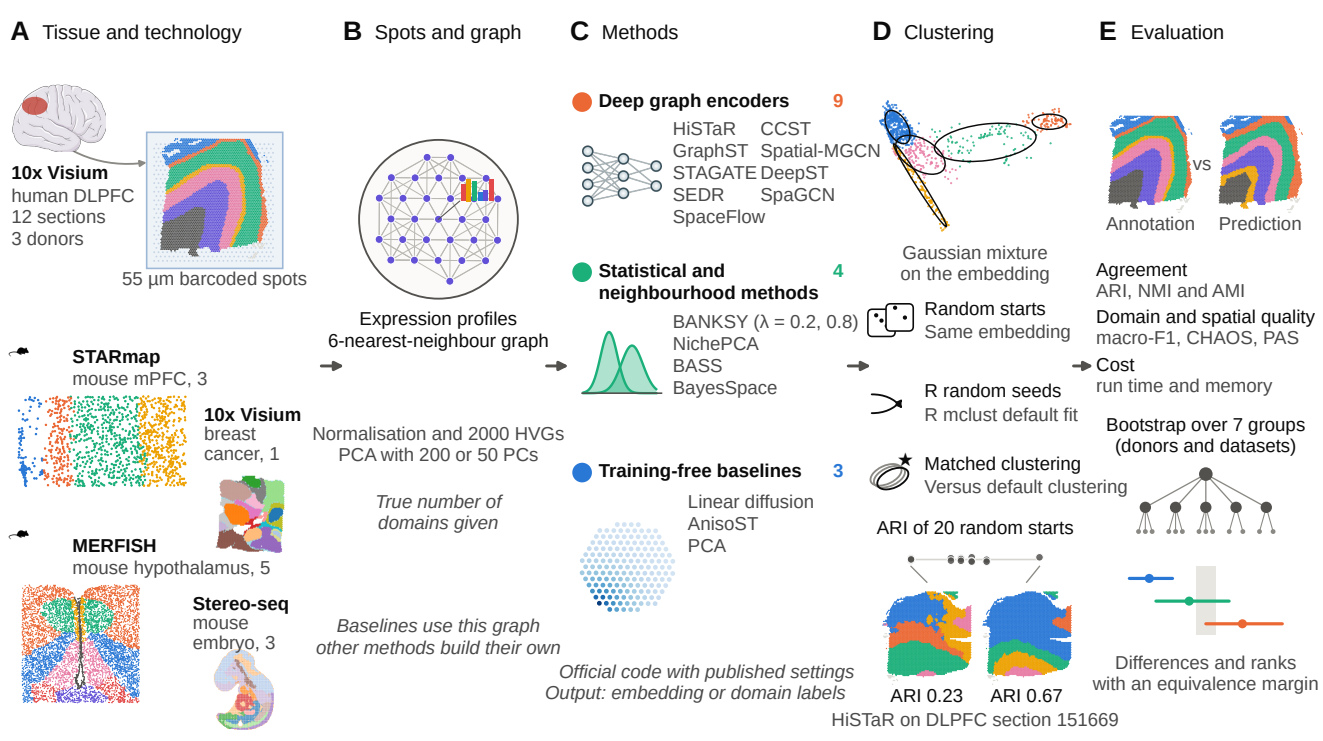

A Tissue and technology
10x Visium
human DLPFC
12 sections
3 donors
55 µm barcoded spots
STARmap
mouse mPFC, 3
10x Visium
breast
cancer, 1
MERFISH
mouse hypothalamus, 5
Stereo-seq
mouse
embryo, 3
B Spots and graph
Expression profiles
6-nearest-neighbour graph
Normalisation and 2000 HVGs
PCA with 200 or 50 PCs
True number of
domains given
Baselines use this graph
other methods build their own
C Methods
Deep graph encoders 9
HiSTaR CCST
GraphST Spatial-MGCN
STAGATE DeepST
SEDR SpaGCN
SpaceFlow
Statistical and
neighbourhood methods 4
BANKSY (λ = 0.2, 0.8)
NichePCA
BASS
BayesSpace
Training-free baselines 3
Linear diffusion
AnisoST
PCA
Official code with published settings
Output: embedding or domain labels
D Clustering
Gaussian mixture
on the embedding
Random starts
Same embedding
R random seeds
R mclust default fit
Matched clustering
Versus default clustering
ARI of 20 random starts
ARI 0.23
ARI 0.67
HiSTaR on DLPFC section 151669
E Evaluation
vs
Annotation
Prediction
Agreement
ARI, NMI and AMI
Domain and spatial quality
macro-F1, CHAOS, PAS
Cost
run time and memory
Bootstrap over 7 groups
(donors and datasets)
Differences and ranks
with an equivalence margin