



**BEERAN'S**  
OUTLOOK TOOLS

# Beeran's Outlook Tools

User Manual

Version 2.4

*Direct, powerful control over Microsoft Outlook — no cloud accounts, no Azure registrations, no subscriptions.*

# Table of Contents

|                                  |           |
|----------------------------------|-----------|
| <b>Table of Contents</b>         | <b>2</b>  |
| <b>1. Welcome</b>                | <b>4</b>  |
| Requirements . . . . .           | 4         |
| <b>2. Getting Started</b>        | <b>5</b>  |
| First Launch . . . . .           | 5         |
| Navigating the App . . . . .     | 5         |
| <b>3. Inbox</b>                  | <b>7</b>  |
| 3.1 Monitor . . . . .            | 7         |
| 3.2 Follow-up Tracker . . . . .  | 7         |
| 3.3 Bulk Archive . . . . .       | 7         |
| 3.4 Account Archive . . . . .    | 7         |
| 3.5 Rules . . . . .              | 8         |
| 3.6 Search . . . . .             | 9         |
| <b>4. Compose</b>                | <b>10</b> |
| 4.1 Templates . . . . .          | 10        |
| 4.2 Out of Office . . . . .      | 10        |
| 4.3 Signatures . . . . .         | 10        |
| <b>5. Cleanup Email</b>          | <b>11</b> |
| 5.1 Bulk Email . . . . .         | 11        |
| 5.2 Duplicate Emails . . . . .   | 11        |
| 5.3 Email Size . . . . .         | 11        |
| <b>6. Contacts</b>               | <b>12</b> |
| 6.1 Duplicate Contacts . . . . . | 12        |
| 6.2 Export / Import . . . . .    | 12        |
| <b>7. Calendar</b>               | <b>13</b> |

|                                            |           |
|--------------------------------------------|-----------|
| 7.1 Daily Digest . . . . .                 | 13        |
| 7.2 Duplicate Calendar . . . . .           | 13        |
| 7.3 Calendar Backup . . . . .              | 13        |
| 7.4 Meeting Inspector . . . . .            | 14        |
| 7.5 Meeting Organizer Recovery . . . . .   | 16        |
| <b>8. Utilities</b>                        | <b>18</b> |
| 8.1 Attachments . . . . .                  | 18        |
| 8.2 Export to PDF . . . . .                | 18        |
| 8.3 Folder Statistics . . . . .            | 18        |
| 8.4 Log . . . . .                          | 18        |
| 8.5 Schedule . . . . .                     | 18        |
| <b>9. Settings &amp; About</b>             | <b>19</b> |
| Reliability: Updates and Reboots . . . . . | 19        |
| Outlook Connection Status . . . . .        | 19        |
| Diagnostics . . . . .                      | 20        |
| Accounts . . . . .                         | 20        |
| Add-ins . . . . .                          | 21        |
| System . . . . .                           | 21        |
| <b>10. System Tray</b>                     | <b>22</b> |
| <b>11. Security</b>                        | <b>22</b> |
| <b>12. Troubleshooting</b>                 | <b>23</b> |
| <b>13. Version History</b>                 | <b>25</b> |
| <b>14. License &amp; Support</b>           | <b>27</b> |
| Support & Suggestions . . . . .            | 27        |

# 1. Welcome

Beeran's Outlook Tools is a Windows desktop app that connects directly to Microsoft Outlook over MAPI/COM. There's no Azure app registration, no API keys, and no browser sign-in — it talks straight to the same Outlook already running on your machine.

This manual covers all 29 features across the app's six navigation groups: **Inbox**, **Compose**, **Cleanup Email**, **Contacts**, **Calendar**, and **Utilities** — plus Settings, About, and the system tray.

New in v2.1: **Account Archive** (Inbox), and **Calendar Backup**, **Meeting Inspector**, and **Meeting Organizer Recovery** (Calendar) — look for the “New in v2.1” tag on those sections. Version 2.2 refines Meeting Organizer Recovery's detection and adds a Browse All Meetings fallback (see that section), plus several fixes found in real-world use. Version 2.3 makes startup feel faster (background tab pre-building plus a cached account/folder scan) and adds a Rescan / Refresh Connection button on the Welcome page. Version 2.4 adds single-instance protection, a --quit-for-update command for safely updating the app while it's running, and an optional Run at Windows startup setting so automation survives an unattended reboot — see Version History for the complete list.

## Requirements

|                          |                                                                                                                                                                |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operating system</b>  | Windows 10 or 11                                                                                                                                               |
| <b>Microsoft Outlook</b> | Installed and running on the same machine                                                                                                                      |
| <b>Internet access</b>   | Only needed for Bulk Email's Auto-Unsubscribe feature                                                                                                          |
| <b>Account types</b>     | Exchange / Microsoft 365 for full functionality; IMAP/POP3 accounts work for most features, with a few exceptions noted per feature below (e.g. Out of Office) |


## 2. Getting Started

### First Launch

- Open **Microsoft Outlook** first — the app connects to whichever Outlook profile is already running.
- Launch **Beeran's Outlook Tools.exe**. The window opens immediately and lands on a Welcome screen.
- A status line on the Welcome screen reads “Please wait while we fully connect to Microsoft Outlook...” while the app discovers every account and folder in your Outlook profile and pre-builds every other tab in the background, then switches to “✓ Done” — this can take a few seconds on large mailboxes the first time, but is usually much quicker on later launches since the previous scan is cached and reused while a fresh one catches up silently.
- A ■ **Rescan / Refresh Connection** button on the Welcome screen forces a full re-scan of every connected account and folder on demand — use it after adding a new Outlook account/profile, or any time the account/folder lists elsewhere in the app look out of date.
- Pick a group from the sidebar on the left to get started. Settings save automatically as you work.

### Navigating the App

The sidebar has six grouped sections. Each group opens a row of folder-style sub-tabs across the top of the content area — clicking a tab swaps the page below it without leaving the group. Settings, About, and Diagnostics are pinned at the bottom of the sidebar and are not part of any group, with a live Outlook connection indicator beneath them.

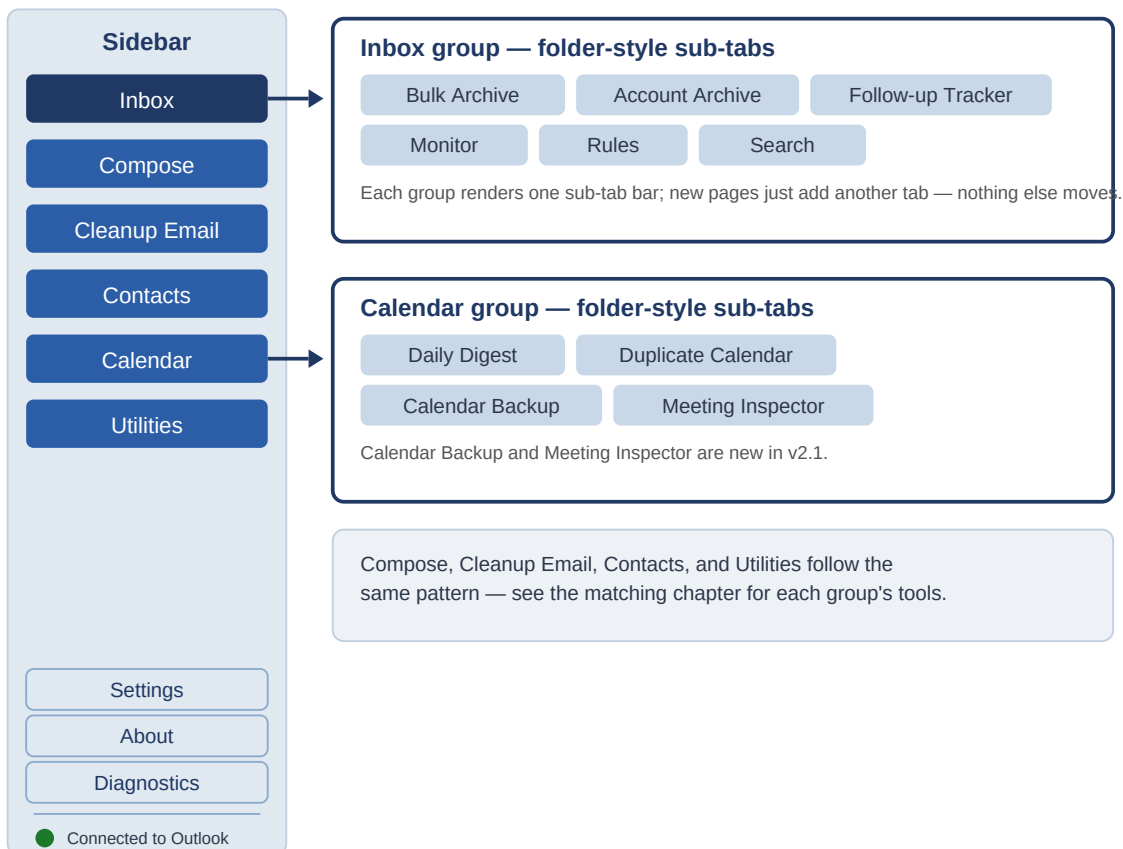

*The grouped sidebar navigation, showing the Inbox and Calendar groups' sub-tabs as an example.*

The chapters that follow are organized the same way — one chapter per sidebar group, one section per sub-tab.

## 3. Inbox

Watch folders, track unanswered mail, clean up old email, archive an entire account, search, and manage native Outlook rules.

### 3.1 Monitor

Watches up to 4 Outlook folders at once, each with its own independent alert settings. If a watched folder goes quiet for longer than its threshold, the app fires an alert.

|                             |                                                               |
|-----------------------------|---------------------------------------------------------------|
| <b>Account / Folder</b>     | Which mailbox and folder to watch                             |
| <b>Alert if no mail for</b> | Minutes of silence before an alert fires                      |
| <b>Alert sound</b>          | 20 built-in sounds, a Windows system sound, or a custom .wav  |
| <b>Repeat alert</b>         | Repeat the sound + popup every 1–5 minutes until mail arrives |

**Tip:** Alerts use a real, dismissable popup window (not the Windows toast), so you can read the full message and select its text.

### 3.2 Follow-up Tracker

Scans Sent Items for messages that haven't received a reply after a configurable number of days, matching replies by conversation topic. Results export to .csv, and scans can run on a schedule (interval or daily at a set time).

Matching is best-effort — unusual threading across different mail clients can occasionally produce a false positive.

### 3.3 Bulk Archive


Moves or deletes many emails at once from a single folder, filtered by age (and optionally unread-only). A count preview always appears before anything happens.

|                      |                                           |
|----------------------|-------------------------------------------|
| <b>Source folder</b> | The one folder this scan targets          |
| <b>Action</b>        | Move to another Outlook folder, or Delete |
| <b>Older than</b>    | Age threshold in days                     |

### 3.4 Account Archive

**New in v2.1**

Moves old items out of an **entire account** into a separate .pst archive file — this actually frees up mailbox space, the same way Outlook's own built-in Archive works. Unlike Bulk Archive above (one folder, email only), Account Archive can sweep Email, Calendar, Contacts, and Notes in a single pass, with one age threshold for everything.

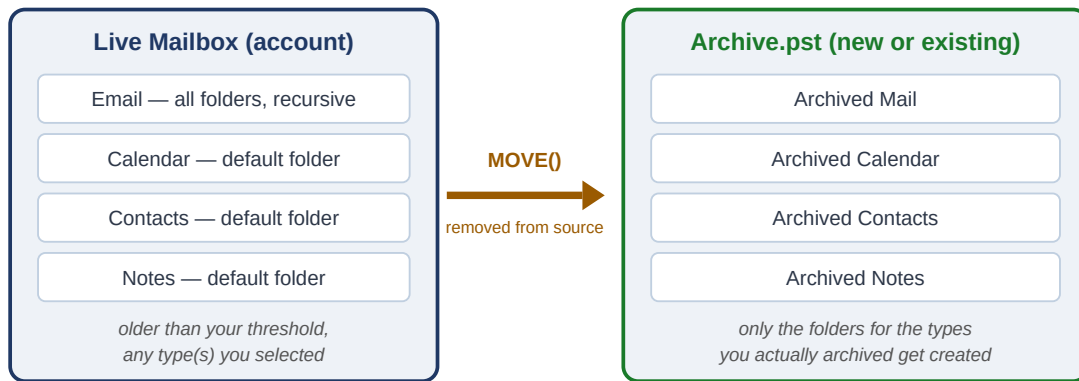

Always preceded by Scan → per-type count preview → Confirm Archive review window.

*Account Archive moves matched items out of the live mailbox into a new-or-existing .pst — always behind a Scan-then-Confirm review step.*

## How to use it

- Pick the **account** to archive — there's no folder picker here, since it works across the whole account.
- Check any combination of **Email, Calendar, Contacts, Notes**.
- Set the age threshold — one number applies to every checked type.
- Choose **Create new archive file** or **Add to an existing archive file** (the existing file just keeps growing across runs).
- Click **Scan**. A per-type count preview opens in a review window — uncheck any type you don't want archived this run, then click **Confirm Archive**.

**Important:** Calendar items that belong to an ongoing recurring series (no end date, or an end date in the future) are always skipped, even if older than your threshold — archiving would otherwise remove part of a meeting series you're still using.

**Note:** This is destructive by design — matched items are moved (not copied) out of their original folders. Use Calendar Backup instead if you want a copy that leaves the original untouched.

## 3.5 Rules

A native Outlook Rules Manager — import, edit, create, and push rules directly back to Outlook. Rules saved here keep running in Outlook even when this app is closed.

- Select an account and click **Get Rules from Outlook**.

- Toggle rules on/off, delete unwanted ones, or add/edit rules.
- Click **Send to Outlook** — the entire remaining rule list is written back and saved; you don't need to select rules first.

**If something goes wrong:** If saving fails because a rule has an invalid condition or a missing target folder, the app identifies exactly which rules are the problem, shows the reason for each, and offers to remove the bad ones so the save can proceed.

## 3.6 Search

Full-text search across Subject, Sender, and Body — scoped to one folder or an entire account, with timestamped results and a Stop button for long searches.

## 4. Compose

Reusable email templates, automatic out-of-office replies, and signature management.

### 4.1 Templates

Save frequently-used email templates (name, subject, body). Opening a template pre-fills a new Outlook compose window with one click, with a signature picker built in.

### 4.2 Out of Office

Reads and writes your Exchange/Microsoft 365 auto-reply settings directly — internal and external messages, optional start/end dates, and an external audience control (all senders, or contacts only). Settings are sent straight to Outlook, so the app does not need to stay open for OOF to keep working.

Requires an Exchange or Microsoft 365 account. IMAP/POP3 accounts show a warning — Outlook COM doesn't expose OOF for those account types.

### 4.3 Signatures

A launcher, not a WYSIWYG editor — Outlook signatures are Word-generated HTML with table layouts that a simple text editor can't reproduce faithfully. This page lists your existing signatures, previews them exactly as they'll render (images included), and opens them in Word for actual editing.

## 5. Cleanup Email

Detect bulk mail, find duplicate messages, and analyze mailbox size.

### 5.1 Bulk Email

Two ways to find bulk senders:

- **Auto-detect** — flags a sender once they've been seen at least N times (configurable), or if their mail carries a List-Unsubscribe header. External senders only, by default.
- **Manual search** — From and/or Subject contains text you specify.

|                          |                                                                                                 |
|--------------------------|-------------------------------------------------------------------------------------------------|
| <b>Action on matches</b> | Log only / Flag / Move to folder / Delete                                                       |
| <b>Excluded Domains</b>  | Domains that are never flagged, added via text entry or one click from scan results             |
| <b>Auto-Unsubscribe</b>  | One-click method where supported; opens a pre-filled Outlook draft for email-based unsubscribes |

### 5.2 Duplicate Emails

Finds duplicate messages using configurable match criteria — Subject+Sender+Date, Subject+Sender, or a custom combination of Subject/Sender/Date/Body. Actions: Log only, Flag, Delete, or Export. Scans can run on a schedule.

### 5.3 Email Size

Lists the largest emails in a folder by size, to help you find what's actually consuming mailbox space.

## 6. Contacts

Find and merge duplicate contacts; export or import via CSV.

### 6.1 Duplicate Contacts

Finds duplicates two ways — same name with different emails, and same email with different names.

- **Delete review** — every group listed with checkboxes (pre-checked for duplicates, keeper unchecked); nothing changes until you confirm.
- **Merge review** — choose a strategy per group: Most recently modified, Most complete, or Manual field-by-field with a live preview.

### 6.2 Export / Import

Exports contacts to .csv with selectable fields (Select All / Deselect All). Imports contacts from a .csv into any Contacts folder.

## 7. Calendar

Daily mail digest, duplicate meeting detection, calendar backup, and a diagnostic tool for meetings that won't stay deleted.

### 7.1 Daily Digest

Pick an account and folders to get unread counts, top senders, and sample subjects for each. Runs on demand, or as a daily popup at a set time.

### 7.2 Duplicate Calendar

Detects duplicate meetings two ways:


- **Individual occurrences** — finds duplicate instances within a configurable date range.
- **Recurring series** — compares entire series masters; choose whether to keep the older or newer master.

Deleting a master in series mode removes every past and future occurrence in that series. A review window always opens first.

### 7.3 Calendar Backup

#### New in v2.1

Exports a calendar to .ics and/or a standalone .pst file — a non-destructive copy; nothing is ever removed from the original calendar. Works on your own calendar or any shared calendar already visible in your Outlook profile.

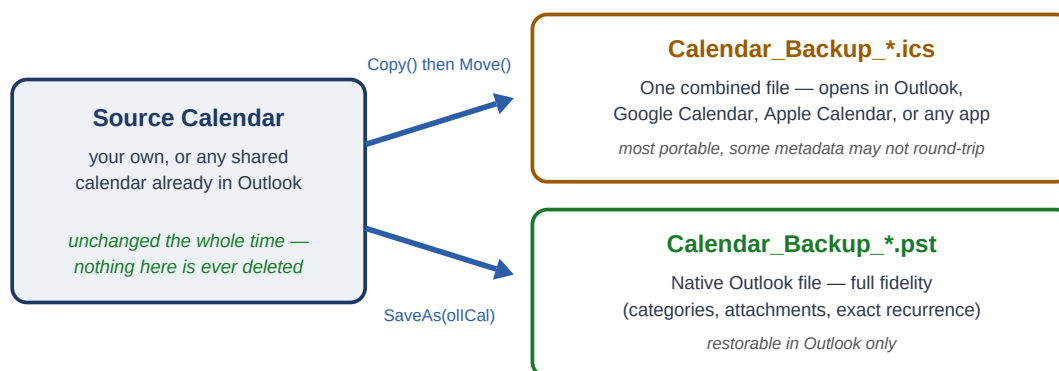

*Calendar Backup can produce both output formats from the same run — the source calendar is only ever read from, never modified.*

#### Scope

- **Entire calendar** — exports each recurring series once, as its master record with the recurrence pattern intact. Recommended for a full backup.
- **Date range** — expands recurring meetings into the individual occurrences that actually fall inside the window, which is closer to “what’s on the calendar between these two dates.”


### Output format

- **.ics** — one combined file, opens in Outlook, Google Calendar, Apple Calendar, or any calendar app. Most portable; some Outlook-specific metadata may not round-trip perfectly.
- **.pst** — a native Outlook data file, full fidelity (categories, attachments, exact recurrence). Restorable in Outlook only.

## 7.4 Meeting Inspector

### New in v2.1

Diagnoses why a meeting keeps reappearing after you delete it, then helps you remove it the right way instead of guessing. This is the tool to reach for when a meeting comes back within minutes of deleting it, with no new invite email — that pattern usually means a duplicate copy or a sync quirk, not anything you did wrong.

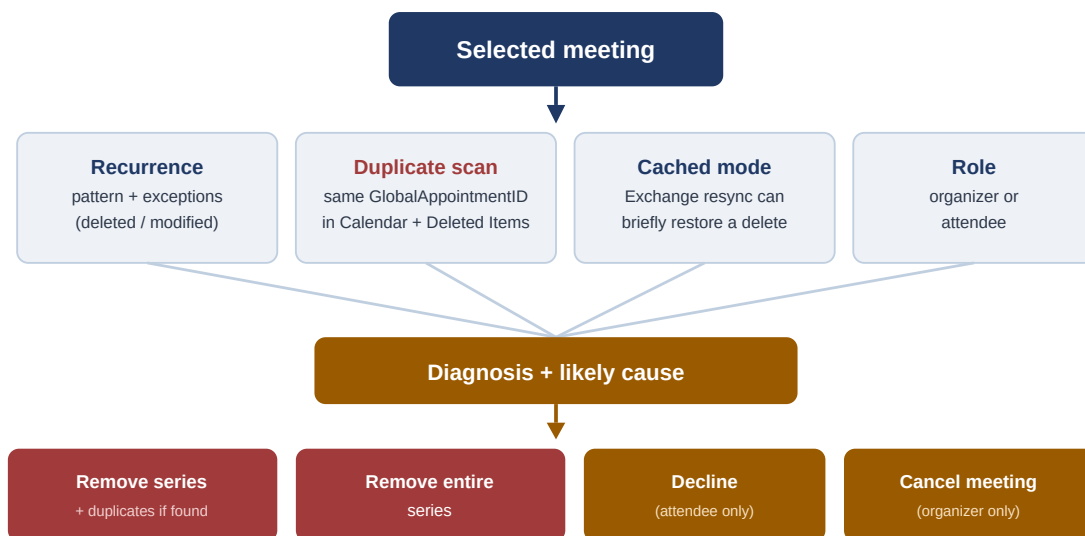

*Only the actions that fit what was found are shown — each requires a confirmation step.*

*Meeting Inspector runs four checks, then only offers the actions that fit what it actually found.*

### How to use it

- Pick an account and calendar folder, then click **Find**. The subject field is an optional filter — type part of the meeting’s subject to narrow a long list, or leave it blank to list every meeting in that folder.
- Click **Inspect** on the match you mean. The Diagnosis panel fills in with the recurrence pattern, any exceptions, a duplicate-copy check, Cached Exchange Mode status, and whether you’re the organizer or an attendee.

- Choose from the action buttons that appear below the diagnosis — only the ones that make sense for that meeting are shown.

### What each check means

|                             |                                                                                                                                                                  |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Recurrence pattern</b>   | Frequency, interval, end date, and how many exceptions (deleted or modified occurrences) exist on the series                                                     |
| <b>Duplicate scan</b>       | Looks for another item with the same GlobalAppointmentID in the calendar and in Deleted Items — the direct explanation for “I deleted it and it came right back” |
| <b>Cached Exchange Mode</b> | If your mailbox is cached, a background resync can briefly re-show an item before the delete finishes syncing to the server                                      |
| <b>Organizer / Attendee</b> | Determines whether Decline (attendee) or Cancel (organizer) is offered — deleting your own copy of someone else's meeting doesn't stop them resending it         |

### Available actions

- **Remove series + duplicates** — shown only when a duplicate was found; removes the series and every duplicate copy detected.
- **Remove entire series** — deletes the master and every occurrence, past and future.
- **Decline meeting** — attendees only. Notifies the organizer, which is what actually prevents the meeting from being resent to you.
- **Cancel meeting** — organizers only. Notifies every attendee before removing it.

**Note:** Every action here is permanent once confirmed. A confirmation step always appears first, describing exactly what will be removed.

*Looking for a meeting still showing an old organizer after a calendar backup/restore into a different account? That's a separate diagnosis — see [Meeting Organizer Recovery](#), next.*

## 7.5 Meeting Organizer Recovery

### New in v2.1

**What it's for:** a narrow, specific scenario — a mailbox was rebuilt, migrated, or had its calendar backed up and restored into a different account (for example after a corrupted profile), and meetings that mailbox used to organize are now stuck showing that old, no-longer-valid organizer identity. Outlook has no built-in way to reassign a meeting's organizer after the fact — Meeting Organizer Recovery works around that by recreating each affected meeting fresh, under the current account, rather than trying to edit the old one in place.

It has its own tab, right next to Meeting Inspector in the Calendar section (they're related but separate diagnoses, so each got room to breathe). Pick an account and calendar folder there, then scan — it finds that exact pattern in the folder selected and recreates each match as a fresh meeting organized by the current account.

### How it decides what qualifies

- Only items this account's own calendar data still marks as organizer-type are considered — meetings you were only ever invited to are never touched.
- The meeting (or, for a series, its recurrence end date) must still be upcoming.
- To tell whether the stored organizer is actually stale, the scan first tries to resolve the meeting's organizer to a real mailbox address and compares that against the current account's own address — this catches the case that matters most for this feature: the same person, with the same display name, now on a rebuilt or migrated mailbox. Comparing names alone would miss that, since the display name can be identical on both the old and new mailbox. If a mailbox address can't be resolved for either side, it falls back to comparing organizer name against account name.
- Each match shows its subject, stale organizer name (and resolved address, when one was found), start time, whether it's a series, whether it looks like a Teams meeting, and attendee count, so you can select exactly which ones to recreate.

### Browse All Meetings

The scan above is deliberately narrow, and it can come back with nothing even when a meeting really is showing a stale organizer — for example if the address-resolution step above can't reach a mailbox address for either the old or new account, and the two accounts happen to share a display name. When that happens, use **Browse All Meetings**, further down the same tab: it lists every upcoming meeting the selected account's data marks as organizer-type — matching the automatic pattern or not — so you can find and select the one you know isn't right, yourself. An optional "Organizer contains" field narrows a long list by organizer name or resolved address; leave it blank to see everything. Selected meetings go through the exact same recreate flow described above.

### What "Recreate" actually does

- Builds a brand-new appointment on the current account with the same subject, location, time, reminder, body, recurrence pattern, and attendee list, then sends it.
- **Non-Teams meetings** are sent automatically once confirmed.

- **Teams meetings** are opened as a draft for you to review and send manually instead, because a genuine new Teams online-meeting link can't be reliably generated from this app alone — it needs the Teams add-in's own provisioning step, which only runs when you send from an open Outlook compose window.
- The stale local copy is always deleted afterward. If the old account is also still connected in this same Outlook profile, its live copy of the meeting is cancelled first so its attendees get a proper cancellation notice rather than an orphaned duplicate.

**Note:** Recreating sends a new invite to the same recipients. Anyone who already has the original meeting will end up with two copies on their calendar unless the original can also be cancelled — which this app can only do if the old account is still connected here. If it isn't (the usual case after the old account has been fully decommissioned), have whoever manages your Exchange/365 tenant run the **Remove-CalendarEvents** PowerShell cmdlet against the old mailbox instead — that's Microsoft's supported way to cancel, on every remaining attendee's calendar, every meeting that mailbox organized. It's the correct complement to this feature, not something this app can do itself: cancelling on behalf of an account requires Exchange admin permissions this app deliberately never asks for.

### Admin command to clear the old mailbox's meetings

Run in Exchange Online PowerShell (connect first with `Connect -ExchangeOnline`), substituting the old mailbox's email address or account name:

```
Remove-CalendarEvents -Identity "old.mailbox@yourdomain.com"
-CancelOrganizedMeetings
```

- **-Identity** — the old/departing mailbox whose meetings need cancelling (email address, alias, or display name).
- **-CancelOrganizedMeetings** — sends a cancellation, on that mailbox's behalf, to every attendee for every meeting it organized. Without this switch the cmdlet only removes items from the mailbox's own calendar and does not notify anyone else.
- Add **-QueryStartDate** / **-QueryWindowInDays** to limit the sweep to a date range instead of the default, and **-WhatIf** first to preview what would be cancelled without actually sending anything.

Full syntax, all parameters, and permission requirements: [learn.microsoft.com — Remove-CalendarEvents](https://learn.microsoft.com/en-US/powershell/modules/exchangelink/Remove-CalendarEvents).

## 8. Utilities

Extract attachments, export emails to PDF, analyze folder statistics, review the event log, and schedule automation.

### 8.1 Attachments

Extracts attachments from any Outlook folder to a local path or another Outlook folder, with an option to move processed emails afterward. Attachments are saved into sub-folders named after each email's subject.

### 8.2 Export to PDF

Exports individual emails or entire folders to PDF — one PDF per email.

|                          |                                                                                                                  |
|--------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>Scope</b>             | All emails in folder, or a date range (calendar picker included)                                                 |
| <b>Additional filter</b> | Subject or From contains text — applies regardless of scope, with a red “Filter Active” badge when set           |
| <b>Options</b>           | List attachment names, save attachments to a subfolder, choose filename format, open the output folder when done |

### 8.3 Folder Statistics

An at-a-glance summary of any folder: total emails, unread count and percentage, total size in MB, oldest/newest email dates, and date span. Walks subfolders recursively, with Exchange cached-mode detection so you know whether the count reflects everything on the server or just what's cached locally.

### 8.4 Log

A live, timestamped record of every event — monitor checks, alerts, extractions, rule actions, scans, and errors. Exportable to .txt or .csv.

### 8.5 Schedule

Runs attachment extraction automatically on an interval and/or daily at a set time, using the same source/destination settings as the Attachments tab.

## 9. Settings & About

|                               |                                                                                                                                                                                                                                                                                                                   |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Appearance</b>             | Dark, Light (default), or System                                                                                                                                                                                                                                                                                  |
| <b>On window close</b>        | Auto (default — asks only if Monitor is active), Ask, Tray, or Exit                                                                                                                                                                                                                                               |
| <b>Portable Version</b>       | Off (default), or On — wipes every other saved setting when the app closes (the toggle itself stays on, so it only needs to be checked once), so running this app from a USB drive or shared folder on a different computer never inherits the previous computer's accounts, folders, or settings.                |
| <b>Run at Windows startup</b> | Off (default), or On — launches automatically, minimized to the tray, the next time you log in. See Reliability: Updates and Reboots below. Switches itself back off whenever Portable Version is on, so a USB/portable install never leaves a startup entry pointing at a drive that may not be there next time. |

The About page shows the full feature list, version number, third-party library attributions, and the complete proprietary license text — and includes a suggestion box that emails the developer directly.

### Reliability: Updates and Reboots

**New in v2.4 — If Inbox Monitor or any scheduled automation (Follow-up Tracker, Daily Digest, a duplicate scan, or Scheduled Extraction) is running and the window is just minimized to the tray, the app is still very much running and still holds its own files open.**

- **Updating the app while it's running** used to be able to fail, because a plain window-close is deliberately treated as “minimize to tray” rather than “exit” under the On window close setting above — so the process never actually went away and its files stayed locked. The app now refuses to let a second copy run at the same time (launching it again while it's already open just brings the existing window to the front), and supports a command-line flag an installer or update script can run right before it replaces this app's files: “Beeran's Outlook Tools.exe” --quit-for-update — it reliably closes a running copy, even one minimized in the tray with automation active, and returns once it's confirmed gone (or immediately if none was running).
- **An unattended reboot** (e.g. a Windows Update installing overnight) used to leave the app simply not running afterward, silently stranding every scheduled task until someone remembered to reopen it. Turning on **Run at Windows startup** above closes that gap — the app relaunches automatically, minimized to the tray, the next time you log in.

### Outlook Connection Status

**New in v2.1 — A small dot and status label sit at the bottom of the sidebar, just below Settings, About, and Diagnostics, showing whether the app is currently talking to Outlook.**

|                                                     |                                                                                                                  |
|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| ● <b>Green</b> —<br>“ <b>Connected to Outlook</b> ” | Outlook is running and reachable; every tool is available.                                                       |
| ● <b>Red</b> — “ <b>Outlook not running</b> ”       | Outlook isn't currently running, or has closed — features that need Outlook will not work until it's open again. |

**Auto-reconnect:** The app checks Outlook's status automatically every few seconds — you never need to click anything or restart the app. If Outlook isn't running when the app starts, or closes while the app is open, the dot turns red, a note is written to the Log tab, and (if Outlook closes mid-session) a Windows notification lets you know. As soon as Outlook is running again, the dot turns green on its own and the app automatically refreshes its list of accounts and folders — no restart needed either way.

## Diagnostics

**New in v2.1** — The connection light only proves Outlook itself is running; it says nothing about whether one specific account's data is actually loading. A corrupted local cache (.ost) or a stuck sync can leave an account showing “connected” while its folders never populate. **Diagnostics (bottom of the sidebar, next to Settings and About) checks every account directly and tells you exactly what's wrong.**

Diagnostics is split into three sub-tabs — **Accounts**, **Add-ins**, and **System** — each checking a different layer of what can go wrong.

### Accounts

It checks the same set of accounts shown on every other page's account dropdown — including any shared mailboxes or public folders you've been given access to, not just your own accounts. Results are grouped under two headings, **Configured Accounts** and **Shared / Delegated Accounts**, so it's obvious at a glance which is which.

Click **Run Diagnostic** and the app checks each account's ability to actually enumerate its own folders (with an 8-second timeout per account, so one stuck account can't freeze the check), along with its Cached Exchange Mode status and the health of its local data file. Each account is marked OK, Warning, or Failed, with the specific reason and — for local data files — the exact file path. Where available, each card also shows a **Send/Receive Activity** summary (how long since each Send/Receive group last synced), a **mailbox quota** reading on Exchange/Microsoft 365 accounts once it's within 90% of full, and a warning if the account's data file lives inside a OneDrive/Dropbox/Google Drive/iCloud-synced folder — Microsoft advises against this, since the sync client can lock or partially write the file while Outlook has it open.

|                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Close Outlook &amp; Repair</b> | Offered only for server-backed accounts (Exchange cached mode, or an IMAP .ost) — closes Outlook, renames the local cache so Outlook rebuilds it fresh from the server, then reopens Outlook automatically. Closing and renaming takes up to about 30 seconds, with live progress shown on the Diagnostics tab; the resync afterward is separate and can take much longer on a large mailbox. Not offered for a plain .pst, since that file is the only copy of that data. |
| <b>Point to a backup file...</b>  | Browse to any .pst and mount it as a stand-in Outlook data source, so you have working data while the live account gets fixed. You choose each time whether the mount stays permanently or is removed automatically when the app closes.                                                                                                                                                                                                                                   |

**If automated repair doesn't work:** If Close Outlook & Repair can't finish — Outlook won't close, or the cache file stays locked — a popup walks you through what to try next: confirm Outlook is fully closed (check Task Manager) and retry, run the Inbox Repair Tool (SCANPST.EXE) on the file, or remove and re-add the account in Outlook's Account Settings. The same popup reminds you that Point to a backup file... is there in the meantime.

Diagnostics can't repair server-side Microsoft 365 issues, and closing/rename only clears out the local cache — anything that existed solely in that file and never finished syncing to the server (an unsent draft, for example) could be lost, so the confirmation step calls that out before anything happens.

## Add-ins

Lists every COM add-in registered in Outlook, whether it's currently loaded, and its startup setting (loads at startup, loads on demand, or disabled). A misbehaving add-in is a common cause of a slow, hanging, or oddly-behaving Outlook session even when every account above checks out fine.

|                         |                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Enable / Disable</b> | Toggling an add-in unloads or reloads it immediately in the running Outlook session and updates its startup setting in the registry, matching Outlook's own File > Options > Add-ins dialog. If a disabled add-in re-enables itself after a restart, an organization IT policy is likely re-enforcing it and it can't be controlled from here. |
| <b>Crash alert</b>      | A banner appears if Outlook has recently auto-disabled an add-in after it crashed — a likely explanation for any add-in below unexpectedly showing "Not loaded."                                                                                                                                                                               |

## System

Two machine-level checks that commonly explain Outlook trouble which has nothing to do with any specific account:

|                                    |                                                                                                                                                                                                                   |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Duplicate Outlook processes</b> | Flags more than one OUTLOOK.EXE process running at once — a leftover process from a previous crash can lock data files and cause exactly the kind of “connected but broken” behavior Diagnostics exists to catch. |
| <b>Disk space</b>                  | Checks free space on every drive that hosts an account's local data file, and warns when a drive is low — cache growth failures and corruption both become more likely as free space runs out.                    |

## 10. System Tray

Closing the main window asks what to do, based on the Settings page above.

|                         |                                                      |
|-------------------------|------------------------------------------------------|
| <b>Minimize to Tray</b> | Window hides; monitoring and scheduling keep running |
| <b>Exit</b>             | App shuts down completely                            |

Double-click the tray icon, or click Show, to restore the window; Quit exits fully.

## 11. Security

The compiled executable includes tamper/decompilation detection. If the app detects it's being run outside its compiled environment, a full-screen warning displays the machine name, IP address, and timestamp before terminating. Reverse-engineering or decompiling this software is prohibited under the license agreement (see Section 13).

## 12. Troubleshooting

### **“Cannot connect to Outlook”**

Open Outlook before launching this app. If Outlook just opened, wait a few seconds and try again.

### **Folders not populating in the dropdowns**

Check the Log tab — any connection errors appear there with details.

### **pywin32 errors during build**

build.bat runs the post-install step automatically. If issues persist, run manually: `python Scripts\pywin32_postinstall.py -install`

### **Tray icon not appearing**

Make sure Pillow and pystray are installed: `pip install Pillow pystray`

### **Out of Office not working**

OOF requires an Exchange or Microsoft 365 account. IMAP/POP3 accounts don't support Out of Office via Outlook COM — the app shows a warning on that page if your account type isn't compatible.

### **Rules “invalid actions or conditions” error on save**

One or more existing Outlook rules may have a missing target folder or invalid condition. The app identifies the specific rules and offers to remove them automatically so the save can proceed.

### **Bulk Email auto-detect not flagging anything**

On personal accounts, the app may not detect your “own domain” automatically — check the Log tab for a note. Frequency-based and List-Unsubscribe detection still work; double-check your Excluded Domains list isn't covering senders you expected to see.

### **Auto-Unsubscribe not working for a sender**

Some senders only support unsubscribing by email reply. The app opens a pre-filled Outlook draft rather than failing silently — check the results list for a [unsubscribe via email] tag.

### **A meeting keeps coming back after I delete it**

Use the Meeting Inspector (Calendar group) instead of deleting it again — it will tell you whether this is a duplicate copy, a cached-mode resync, or an attendee/organizer mismatch, and offer the action that actually fixes it.

### **Account Archive says an account isn't found**

The account name must match exactly what Outlook shows for that store. Re-open the page to refresh the account dropdown if you've recently added or removed an account in Outlook.

### **The dot below About is red**

The app can't currently reach Outlook — usually because Outlook isn't open, or just closed. Open (or reopen) Outlook and wait a few seconds; the dot turns green and the app reconnects automatically, with no restart needed.

### **The dot is green, but one account's folders won't populate**

That green light only confirms Outlook itself is running — it doesn't check any individual account. Open Diagnostics (bottom of the sidebar) and click Run Diagnostic; it will identify the broken account, explain the likely cause (usually a corrupted .ost or a stuck sync), and point you at the exact file and fix. You can also mount a backup .pst from there to keep working meanwhile.

### **A disabled add-in turns itself back on**

Check the Add-ins sub-tab under Diagnostics. If it re-enables after an Outlook restart, your organization's IT policy is likely managing that add-in centrally — it can't be permanently disabled from a per-user setting in that case.

### **Diagnostics flags low disk space or a near-full mailbox**

Both are shown on the Diagnostics tab (System and Accounts sub-tabs) before they cause real symptoms. Free up space on the flagged drive, or ask your admin about a mailbox quota increase or an archive/cleanup pass, before the account starts failing to sync.

### **Organizer Recovery recreated a meeting, but attendees now see two copies**

That happens when the old organizing account isn't connected in this same Outlook profile anymore, so this app has no way to send a cancellation from it. Ask your Exchange/365 admin to run Remove-CalendarEvents against the old mailbox — that cancels, on every attendee's calendar, everything it organized, clearing out the duplicate.

# 13. Version History

## v2.4

Single-instance protection: a second launch now brings the already-running copy to the front instead of opening a confusing duplicate (two copies both polling/moving the same mailbox would be a real problem) · new `--quit-for-update` command line flag lets an update process (an installer, or a manual update script) reliably close a running copy — even one sitting minimized in the tray with Inbox Monitor or a schedule active — before replacing this app's files, instead of the update silently failing because a plain window-close is treated as minimize-to-tray whenever something would be lost by closing outright · new “Run at Windows startup, minimized to the tray” Settings checkbox, off by default, so Inbox Monitor and any scheduled automation (Follow-up Tracker, Daily Digest, duplicate scans, Scheduled Extraction) comes back on its own after an unattended reboot — e.g. a Windows Update installing overnight — instead of staying stranded until someone reopens the app by hand; self-heals the registry entry on every launch and disables itself automatically with Portable Version

## v2.3

Faster perceived startup: right after the window opens, every tab and sub-tab is pre-built in small background chunks while the Welcome page shows “Please wait while we fully connect to Microsoft Outlook...”, so the first click on any tab is usually already instant instead of pausing to build that tab's widgets · the scanned Outlook account/folder list is now cached to `config.json`, so the next launch can pre-build tabs with real data immediately instead of waiting on that launch's own live Outlook scan — the live scan still always runs and silently refreshes everything once done · new “■ Rescan / Refresh Connection” button on the Welcome page forces a fresh full scan of every connected account/folder on demand and refreshes all tabs' dropdowns with the result, with its own working/done status message · the Welcome page now shows a live status line for both of the above, ending in a “✓ Done” message

## v2.2

Fixes and refinements found testing the deployed v2.1 build. Meeting Organizer Recovery's detection now resolves each meeting's organizer (and the current account) to a real mailbox address rather than just comparing display names, so a same-name/rebuilt-mailbox case is caught correctly; added Browse All Meetings, a manual list-and-select fallback with an optional organizer filter, for when the automatic scan finds nothing · fixed a startup crash, and similar crashes from scheduled background scans (Daily Digest, Follow-up Tracker, duplicate email/contact scans, scheduled extraction), introduced by v2.1's lazy tab-loading speed-up, where the app could try to update a tab's contents before that tab had ever been opened that session · Meeting Inspector's subject field is now correctly optional, so Find with it left blank lists every meeting in the folder instead of refusing to search · the main window now reopens at the same size and screen position it was last closed at, instead of always resetting to a fixed centered size, and no longer renders oversized on a monitor running Windows display scaling above 100%

## v2.1

Calendar Backup (.ics / .pst export, non-destructive) · Meeting Inspector (duplicate-copy and recurrence diagnostics) · Meeting Organizer Recovery (its own tab; recreates meetings left showing a stale organizer after a calendar backup/restore into a different or rebuilt account) · Account Archive (whole-account, multi-type, moves to a new-or-existing .pst) · Outlook connection status indicator with automatic reconnect ·

Diagnostics, now with Accounts / Add-ins / System sub-tabs — per-account health check with mailbox quota, Send/Receive activity, and cloud-sync data-file warnings, one-click repair for server-backed accounts, backup-file mount, COM add-in list with enable/disable, and system-level checks for duplicate Outlook processes and low disk space · Portable Version setting · build.bat now updates pip automatically before installing dependencies · faster startup and shutdown (pages now build on first visit instead of all at once) · exe/install folder name made version-less so future updates don't move the install path

## **v2.0**

Native Outlook Rules Manager · Email Templates · Out of Office Manager · Bulk Archive · Email Size Analyzer · Folder Statistics · Contact Export/Import · Duplicate Calendar Detector · Grouped navigation · 20 built-in alert sounds · Tamper detection

## **v1.5**

Follow-up Tracker · Daily Digest · Duplicate Email Detector · Duplicate Contact Detector · Bulk Email Detector with auto-unsubscribe · Welcome landing page

## **v1.4**

4 built-in musical alert sounds · Per-folder repeat alerts

## **v1.3**

Multi-folder monitor (up to 4) · Per-folder custom sounds · About page · Light mode default

## **v1.2**

System tray · Scheduled extraction · Email rules engine · Full-text search · Log export · Dark/light themes

## **v1.0**

Inbox monitor · Attachment extractor · In-app log · Windows notifications

## 14. License & Support

Beeran's Outlook Tools is proprietary software — free to use, but may not be modified or redistributed. Attempting to reverse-engineer or decompile the application is prohibited under the license agreement. The complete license text is in LICENSE.md and on the About page inside the app.

### Support & Suggestions

Use the About tab inside the app to send a suggestion directly, or email **BeeransTools@outlook.com**. This app grows with its users — if there's a feature, a folder action, or anything else on your mind, it's worth sending.

*Beeran's Outlook Tools · © 2026 Beeran · All rights reserved*