一、django项目-3

二、教学目标

1、实现首页功能

2、实现修改密码功能

3、实现退出登录功能

4、添加初始化数据

5、首页展示文章列表

三、首页功能

[BootStrap中文官网]

3.0.1 urls.py

```
#首页
path('home/', views.home),
```

3.0.1 views.py

```
def home(request):
    return render(request, 'home.html')
```

3.0.1 templates -> home.html

```
<nav class="navbar navbar-default">
  <div class="container-fluid">
    <!-- Brand and toggle get grouped for better mobile display -->
    <div class="navbar-header">
      <button type="button" class="navbar-toggle collapsed" data-
toggle="collapse" data-target="#bs-example-navbar-collapse-1" aria-
expanded="false">
        <span class="sr-only">Toggle navigation</span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
      </button>
      <a class="navbar-brand" href="#">博客园</a>
```

```
    </div>

    <!-- Collect the nav links, forms, and other content for toggling -->
    <div class="collapse navbar-collapse" id="bs-example-navbar-collapse-1">
      <ul class="nav navbar-nav">
        <li class="active"><a href="#">博客<span class="sr-only">(current)</span>
</a></li>
        <li><a href="#">文章</a></li>
{#        <li class="dropdown">#}
{#          <a href="#" class="dropdown-toggle" data-toggle="dropdown"
role="button" aria-haspopup="true" aria-expanded="false">Dropdown <span
class="caret"></span></a>#}
{#          <ul class="dropdown-menu">#}
{#            <li><a href="#">Action</a></li>#}
{#            <li><a href="#">Another action</a></li>#}
{#            <li><a href="#">Something else here</a></li>#}
{#            <li role="separator" class="divider"></li>#}
{#            <li><a href="#">Separated link</a></li>#}
{#            <li role="separator" class="divider"></li>#}
{#            <li><a href="#">One more separated link</a></li>#}
{#          </ul>#}
{#        </li>#}
      </ul>
{#      <form class="navbar-form navbar-left">#}
{#        <div class="form-group">#}
{#          <input type="text" class="form-control" placeholder="Search">#}
{#        </div>#}
{#        <button type="submit" class="btn btn-default">Submit</button>#}
{#      </form>#}
      <ul class="nav navbar-nav navbar-right">
         {% if request.user.is_authenticated %}
             <li><img src="{{ request.user.avatar }}"></li>
            <li><a href="#">{{ request.user.username }}</a></li>
            <li class="dropdown">
              <a href="#" class="dropdown-toggle" data-toggle="dropdown"
role="button" aria-haspopup="true" aria-expanded="false">更多操作<span
class="caret"></span></a>
              <ul class="dropdown-menu">
                <li><a href="#" data-toggle="modal" data-target=".bs-example-
modal-lg">修改密码</a></li>
                <li><a href="#">修改头像</a></li>
                <li><a href="#">后台管理</a></li>
                <li role="separator" class="divider"></li>
                <li><a href="/logout/">退出登录</a></li>
              </ul>
            </li>
         {% else %}
            <li><a href="/register/">注册</a></li>
             <li><a href="/login/">登录</a></li>
          {% endif %}



      </ul>
    </div><!-- /.navbar-collapse -->
  </div><!-- /.container-fluid -->
</nav>
```

四、修改密码

4.0.1 templates -> home.html

```
<!-- 修改密码-弹出框 -->
<div class="modal fade bs-example-modal-lg" tabindex="-1" role="dialog" aria-
labelledby="myLargeModalLabel">
  <div class="modal-dialog modal-lg" role="document">
    <div class="modal-content">
      <h1 class="text-center">修改密码</h1>
      <div class="row">
          <div class="col-md-8 col-md-offset-2">
              <div class="form-groupr">
                  <label for="">用户名: </label>
                  <span>{{ request.user.username }}</span>
              </div>
              <div class="form-groupr">
                  <label for="old_password">原密码: </label>
                  <input type="text" id="old_password" class="form-control"
name="old_password">
                  <span id="old_password_error" style="color: red"></span>
              </div>
              <div class="form-groupr">
                  <label for="">新密码: </label>
                  <input type="text" id="new_password" class="form-control"
name="new_password">
              </div>
              <div class="form-groupr">
                  <label for="">确认密码: </label>
                  <input type="text" id="confirm_password" class="form-control"
name="confirm_password">
                  <span id="confirm_password_error" style="color: red"></span>
              </div>
             <div class="modal-footer">
                    <button type="button" class="btn btn-default" data-
dismiss="modal">关闭</button>
                    <button type="button" id="id_edit" class="btn btn-primary">提
交</button>
             </div>
          </div>
      </div>
    </div>
  </div>
</div>



<script>
    $('#id_edit').click(function () {
        $.ajax({
            url:'/set_password/',
            type:'post',
            data:{
                old_password:$('#old_password').val(),
                new_password:$('#new_password').val(),
                confirm_password:$('#confirm_password').val(),
```

```
                csrfmiddlewaretoken:'{{ csrf_token }}'
            },
            success:function(res){
                if(res.code === 200){
                    // 修改成功,刷新页面
                    location.reload()
                }else if (res.code === 401){
                    $('#confirm_password_error').text(res.msg)
                }else if (res.code === 402){
                    $('#old_password_error').text(res.msg)
                }
            }
        })
    })

     // 当用户开始输入原密码时，清除原密码错误信息
    $('#old_password').on('input', function() {
        $('#old_password_error').text('');
    });

    // 当用户开始输入确认密码时，清除确认密码错误信息
    $('#confirm_password').on('input', function() {
        $('#confirm_password_error').text('');
    });


</script>
```

4.0.1 urls.py

```
#修改密码
path('set_password/',views.set_password),
```

4.0.1 views.py

```
#登录验证装饰器
from django.contrib.auth.decorators import login_required


@login_required
def set_password(request):
    if request.method =='POST':
        back_dict = {'code':200,'msg':''}
        old_password = request.POST.get('old_password')
        new_password = request.POST.get('new_password')
        confirm_password = request.POST.get('confirm_password')
        #校验旧密码是否正确
        is_right = request.user.check_password(old_password)
        if is_right:
           # 校验两次密码是否一致
           if new_password == confirm_password:
               request.user.set_password(new_password) # 修改对象属性
               request.user.save()
           else:
               back_dict['code'] = 401
               # 将报错信息添加到字典中
```

```
                back_dict['msg'] = '两次密码不一致'
        else:
            back_dict['code'] = 402
            # 将报错信息添加到字典中
            back_dict['msg'] = '原密码错误'

        return JsonResponse(back_dict)
```

4.0.1 settings.py

```
#配置登录认证装饰器
LOGIN_URL = '/login/'
```

五、退出登录

5.0.1 urls.py

```
#退出登录
path('logout/',views.logout)
```

views.py

```
@login_required
def logout(request):
    auth.logout(request)
    return redirect('/home/')
```

templates -> home.html

```
<li><a href="/logout/">退出登录</a></li>
```

六、添加初始化数据

6.0.1 创建管理账号

```
python manage.py createsuperuser
```

发现报错:

> django.db.utils.IntegrityError: (1048, "Column 'phone' cannot be null")

6.0.1 models.py

```
# 用户表
class UserInfo(AbstractUser):
    #手机号
    phone = models.BigIntegerField(verbose_name='手机号',null=True)
    ....
```

之前我们没有为这个手机号码设置为空导致

重新迁移和执行

```
python manage.py makemigrations
python manage.py migrate
```

6.0.1 admin.py

```
from django.contrib import admin

from app01 import models

# Register your models here.
admin.site.register(models.UserInfo)
admin.site.register(models.Blog)
admin.site.register(models.Category)
admin.site.register(models.Tag)
admin.site.register(models.Article)
admin.site.register(models.UpOrDown)
admin.site.register(models.Comment)
```

6.0.1 添加基础数据

访问后端admin页面

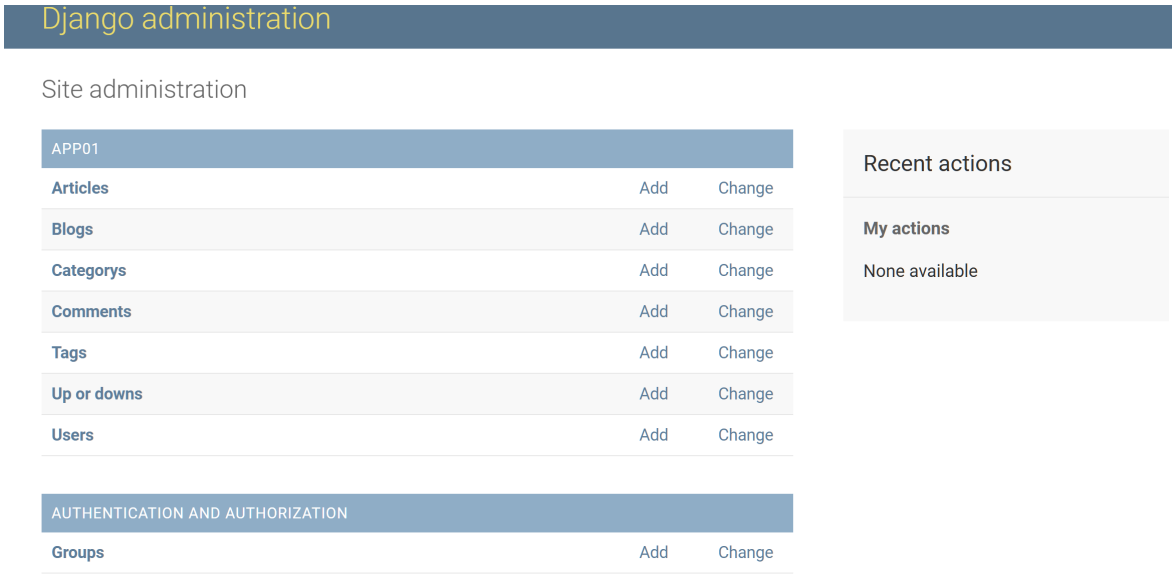

添加站点的信息

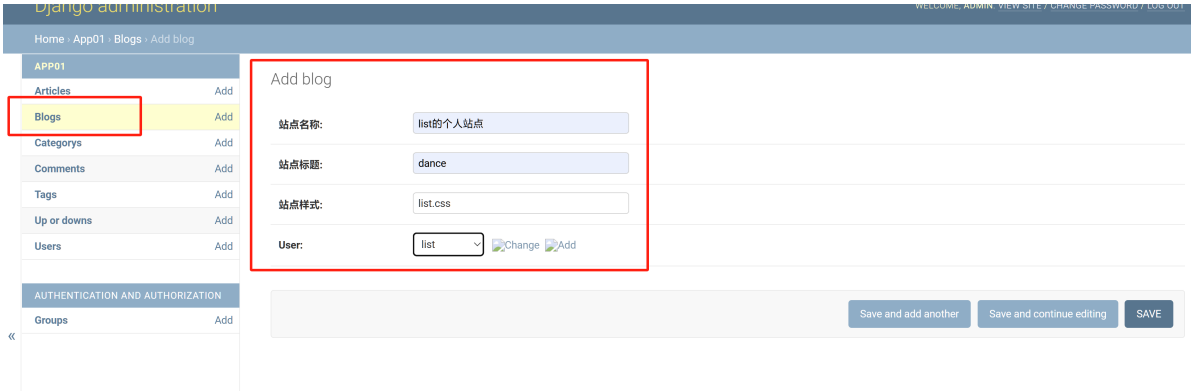

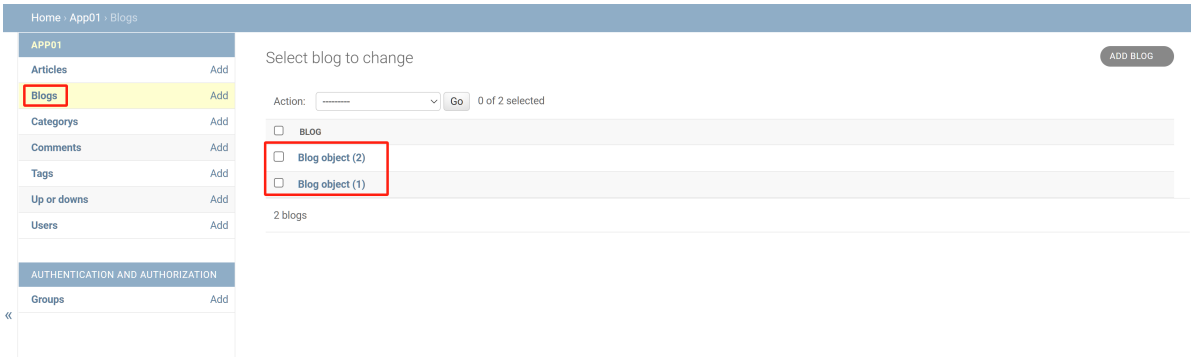

发现问题:

看不到具体的名称

添加str方法即可

```
# 个人站点表
class Blog(models.Model):
    site_name = models.CharField(max_length=32,verbose_name='站点名称')
    site_title = models.CharField(max_length=64, verbose_name='站点标题')
    # 存在css/js文件的路径
    site_theme = models.CharField(max_length=32, verbose_name='站点样式')

    #用户和个人站点是一对一
    user = models.OneToOneField(to='UserInfo',on_delete=models.CASCADE)

    def __str__(self):
        return self.site_name
```

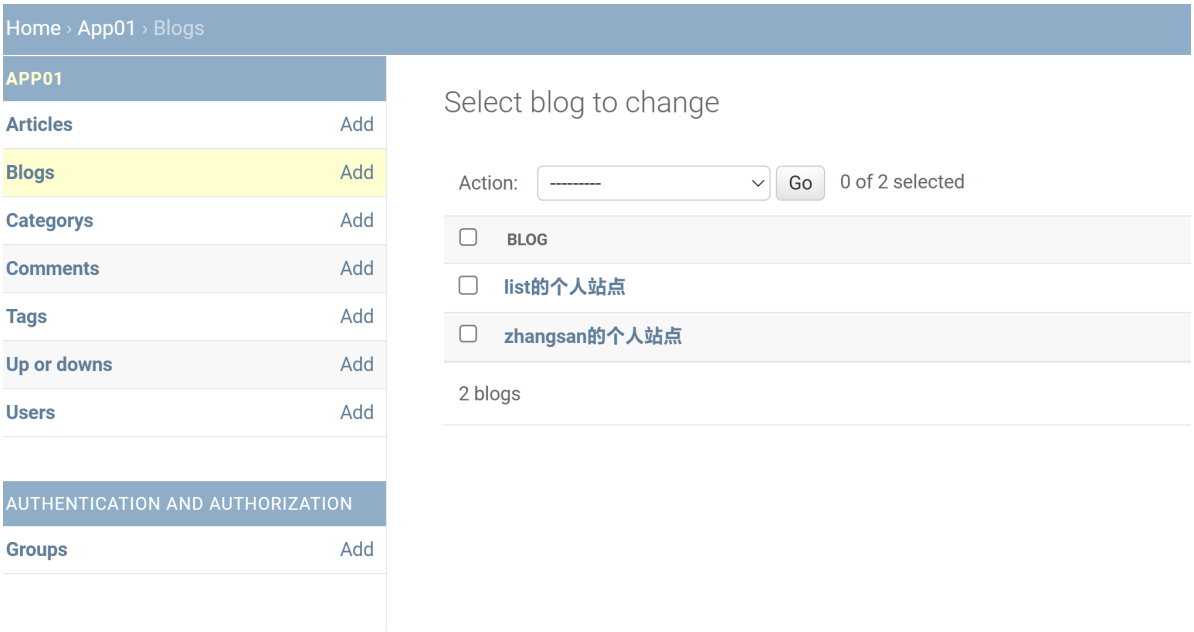

同时其他的类也可以相对应的做添加

```
# 文章分类
class Category(models.Model):
    ...

    def __str__(self):
        return self.name


# 文章标签
class Tag(models.Model):
    ...


    def __str__(self):
        return self.name
# 文章表
class Article(models.Model):
    ....

    def __str__(self):
        return self.title
```

继续添加其他的信息

- **分类**

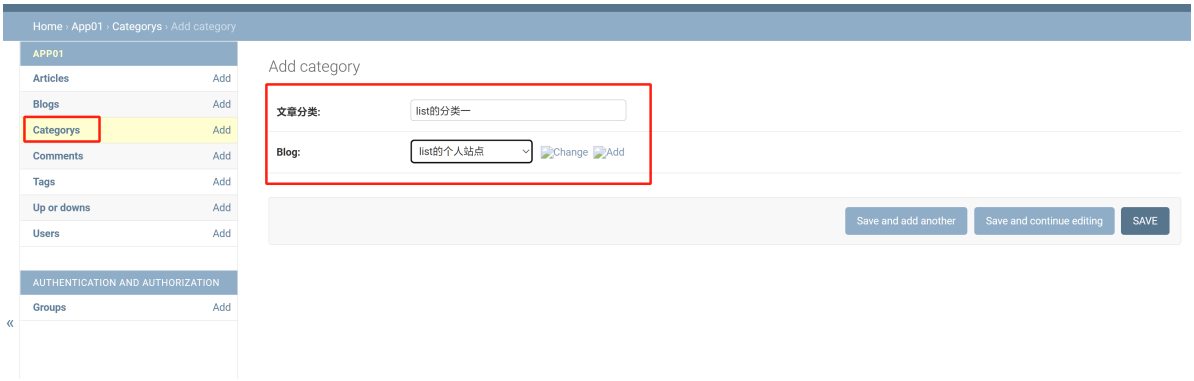
Home › App01 › Categorys › Add category
APP01
Articles Add
Blogs Add
Categorys Add
Comments Add
Tags Add
Up or downs Add
Users Add
AUTHENTICATION AND AUTHORIZATION
Groups Add
Add category
文章分类:
list的分类一
Blog:
list的个人站点
Change
Add
Save and add another
Save and continue editing
SAVE

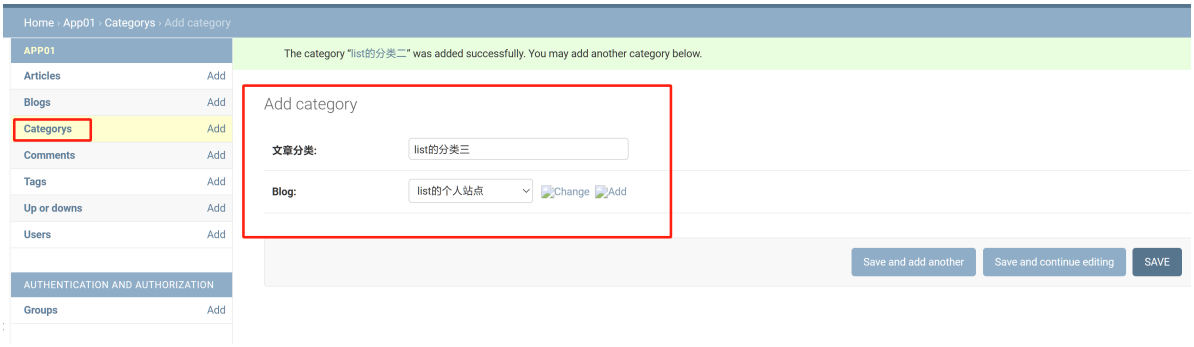
Home › App01 › Categorys › Add category
APP01
Articles Add
Blogs Add
Categorys Add
Comments Add
Tags Add
Up or downs Add
Users Add
AUTHENTICATION AND AUTHORIZATION
Groups Add
The category "list的分类二" was added successfully. You may add another category below.
Add category
文章分类:
list的分类三
Blog:
list的个人站点
Change
Add
Save and add another
Save and continue editing
SAVE

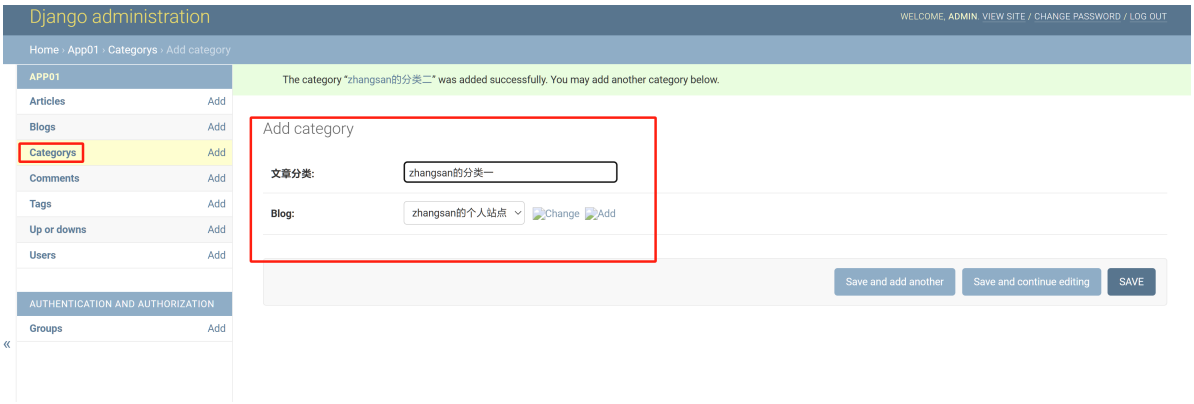
Django administration
WELCOME, ADMIN. VIEW SITE / CHANGE PASSWORD / LOG OUT
Home › App01 › Categorys › Add category
APP01
Articles Add
Blogs Add
Categorys Add
Comments Add
Tags Add
Up or downs Add
Users Add
AUTHENTICATION AND AUTHORIZATION
Groups Add
The category "zhangsan的分类二" was added successfully. You may add another category below.
Add category
文章分类:
zhangsan的分类一
Blog:
zhangsan的个人站点
Change
Add
Save and add another
Save and continue editing
SAVE

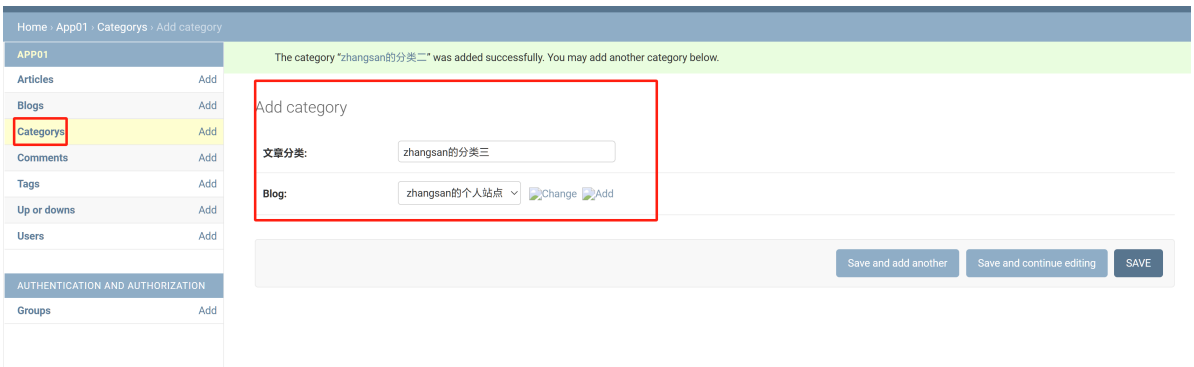
Home › App01 › Categorys › Add category
APP01
Articles Add
Blogs Add
Categorys Add
Comments Add
Tags Add
Up or downs Add
Users Add
AUTHENTICATION AND AUTHORIZATION
Groups Add
The category "zhangsan的分类二" was added successfully. You may add another category below.
Add category
文章分类:
zhangsan的分类三
Blog:
zhangsan的个人站点
Change
Add
Save and add another
Save and continue editing
SAVE

相对应的添加三个

CATEGORY
list的分类三
zhangsan的分类三
zhangsan的分类二
zhangsan的分类一
list的分类二
list的分类一
6 categorys

- **标签**
  - 相对应的添加三个

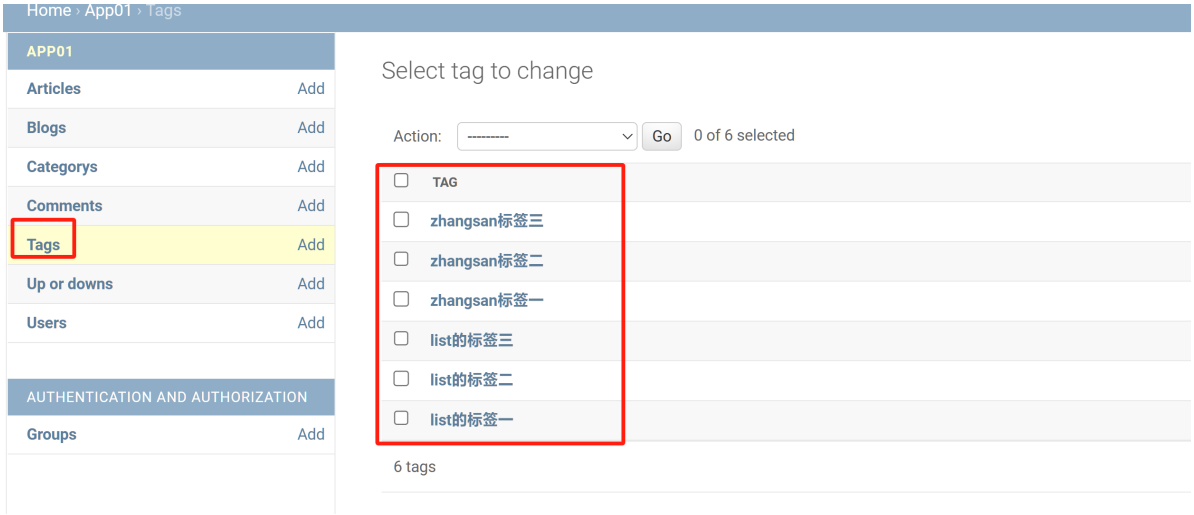

- **文章信息**

可以通过博客园的网址自行添加一些数据 随机添加到个人站点和标签中

七、首页展示

7.0.1 views.py

```
#首页
def home(request):
    #查询所有的文章
    article = models.Article.objects.all()
    return render(request, 'home.html',locals())
```

[去到BootStrap中文官网-媒体对象]

7.0.1 templates -> home.html

```
<!---------导航条结束---------->
<div class="container-fluid">
    <div class="row">
        <div class="col-md-2"></div>
        <div class="col-md-8">
            <ul class="media-list">
                {% for article in article_list %}
                    <li class="media">
                    <div class="media-left">
                      <a href="#">
                        <img class="media-object" src="{% static
'images/default.png' %}" width="100px" height="100px" alt="...">
                      </a>
                    </div>
                    <div class="media-body">
                        <a href=""><h4 class="media-heading">{{ article.title}}
</h4></a>
                        {{article.desc}}
                    </div>
                    <div>
                        <span>{{ article.blog.user.username }}</span>
```

```
                        <span>{{ article.create_time|date:'Y-m-d' }}</span>
                    </div>
                  </li>
                {% endfor %}



            </ul>
        </div>
        <div class="col-md-2"></div>
    </div>
</div>
```

八、作业

8.1 完成本天的案例