R

PROCESS FLOWS · 2026-10-11

Rosetta - process flows

From a legacy codebase to a verified specification and a modernisation hand-off

01 1. From a GitHub URL to a hand-off package

02 2. Understanding an area and checking every claim

03 3. The life of a claim

04 4. Cost control from estimate to cap

05 5. Accounts and the teacher account


06 6. What leaves the machine

07 7. From the planning brief to the hand-off package

08 8. Comparing providers on a second target (Release 2)


SOURCE OF TRUTH: PROCESS-FLOWS.MD

1. From a GitHub URL to a hand-off package

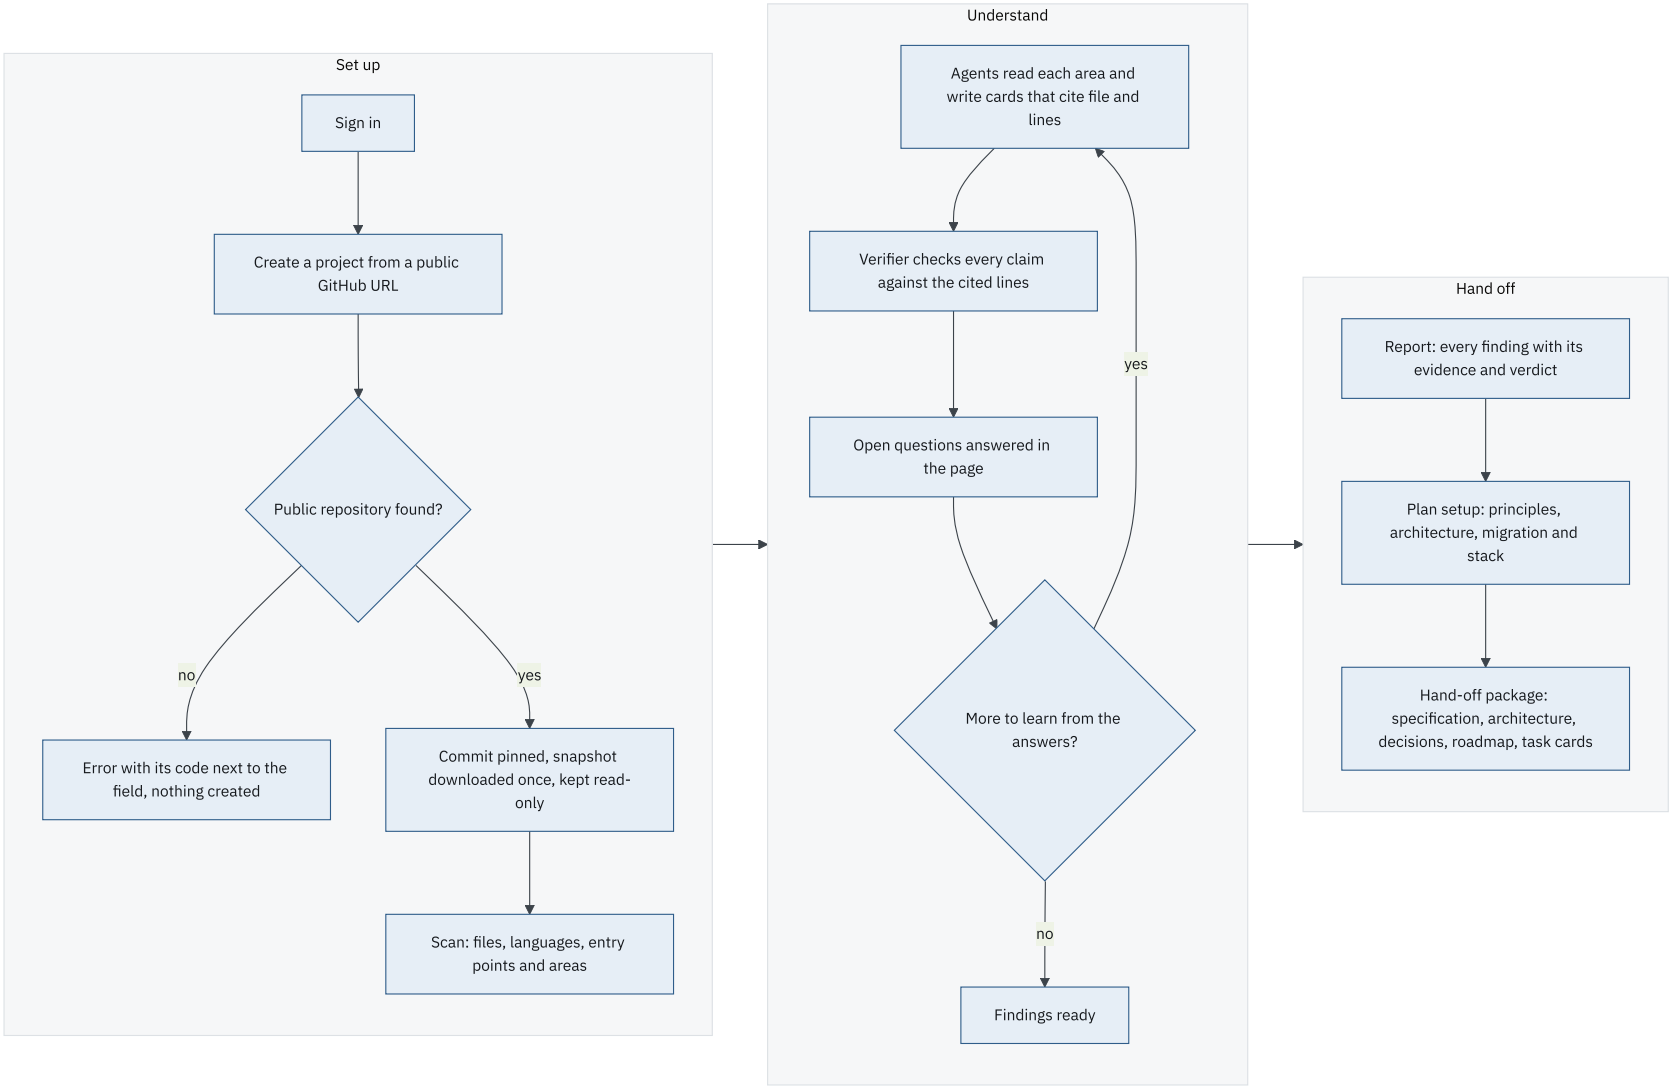


Every finding in the report and every requirement in the package points back to the exact lines of code it comes from, so a person can check any statement in minutes. Sources RF-010, RF-100..RF-106, RF-120..RF-122, RF-200..RF-204, RF-240, RF-241, RF-300, RF-301, RF-500..RF-502, RF-602, RF-604, RF-605, RF-1007, RF-1100.

2. Understanding an area and checking every claim

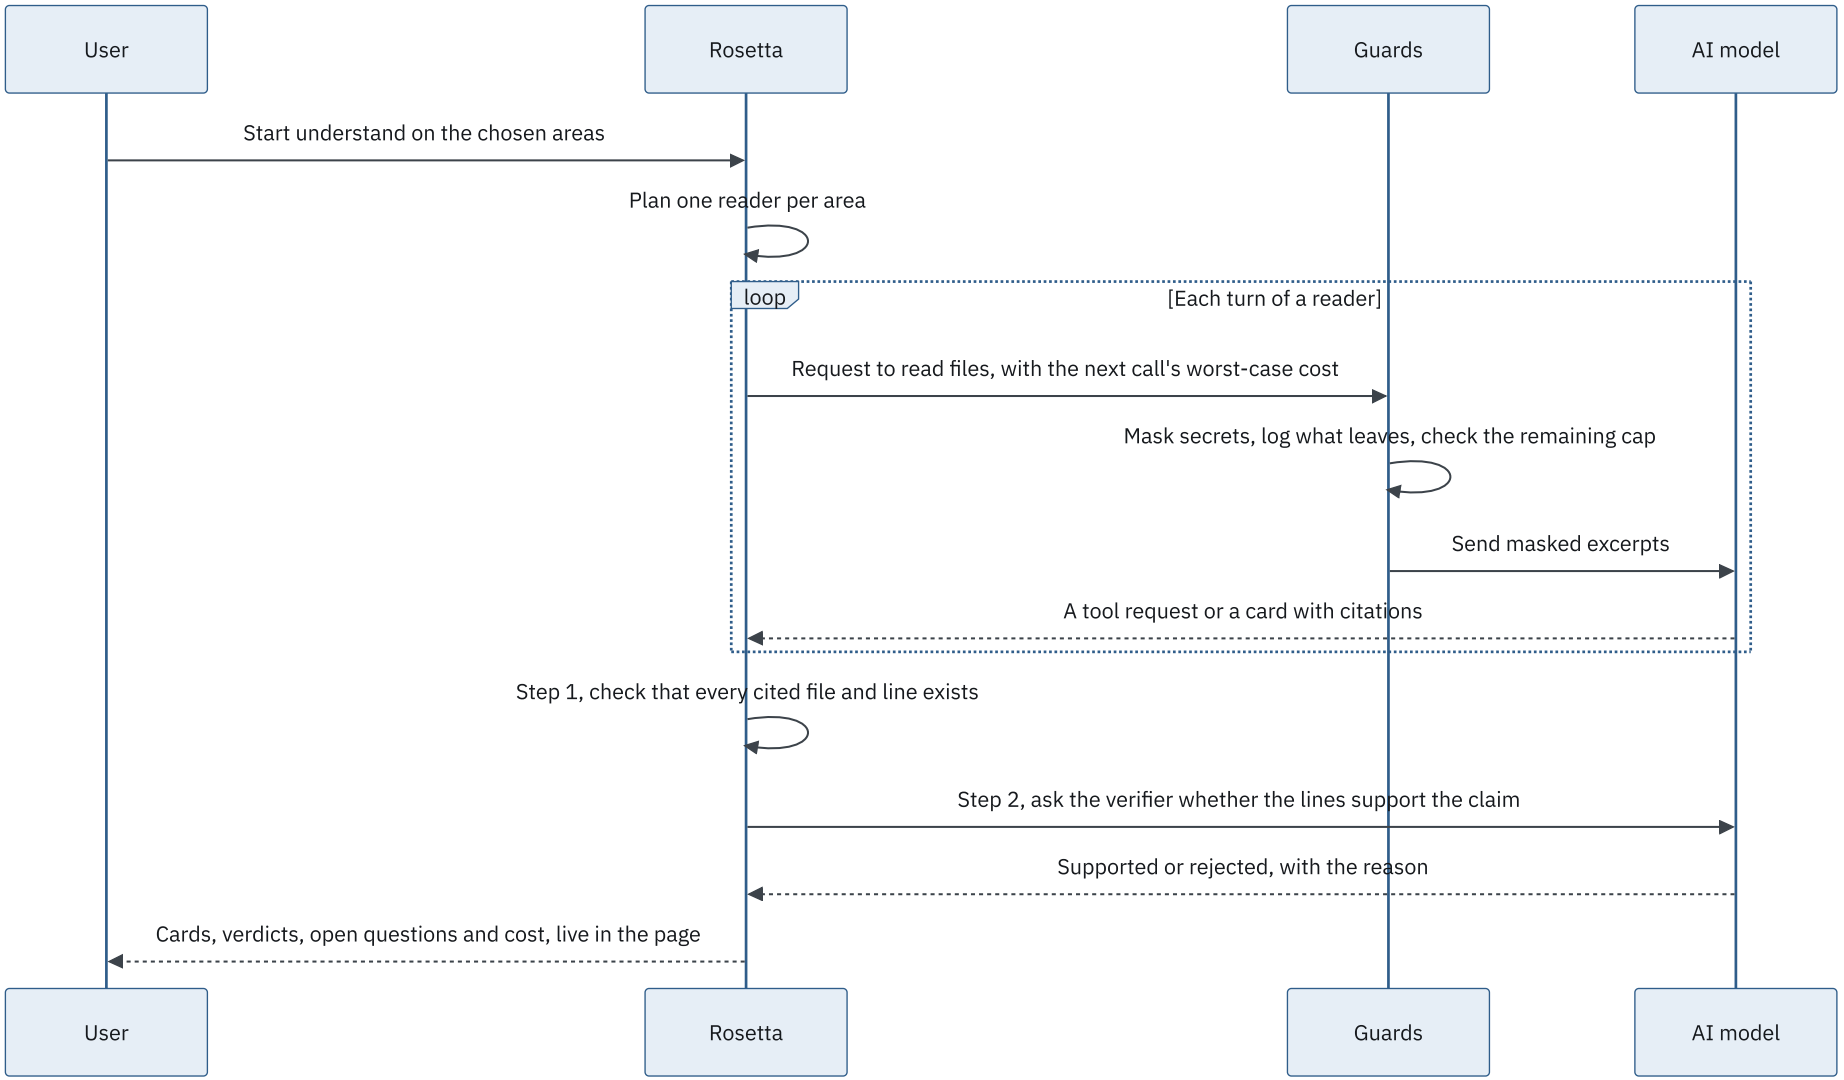


Agents can only read, never change, the code, and nothing reaches a model without passing the guards first. Sources RF-140..RF-147, RF-200..RF-205, RF-300, RF-301, RF-420..RF-422, RF-1002..RF-1004.

3. The life of a claim

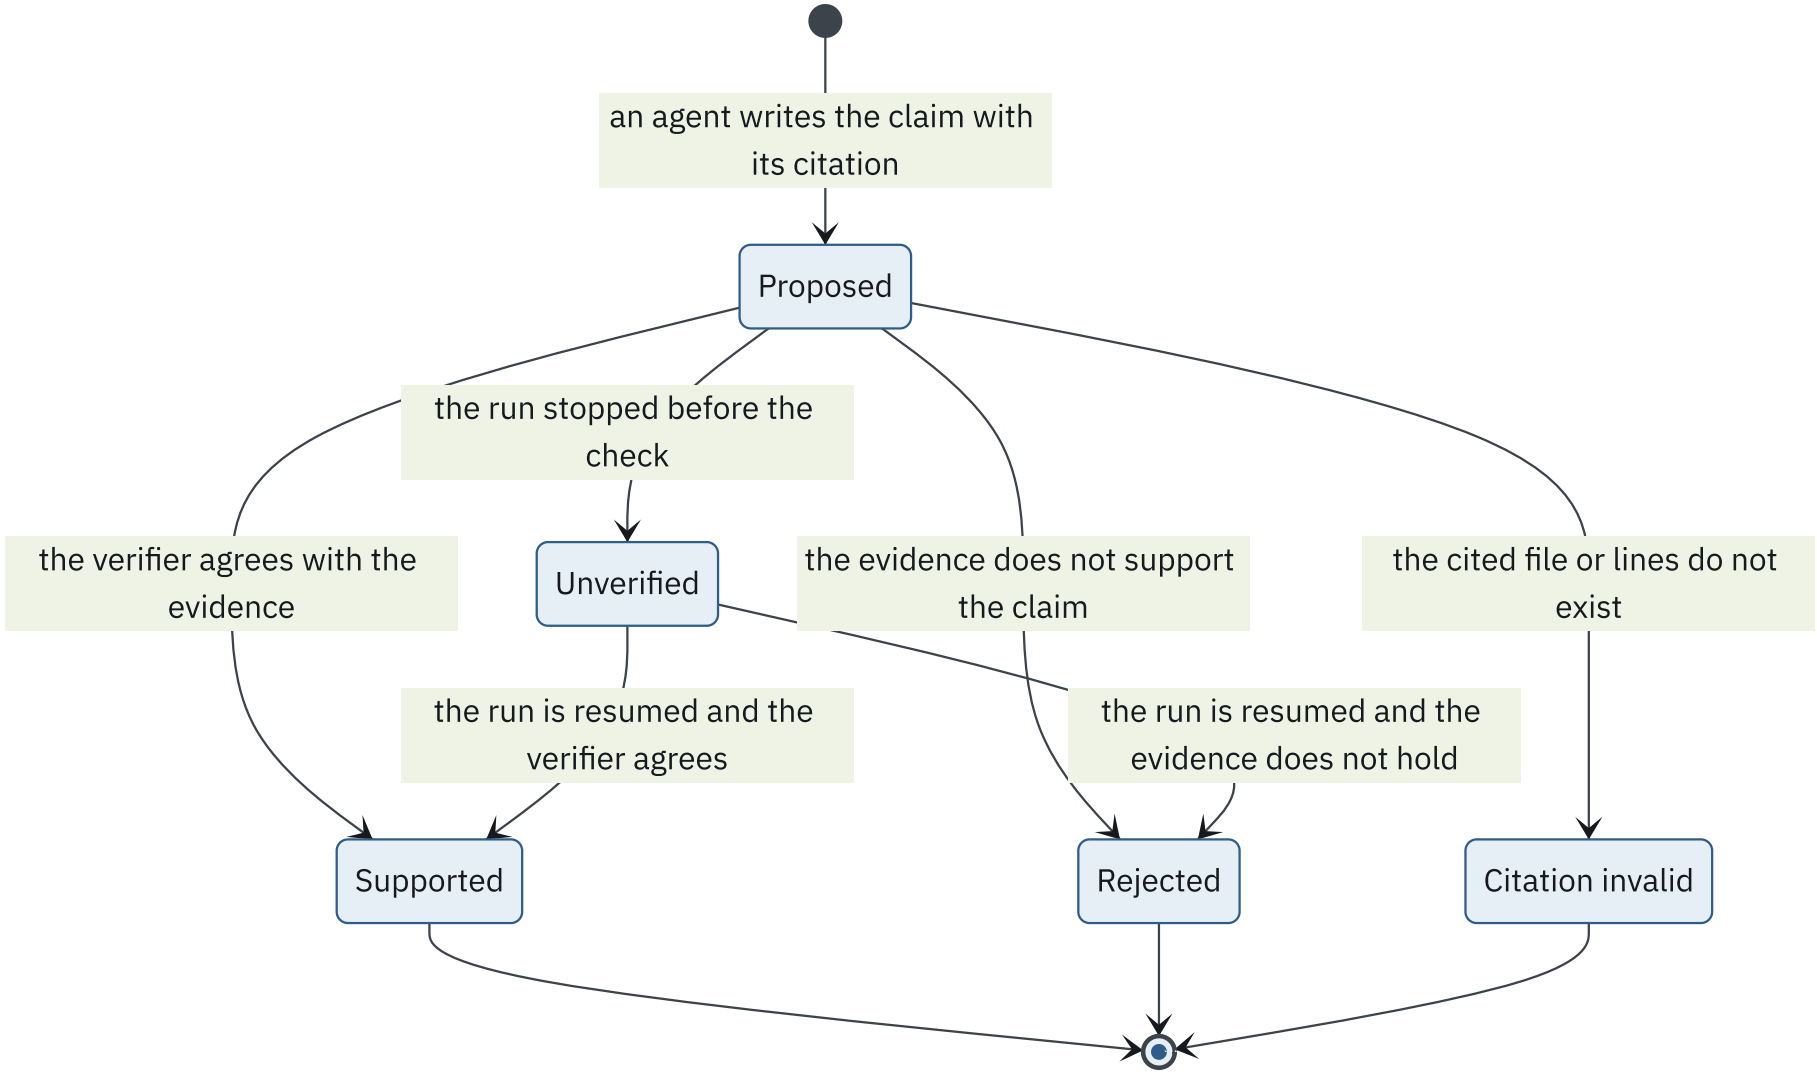


A rejected claim is never deleted: it stays in the report with the verifier's reason, and only supported claims feed the hand-off package. In the first milestone the verifier's second check is not built yet, so a claim whose citation holds is shown as awaiting model verification. Sources RF-300..RF-304, RF-006, RF-604.

4. Cost control from estimate to cap

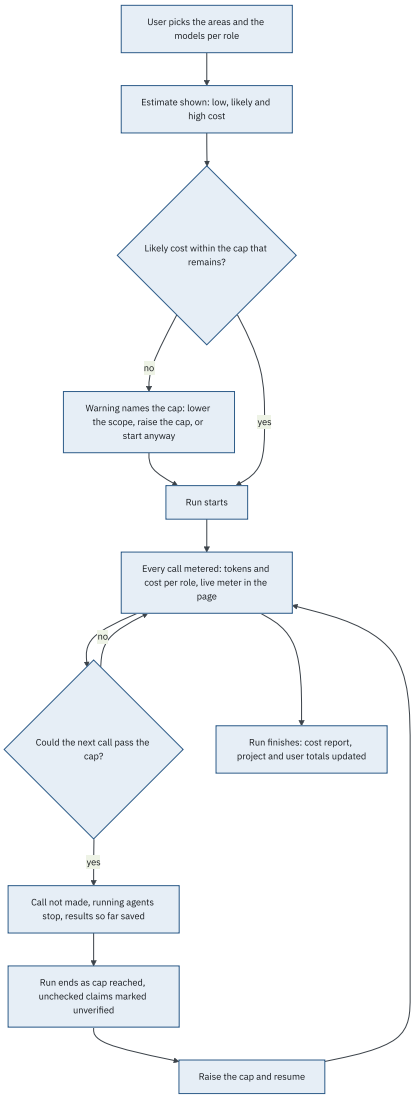


The estimate only warns; the cap itself is never exceeded: the worst case of each call is reserved and checked before it is made, and every cent is kept in the project's cost ledger even after runs are deleted. Sources RF-006, RF-420..RF-428, RF-1003, RF-1010, RF-1106.

5. Accounts and the teacher account

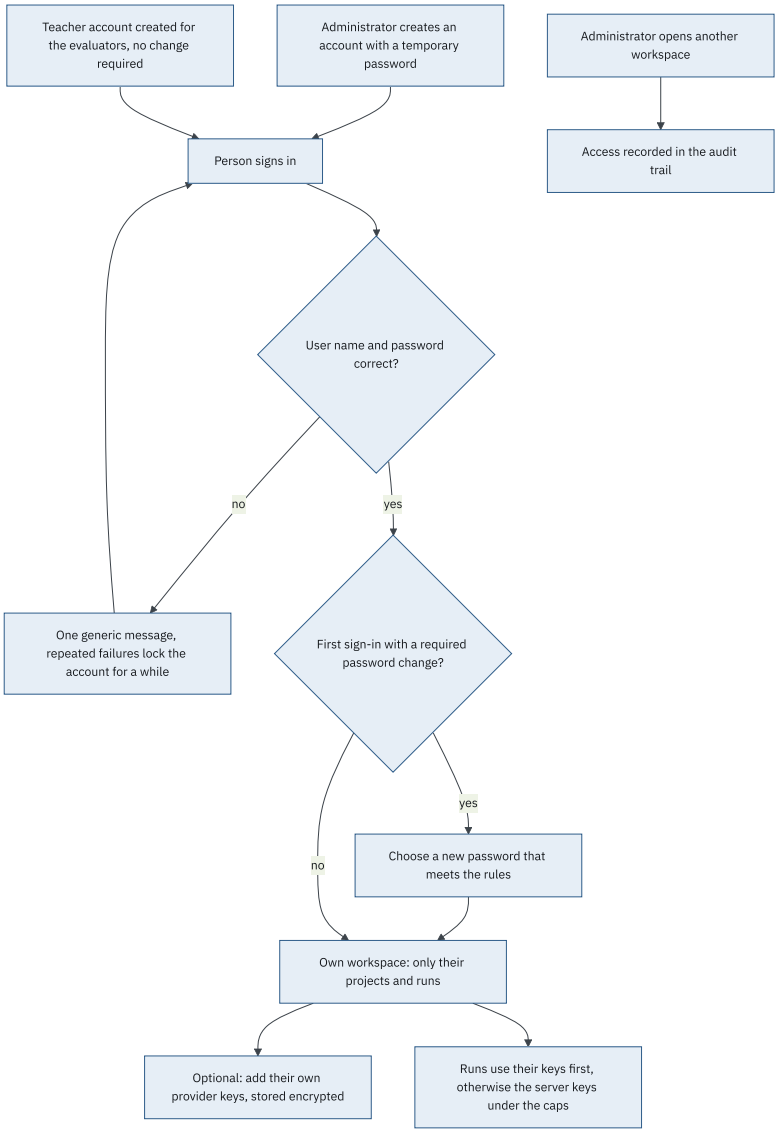


Nobody signs themselves up and nobody sees another person's work; the administrator's access to a workspace is always audited. Sources RF-1100..RF-1107, RF-1109.

6. What leaves the machine

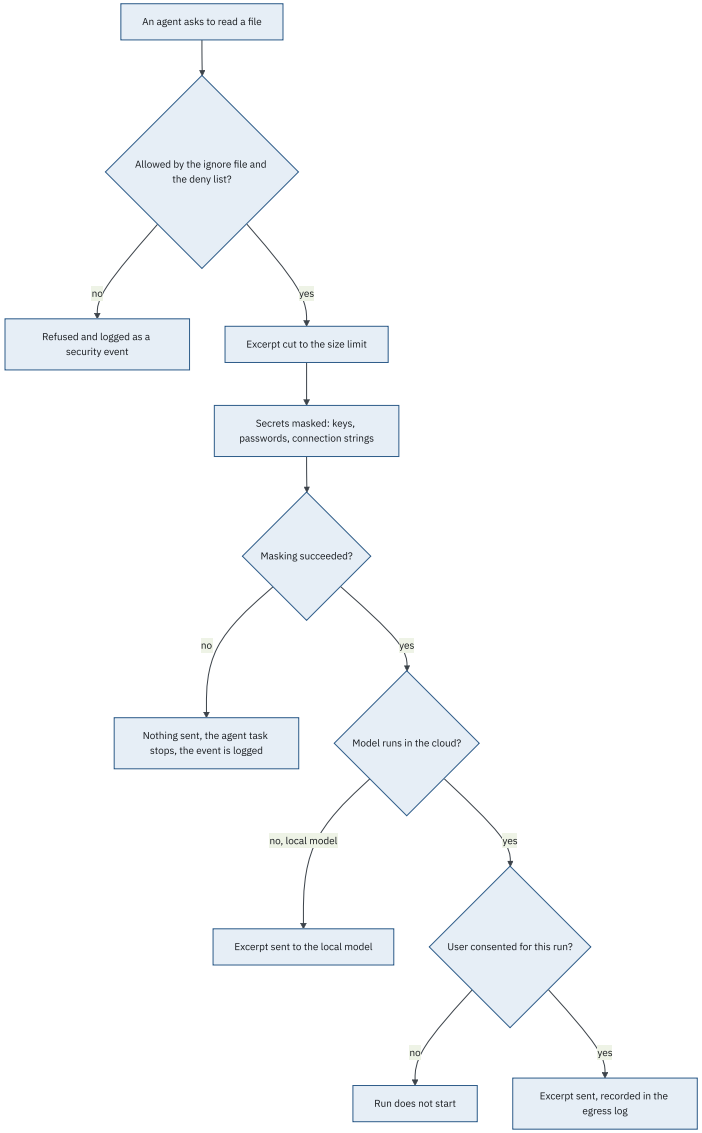


Every guard fails closed: when in doubt, nothing is sent, and every excerpt that does leave is logged. Sources RF-140..RF-147, RF-143.

7. From the planning brief to the hand-off package

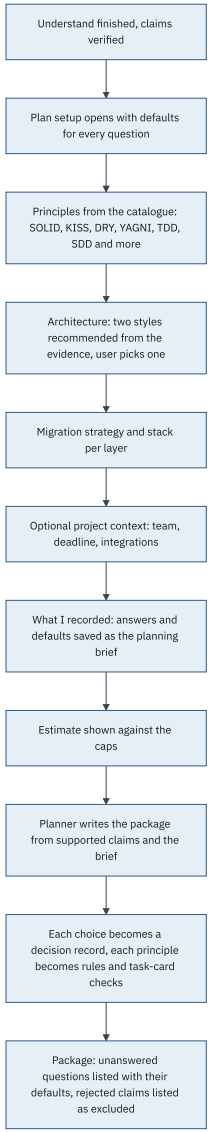

The package follows the choices the user made, not the model's guesses: anything left unanswered is listed with its default instead of being invented. Sources RF-601..RF-613.

8. Comparing providers on a second target (Release 2)

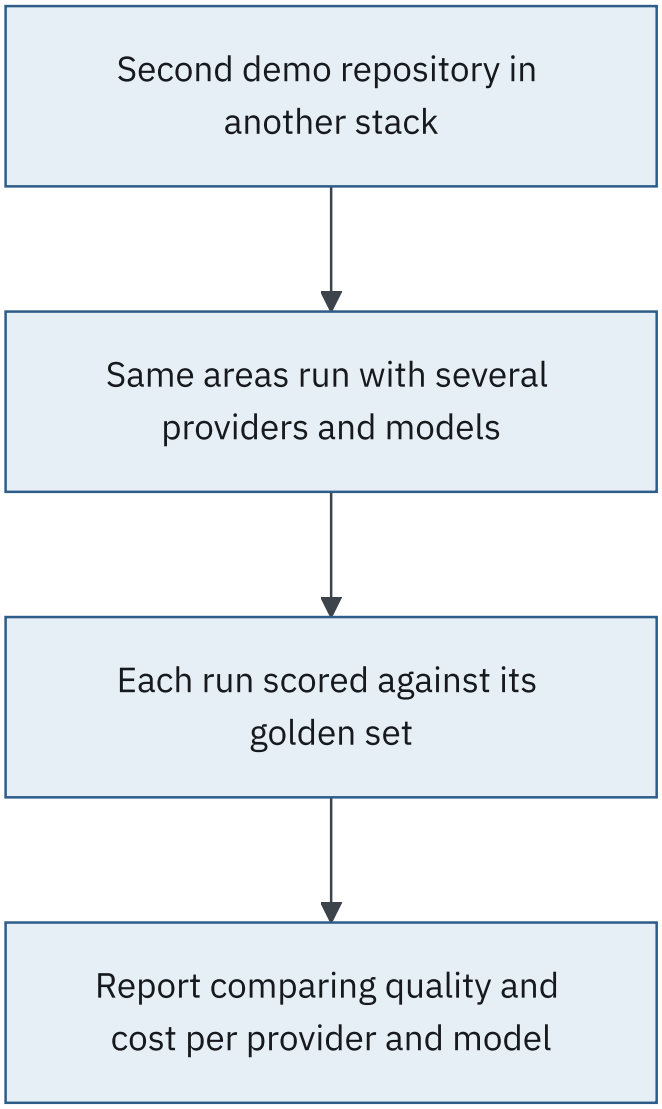

Release 2 measures which model gives the best findings for the money on more than one stack; its requirements are reserved, not yet written. Sources Q-05.