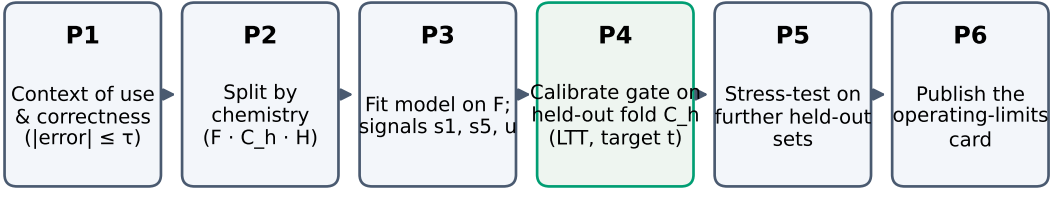

Each query is accepted, with a prediction, or declined; the gate's precision target holds for queries exchangeable with C_h.