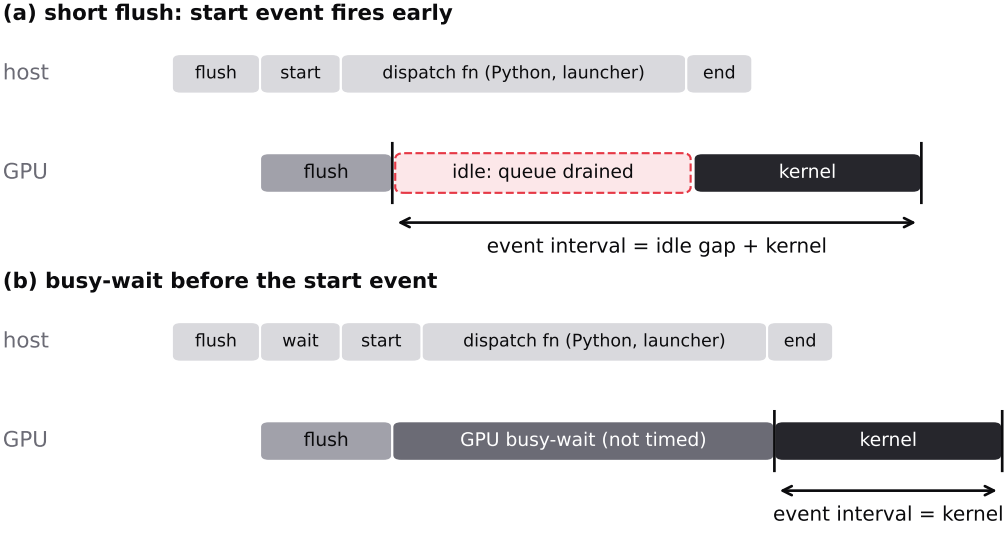
(a) short flush: start event fires early
host
flush
start
dispatch fn (Python, launcher)
end
GPU
flush
idle: queue drained
kernel
event interval = idle gap + kernel
(b) busy-wait before the start event
host
flush
wait
start
dispatch fn (Python, launcher)
end
GPU
flush
GPU busy-wait (not timed)
kernel
event interval = kernel