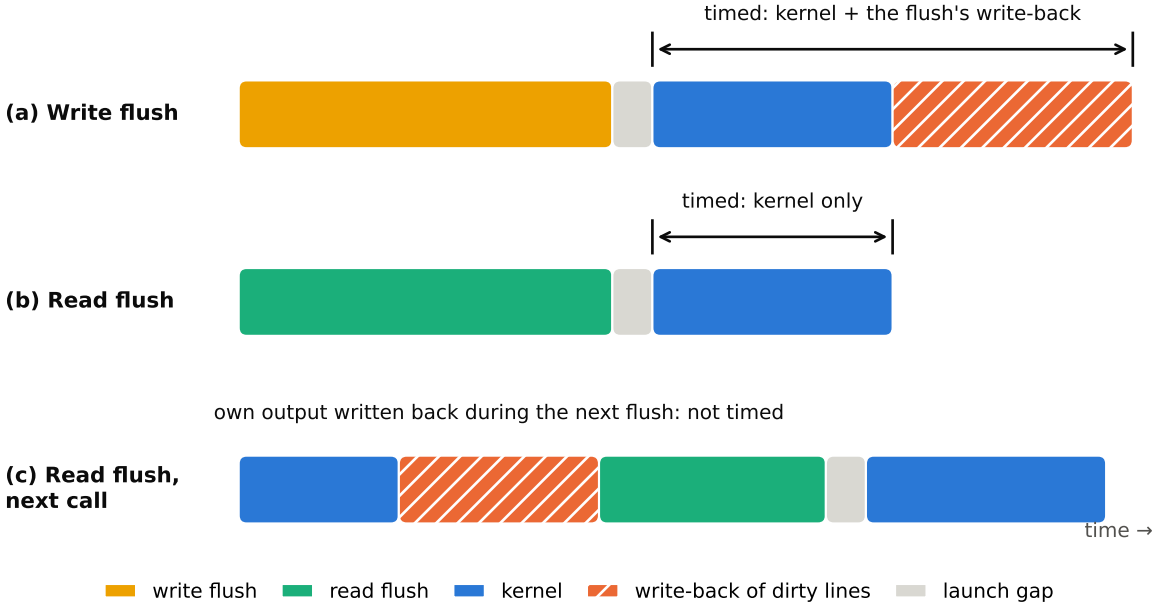
timed: kernel + the flush's write-back
(a) Write flush
timed: kernel only
(b) Read flush
own output written back during the next flush: not timed
(c) Read flush, next call
time →
write flush
read flush
kernel
write-back of dirty lines
launch gap