Git Cheat Sheet

Prepare environment

Deal with CR/LF issues (Windows)
```
$ git config –global core.autocrlf true
```

Set name
```
$ git config –global user.name [name]
```

Set email (in case of SSH issues)
```
$ git config –global user.email [email]
```

Create a repository

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Second

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Second

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```
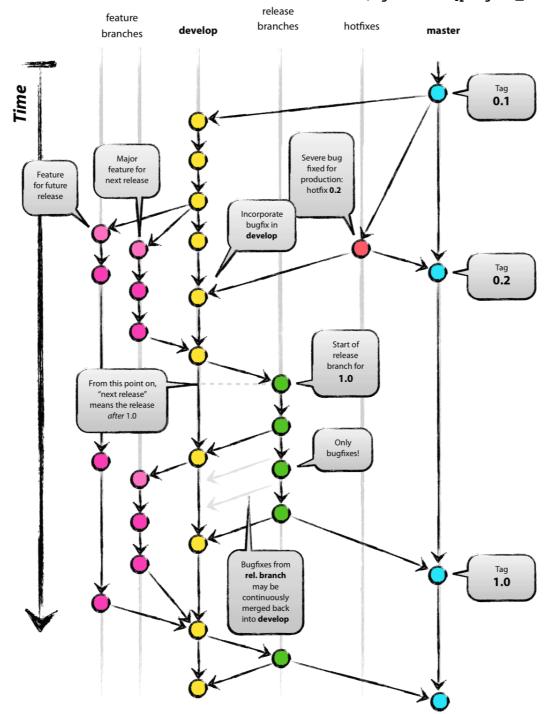
Second

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```

Download from an existing repository
```
$ git clone [my_url]
```

Create new local repository
```
$ git init [project_name]
```