

Earth-State Embeddings: self-supervised representations of the observed ocean, probed against the Atlantic overturning circulation

blauewelt/earth — technical report, v7

27 August 2026

Retired version. Every rolled-forecast number in this report was measured on stage-2 heads whose training pool teacher-forced the held-out years (§14, added 2 September 2026). The statements that those years were held out of training are wrong. The current report, `ml/paper/paper.tex` in the repository, carries only measurements made under the corrected protocol.

Abstract

We compress everything the observing system knows about each point of the North Atlantic into one vector per pixel per time step (a self-supervised *embedding*), train a temporal transformer to predict those vectors forward, and read out anything — AMOC transport at 26.5°N against RAPID is the headline read-out. This abstract carries only the main results; the sections carry their caveats and costs.

Probing today’s state: an attention head over the unpooled section reads transport at $r = 0.672$ across two seeds (RMSE ≈ 2.1 Sv against a 2.79 Sv target) — but a matched raw-pixel head reaches 0.659, so the embedding’s demonstrated value is as a *forecasting substrate*, not a probe. **Forecasting, monthly:** field anomaly correlation 0.62 at one month, crossing 0.5 near four months; rolled twelve months, the best configuration on record — a 211M stencil head, trained on all longitudes, with input noise at the model’s own error scale — scores corridor AUC **0.93733/0.93758** (a seed pair). The largest measured effects on the rolled score: capacity +0.042, input noise +0.045/+0.050, retiring the longitude holdout +0.071. **The governing caveat:** long rolls in this system are *trajectory replay*, not forecast — tracking correlation flat in lead time, unforced future peaks pinned to calendar months — so every long-hindcast r in the archive, ours included, is withdrawn as a skill number (§9.2). **The pentad frontier:** at 5-day steps the year-long roll broke (−0.499, below climatology); a step×span factorial localizes the difficulty in *context span*, not step size (§10.3). At the full 200k budget the two-year-context head reaches one-step **0.0330** — the best pentad number on record, 2.5× its 20k twin, refuting the pre-registered flat-budget expectation — and its 12-month roll is the registered decisive reading, still owed. The span effect is *distributed*: sparse time-sampled skeletons (seasonal-analog pins 0.1858; a 24-frame log ramp 0.1561) recover 55–65% of it and none reach the dense slab’s 0.0820. **Quantization:** retraining the codec *through* an 8-level lattice gives the best forecasting substrate measured (**0.4394** against the continuous 0.5056); cold-start quantization collapses, and quantization switched on *after* training survives. Fusing a month of 5-day bins into one embedding cures a reconstruction pathology but *loses* as a substrate (0.2127 against 0.0721) and is not pursued (§10.7). **Infrastructure:** the stack has a second, framework-independent JAX implementation gated against PyTorch at 10^{-7} – 10^{-5} , on which a TPU v5litepod-4 trains $\approx 5.6\times$ faster per step than a rented H100 (§11). Replication discipline is priced per metric and scale (§8); every pentad number except the one-step control pair is $n=1$.

1 Introduction

The AMOC moves on the order of 17 Sv of water northward through the Atlantic’s upper kilometre ($1 \text{ Sv} = 10^6 \text{ m}^3 \text{ s}^{-1}$), carries roughly a petawatt of heat, and is directly measured at only a handful of latitudes, for only about two decades. It is the canonical example of a climate-critical quantity that is *composite*: part wind-driven (Ekman transport), part density-driven (geostrophic shear), part boundary currents. No single satellite or float sees it; it must be inferred from the state of the ocean around it.

This project asks a representation-learning question of that inference problem: *if we compress the whole observable ocean state into generic, task-blind embeddings, do climate-critical integrals like the*

AMOC come along for free? The design is deliberately strict: the embedding model never sees any transport data; every read-out is a linear (ridge) regression, so any skill must already be present, linearly accessible, in the representation; and every claim is cross-validated in blocks that respect the autocorrelation of the climate system. The project also serves as a live test of a foundation-model hypothesis (§6): that a single representation trained on *all* the data — every ocean, every channel — serves specific regional tasks at least as well as one trained only on the task’s own region.

2 Terminology

Terms are used throughout in the following precise senses.

Transport the physical quantity all “truth” targets measure: the volume of water a current system moves, in Sverdrups ($1 \text{ Sv} = 10^6 \text{ m}^3 \text{ s}^{-1}$). The AMOC’s strength is a transport ($\sim 17 \text{ Sv}$ northward across 26.5°N). A *transport series* is one array’s monthly record of it; none is ever a model input.

AMOC vs. Gulf Stream vs. North Atlantic Current three distinct things that popular usage runs together, and this paper’s target is only the first. The **AMOC** is the basin-wide overturning — warm water northward in an upper limb, dense water southward at depth — and its strength is the transport above; it is what every truth series here measures. The **Gulf Stream** is the wind-driven western boundary current of the subtropical gyre, set principally by the wind stress curl, and it would persist much as it is under a substantially weakened overturning. The **North Atlantic Current** is its northeastward extension toward Europe, and is the branch carrying the largest overturning-driven component. English “Gulf Stream” and German *Golfstrom* colloquially denote all three, which is why *will the Gulf Stream stop* and *what will the AMOC do* are so often treated as one question. They are not, and only the second is posed here. The related popular claim — that the Gulf Stream is why northwest Europe is mild — is also weaker than usually stated: [25] attribute most of the Europe–Labrador contrast to atmospheric stationary waves and to seasonal ocean heat storage released in winter, leaving ocean heat transport a real but smaller term. That is consistent with, not contrary to, a weakened AMOC cooling northwest Europe in most models; the two claims are about different quantities.

Fold one round of the year-blocked cross-validation: a calendar year serves as the test set while the probe is re-fitted from scratch on all other years. “Per fold” means exactly that re-fitting — no test month ever influences the weights that predict it.

Transport claims / field-prediction claims the project’s two scoreboards, kept apart because their baselines differ. Transport claims: predicting the mooring series (k -fold r , RMSE in Sv, event capture) against the wind-only ridge. Field-prediction claims: predicting the ocean’s own input fields ahead in time (chan%, rollout MSSS/ACC) against persistence and climatology.

Channel one physical input field: e.g. surface current speed, mixed-layer depth, temperature at 700 dbar, zonal wind stress. The data tensor has 12–15 channels in the first generation, 24–25 in the second, and 39 in the third (Table 1, §3.2).

Tensor generation one build of the input tensor whose channel set, grid, or time axis differs from the others enough that results are not comparable across it (§3.2). Three exist, and we name them by what defines them: the **coarse tensor** (1° , 4 Argo pressure levels; “family 1” in earlier notes), the **deep tensor** (1° , 8 Argo levels; “family 2”), and the **quarter-degree tensor** (0.25° North Atlantic, 16 Argo levels, sea-surface height added, time axis extended to 1982; “family 3”). Run names keep the short prefixes (f3_ etc.); prose uses the descriptive names.

Pixel one ocean grid cell — $1^\circ \times 1^\circ$ in the first two tensor generations, $0.25^\circ \times 0.25^\circ$ in the third. A *pixel-month* is one pixel at one month — the atomic sample.

Channel space the space of the physical fields themselves. An error “in channel space” is an error in predicted physical values (normalized units), directly comparable with a persistence forecast of the same fields.

Embedding / embedding space the 64-dimensional vector z the encoder produces for a pixel-month, and the space of such vectors. An error “in embedding space” compares predicted to actual z ; it is an internal diagnostic, since z has no physical units.

Codec the stage-1 encoder–decoder (§4); it encodes a pixel-month’s channels to z and can decode z back to channels. “Codec” emphasizes that it is a learned compression.

Anomaly space all dynamic channels are expressed as departures from that pixel’s own monthly climatology (computed over training years only), then normalized. This removes everything predictable from location and calendar alone.

Climatology the long-term mean for a given pixel and calendar month. As a forecast, “climatology” predicts zero anomaly — the no-skill floor every real forecast must beat.

Persistence the forecast that the anomaly stays exactly as it is now. Hard to beat at short range; decays into a poor forecast at long range. *Damped persistence* multiplies the anomaly by its own lag- h autocorrelation — the fair statistical baseline.

Patch codec a codec variant whose channel token carries the 3×3 neighbourhood of the pixel (nine values and nine observed-flags) rather than a single scalar, giving the encoder gradient vision and turning the representation from an expander into a genuine compressor (§4).

Stage 2 / temporal model a causal transformer over a pixel’s sequence of frozen embeddings that predicts next month’s embedding. “Frozen” means the codec’s weights are not updated by stage-2 training, so improvements are attributable.

Probe a read-out fitted from frozen embeddings to a target series; the codec and stage 2 are never updated by it. Historically a ridge regression, deliberately weak; now the bottom rung of the probe ladder below. A probe measures what a representation *contains*.

Probe ladder three read-outs of the same frozen embeddings, increasing only in what they may see: *ridge* (linear, on the section-mean embedding), *MLP* (adds pointwise nonlinearity, same pooled input), *attention head* (adds spatial structure: one learned query attends over the unpooled per-pixel embeddings of the section). Each rung localizes where a capability comes from.

Section the row of grid cells nearest a mooring array’s latitude, clipped to the array’s longitude span (e.g. RAPID: 26.5°N, 80°W–13°W). Probes read the mean embedding along the target’s section.

Holdout years entire calendar years (2009, 2017, 2023) excluded from all training; with the held-out longitude block below they form the blocked validation splits. Random splits are never used — adjacent months are too correlated to count as independent.

Holdout longitudes the meridional block 45°W–25°W (`train.py --holdout-lon`, half-open in longitude), excluded from training in *both* stages: the codec never fits a pixel there and the forecast head never takes a training window centred there. It is 25.0% of the evaluation window, 23.9% of the corridor and 30.2% of the RAPID section — and the rolled evaluation scores it along with everything else, so every rolled number in this report is a blend of trained- and untrained-longitude skill. §8.1 and Fig. 7 measure what that costs.

k-fold (year-blocked) every calendar year takes one turn as the test set while the probe is fit on the others; the assembled out-of-fold predictions are scored once. Confidence intervals come from a bootstrap that resamples whole years (a *block bootstrap*).

chan% held-out next-month prediction error reduction versus persistence, in channel space, in anomaly space: $100(1 - \text{MSE}_{\text{model}}/\text{MSE}_{\text{pers}})$. Comparable only within one channel set, since the persistence baseline moves when channels change.

MSSS mean squared skill score, $1 - \text{MSE}/\text{MSE}_{\text{ref}}$ [6]; our rollout reports it against climatology, persistence, and damped persistence.

ACC anomaly correlation coefficient: the Pearson correlation between predicted and observed anomalies at a given forecast horizon. $\text{ACC} = 0.5$ is the conventional “useful skill” line.

RAPID / FC / MOVE / OSNAP / SAMBA the five transport truth series: the RAPID array at 26.5°N (2004–, monthly), the Florida Current cable at 27°N (1982–, daily), MOVE at 16°N (2000–2022, the *deep* western-boundary flow), OSNAP in the subpolar gyre (2014–2022), SAMBA at 34.5°S (2009–2017). None is ever an input.

Stencil the set of *neighbour pixels* whose embedding sequences the temporal model reads alongside the centre pixel’s own (§8). A stencil of S slots turns the model’s input from one 24-month

embedding sequence into $S+1$ of them. Geometries used: rings at a fixed radius, spirals (every point on its own bearing), and *sunflower* layouts — golden-angle spirals with a far-heavy radial ramp, at Fibonacci counts 34/55/89/144, reaching 111–4444 km. A neighbour that falls on land or off-window is a *dead slot*, encoded as zero.

Forecast ratio the one-step scoreboard of the stencil programme: $\text{MSE}_{\text{model}}/\text{MSE}_{\text{pers}}$ for z_{t+1} prediction on held-out windows, in embedding space. Lower is better; persistence sits at 1.0 by construction and the measured persistence MSE is ≈ 3.1 z -units². Reproduces to ± 0.002 across seeds, so paired differences of 0.002 are readable.

Corridor the scored subset of the rolled evaluation: the fastest quarter of the window’s pixels by train-month mean current speed, dilated two cells, plus the RAPID section — 29,627 of 84,405 window pixels. It is where the AMOC’s limbs live, and it is rendered as a globe layer in the companion visualization.

Corridor AUC the rolled scoreboard: initialize with true embeddings, roll twelve months feeding predictions back, decode, and score MSSS against climatology over the corridor’s pixel-months at each horizon,

$$\text{AUC} = \frac{1}{12} \sum_{h=1}^{12} \left(1 - \frac{\text{MSE}_h}{\text{MSE}_{\text{clim},h}} \right).$$

“AUC” is *area under the skill-versus-horizon curve* — a plain mean over twelve monthly horizons — **not** a ROC statistic. Higher is better; climatology sits at 0 by construction, and the ranking is unchanged under persistence and damped-persistence references and under horizon re-weighting (§8.2). Table 5 is the reference table.

Gate head a frozen reference head (**e017**, no neighbours) re-evaluated at the start of every corridor evaluation; it must reproduce its pinned AUC of 0.643 to the third decimal or the evaluation is void. Every number in §8 passed this gate.

Capacity tiers the three stage-2 sizes of §8, with parameters measured from the checkpoints: *base* 576×8 (34.1M at 56 slots), *big* 768×12 (88.0M), *xl* 1024×16 (205.4M).

Cadence the length of one bin on the tensor’s time axis, and therefore of one forecast step: *monthly* (family 3), *pentad* = 5 days (family 4), *daily* (family 5). Cadence is not a tuning knob but a tensor property — a codec, its embeddings and every head over them belong to one cadence, and §10 is about what changes when it does.

Day-matched horizon the convention that makes rolls of different cadences comparable: they are compared at equal *elapsed time*, not at equal step count. Twelve monthly steps and 73 pentad steps are both 365 days, so the pentad roll’s day-matched AUC averages the 73-step curve at the twelve leads nearest those months. A raw 73-lead mean would beat a 12-lead one on lead sampling alone — most of its leads are short, where skill is highest — so only the day-matched form is ever quoted across a cadence boundary.

Variance lost / FVU the fraction of a channel’s variance a reconstruction fails to reproduce, rmse^2 in standardized units (equivalently $1 - R^2$). 0% is identity; 100% means the reconstruction carries none of the channel’s variance and a constant would have done as well. Used for the *copy reconstruction* audits of §10.5, which encode and decode at full visibility — no masking, no forecasting — and so measure the representation tax alone.

Calendar replay the failure mode of §9.2: a long unforced roll whose trajectory is indexed by the calendar rather than by its initial state. Its two signatures are a future that peaks in the same calendar months from any starting state, and a within-record tracking correlation that does *not* decay with lead time. Genuine forecast skill decays; replay does not.

Month-block codec the E-047 variant of the stage-1 codec whose encoder reads a $k_{\text{time}} \times C$ grid of *cells* — up to seven pentad bins $\times$ 40 channels — and emits one z for the whole calendar month, with learned within-block time-offset embeddings on both the cells and the decoder’s queries. It is the architectural answer to the Argo anchor problem (§10.7): the one bin per month that carries subsurface data fuses with its neighbours instead of switching the representation regime under the forecaster.

channel(s)	source	record	role
surface current speed, MLD	GLORYS reanalysis	1993–	dynamics
sea-surface height ($\frac{1}{4}^\circ$ only)	GLORYS reanalysis	1993–	geostrophy
T at 4 / 8 / 16 pressure levels	Roemmich–Gilson Argo	2004–	density structure
S at 4 / 8 / 16 pressure levels	Roemmich–Gilson Argo	2004–	density structure
wind stress τ_x, τ_y	NCEP R1	1948–	Ekman forcing
within-month τ std. dev.	NCEP R1 daily	1948–	storminess
monthly SST (optional, 1° only)	OISST v2.1	1981–	thermal memory
SST, precip climatologies (1° only)	OISST, GPCP	fixed	(measured inert; §12)

Table 1: Channels of the data tensor across its three generations (§3.2). Coarse and deep tensors: monthly, 1° , 1993–present; NA pilot window (100°W – 20°E , 0 – 70°N ; 5,787 ocean pixels) or global (44,964 pixels). Quarter-degree tensor: monthly, 0.25° , NA window, 84,405 ocean pixels, axis extended to 1982–01 (channels absent before their records enter as missing tokens), $C=39$. Missing data (Argo before 2004, polar gaps, pre-1993 months) is represented explicitly, never imputed.

Input quantization snapping a head’s input embeddings to a finite per-dimension alphabet (L levels, straight-through gradients, targets left continuous). At $L = 8$ this is three bits per dimension. The same lattice applied *inside* the codec’s bottleneck is finite scalar quantization (FSQ); §10.6 measures both.

3 Data

The tensor (Table 1) is built entirely from credential-free public archives. Two properties matter most. First, *missingness is information*: a pixel-month’s unobserved channels enter the encoder as learned “missing” tokens rather than imputed values, so the representation knows what the observing system knew. Second, everything is in anomaly space (§2) — the founding negative result of the project was that a model trained on raw fields wins reconstruction by memorizing the seasonal cycle while learning nothing about change.

The five truth series (RAPID, FC, MOVE, OSNAP, SAMBA) ride along as never-input targets: 240 RAPID months plus 792 additional truth months across four other latitudes.

3.1 The sources, one by one

Every input is a credential-free public archive; this subsection says what each one is, what channels it contributes, and why it is in the tensor. (The companion visualization at blauewelt.github.io/earth renders most of these sources as interactive globe layers with per-dataset documentation; the descriptions here follow its catalog.)

GLORYS ocean reanalysis (CMEMS). An eddy-permitting model of the global ocean constrained by satellite altimetry, SST, sea ice, and in situ profiles — the closest thing oceanography has to a best-estimate movie of the ocean since 1993. Contributes monthly *surface current speed* ($\sqrt{u^2 + v^2}$; the western boundary currents that carry the AMOC’s upper limb are current-speed structures) and *mixed-layer depth* (log-transformed; deep winter mixing in the subpolar gyre is where surface waters acquire the density to sink — the “engine room” of the overturning). At 1° these come from the quarter-degree ensemble member binned down; the quarter-degree tensor reads the native grid and adds *sea-surface height*, whose meridional gradient is the geostrophic surface flow and whose boundary difference is the classical altimetry AMOC proxy [1].

Roemmich–Gilson Argo climatology. The gridded monthly temperature and salinity fields (1° , 0–2000 dbar) built from the Argo float array [21] — the backbone subsurface observing system: $\sim 4,000$ autonomous floats, each profiling every ~ 10 days. Contributes T and S at 4, 8, or 16 pressure levels (10–1900 dbar) depending on tensor generation. These are the density channels: thermal wind makes the transport an east-minus-west density difference, and the deep levels see the cold limb the surface channels cannot. Intrinsically 1° -smooth (in the quarter-degree tensor they are bilinearly upsampled and carry no sub-degree information — stated, not hidden). The record begins in 2004; earlier months are missing tokens.

NCEP/NCAR Reanalysis 1 surface wind stress. The longest-running atmospheric reanalysis [22], daily since 1948, on a Gaussian grid regridded to the tensor. Contributes monthly-mean τ_x, τ_y (Ekman transport, the wind-driven part of the AMOC’s monthly variability — and hence also the source of the wind-only baseline every codec must beat) and the *within-month standard deviation* of the daily stress (storminess: buoyancy loss in storms drives convection in a way monthly means erase). Its length is what lets the quarter-degree tensor’s axis start in 1982.

NOAA OISST v2.1. Daily 0.25° SST from AVHRR plus in situ data since late 1981 [23], monthly-meaned; optional channel 15 of the deep tensor, and (as a fixed 1991–2020 climatology) one of the two deliberately inert channels of §12.

GPCP v2.3 precipitation climatology. The satellite–gauge merged precipitation record [24]; enters only as the second inert climatology channel of §12.

Truth arrays (never inputs). Five basin-scale transport series, each a moored or cable observing system: *RAPID–MOCHA* 26.5°N [26], the flagship full-depth AMOC record (2004–, our 240 labelled months); the *Florida Current submarine-cable transport* [27], the lowest-latency AMOC component, daily since 1982 — the decade 1982–92 is usable truth only for the quarter-degree tensor’s extended axis; *MOVE* 16°N [28], the longest deep-limb record (southward NADW flow, 2000–); *OSNAP* [29], the subpolar array where overturning variability originates (2014–); and *SAMBA* 34.5°S [30], the only sustained South Atlantic array (2009–, anomalies only).

3.2 Tensor generations, and why they may not be compared

The tensor is rebuilt from the fetcher scripts at the start of every training job, so a change to a fetcher silently changes the input of every subsequent run. Sampling 8 Argo pressure levels instead of 4 took the tensor from 14 channels to 24 (25 with monthly SST) without any dispatch asking for it. Every result below therefore belongs to one of three *tensor generations* — the **coarse tensor** (1° , 4 Argo levels), the **deep tensor** (1° , 8 levels), and the **quarter-degree tensor** (0.25° NA, 16 levels, SSH, axis from 1982) — with a fourth and fifth (the **pentad** and **daily** tensors of §3.3, same window and channels, finer time axes), which carried no results when v6 was written and now carry §10 — and cross-generation comparison is not licensed: the persistence baseline that `chan%` is measured against moves with the channel set, the wind-only ridge baseline moves with the grid (0.531 on the 1° tensors, 0.568 on the quarter-degree), and, as §7.5 shows, so does the meaning of the transport probe. (Earlier project notes call these “channel families” 1–3; run names keep the shorter prefixes.) Channel counts in this report are read from each checkpoint, never from a run’s name — a run directory carried a misleading name for an hour before this was enforced, and every run now ships a provenance manifest recording the tensor it actually saw.

3.3 Input data

The subsections above are the history; this one is the specification, current as of the two cadence rebuilds of the quarter-degree tensor — **family 4** (pentad) and **family 5** (daily), which share family 3’s grid and channel set exactly and differ only in the time axis. The encoder sees one array, $[T, 281, 481, 39]$: a 0.25° North Atlantic window ($0\text{--}70^\circ\text{N}$, $100^\circ\text{W}\text{--}20^\circ\text{E}$) whose samples sit *on* multiples of 0.25° rather than at cell centres, 39 channels, stored `float16` and z-scored per channel. The time axis is fixed bins counted from the epoch 1982-01-01 — monthly for family 3, 5-day for family 4 ($T=3142$), 1-day for family 5 ($T=15706$) — the same bin definition the transport labels are reduced onto, so a label is the target of a state with no re-alignment step anywhere. Table 2 is the channel list, in tensor order.

A second axis crosses the cadence axis: the *recipe revision*. Revision **r1** is the 39-channel tensor every number in this report was measured on. Revision **r2** appends one channel — daily 0.25° OISST sea-surface temperature, channel 40. When v6 was written no codec had been trained on it; every codec in §10 now is, so the cadence results differ from the monthly ones in the channel set as well as in the time axis, and the two are never compared across that seam. What *that* channel is worth on its own is still unmeasured: the matched pair that would answer it was dispatched, cancelled fourteen hours short in a fleet-wide credit triage, and has not been re-run. It is listed here because the two revisions are one specification with one difference, and because a channel addition is not a variation of a tensor but a new one: it changes C , so it changes the encoder’s input projection and channel embedding, and every codec must be retrained rather than fine-tuned. Appending rather than inserting is what keeps the two

comparable — channels 1–39 hold the indices at which every published result was measured, and an `r1` and an `r2` tensor are diffable channel by channel.

The run-name grammar, in one place. Codec and recipe names compose as `f⟨N⟩⟨rev⟩-⟨size⟩[-⟨variant⟩]`: `f4` = family-4 tensor (pentad), `f5` = family 5 (daily), `r2` = recipe revision 2 (the appended OISST channel; family 5 runs to date are `r1`, so `f5-40M` carries no revision token), and the size is the parameter class (40M names the 38.0M geometry). Variant tokens: `monthblock` = one embedding per calendar month built from the month’s ≤ 7 pentad cells (§10); `fsq8` = the FSQ bottleneck at 8 levels per dimension; `w6s6/w6s3` = fixed 6-pentad windows advancing 6 or 3 pentads (the overlapping form); `b512/b256` = an explicit batch, used only where the same geometry runs at two batches; `nohold` = trained with no held-out longitude block. So `f4r2-40M-monthblock` reads: pentad tensor with SST, 38M-class encoder, one z per calendar month.

Labels are not inputs. The transport series ride along as never-input targets, reduced to bin means on the same axis: RAPID 26.5°N overturning transport (240 monthly, 1,459 pentad, 7,290 daily labels) and the NOAA Florida Current submarine cable (daily since 1982; 433, 2,553, 13,931). The anomaly baseline used for training and probing is a *train-years-only* monthly climatology computed inside the pipeline — never the WMO 1991–2020 normal that the companion visualization uses, which contains held-out years and would leak test-period information into training through the baseline. The two baselines look interchangeable and are not.

The temperature channel, and what is still not an input. Every monthly result in this report — everything through §8.8 — was measured on `r1`, and `r1` carries no sea-surface-temperature field of any kind. (§10’s codecs are `r2`; that is one of the reasons its numbers are not a rung on the monthly ladder.) Its only temperature is Argo `rg-t`, which begins in 2004 and is live one bin per month, so **22 of the 43 years on the axis carry no temperature at all**, and inside the Argo era the channel is a missing token in $\approx 83\%$ of pentad and $\approx 97\%$ of daily bins. That is the gap revision `r2` closes, and it closes only that: daily 0.25° OISST is the sole channel native to the tensor’s own grid and the sole channel live across the whole 1982–2024 axis, including the GLORYS-less 1982–92 decade in which the Florida Current cable supplies the labels. Because the source’s grid is offset from the tensor’s by exactly half a cell in each axis — OISST posts at cell centres $0.125^\circ + k \cdot 0.25^\circ$, the window samples *on* the multiples — the channel is bilinearly interpolated rather than nearest-sampled; nearest-indexing would displace the entire field by half a cell, consistently, and would look like an ordinary SST map. The clean test is a matched pair against the `r1` codec in which the tensor is the only difference, so what SST is worth can be read off directly. It was dispatched, cancelled mid-run in a credit triage, and has not been re-run — a money decision, not a scientific one, recorded here so the gap is not mistaken for an answer — and nothing in §10 substitutes for it: those codecs are all `r2`, so SST is present in every one of them and varied in none. Every pentad result in this report therefore carries the channel as an untested assumption.

Three things remain deliberately absent. There is **no air–sea heat or freshwater flux**: the ocean’s thermal forcing enters only through the state fields it has already acted on. There is **no sea-ice field**, although the window reaches 70°N. And there is **no CO₂ or radiative-forcing series**, which is a decision rather than an omission — over 1982–2024 monthly CO₂ correlates with a linear time index at $r = +0.99$, so a model handed it has been handed the calendar, and would fit the trend while being indistinguishable from one that learned the date.

Provenance. Every training run records the built tensor’s sha256, shape and channel list beside the verbatim dispatch inputs, in a provenance manifest written after the build. A result therefore names the exact bytes it was measured on, rather than the recipe it was supposed to have used.

4 Methods

Stage 1 — the codec. A per-pixel masked autoencoder producing $z \in \mathbb{R}^{64}$ per pixel-month, trained on all pixel-months outside the holdout blocks. The pilot is 0.92M parameters and a 10.25M variant (320×8) followed; the workhorse of §8 is the 40.7M quarter-degree anchor of §7.4, sized by the Chinchilla-style arithmetic of the Compute paragraph, and §10 adds a 38.0M pentad codec and a 40M month-block

ch.	channels	source	native	into the pentad tensor	into the daily tensor	live coverage
1–3	<code>cur_speed</code> , <code>log_mld</code> , <code>ssh</code> (3)	CMEMS GLORYS12V1 reanalysis (<code>uo</code> , <code>vo</code> , <code>mldst</code> , <code>zos</code>)	1/12°, daily	5-day means of the daily fields, binned to the point-aligned 0.25° grid; <code>cur_speed</code> is the hypotenuse of the <i>binned mean</i> <i>components</i> , never a mean of magnitudes; <code>log_mld</code> is $\log_{10}$ of <code>mldst</code>	the day’s own fields	1993-01-01 to 2024-12-31; 1982–92 enters as missing tokens
4–35	<code>rg_t</code> (4–19) and <code>rg_s</code> (20–35), each at the same 16 pressures, 10–1900 dbar (32)	Roemmich– Gilson Argo climatology (Scripps): monthly mean + anomaly	1°, monthly	one live bin per month — the bin containing the 15th — lifted to 0.25° by NaN-aware bilinear; missing tokens in every other bin	the same policy, one live day per month	2004-01 onward
36–37	τ_x , τ_y (2)	NCEP/NCAR Reanalysis 1 momentum flux (<code>uflx</code> , <code>vflx</code>), sign-flipped so positive is stress <i>on</i> the ocean	$\approx 1.9^\circ$ Gaussian, daily	5-day mean	the day’s field	the full axis, 1982–2024
38–39	τ_x std., τ_y std. (2)	as above	$\approx 1.9^\circ$ Gaussian, daily	within-pentad standard deviation	σ over the 5 calendar days <i>centred</i> on the bin’s midpoint	the full axis, 1982–2024
40 (r2)	<code>sst</code> (1), <i>revision r2</i> <i>only</i>	NOAA OISST v2.1 <code>sst.day.mean</code> (AVHRR analysis, NOAA PSL)	0.25°, daily	NaN-aware mean of the bin’s 5 days, on the window’s own grid	the day’s own field	the full axis, 1982–2024; live in $\approx 100\%$ of bins

Table 2: **What the encoder tensors contain**, families 4 and 5. Both are $[T, 281, 481, 39]$ `float16` at recipe revision r1 — $[T, 281, 481, 40]$ at r2, whose appended `sst` channel is the last row and is carried by no trained model yet — z-scored per channel, on the axis described above. The *ch.* column gives each group’s 1-based position along the channel axis, in tensor order; that order is defined once, in `ml/build_family3.py`, and imported by every later builder, so the index a result quotes and the index the encoder reads cannot drift apart. The daily storminess channels are the same quantity as the pentad ones — for a pentad bin the centred 5-day window *is* the bin — sampled every day instead of every fifth, which is what keeps the two cadences comparable. The Argo policy is deliberate: forward-filling was rejected because it would tell the model the subsurface was observed on days it was not, so even inside the Argo era the one-live-bin rule leaves $\approx 83\%$ of pentad bins and $\approx 97\%$ of daily bins carrying the missing token on those 32 channels (92% and 98% over the whole 1982–2024 axis). Missingness is information, and it is represented, never imputed. The r2 channel is the complement of that row: OISST is observed daily on the tensor’s own grid, so it is the one channel live in essentially every bin of the full axis, including the 22 years (1982–2003) in which the tensor otherwise holds no temperature at all.

variant on the finer time axes. Checkpoints carry their architecture, and every loader reconstructs from it. One structural variant is new in v7: the **month-block codec** of §10.7 encodes a $k_{\text{time}} \times C$ grid of cells and emits one z per calendar month rather than one per bin.

What exactly enters the encoder. The encoder is a small transformer (128×4 in the pilot, 320×8 in the 10M variant) over $C+2$ tokens for one pixel-month:

- **One token per channel.** If the channel is observed and not masked, the token is a linear projection of its scalar value (in anomaly space: the departure from that pixel’s own monthly climatology, standardized) plus a learned per-channel identity embedding. If the channel is *masked for training*, the value is replaced by a learned **mask** token; if it is *genuinely unobserved* — Argo before 2004, polar gaps — by a distinct learned **missing** token. “I am hiding this from you” and “the observing system never measured this” are different facts, and the distinction measurably matters.
- **One context token:** a linear projection of $[\sin(2\pi m/12), \cos(2\pi m/12), \text{lat}/90, \text{lon}/180]$ — season and position. Never masked. This token is why static climatology input channels carry zero information (§12).
- **One CLS token**, whose final hidden state is projected to $z \in \mathbb{R}^{64}$.

The decoder never sees the inputs — it answers *queries* (channel, Δlon , Δlat , Δmonth) from z alone, with offsets up to ± 3 cells and months, so the training signal is reconstruction of masked channels *plus* prediction of spatial and temporal neighbours.

The patch codec. At 14 channels a pixel-month carries on average 10.4 observed values, so a 64-dimensional z is an *expander* ($\sim 6\times$), as in masked language models; the information bottleneck is the masking objective, not the dimensionality. The patch variant gives each channel token its 3×3 neighbourhood — nine values and nine observed-flags, projected by $\text{Linear}(2p^2, d_{\text{model}})$ — so that at 24 channels roughly 160 observed values enter one 64-dimensional vector, a genuine 2.5:1 compression. Longitude wraps (the globe is periodic in x) and latitude clamps with out-of-range rows marked unobserved; the centre cell defines whether a channel counts as observed, and reconstruction targets remain centre values, so the loss is unchanged and $p=1$ checkpoints load identically. The motivation is physical as well as informational: thermal wind *is* a density gradient, and a gradient does not exist within a single pixel.

Stage 2 — the temporal model. A causal transformer (default $d_{\text{model}}=96 \times 3$ layers, 0.35M parameters; capacity sweep in Fig. 20) over each pixel’s 24-month embedding sequence, predicting z_{t+1} ; scored after decoding to channel space. The codec stays frozen.

Probes — the ladder. The base instrument is a ridge regression from section-mean embeddings to each truth series, deseasonalized, regularization chosen on a training tail — never on test data; verification is year-blocked k-fold with block-bootstrap confidence intervals. Two stronger read-outs sit above it, behind the same folds and the same inner-tail discipline. A small MLP ($64 \rightarrow 32 \rightarrow 1$, weight decay, early stopping, three seeds per fold) tests whether skill is present but not *linearly* accessible. An attention head tests whether skill is present but not accessible from the *pooled* section: every (pixel, month) embedding enters as a token with a longitude encoding, one learned query cross-attends over them, and a two-layer read-out maps the pooled vector to transport ($\sim 25\text{k}$ parameters, weight decay 10^{-2} , token dropout, three seeds per fold). The codec stays frozen throughout — these are probes, not fine-tuning. The design principle: each rung adds one capability, so a gap between rungs is attributable to that capability alone. Beneath the ladder sit two end-to-end *controls*: the identical head fed raw section values and observed-flags instead of embeddings, at single-pixel and at 3×3 receptive fields — pretraining is then the only manipulated variable (§7.3).

Rollout. For horizons $h = 1 \dots 12$: initialize with true embeddings, predict one month, feed the prediction back, repeat — scored in channel space against climatology, persistence, and damped persistence, and probed for the AMOC at each horizon.

Compute. Runs through 2026-08-07 were trained on GitHub-hosted 4-core CPU runners at ~ 1.3 steps/s. Since then three rented consumer GPUs (RTX 4090, $\sim \$0.24/\text{h}$ each) are attached as self-hosted runners at ~ 124 steps/s each — a factor of 95 per box, which turns a 30k-step schedule from six hours into four minutes and made the controlled comparisons of §7 affordable. The raw source data (~ 13 GB) is mirrored as a GitHub release so a fresh box seeds its cache from a CDN rather than the origin archives, one of which (the Argo host) times out under load. Nothing about the model or protocol changed with the hardware. Chinchilla-style anchor for sizing: the current tensor carries $\sim 270\text{M}$ observed values per epoch; at the $\sim 20:1$ data-to-params ratio that suggests a $\sim 13\text{M}$ -parameter codec — $14\times$ the pilot, and the reason the 10M variant exists. The arithmetic is redone whenever the data changes.

5 Metrics and their statistical power

Full definitions are in the glossary; the reliability ordering is the substance. **chan%** is decision-grade within a channel set: seed spread ± 0.5 points, so differences ≥ 2 points are real. The **fixed-holdout probe** r (36 held-out months, effective sample ≈ 15 after autocorrelation) has a 95% CI of ± 0.57 — a compass, never a verdict; the same configuration has drawn 0.09 and 0.33 on two seeds. The **year-blocked k-fold** tests all 240 RAPID months once each ($\text{SE} \approx 0.10$) and is the only probe protocol we argue from — but *which read-out* runs inside it is a second decision, and since 2026-08-21 the answer is the *unpooled* attention head over the section’s individual pixels, with the pooled section-mean ridge retained only as the bridge to an archive measured before the head existed. Both columns of Table 4 are that k-fold; only the second is a verdict, for the mechanical reason its caption gives. The most instructive failure: a $d_z=128$ codec set the all-time fixed-holdout record (0.528) while the k-fold read 0.166 — the coarse instrument flatters widest exactly where overfitting is easiest.

The stage-2 programme of §8 adds two instruments at opposite ends of the power spectrum. The **forecast ratio** is the sharpest number in the project:

$$\text{ratio} = \frac{\text{MSE}(\hat{z}_{t+1}, z_{t+1})}{\text{MSE}(z_t, z_{t+1})}$$

over held-out windows — the temporal model’s one-step error in embedding space, divided by the error of simply asserting that next month’s embedding equals this month’s (persistence, whose measured MSE is ≈ 3.1 z -units²). A ratio of 0.13 therefore reads “the model’s one-step error is 13% of the no-change forecast’s.” Because every stage-2 arm shares the same frozen codec, the denominator is identical across arms and the ratio is directly comparable across the whole of §8 — which is exactly why it, and not a channel-space score, is the ladder’s screening metric. Its statistical power is what makes the paired designs work: three-seed spread is ± 0.002 , so paired same-seed differences of 0.002 (the width effect) are readable and differences of 0.03 (the capacity effect) are $\sim 30\sigma$. Its limitation is inherited from its space: it is an internal, embedding-space quantity, blind by construction to anything the frozen codec cannot represent, and a gain on it need not survive iteration — which is what the **corridor AUC** exists to test. That instrument is the opposite trade: physically meaningful (channel-space MSSS against climatology, rolled twelve months, averaged over horizons, scored on the 29,627 corridor pixels), expensive (hours per head), and guarded rather than powerful — its error discipline is the gate head’s exact reproduction (0.643, third decimal, every run) plus paired seeds, and its decision threshold is the observed seed spread (± 0.005 at the 88M tier; at 205M, ± 0.001 on the 60k-step triple and 0.002–0.005 across the five 200k-step pairs — the full replicate record, with the single-seed rule it licenses, is in the repository’s experiment log). Every claim in §8 names which of the two instruments it is read from.

Two instruments this revision demotes, and one convention it adds. The rolled evaluation also emits a *long* hindcast — roll twenty years from a 2004 context and correlate against the observed transport — and an unforced future roll past the end of the record. Those correlations were quoted in v6 as a weak skill read-out. They are not one: §9.2 shows the trajectory is indexed by the calendar rather than by the initial state, so the *long* r is retired from the skill instruments and reported only as *replay tracking* — a diagnostic of how completely a head has memorized the training record. The convention added is the **day-matched horizon** (§2): across a cadence boundary a roll is compared at equal elapsed days, never at equal step counts. At monthly cadence the two are the same quantity by construction — checked on all eighteen scope blocks of the first run to emit both, where they agree

exactly — so adding it moved no number in this report. It exists for §10, where 73 steps and 12 steps have to be set beside one another.

6 Related work

Three literatures border this project; we take them in turn. (The repository file `m1/LITERATURE.md` carries the full survey and is updated more often than this section.)

AMOC reconstruction from observables. The classical line regresses the RAPID transport on physically chosen observables. Frajka-Williams [1] reconstructs the MOC from satellite sea-level anomaly plus the cable and Ekman terms and explains >90% of variance ($r \approx 0.95$) — but after 18-month low-pass filtering, with in-sample calibration; Sanchez-Franks et al. [2] reach $r = 0.83$ from altimetry via a thermal-wind argument under the same filtering; Worthington et al. [8] fit boundary densities to the upper-mid-ocean transport ($R^2 = 0.78$ monthly, held-out $r \approx 0.75$ on a single 2017–18 test year). Fingerprint methods [9] recover multi-decadal AMOC trends from SST patterns but no monthly signal. The machine-learning line trains almost exclusively on simulations: Solodoch et al. [3] report $r \approx 0.98$ for a CNN reading OBP/SSH/SST/wind strips — inside the laminar 1° ECCO state estimate; in eddy-resolving models the same task drops to explained variance 0.44–0.74 [4, 5], which we read as the honest difficulty scale. Application to real RAPID data at monthly cadence with blocked cross-validation is, as far as we can determine, absent from the literature. Our pooled-ridge $r = 0.60$ — monthly, deseasonalized, real data, year-blocked k-fold, no RAPID-derived inputs — sits where the eddying simulations predict it should (the attention-head read-out reaches 0.65–0.69 across two seeds, with the attribution caveats of §7.3), and no published surface-to-OSNAP reconstruction exists for our OSNAP null to contradict.

6.1 Why these numbers are not comparable

Table 3 spans $r = 0.44$ to $r = 0.98$, and almost none of that spread is model quality. Four mechanisms, in descending order of how much they matter.

1. Some inputs already contain the answer. RAPID does not measure one thing; it sums three: the Florida Current transport, the wind-driven Ekman transport, and the upper-mid-ocean geostrophic transport. Frajka-Williams [1] takes the *cable* record (which *is* the Florida Current term, measured) and Ekman (from wind) as inputs, and reconstructs only the third. Two of the three addends are handed to the model; the reported correlation is substantially the correlation of a partial sum with its own total. Wölker [5] likewise includes cable transport. Our inputs contain no transport measurement of any kind — not the cable, not Ekman as a transport — so we are inferring all three terms from the ocean state. These are different problems, and the harder one should be expected to score lower.

2. The 18-month filter removes 83% of the variance and 87% of the degrees of freedom. This is the difference most often glossed as a methodological detail, so we measured it on the RAPID series itself. Monthly deseasonalized RAPID has $\sigma = 2.79$ Sv, a lag-1 autocorrelation of 0.32, and an integral timescale of 3.5 months — so its 240 months carry ≈ 68 effective degrees of freedom. After an 18-month low-pass, the integral timescale becomes 25 months and the effective sample size falls to ≈ 9 , while the retained variance is **17%** of the original. Two consequences. First, the filtered task is easier: what survives is the slow, heat-content-like component that altimetry and density observables track well, while the wind-driven month-to-month variance — the part we are scored on — has been removed. Second, the filtered statistic is barely constrained: $r = 0.95$ on 9 effective points carries a 95% confidence interval of roughly $[0.77, 0.99]$, and $r = 0.83$ one of $[0.37, 0.96]$ — intervals wide enough to overlap our unfiltered number. (As a check on the arithmetic: the same calculation gives $[0.42, 0.73]$ for our $r = 0.60$ at 68 effective points, against the $[0.46, 0.73]$ our block bootstrap reports independently.)

We can also show the instability empirically rather than asserting it. Two codecs of *identical* configuration differing only in training seed score 0.543 and 0.531 monthly — a gap of 0.012 — but 0.449 and 0.327 once 18-month filtered, a gap of 0.122, ten times larger. Across our runs the filtered correlation ranges from 0.33 to 0.75 while the monthly one stays within 0.53–0.62. We report the filtered number

study	inputs	target & filtering	protocol	skill
Frajka-Williams [1]	altimetry + cable + Ekman	RAPID MOC, 18-mo low-pass	in-sample	$r \approx 0.95$
Sanchez-Franks [2]	altimetry (thermal wind)	RAPID, deseas. + 18-mo	in-sample	$r = 0.83$
Worthington [8]	boundary densities	RAPID <i>UMO</i> , monthly	1 test year	$R^2 = 0.78$; $r \approx 0.75$
Caesar [9]	subpolar SST finger-print	AMOC index, 20-yr LOWESS	model-calibrated	trend only
Solodoch [3]	OBP+SSH+SST+ τ	ECCO MOC, monthly	chrono. 70/30, <i>simulation</i>	$r \approx 0.98$
Meng [4]	SSH+OBP maps	eddying-model MOC	<i>simulation</i>	skill ≈ 0.44
Wölker [5]	virtual Argo + τ + cable	VIKING20X 26.5°N	<i>simulation</i>	$R^2 \approx 0.74$
this work (ridge)	14-ch embedding, no transport	real RAPID, monthly deseas.	year-blocked k -fold	$r = 0.602$ [0.46, 0.73]
this work (head)	24-ch embedding, no transport	real RAPID, monthly deseas.	year-blocked k -fold, 2 seeds	$r = 0.672$
<i>same, under their filter</i>	—	+18-mo low-pass	<i>as above</i>	$r = 0.33$ –0.75
<i>classical inputs re-scored in OUR protocol (§6.2) — same 227 months, same folds</i>				
wind only	section τ_x, τ_y	real RAPID, monthly	year-blocked k -fold	$r = 0.401$ [0.27, 0.56]
cable only	Florida Current transport	real RAPID, monthly	year-blocked k -fold	$r = 0.254$ [0.15, 0.36]
cable + wind	two of RAPID’s three terms	real RAPID, monthly	year-blocked k -fold	$r = 0.566$ [0.45, 0.68]

Table 3: **Joint results table.** Every row is a defensible number in its own frame; the frames differ so much that the rightmost column should not be read as a ranking. §6.1 explains each difference and quantifies the largest. Bold marks the two design choices that most change the task: whether a *transport measurement* is among the inputs, and whether the target is the *real* ocean or a simulation.

for every run (it is in the repository’s leaderboard), but we decline to headline a statistic whose seed noise is an order of magnitude larger than the effect anyone wants to measure.

3. In-sample calibration is a fit, not a prediction. The classical reconstructions [1, 2] tune their coefficients on the same period over which skill is then reported; Caesar [9] calibrates against models. No held-out set exists, so the number answers “how well can this functional form describe these years” rather than “what would it say about a year it has not seen”. Worthington [8] is the honourable exception in the classical line, holding out 2017–18 — one test year, where our protocol re-fits from scratch for every year in turn. Our year-blocked k -fold is the strictest arrangement here and costs us skill relative to every in-sample row, by construction.

4. A simulated ocean is a different ocean. Solodoch’s $r \approx 0.98$ [3] is obtained inside ECCO, a 1° state estimate whose dynamics are laminar and whose surface fields and MOC are generated by the same model — the mapping to be learned is close to deterministic and free of observational noise. The moment the same task is posed in eddy-resolving simulations it falls to 0.44–0.74 [4, 5], and the real ocean adds sparse, irregular sampling on top of eddies. We read the eddying-model range, not the laminar one, as the relevant difficulty scale — and our 0.60–0.67 on real observations sits inside it.

6.2 Making them comparable: the classical inputs under our protocol

A like-for-like comparison requires real RAPID data, monthly resolution without low-pass filtering, no transport measurement among the inputs, and an out-of-sample protocol; no published result meets all four. But the comparison can be rescued from the other end. Rather than dress our number up in

the literature’s conventions, we put the literature’s *inputs* through our protocol — same target, same deseasonalization, same year-blocked folds, same block bootstrap — so that the rows differ only in what the model is allowed to see. The Florida Current cable, normally one of our never-input truth series, is used as an input for these rows and these rows only (`ml/classical.baseline.py`).

The bottom block of Table 3 reports it, on the 227 months where RAPID and the cable overlap. Wind stress alone gives $r = 0.401$; the cable alone $r = 0.254$; **the two together — i.e. two of RAPID’s three constituent terms, handed to the model as direct measurements — give $r = 0.566$ [0.45, 0.68].** Our embedding, which is shown no transport measurement of any kind, reaches 0.578–0.620 under the same pooled ridge and 0.672 with the unpooled head.

We read that carefully. It does *not* say we beat Frajka-Williams: that reconstruction also uses altimetry for the third term, which this ladder omits, and it targets a filtered series. What it does say is sharper and is the number we could not get any other way: at monthly resolution, out of sample, being handed the Florida Current and the Ekman transport outright is worth about $r = 0.57$ — and a task-blind embedding of the ocean state matches it without being handed anything. The gap between that 0.57 and a published 0.95 is therefore not model quality; it is the 18-month filter and the in-sample fit, quantified. A supporting observation in the same direction: when we apply the 18-month filter to these classical rows’ *out-of-fold* predictions their correlations collapse (-0.07 , -0.23 , $+0.24$), which is what a filtered statistic with nine effective points does once it is no longer allowed to see its own test years.

Ocean and climate forecasting. Our field-prediction metrics are the standard decadal-verification quantities under other names: skill vs. climatology is MSSS with a climatological reference, and we adopt ACC per lead and damped persistence from the same framework [6]. Reference points at our monthly cadence: Ham et al.’s ENSO CNN [10] holds Niño3.4 correlation > 0.5 to ~ 17 months (the ocean’s most predictable index); Taylor & Feng [11] forecast global monthly SST anomaly fields with a Unet-LSTM (RMSE 0.48°C at 1 month rising to 0.63 at 18) — the closest published analogue to our stage-2 rollouts. The daily $1/4^\circ$ – $1/12^\circ$ neural ocean forecasters (XiHe, WenHai, GLONET) and the global weather models they descend from [12, 13] operate in a different regime (days, full fields, reanalysis-supervised) and are cited for orientation, not comparison.

Self-supervised and foundation models for Earth observation. Architecturally we are a masked autoencoder [14] over channel tokens rather than image patches. The flagship Earth-system foundation models — ClimaX [15], Aurora [16], and the land-surface line of Prithvi [17] and SatMAE [18] — evaluate mainly by full fine-tuning; frozen-representation evaluation, our entire protocol, is the exception: Prithvi WxC’s anomaly-space masked pretraining with frozen backbone and small heads is our closest architectural relative (atmosphere-only), and Lehmann et al. [7] argue explicitly that frozen-backbone extension should be a standard foundation-model quality metric. AlphaEarth Foundations [19] embeds every terrestrial 10 m pixel into 64 dimensions — the same width we use — from ten data modalities, and is the clearest statement of the “embedding field” idea this project transplants to the ocean; it is terrestrial-only, and its modality list (translated to ocean: altimetry, gravimetry, scatterometry, ocean colour, sea ice) is our data-ladder shopping list. Model sizing follows the compute-optimal-scaling heuristic of Hoffmann et al. [20] adapted to observed-value counts (§4, Compute). To our knowledge no self-supervised foundation model exists for the gridded ocean interior; frozen-embedding probes to integrated circulation indices, and missingness-as-information over the historical observing system, remain unoccupied territory.

7 Results

7.1 The bottleneck: what width buys

Fig. 1: the transport read-out wants more width than field reconstruction rewards, but not unboundedly — the turnover at $d_z=128$ is a truth-data limit, not a representation limit. That this sweep was run at $C=12$ becomes important in §7.5.

run	window	C	patch	d_z	steps	chan% [†]	pooled ridge r [§]	unpooled head r [¶]	dip
<i>coarse tensor (1°, 4 Argo levels)</i>									
pilot4	NA	4	1	32	8k	+29.3	—	—	—
dz8	NA	12	1	8	30k	+28.6	0.111 [0.01, 0.20]	—	—
dz16	NA	12	1	16	30k	+30.3	0.151 [0.01, 0.28]	—	—
dz32	NA	12	1	32	30k	+30.5	0.182 [0.05, 0.31]	—	—
dz64	NA	12	1	64	30k	+30.6	0.308 [0.13, 0.46]	—	16%
dz128	NA	12	1	128	30k	+30.2	0.166 [0.07, 0.30]	—	—
wind14	NA	14	1	64	30k	+35.6	0.604 [0.47, 0.72]	—	50%
global14	global	14	1	64	30k	+30.6	0.602 [0.46, 0.73]	0.635 [0.53, 0.74]	50%
global14b*	global	14	1	64	30k	+30.9	0.556 [0.43, 0.68]	—	—
global15sst	global	15	1	64	30k	+30.8	0.582 [0.43, 0.71]	—	47%
<i>deep tensor (1°, 8 Argo levels; §3.2)</i>									
patch24	global	24	3	64	40k	+32.0 [‡]	0.543 [0.43, 0.66]	0.690 [0.57, 0.78]	27%
pixel25	global	25	1	64	40k	+30.9 [‡]	0.536 [0.38, 0.68]	0.617 [0.49, 0.73]	59%
pixel24	global	24	1	64	40k	—	0.515 [0.41, 0.63]	—	—
pixel24-30k	global	24	1	64	30k	—	0.585 [0.45, 0.71]	—	—
pixel24-60k	global	24	1	64	60k	—	0.549 [0.42, 0.67]	—	—
patch24-30k	global	24	3	64	30k	—	0.551 [0.42, 0.68]	—	—
patch24-1M	global	24	3	64	1M	+32.1 [‡]	0.571 [0.42, 0.70]	—	—
patch24-seed2	global	24	3	64	40k	—	0.531 [0.40, 0.65]	0.654 [0.54, 0.75]	27%
pixel24-seed2	global	24	1	64	40k	—	0.564 [0.44, 0.69]	—	—
big10M (10.26M)	global	24	3	64	60k	—	0.578 [0.45, 0.70]	—	26%
<i>quarter-degree tensor (0.25° NA, 16 Argo levels, SSH; §7.4)</i>									
f3-pilot	NA 0.25°	39	3	64	40k	—	0.620 [0.48, 0.74]	—	46%
f3-anchor41M (40.7M)	NA 0.25°	39	3	64	60k	+31.5	0.631 [0.51, 0.73]	0.662 [0.56, 0.75]	51%
f3-anchor41M-nolonhold	NA 0.25°	39	3	64	60k	—	0.613 [0.49, 0.72]	—	44%
<i>pentad and daily tensors (finer time axes, r2; §10) — own baselines, and their own n</i>									
f4r2-40M (run-415)	NA pentad	40	1	32	197k	—	0.637 [0.58, 0.69]	0.659 [0.60, 0.72]	32%
f5-40M (run-419)	NA daily	39	1	32	200k	—	0.612 [0.56, 0.66]	—	—
f4r2-monthblock (TPU)	NA month blk	40	1	64	60k	—	—	—	—

Table 4: **Master table: every codec run.** Generated from each run’s own JSON by `ml/make_table.py`, not transcribed. Run-name grammar (`f4r2`, `monthblock`, ...) is decoded in §3.3. **There are two read-out columns and they are not interchangeable.** [§]*Pooled ridge* is `probe_kfold`’s ridge on the *section-mean* embedding. It is the comparability bridge across this whole archive and it is never a verdict: geostrophic transport at 26.5°N is the east–west contrast *across* the section, and a section mean is precisely the statistic in which that contrast cancels — measured on the anchor’s own embeddings, z along the section correlates $r = 0.99$ at one cell, 0.88 at five and 0.35 at eighty, so the mean averages about **2.5 effective independent pixels of 265**. [¶]**Unpooled head** is `probe_head`’s attention query over the section’s *individual* pixels (§7.3) — the verdict column. It is mostly empty because the flag that produces it defaulted to off until 2026-08-21: it exists in **12 of 204** archived bundles. **A dash means not measured and is never a copied pooled number**; the missing rows are being filled by eval-only ladders over the already-published checkpoints, which retrain nothing. **Each column has its own bar and they must not be crossed.** The pooled bar is the wind-stress-only *ridge*: $r = 0.531$ on the 1° tensors, 0.568 on the quarter-degree, 0.670 at pentad and 0.607 at daily, all on the same folds. The unpooled bar is the same head fed wind stress with nothing pooled, and where it has been measured — the pentad section — it reads 0.690; there is no unpooled wind bar on the monthly section. The matched raw-data controls, the head fed section values instead of embeddings, are 0.659 (1° deep, 3×3), 0.628 (quarter-degree monthly) and 0.693 (pentad). **Read the pentad row against those and the codec loses:** run-415’s own head (0.659) sits below both its raw- 3×3 control (0.693) and the unpooled wind bar (0.690), where its pooled figure (0.637) merely sat below a pooled bar. Sample sizes differ by cadence — 240 monthly transport labels, 1,459 pentad, 7,290 daily — so a CI in the bottom block is not comparable with one above it, and neither is a point estimate. [†]chan% is comparable only within one channel set (its persistence baseline moves with the channels). Dip = share of the winter 2009–10 collapse amplitude captured out-of-fold. *global14b is an exact-configuration replication on a different runner: codec-seed noise on the pooled k-fold is $\approx \pm 0.05$, which the four pixel24/patch24 rows (0.515–0.585 across 30k–60k steps) are consistent with, and patch24-1M is flat from the first probe to the millionth step (§13). The two patch24 rows are a codec-seed pair and are why no single-seed number in either read-out column is a level: pooled moves 0.012 between them, unpooled 0.036. [‡]in-training probe at the final step. Stage-2 figures for global14b and global15sst are *withdrawn*: a poisoned embedding cache (§13). ^{||}The month-block codec has neither number: no probe bundle was archived for it, its probe path is block-shaped, and it is JAX/TPU-trained and so never pooled with a PyTorch number (§11). Its evidence is §10.7’s reconstruction audit. Codecs still training or not yet dispatched carry no number at all and ~~are~~ Table 9.

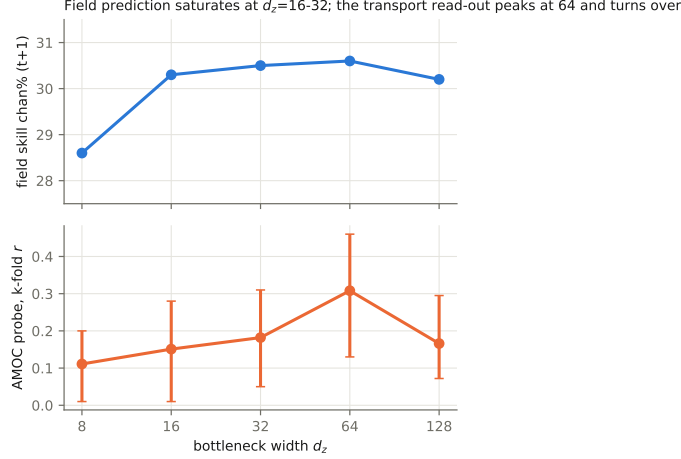


Figure 1: Bottleneck width d_z versus its two customers, on the 12-channel North-Atlantic tensor at matched training steps. Field prediction (top) saturates by $d_z=16-32$; the AMOC probe (bottom, with 95% block-bootstrap CIs) rises to a peak at $d_z=64$ and turns over at 128 — 128 ridge features against ~ 220 truth months per fold overfits. $d_z=64$ became the working setting, a choice made when the tensor had 12 channels.

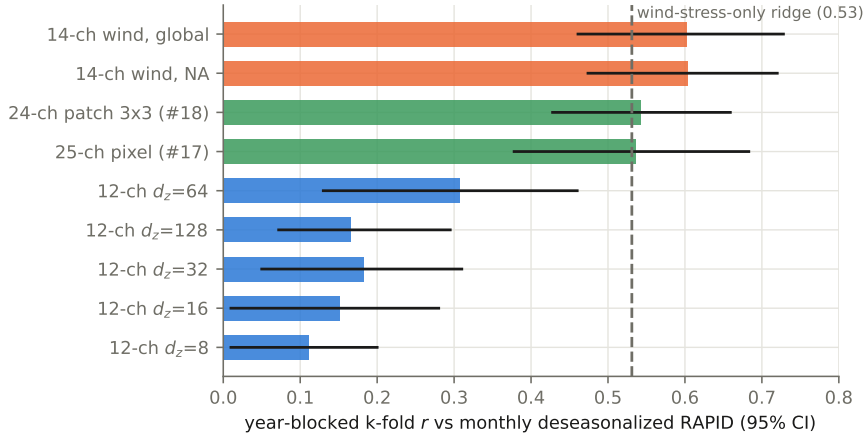


Figure 2: Year-blocked k-fold correlation with monthly deseasonalized RAPID transport, all codec generations, 95% CIs. Adding wind stress (orange) nearly doubled the defensible probe; training globally cost the Atlantic read-out nothing. The deep-tensor codecs (green) fall back onto the dashed wind-only baseline — a ridge on section-mean wind stress with no embedding at all.

7.2 The probe ranking, and what the wind already knows

Fig. 2 is the project’s headline and its conscience in one picture. The wind channels moved the probe more than every architecture decision combined ($0.31 \rightarrow 0.60$); the global codec matches the regional one exactly (0.602 vs 0.604 — the generic-embedding hypothesis holds at fixed capacity); and the wind-only baseline at 0.53 says most monthly skill is Ekman physics. The coarse tensor’s embedding increment over pure wind is +0.07; its distinctive contributions are the low-frequency component (18-month low-passed $r = 0.64$) and event anatomy (Fig. 6). In Sverdrups: RMSE 2.23 Sv against a target standard deviation of 2.79 Sv.

7.3 The probe ladder: pooling was hiding the signal

Fig. 3 is this revision’s central result, and it changes both a number and a story. The number: the patch codec read by the attention head reaches $r = 0.690$ [0.570, 0.781], RMSE 2.02 Sv (and 0.654 on a second codec seed, below) — against 0.60 for the best pooled-linear configuration, and against a wind-only

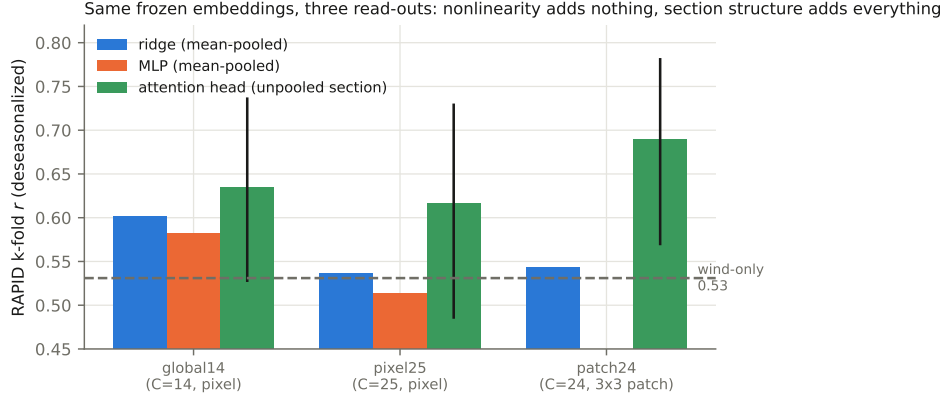


Figure 3: Same frozen embeddings, three read-outs, same year-blocked folds. The MLP (orange) trails the ridge (blue) everywhere — pointwise nonlinearity recovers nothing. The attention head over the unpooled section (green, with 95% CIs) beats every pooled probe, restores the 25-channel codec to parity with the 14-channel one, and reveals the patch codec — invisible to pooled probes — as the strongest representation in the programme at $r = 0.690$.

baseline of 0.531 that the pooled deep-tensor probes had barely cleared. The story: the ladder’s two rungs dissociate cleanly. Pointwise nonlinearity (MLP rung) recovers nothing on any target for any codec — so the ridge was never the limit as a *function class*. Spatial structure (head rung) recovers a great deal — so the limit was the *pooling*. Mean-pooling the section computes the one statistic in which an east-west difference cancels, and thermal wind says the transport *is* an east-west difference. The two architectural changes of this cycle turn out to be halves of one physical idea: the 3×3 patch puts local gradients into each embedding, the attention head reads gradients across the section, and each looked worthless without the other — the patch codec’s pooled numbers were indistinguishable from its pixel control.

The attribution matrix. An end-to-end baseline completes the picture: the *same* attention head, same folds, same regularization, fed raw section anomalies (values + observed-flags) instead of embeddings, at both receptive fields:

tokens carry	raw data	codec embedding
single pixel	0.613 [0.48, 0.73]	0.617 [0.49, 0.73]
3×3 neighbourhood	0.659 [0.55, 0.75]	0.690 / 0.654 (2 seeds)

A second seed, and a retraction. The 0.690 cell was replicated on an independently trained codec of identical configuration. It came back at 0.654 [0.543, 0.748]. The capability claim survives — both seeds beat every pooled probe and the wind-only baseline decisively, so unpooling is real — but the *pretraining margin does not*. The raw- 3×3 baseline is codec-independent at 0.659; the two-seed embedding mean is 0.672; the advantage is therefore +0.013, which is nothing. We previously reported +0.031 “positive in direction, not significant” and we withdraw even that directional reading: it was one seed’s noise. Note that the pooled ridge replicated far more tightly across the same two codecs (0.543 vs 0.531) than the head did (0.690 vs 0.654) — the more expressive probe is also the noisier instrument, and no future head number in this programme should be quoted from a single seed.

What remains, then, decomposes as: *unpooling* the section is the whole of the improvement (pooled ridge 0.54 $\rightarrow$ head 0.65+); the 3×3 *receptive field* adds $\sim +0.045$ and does so on raw data alone; *pre-training* adds nothing measurable at either receptive field. For the monthly RAPID probe, a supervised head over raw section data recovers everything the codec offers. The pretraining case now rests entirely on the scoreboards where 240 labelled months have no answer: field prediction (stage 2 beats persistence everywhere; the matching end-to-end field-forecaster baseline is the open follow-up), transfer to sparsely-labelled targets like MOVE, and whether a margin appears at all once the codec is sized to its Chinchilla anchor.

That last test has now run, on the quarter-degree tensor at 40.7M parameters (§7.4), and it neither

rescues the pretraining case nor closes it: the head reads 0.662 [0.557, 0.745] from the codec against 0.628 [0.514, 0.729] from raw 3×3 tokens on the same section, a margin of +0.034 where the 1° pair gave +0.013. Same sign, roughly twice the size, still a small fraction of its own confidence interval, and — the part that governs how it should be quoted — *one seed*. We wrote above that no head number in this programme should be quoted from a single seed, and we decline to exempt this one because it happens to point the way we would prefer.

At 5-day cadence the decomposition sharpens, and the representation term goes to zero.

The quarter-degree tensor rebuilt at pentad cadence ($T=3142$, $n=1,459$ transport bins) supports the same comparison at six times the label count, and every rung of it has now been read under one protocol. The pooled ridge *under-reads*: 0.660 [0.593, 0.722] against a wind-only bar of 0.670 measured on that tensor — on the pooled number alone this would have been recorded as another failure to clear wind. An attention head over the unpooled section pixels clears the bar: the frozen monthly codec reads 0.691 [0.631, 0.746], recovering the +0.031 that pooling had destroyed. But the matched raw-pixel control — the same head, same folds, fed section anomalies with no codec at all — reads 0.683 [0.620, 0.742]; and a codec trained from scratch *on the pentad tensor itself* (38M parameters, 167k steps) reads 0.680 [0.617, 0.740] through the identical head, -0.003 below its own raw control. Three read-outs that see unpooled section pixels — one frozen representation, one purpose-trained representation, and none at all — land within 0.011 of one another with nearly coincident intervals. So at 5-day cadence neither a frozen monthly representation nor 167k steps of matched-cadence pretraining adds measurable transport information beyond the raw fields: *read-out design, not representation learning, is what moved the number*. This also disposes of the domain-shift reading the pentad arm was built on — if monthly embeddings under-performed because 5-day fields are out of domain for them, a codec trained on 5-day fields should have beaten them, and it does not. Each of the three cells is one seed, and by our own rule we do not quote any of them as a level; the claim rests on their *differences*, which are 3–12 $\times$ smaller than the head probe’s own measured seed spread (0.036) and are therefore consistent with zero however the seeds fell.

The scope of that statement. It is a statement about the *current-state* read-out: what today’s fields, encoded or not, say about today’s transport. The codec’s function in this system is not to add information — it is a compression and cannot — but to make the state *attendable*: to turn the 84,405 ocean pixels $\times$ 39 channels of one time step into a token sequence a transformer can carry and roll forward. The representation’s operative test is therefore forecast skill from rolled-forward embeddings, the corridor AUCs of §8, and on that scoreboard the embedding pipeline is the only entrant: the matched raw-pixel control that makes the table above interpretable has no forecaster counterpart at this resolution, where the daily tensor alone is 165.6 GB and attention over raw fields is not tractable on any hardware we run. We report the parity and do not read it as a verdict on the representation.

Honesty box: the head is the most expressive probe we run (~ 25 k parameters against ~ 220 training months per fold), and although it is regularized hard, early-stopped on a train tail, and seed-averaged behind the same blocked folds as every other number, the head-vs-ridge gaps have not yet been given a paired significance test. The second-seed replication is no longer outstanding — it is reported above, and it cost us the pretraining margin. A capacity sweep of the head itself (23k $\rightarrow$ 325k $\rightarrow$ 2.0M parameters) shows *neither* side is parameter-limited: at 325k both columns drop (raw-3 $\times$ 3 0.659 $\rightarrow$ 0.590, embedding-3 $\times$ 3 0.690 $\rightarrow$ 0.611), as the label-count arithmetic predicts (~ 220 training months per fold support a head of tens of thousands of parameters, not hundreds), and the embedding margin persists at both sizes. The 2.0M cells are running as a formality.

7.4 First light from the quarter-degree tensor

The first codec trained on the quarter-degree tensor — a pilot-size (0.92M) control, $C=39$, 84,405 pixels, single seed — posts the highest pooled-ridge k-fold of the programme: RAPID $r = 0.620$ [0.484, 0.741], RMSE 2.25 Sv, 18-month low-passed 0.747, 46% of the 2009–10 dip. Three readings, in decreasing confidence. First, the baseline discipline holds: the wind-only ridge measured *on this tensor* is 0.568, so the codec clears its own baseline by +0.052 where the deep-tensor pilots sat exactly on theirs — though the CIs overlap and this is one seed. Second, MOVE transfers again (0.235 [0.112, 0.340], low-passed 0.726) while wind-only at MOVE is *negative* (-0.376): at 16°N the embedding carries signal the wind actively gets wrong. Third, and to be read with care: 0.620 beats every 1° codec on the same truth

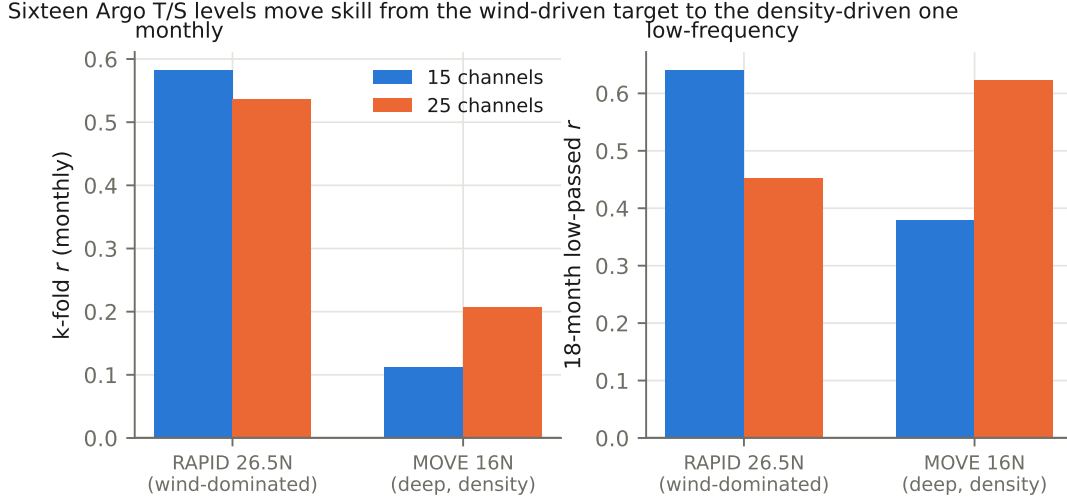


Figure 4: Sixteen Argo temperature and salinity levels to 1900 dbar *appeared* to cost monthly RAPID skill under pooled probes (left, first pair) — resolved by §7.3 as a read-out artifact, not a representation change — while genuinely roughly doubling skill at MOVE (left, second pair) and transforming the low-frequency read-out there (right). MOVE measures the *deep* western-boundary flow at 16°N — precisely the quantity the added levels describe.

and protocol, but across tensor generations that sentence means “this data recipe is better”, not “this codec is better” (§3.2).

The 41M-parameter codec trained *at* this tensor’s compute-optimal anchor has since finished, and its answer is a flat one: pooled k-fold RAPID $r = 0.631$ [0.513, 0.732], RMSE 2.16 Sv, against the pilot’s 0.620 on the same tensor and protocol. Forty-four times the parameters bought +0.011, comfortably inside seed noise. Both clear the quarter-degree wind bar (0.568) and neither does so significantly. The honest reading is that skill on this tensor is *not* capacity-limited at the pooled read-out — which, combined with the flat 50k→1M step sweep of §13, closes both easy scaling axes at once: neither more parameters nor more steps is what stands between this programme and a better transport number. What did move: the unpooled head reads 0.662 [0.557, 0.745] from the same frozen codec, the 2009–10 dip capture rose to **51%** from the pilot’s 46%, and the 18-month low-passed correlation reached 0.820 — the last of which should be read against the ~ 9 effective degrees of freedom of §5, not as a 0.82-with-240-months would be.

7.5 Where more data moved the skill

Under *pooled* probes, expanding the input appeared to cost RAPID skill: both deep-tensor codecs landed on the wind-only line (0.543 and 0.536 against 0.531) where the coarse tensor held +0.07. Section 7.3 resolves this: the skill had moved into cross-pixel structure, not out of the representation, and the unpooled read-out recovers it in full (0.617–0.690). The RAPID half of this subsection’s original claim is therefore retracted; what follows — the MOVE result — is the part that survives, and it was measured pooled, so unpooling can only strengthen it.

At MOVE the same channels do the opposite. The 25-channel codec scores $r = 0.206$ [0.044, 0.346] — the first multi-target result in this programme whose confidence interval excludes zero — with an 18-month low-passed correlation of 0.623, against 0.111 and 0.379 for the 15-channel codec. MOVE is a deep, density-driven transport; RAPID’s monthly variance is largely Ekman. The added channels are Argo T and S to 1900 dbar. The skill went where the physics says the information is.

The corrected reading is about read-outs, not bottlenecks: the embedding kept everything, and the probe determined what could be seen. For the generic-embedding hypothesis of §6 this is a *stronger* confirmation than the regional-versus-global comparison — one task-blind representation now serves the wind-dominated and the density-dominated target simultaneously, provided the read-out respects the structure of the question being asked of it.

One more asymmetry is worth recording: the 25-channel codec captures **59%** of the winter 2009–10

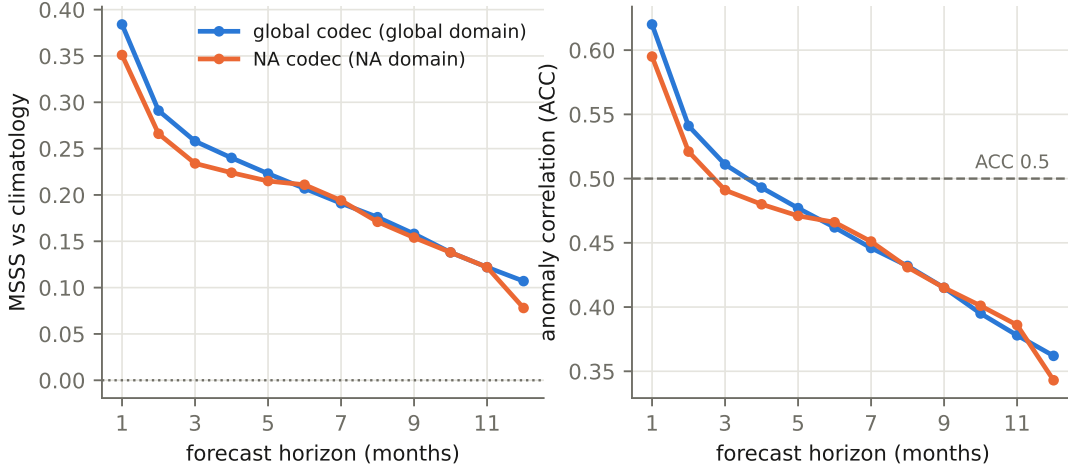


Figure 5: Autoregressive rollout skill versus forecast horizon for the global codec (blue, global domain) and the regional codec (orange, North-Atlantic domain; domains differ, so compare shapes more than levels). Left: MSSS against climatology — still positive at 12 months. Right: anomaly correlation, crossing the conventional 0.5 useful-skill line near four months.

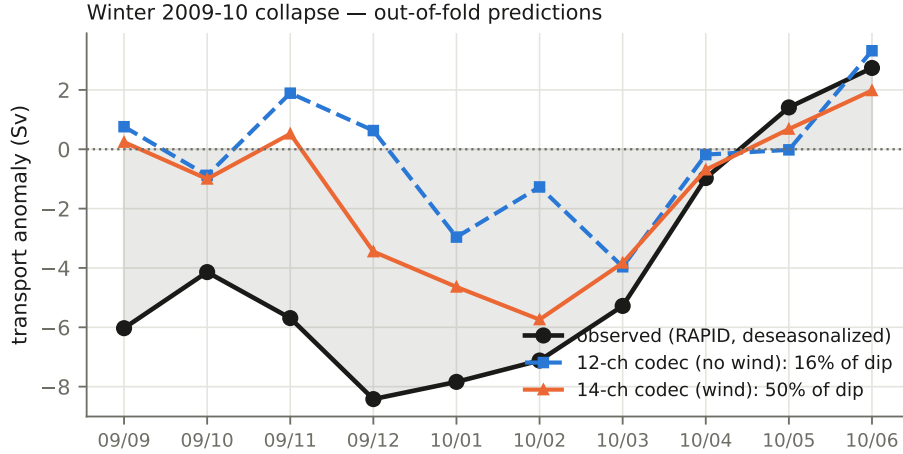


Figure 6: The sharpest event in the RAPID record, predicted out-of-fold. Without wind channels (blue) the model captures 16% of the dip amplitude; with them (orange), 50%. The 25-channel codec reaches 59% (not plotted; see Table 4). The November onset — triggered inside a month — stays invisible to monthly data.

collapse out-of-fold, the best of any run in the programme, while its monthly correlation is the second worst. Event anatomy and average correlation are not the same capability, and a table that reports only the latter will hide the former.

7.6 How far ahead the ocean can be predicted

Fig. 5: feeding predictions back month after month, the anomaly field stays predictable beyond a year (MSSS +0.11 at $h=12$; ACC 0.36). The decay is decorrelation, not amplitude damping (the forecast-to-observed amplitude ratio holds near 0.5 throughout). The AMOC read-out on rolled embeddings, by contrast, dies after about a season — transport forecasting at range remains open, consistent with its wind-driven monthly variance.

7.7 Case study: the winter 2009–10 collapse

8 The rolled forecast at scale

Everything above probes what the representation *contains*. This section — the work of 13–16 August, and the reason for v6 — is about what the temporal model can *do* with it: predict the ocean’s state forward, month over month, over the pixels that carry the overturning. One sentence of configuration so the reader carries the right picture: *everything in this section runs on the quarter-degree tensor* — all 39 channels of Table 1, including the sixteen Argo depth levels to 1900 dbar and sea-surface height — through the frozen 40.7M anchor codec of §7.4; the 14- and 24–25-channel tensors of the earlier sections are history here, and “scale” below always means the size of the *stage-2 temporal head*, never the codec or the channel count. The section’s one-sentence summary: input geometry looked decisive and was a symptom; **capacity was the variable**, and it has not stopped paying at 205M parameters.

8.1 Spatial coupling: the stencil

The stage-2 model of §4 predicts a pixel’s next embedding from that pixel’s own history — an ocean of independent columns. Physically that is wrong in a specific way: anomalies *advection*, and a month of Gulf Stream transport moves water hundreds of kilometres. The stencil gives the temporal model that information: alongside the centre pixel’s 24-month embedding sequence it reads the sequences of S neighbour pixels at fixed geographic offsets. Three geometry families were swept (rings at one radius; spirals, every point on its own bearing; and golden-angle *sunflower* layouts with a far-heavy $\sqrt{\cdot}$ radial ramp at Fibonacci counts), with reach up to 4444 km. Reach beyond 4444 km was measured and *refused* before any training: on this window it deletes live input (26.1 live corridor slots at $r_{\max}=4444$ km for a 55-point sunflower, 19.7 at 6666 km), because the extra reach lands on land or off-window.

Two scoreboards, defined in the glossary, are kept strictly apart — the **forecast ratio** (one step ahead, against persistence, reproducible to ± 0.002 across seeds) and the **corridor AUC** (twelve months rolled, feeding predictions back, scored where the AMOC lives). The programme’s founding observation (E-022, 13 August) was that they can *disagree*: a change that improves the one-step forecast can worsen what compounds under iteration. Every evaluation runs behind the **gate head** discipline — a frozen no-neighbour reference must reproduce its pinned corridor AUC of 0.643 exactly before any new number is accepted; it has now done so on every evaluation in this section.

A picture of spatial generalisation. Every rolled number in this section is a scalar summary of a field, and the field is not flat. Fig. 7 draws it — per-pixel skill against climatology at $h=6$ months over all 84,405 window pixels, for one seed of the widest 205M arm. Almost everywhere the basin beats climatology comfortably: 0.86 averaged over the trained longitudes, 0.86 again in a Gulf Stream box (32–45°N, 75–45°W), and only 2% of window pixels below zero. The exception is a single meridional band — and the band is not an ocean feature. Its edges fall at exactly 45°W and 25°W, which are the two numbers in `train.py`’s `--holdout-lon` default. That block is withheld from training in *both* stages: the stage-1 codec pool is built as `obs.any&~t_hold&~x_hold` and the stage-2 head pool as `ok_p=~x_hold[xs]`. The rolled evaluator recomputes the identical mask from the checkpoint’s own arguments, uses it to set the normalisation constants — and then scores every pixel anyway. For every evaluation reported here it recorded nothing about the block in its output at all; the evaluator has since been changed to emit the bounds, the per-scope in-block counts, and each scope split into its trained and held-out longitudes, so future rolls report the two separately. The band is therefore the model’s *spatial generalisation gap*, and this figure is a direct picture of one: skill against climatology as a function of distance from the training set.

Three measurements identify it and close the alternatives. (i) *It is a boundary effect, not a patch.* Skill decays monotonically with distance *into* the block from each trained edge and does so from both sides: reading in from 45°W at one-degree steps, 0.70, 0.49, 0.34, 0.23, 0.19; in from 25°W, 0.71, 0.54, 0.42, 0.33, 0.26; the two meeting at ≈ 0.17 in the middle rather than collapsing to nothing. The ten steepest column-to-column gradients anywhere in the 481-column window all lie inside the block and within 2.5° of an edge; the figure’s code asserts that rather than asking the reader to see it. The edges are ramps 1–2° wide, not discontinuities. (ii) *The mechanism is explicit.* The head’s static context concatenates the pixel’s normalised coordinates ($\varphi/90$, $\lambda/180$), so *longitude is a literal input feature with a 20° hole in its training range*: the head is interpolating across a gap in its own input, and its

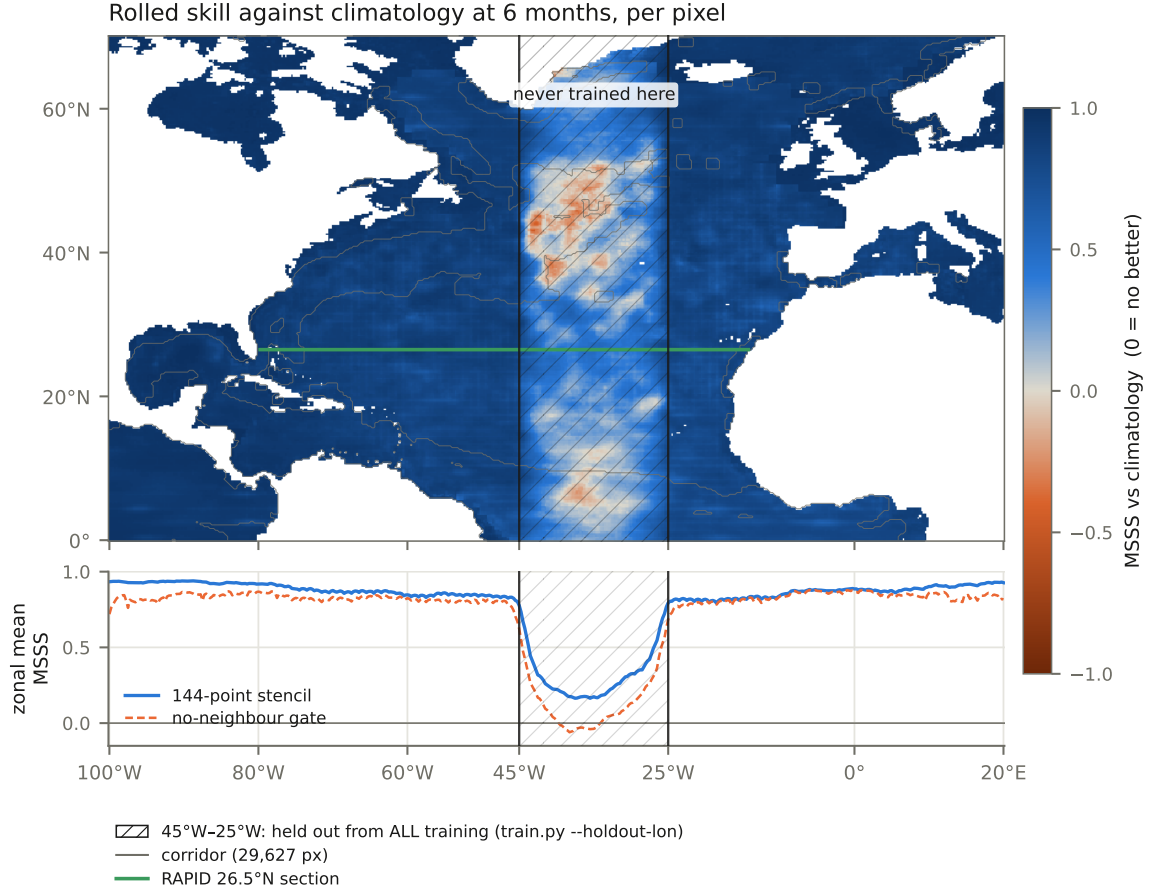


Figure 7: **A held-out longitude block, seen from outside it.** Per-pixel MSSS against climatology at a six-month horizon — pooled over all 39 channels and every evaluation start-month — for all 84,405 window pixels, from one seed of the 205M 144-point stencil head. Positive means beating the train-month climatology, zero means matching it, and the colour scale is symmetric about zero, so the midpoint is the climatological line itself. Land and out-of-window cells are blank: an unmodelled cell and a zero-skill cell are not the same thing. **Hatched: 45°W–25°W, the longitude block that `train.py --holdout-lon` withholds from training in both stages** — no codec fit and no forecast-training window ever falls there, while the rolled evaluation scores those pixels along with the rest. It is a quarter of the window. Grey: the 29,627-pixel corridor, whose outline follows the coast almost everywhere because the fastest quarter of the window largely is coastal. Green: the 265-pixel RAPID 26.5°N section (80°W–13°W), where the transport read-out is taken. *Lower panel:* the same field as a zonal mean, with the frozen no-neighbour gate head beneath it. Two cliffs, at the two numbers in an argparse default and nowhere else in 481 columns of ocean; inside, skill decays with distance from each trained edge and bottoms at ≈ 0.17 rather than vanishing. The head is `e032x1_u1.s0.pt` — sunflower-144 at 1024×16 , seed 0 — from run #356, staged in the repository as `ml/paper/roll.356.json`; the pixels carry no coordinates in that file, and their geography is recovered from `data/amoc_eval_mask.json`, which the evaluator writes from the same `ys/xs` arrays it scores. This is *one seed*: the figure shows *where* skill sits, not a level.

accuracy decays with how far into the gap it has to reach. (iii) *The alternatives fail.* It is not the codec — the retrained deep-temperature decoder reads 1.43% rmse^2 on the held-out longitudes against 0.85% on trained ones (and 1.90% on held-out *months*), so the representation generalises across the block essentially perfectly and the collapse is entirely a stage-2 forecast-head failure. It is not latitude-structured, which is what a Mid-Atlantic Ridge or an observing-coverage reading would require: in ten-degree bands the in-block/out-of-block contrast is 0.29/0.83 at 0–10°N and 0.42/0.91 at 60–70°N. And it is not the variance normalisation, which is the reading the previous revision of this paragraph offered. MSSS is a variance-normalised ratio, so we computed its denominator per pixel — the standardised

anomaly variance of the 0.25° base tensor’s three dynamic channels, on the evaluation’s own recipe of train-month climatology with the holdout years excluded. It is smooth and edgeless straight through the region, with nothing happening at 45°W or 25°W ; it is nearly *twice* as large at the western edge (1.38) as at the eastern one (0.79), where skill is the same to within 0.01; and it reaches its minimum far to the east of the band. Denominator size does not order skill here.

What that costs the numbers in this section. 25.0% of window pixels, 23.9% of corridor pixels and 30.2% of the RAPID section lie inside the block, so every rolled score in Table 5 is a blend of trained- and untrained-longitude skill. The direction is deflationary: including the block makes every number *worse* than its trained-longitude counterpart, so nothing reported here is inflated by it. The *stencil advantage* is a different matter. At $h=6$ the 144-point head beats the frozen no-neighbour gate by +0.091 over the corridor; decomposed by the block, that is +0.182 on the 24% of corridor pixels inside it and +0.062 on the 76% outside, so **48% of the advantage is earned on pixels the model was never trained on** — over the whole window, 59%. The split is stable across the four stencil heads rolled here (42–48% corridor, 57–59% window). That is a defensible thing for a stencil to be good at — reading neighbours is precisely how one covers a hole in one’s own coordinate input, and the neighbours of an untrained pixel include trained ones. But *spatial coupling helps forecasting* and *spatial coupling helps a model extrapolate into a hole in its own coordinate input* are different claims, and no number in this report separates them. About half of the measured stencil advantage belongs to the second.

The corridor paradox dissolves. The previous revision of this figure reported that the corridor is *not* the skilful part of the window and could not say why. Split by the block, it is: outside the block the corridor and the rest of the window are indistinguishable (0.864 against 0.866), and the whole of the corridor’s apparent deficit is inside it (0.229 against 0.369). The corridor is not selecting unskilful pixels. Fast-current pixels inside an untrained longitude block are simply the hardest thing in the window to extrapolate to — which is what one would expect if the information the model is missing there is advective. Every contrast quoted in this subsection reproduces on the arm’s second seed to within 0.02; the one quantity that does not is a level rather than a contrast (the block-centre value reads 0.171 and 0.148 on the two seeds), and nothing here is quoted as a level. One seed is a picture, not a number.

What would settle the diagnosis beyond argument is cheap and not yet done: retrain one stage-2 head with a *different* held-out longitude block and confirm that the band moves with it. It is not a one-line change, which is why it is not in this revision — the stage-2 trainer reads the block from its frozen codec’s saved arguments (`ck["args"]["holdout_lon"]`) and has no switch of its own, so either the plumbing grows a stage-2 knob or the codec is retrained too. We record the prediction here rather than the result.

8.2 An inversion at base scale, and the audit that cleared the instrument

At the then-standard stage-2 size (576×8 , 34M parameters), a factorial over stencil geometries produced a clean and disturbing result: across eleven arms the one-step and rolled scoreboards were *anti-correlated*. The widest, farthest-reaching stencils posted the best forecast ratios in the programme and rolled *worse than the no-neighbour baseline*; the best rolled arm was a minimal ring of 8 points at 222 km whose one-step forecast was mediocre. The full base-scale table is preserved in Appendix A.

Because an inversion of that shape could equally be a bug in the evaluator, it was audited before being believed (“investigate thoroughly and not hypothesize”). Six artifact classes were tested and eliminated on the archived evaluations alone, zero GPU spent: per-head scored-set differences (sample counts are identical to the pixel), broken rolled-input construction (at $h=1$ the roll consumes observed truth and reproduces the training ordering exactly), baseline choice (ordering invariant under climatology, persistence, and damped persistence), amplitude collapse (amplitude ratios do not track the inversion — the far-reach heads predict confident, full-amplitude, increasingly *wrong* patterns), horizon weighting (the top ranks are invariant), and boundary/dead-slot artifacts — eliminated with the sharpest measurement of the audit: the rolled penalty *rises* with the fraction of the stencil that is live ($r = +0.176$, monotone in quintiles), so pixels whose far stencils are fully over ocean pay most. An instrumented re-roll added channel structure: the penalty concentrates on the slow 300–700 m heat and salt reservoir — the AMOC-relevant fields — while the same wide stencils *keep* their advantage on fast wind-stress channels under iteration. The instrument was clean; the phenomenon lived in the model-under-iteration.

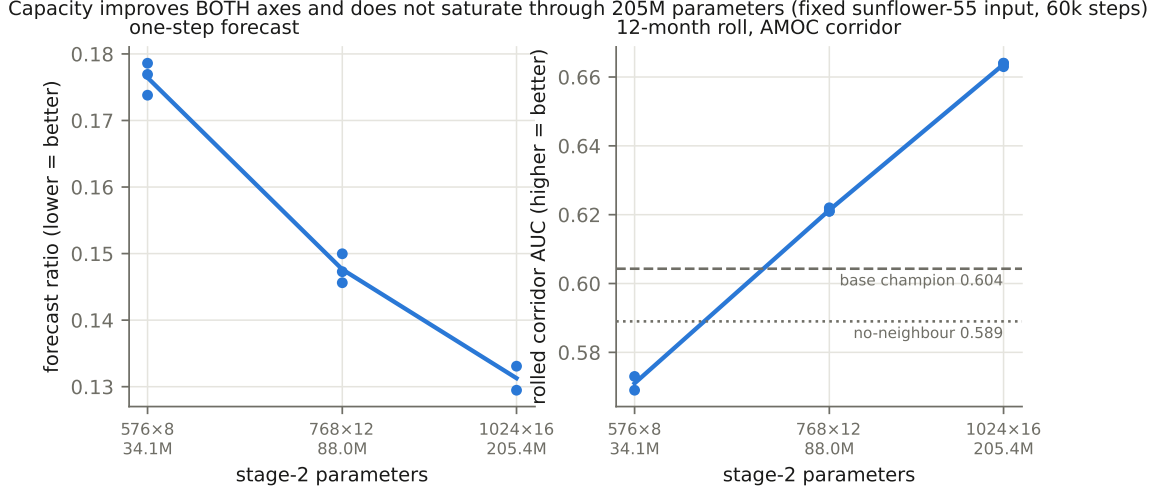


Figure 8: The capacity ladder at fixed input (sunflower-55, 60k steps), all seeds shown, parameters measured from the checkpoints. Left: the one-step forecast ratio. Right: the rolled corridor AUC, against the no-neighbour baseline (dotted) and the best base-scale geometry (dashed). The 576×8 tier is *below* both reference lines — that is the inversion of §8.2 — and the same input geometry crosses both lines the moment the head is large enough. Neither panel shows saturation at 205M.

8.3 Capacity breaks the inversion

The resolving experiment was a 2×2 — head size (576×8 vs 768×12) $\times$ input width (34 vs 55 sunflower points), three seeds per cell, everything else frozen. On the forecast ratio the capacity main effect is -0.029 paired at every seed ($\sim 30 \times$ the three-seed noise bar); the width effect is -0.002 , same sign at every seed; and there is *no interaction* — width helps by the same small amount at both sizes. Capacity is worth three times the entire geometry axis of Appendix A.

The decisive question was whether that gain *rolls* — a one-step gain that evaporated under iteration would have been exposure bias wearing a scaling law’s clothes. It rolls: paired by seed, the 768×12 tier gains **+0.050** corridor AUC over 576×8 on the same 55-point sunflower ($+0.052/+0.048$), and the same geometry that rolled at $0.569\text{--}0.573$ (below the no-neighbour 0.589) rolls at $0.621\text{--}0.622$ — past the no-neighbour baseline *and* past the base-scale champion’s 0.604 . The E-026 inversion was a capacity-starvation artifact: a 34M head fed 55×64 -dimensional inputs learns a one-step mapping whose errors compound under iteration; an 88M head learns one whose errors do not. The channel fingerprint of the audit (slow subsurface pays, wind survives) is what that starved mapping looks like.

One tier up (1024×16 , 205.4M, same input, same steps), both scoreboards improve again: forecast ratio $0.1295\text{--}0.1331$ (the project’s best), corridor AUC **0.664**/ $0.663/0.664$ — $+0.042$ over the 88M tier, $+0.075$ over the no-neighbour baseline, with a seed spread of 0.001 against the forecast axis’s 0.004 : at this capacity the rolled skill is essentially deterministic given the data. Fig. 8 shows the ladder; Table 5 is the per-seed record. No saturation is visible on either axis through 205M parameters.

8.4 The other axes: width and step budget

With capacity established as the first-order variable, the remaining axes were measured against it (Fig. 9). **Width**: at the 88M tier, sunflower inputs of 34, 55, and 89 points give forecast ratios of $0.1498 \rightarrow 0.1476 \rightarrow 0.1453$ (means of three seeds; paired per rung ≈ -0.002 , same sign at every seed) — small, consistent, unsaturated. **Step budget**: extending the 89-point arms from 60k to 120k to 200k steps under a horizon-free exponential-decay schedule traces $0.1449 \rightarrow 0.1377 \rightarrow 0.1361$ (two-seed means), i.e. a per-step value that falls $\sim 6 \times$ between the first extension and the second. The comparison that matters: the 88M/89-point model at its *full* 200k budget ($0.1355\text{--}0.1366$) still does not reach the 205M model at 60k ($0.1295\text{--}0.1331$). At this scale, *parameters beat steps*, which is the same verdict the corridor gave.

head	tier	s0	s1	s2	mean
no neighbours (gate)	576×8	0.589	—	—	0.5890
base55 (sunflower-55)	576×8	0.569	0.573	—	0.5710
ring-8@222 (base champion)	576×8	0.608	0.599	0.606	0.6043
big55 (sunflower-55)	768×12	0.621	0.621	0.622	0.6213
big34 (sunflower-34)	768×12	0.628	0.618	0.625	0.6237
xl55 (sunflower-55)	1024×16	0.664	0.663	0.664	0.6637
xl89 (sunflower-89)	1024×16	0.674	0.671	—	0.6725
xl144 (sunflower-144)	1024×16	0.681	0.676	—	0.6781
xl233 (sunflower-233)	1024×16	0.675	0.673	—	0.6739
<i>not a capacity change — same 88M tier, different input or objective</i>					
sun89, 60k steps	768×12	—	0.639	0.630	0.6345
sun89, 200k steps	768×12	—	0.639	0.630	0.6341
ring-8@222 (near-field)	768×12	0.646	0.661	0.661	0.6560
znoise, $\sigma=0.7$ (sun-55)	768×12	0.683	0.674	—	0.6785
<i>the composition — noise $\times$ input width, at the 205M tier</i>					
znoise $\times$ xl144	1024×16	0.722	0.725	—	0.7235
znoise $\times$ xl233	1024×16	0.725	0.723	—	0.7240

Table 5: **Rolled corridor AUC, per seed** — the reference table for the metric defined in §2. Every row is read from an evaluation whose gate head reproduced its pinned 0.643 exactly; the full per-horizon and per-channel outputs are archived per evaluation run (`ml-metrics` branch). The upper block is the capacity ladder at fixed input. **The middle block is the result that reorders this section:** neither row is a capacity change, and both beat the tier they belong to — input noise by +0.057 and near-field geometry by +0.035 over the same 88M model, with the *noised 88M* model beating the *clean 205M* one outright. **The bottom block is what happens when the two are composed**, and it holds the best numbers in the programme by a margin larger than the gap between the top of the capacity ladder and its second rung: 0.7235/0.7240 against 0.6785 for noise alone and 0.6781 for width alone. The two noised rows sit 0.0005 apart across a $1.6\times$ change in input width — which is the finding of §8.5, in one line. The clean xl233 row is now a completed pair: its seed-0 partner, lost at first to a truncated checkpoint upload, was retrained and rolled, and the two seeds read 0.67492/0.67292 — a spread of 0.0020, the tightest of the five pairs at this tier, and a mean 0.0042 below xl144. The base-scale geometry table behind the ring-8@222 row is Appendix A.

Where width really stops. Combining the widest inputs with the largest head settles the width question on the forecast axis and re-opens it on the roll. At 1024×16 and 200k steps, 89 and 144 points give forecast ratios of 0.12362/0.12158 and 0.12358/0.12146 — paired differences of -0.00004 and -0.00012 , roughly $17\times$ inside the seed spread. On the one-step scoreboard width is *finished* at 89 points, and we said so.

The corridor disagrees, and it is the scoreboard that matters. Paired by seed, xl144 rolls at 0.68067/0.67558 against xl89’s 0.67433/0.67058: +0.0063 and +0.0050, same sign at both seeds, and the ladder $0.6637 \rightarrow 0.6725 \rightarrow 0.6781$ across $55 \rightarrow 89 \rightarrow 144$ points is monotone with no visible flattening. The effect is comparable to the tier’s own seed spread (0.004–0.005 here, against the 0.001 we measured at xl55), so we read it as consistent and suggestive rather than decisive — but its *direction* is not in doubt, and it is the opposite of what the forecast ratio predicted. **The decision this reverses is a concrete one:** a previous revision concluded from the forecast axis alone that a 233-point stencil should not be built. That conclusion is withdrawn. Saturation on a one-step metric is not evidence of saturation under iteration, and this programme has now made that mistake in both directions — E-010 closed the capacity axis in a regime that could not exercise it, and E-032 closed the width axis on a scoreboard that could not see it.

The 233-point rung, and where the ladder actually stops. The stencil that decision built has now been rolled at *both* seeds, and it answers the question against the extrapolation. xl233 rolls at 0.67492/0.67292 — pair mean 0.6739, seed spread 0.0020 — against xl144’s 0.68067/0.67558, mean 0.6781. Paired by seed the difference is -0.0058 and -0.0026 ; on the means it is -0.0042 , where the $+0.005/\text{rung}$ trend predicted ≈ 0.683 . **On the clean arm, width beyond 144 points buys nothing measurable.** That is what the pair licenses and it is deliberately not more. The -0.0042 is about

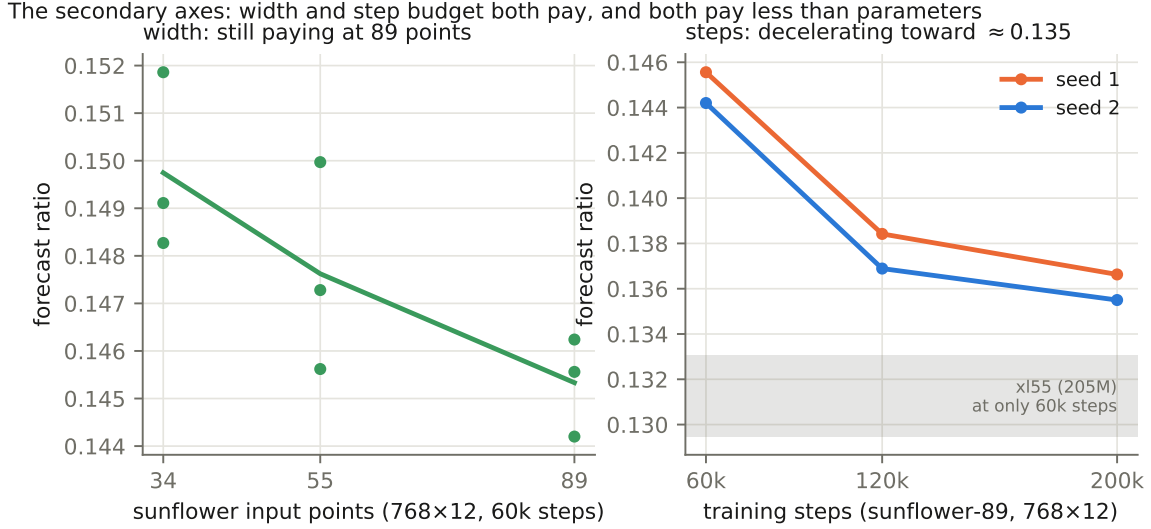


Figure 9: Left: input width at the 88M tier — the forecast ratio improves by ≈ 0.002 per Fibonacci rung and has not saturated at 89 points. Right: step budget at 89 points — the first 60k-step extension buys -0.0072 paired, the second (80k steps) only -0.0016 ; the trajectory is bending toward ≈ 0.135 , and the 205M tier at 60k steps (grey band) remains out of reach of the 88M tier at any step budget measured.

twice the sd this tier’s replicate record assigns to a difference of two paired means (0.0021 pooled, 7 dof): enough to exclude $+0.005/\text{rung}$, which is the hypothesis that was on the table, and not enough to say that width *hurts*. The ladder $0.6637 \rightarrow 0.6725 \rightarrow 0.6781 \rightarrow 0.6739$ across $55 \rightarrow 89 \rightarrow 144 \rightarrow 233$ points stops climbing at 144, and the earlier $n=1$ reading of this rung — which could distinguish flat from $+0.005$ but not flat from slightly down — is retired in favour of the pair.

The confound this arm was designed to exclude does not apply. Slot occupancy was measured before dispatch and is scale-invariant across a $7\times$ range of point counts — 47.6%, 47.4%, 47.1%, 47.0% and 46.9% of corridor slots resolve to live ocean at 34, 55, 89, 144 and 233 points — so a null at 233 cannot be read as “the window ran out”. More points bought proportionally more live input, as at every rung below, and bought nothing. Width and window have not become the same axis; width has simply stopped paying.

Both axes, rolled at 88M. The same split appears one tier down (gate 0.643, five of five heads). **Width does roll:** at the 88M tier, 89 points give corridor AUC 0.6345 against 0.6213 for 55 and 0.6237 for 34 — $+0.013$, several times the tier’s ± 0.005 seed spread, and in the same direction as the forecast axis. **Steps do not.** Paired by seed, the 200k arms roll at 0.63867 and 0.62958 against the 60k arms’ 0.63883 and 0.63017: differences of -0.0002 and -0.0006 , both *negative*, both an order of magnitude inside seed noise. Three and a third times the training compute bought a decisive -0.0088 on the one-step forecast and *nothing at all* on the twelve-month roll.

The per-horizon breakdown says why, and it is not a flat null. The 200k model is *better* than the 60k model at short range (seed 1, $h=1$: 0.761 vs 0.756) and *worse* at long range ($h=9$: 0.602 vs 0.607), with the crossover near $h=5$; the extra training sharpened the one-step mapping at the cost of its behaviour under iteration, and the corridor’s flat average is those two effects cancelling. That is the same trade the noise experiment of §8.6 attacks from the other end — deliberately *worsening* the one-step fit to buy iteration robustness, and gaining $+0.057$ for it. Extra steps are the anti-noise intervention, and the roll prices them accordingly.

8.5 Noise $\times$ width: one axis carries all of it

Every axis in §8.4 was measured alone. Composing the two that appeared to pay — input noise and the widest stencil, at the largest capacity — produces the programme’s best rolled numbers, and a sharper result than the one we expected: across the full 2×2 , *noise carries the entire gain and width contributes*

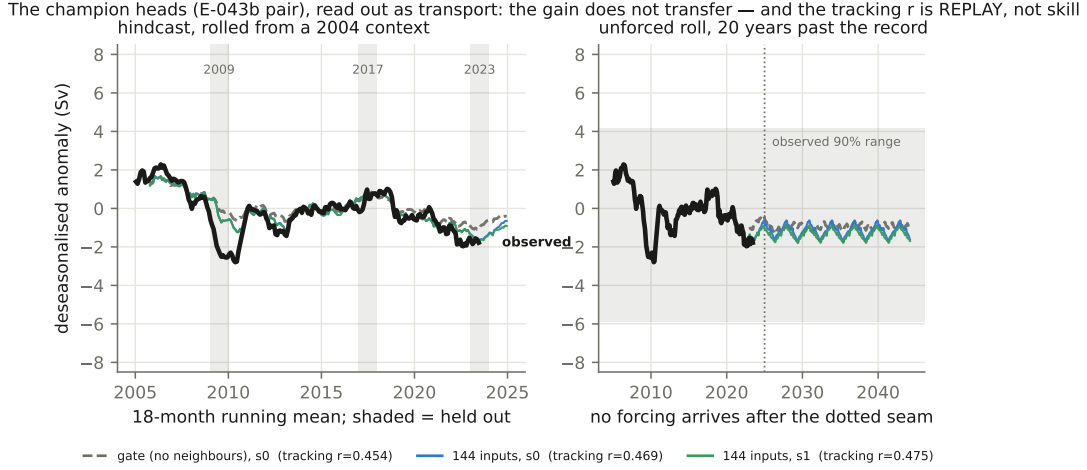


Figure 10: The AMOC read-out of the *champion* heads — the E-043b no-longitude-holdout pair, the best rolled configuration on record (corridor AUC 0.93733/0.93758, both seeds shown) — against the frozen no-neighbour gate. (The frontier pentad head of §10.3, one-step 0.0330, has no roll yet; this figure shows the best heads that *have* been rolled.) Left: hindcast from a 2004 context, with the three never-trained years shaded. **Those columns are not a test, and the legend’s r is not a skill number:** §9.2 rolls this configuration from six context ends spanning a decade and finds the tracking correlation *flat* in lead time and the post-record peaks pinned to fixed calendar months whatever the starting state. The whole left panel — shaded columns included — is trajectory replay, and its r is relabelled here as replay tracking: it measures how completely the head has memorized the record, not how well it forecasts. Right: twenty years of unforced roll past the end of the record. The flatness on the right is the finding, not a forecast: with no wind or heat-flux forcing after the seam, the learned dynamics relaxes toward climatology and stops moving, which is a damped attractor rather than a quiet ocean — and §9.2 adds that what residual motion there is repeats on an integer number of years. Interactive version, with the per-arm table, at blauewelt.github.io/earth/ml/paper/figs/amoc.roll.html.

nothing.

input	clean	noised ($\sigma=0.7$)	Δ noise
sunflower-144	0.6781	0.7235	+0.0454
sunflower-233	0.6739	0.7240	+0.0501
Δ width	−0.0042	+0.0005	

Table 6: **The 2×2 , rolled corridor AUC.** Both rows at 1024×16 , 200k steps, same schedule; every cell is now the mean of two seeds. The noise column is +0.045 to +0.050; the width row is −0.004 and +0.0005. The interaction term — whether noise pays *more* at greater width — is +0.0047, at the scale of the seed spread it would have to clear.

Table 6 is the whole experiment, and every cell of it is a seed pair. Noise buys +0.0454 at 144 points and +0.0501 at 233; width buys −0.0042 clean and +0.0005 noised. The interaction term is +0.0047, which is the size of the seed spread it would need to exceed, so we do not claim it. Read across the noised column instead: 0.7235 and 0.7240, five ten-thousandths apart, across a $1.6\times$ change in the number of input points. **Once noise is on, the stencil width stops mattering entirely.**

A correction, recorded. On the 233-point pair alone this section claimed a *compounding* interaction — that noise paid where width had just stopped paying. The 144-point pair, evaluated a few hours later, shows that reading was an artifact of having one cell of a 2×2 : noise pays the same amount at both widths, so there is nothing for width to compound with. The claim was wrong in the direction this programme is most prone to, and §13 keeps the general form of the lesson: a single arm of a factorial design licenses a main effect and never an interaction.

The comparison is as clean as this programme gets: *same* seed, *same* 1024×16 head, *same* 233-point

sunflower input, *same* 200k steps under the same schedule, differing in one flag. Both arms are now two-seed, so the 233-point comparison pairs seed-for-seed twice over: $\sigma=0.7$ noise rolls at 0.72517/0.72292 against the clean arm’s 0.67492/0.67292 — **+0.0503** at seed 0 and **+0.0500** at seed 1, the same number to three decimals, and ten times the largest seed-pair delta measured anywhere at this tier (0.0051). Each pair is itself tight (0.0023 noised, 0.0020 clean). The 144-point pair reads 0.7220/0.7250 against a clean 0.6781: +0.045, the same effect at a different width.

Two reference points make the size legible. Noise alone at 88M reached 0.6785; width alone at 205M reached 0.6781; the composition reaches **0.7235/0.7240**. The whole capacity ladder, from the no-neighbour gate to the widest clean model, spans $0.589 \rightarrow 0.678$; one flag, applied at the top of it, adds more than half that span again.

The effect is also strikingly *constant*. Input noise bought +0.057 at 88M on a 55-point stencil, +0.045 at 205M on 144 points and +0.050 at 205M on 233 points — a spread of 0.012 across a $2.3\times$ change in capacity and a $4.2\times$ change in input width. Whatever exposure bias costs this architecture, it costs about the same everywhere we have looked, and correcting it returns about the same everywhere. That is a more useful shape than a compounding one: it makes noise a fixed dividend available at any point on the ladder, rather than a reward for having climbed it.

horizon h	clean (mean)	noised (mean)	Δ
1	0.775	0.769	−0.006
2	0.730	0.747	+0.017
4	0.692	0.730	+0.038
6	0.665	0.722	+0.057
8	0.651	0.717	+0.066
10	0.635	0.707	+0.072
12	0.627	0.701	+0.074

Table 7: **Where the noise gain lives.** Corridor MSSS against climatology by horizon, for the 233-point 205M arms with and without $\sigma=0.7$ input noise. Both columns are two-seed means. The noised model is *worse* at one step and better at every horizon after, with the advantage growing at every horizon shown and reaching +0.074 at a year (its maximum over all twelve is +0.077, at eleven months). This is the exposure-bias signature stated as a prediction in §8.6, measured: noise buys stability under iteration and pays for it in one-step accuracy.

Table 7 is the mechanism. The noised model is *behind* at $h=1$ by 0.006 and ahead at every horizon thereafter, and the gap widens across the table — +0.017 at two months, +0.038 at four, +0.074 at a year. Nothing about that shape is a better one-step mapping; it is a model that degrades more slowly when fed its own output, which is exactly and only what the intervention was designed to produce. The prediction registered in §8.6 was that noise would cost the forecast ratio and buy the roll. It costs 0.006 on the one-step corridor and buys 0.074 at twelve months.

It also settles a sequencing question that was left open deliberately. A σ sweep was judged not worth running until it was known whether noise still paid at 205M, on the grounds that $\sigma = 0.7$ was set from the model’s own measured one-step error and never tuned. It pays, at the top of the ladder, at a size no capacity increase has matched — so the sweep is now the obvious next experiment, and the untuned value it starts from is already the best configuration this programme has.

The honest caveat. σ was set from the *clean* model’s one-step error. The noised model’s error is larger, which means the value that was self-consistent at 88M is not self-consistent here, and the direction of the mismatch is unknown. The composition is measured; its optimality is not claimed.

What the corridor gain does *not* buy. Fig. 10 rolls these same two arms out as transport, and the result is a caution against reading corridor AUC as AMOC skill. Over the three held-out years the no-neighbour gate reads $r = +0.45$, xl89 reads +0.44/+0.39 and xl144 reads +0.42/+0.35 — if anything a mild *decline* with the input width that gains most on the corridor, and a seed spread (0.05–0.07) that swamps every difference between arms. The corridor ranking does not transfer to the transport read-out at all.

§8.5 sharpens this to the point of discomfort. The noised 233-point arms gain +0.050 corridor AUC over their own clean control — the largest single effect in the programme — and their banded transport

correlations are 0.460/0.352/0.451 and 0.457/0.341/0.422 against the clean arm’s 0.460/0.350/0.443: equal at short range, equal or slightly worse at long. The *no-neighbour 32M gate*, which rolls the corridor at 0.589 and sees no neighbourhood at all, still reads the best transport bands of any head evaluated (0.470/0.375/0.492). A +0.135 spread in rolled field skill produces no ordering whatsoever in transport. Whatever the corridor is measuring, twelve months of it is not the overturning. Two readings are available and we cannot yet separate them: the corridor scores the model’s own input fields where the transport probe scores a thin integral of them, so the gain may be real and simply not where the probe looks; or the wide arms are winning the corridor on fields the transport does not depend on. Either way, §13(6) stands unchanged, and the bridge from rolled field skill to transport skill at range remains the programme’s open problem rather than something scale has quietly solved.

8.6 Exposure bias: two mechanisms under test

The audit’s finding — errors that compound under iteration — suggests the classic exposure-bias remedies, and two are under test. *Input-noise training* adds Gaussian noise to the input embeddings at the model’s own measured one-step error scale ($\sigma = 0.7$ z -units), so training-time context statistically resembles roll-time context; as predicted it *costs* one-step forecast (0.1548/ 0.1539 vs. the clean tier’s 0.1476). Whether it buys the roll was open when this section was first written and is now answered: §8.5 measures +0.050 corridor AUC at the 205M tier, paired at both seeds, with the gain confined to $h \geq 2$ and reaching +0.074 at twelve months. This is the one exposure-bias mechanism the programme has confirmed. *One-hop wide unroll* exploits a dependency-cone observation: to train through one step of self-generated context at stencil width S , one does not need to roll the whole ocean — only the S input pixels of the next step, each of which is exactly a depth-1 prediction from its own observed window. This is implemented (detached depth-1 forwards over the slot pixels, an assembled $t+1$ window, a differentiable second step against Z_{t+2} at half weight) and verified by alignment tests; its first two arms were stopped mid-run by an operator decision after the measured step cost came in at $8.5\times$ the clean model (gather-dominated), and the checkpoint state is preserved for a decision on resumption. *That* mechanism has still produced no rolled verdict and remains falsifiable against the clean 88M tier’s corridor AUC of 0.6213. (An earlier draft of this sentence said “neither mechanism”, which contradicted the paragraph above it; the noise arm is answered and the unroll arm is not.)

The dose does not travel across cadences. $\sigma = 0.7$ was set from the monthly model’s measured one-step error, i.e. as a fixed *fraction* of the one-step persistence scale ($0.398\times$). §10.4 carries that fraction across to five-day cadence, holding the relative dose constant to within a thousandth — and the one-step ratio goes to 0.8145 from a control of ≈ 0.505 , having passed through worse-than-persistence mid-run. So the relative-dose formulation, which is what made $\sigma = 0.7$ look like a constant of the architecture rather than of the monthly regime, is refuted the first time it leaves that regime. Whatever noise the pentad roll needs must be sized from the pentad model’s own error.

8.7 The dependency cone, and what every rolled number assumes

A stencil head predicts a pixel from its S neighbours, so a two-step prediction depends on the neighbours’ neighbours, and the set of pixels an h -step prediction depends on — its *cone* — grows by the stencil’s reach every step. At 4444 km that is 4444 h km against Earth’s 40,075 km circumference, so the cone wraps the planet within a few steps while our window is a basin. The evaluator already rolls every one of the 84,405 window ocean pixels, which is the most it can do; the question is whether the window is large enough.

Measured rather than argued (pure geometry over the real neighbour table, seeded from the RAPID section): for the 144-point sunflower the cone covers 26.9% of the window at $h=1$, 99.5% at $h=2$ and **100% at $h=3$** , after which **$\sim 50\%$ of every step’s requested neighbours resolve to land or off-window**. The near-field ring-8@222 reaches only 30.7% of the window by $h=12$ with 4.8% of its demand unmet — so it is *reach*, not slot count, that escapes.

This is not an error: dead slots are encoded as zero in training exactly as in evaluation, so no number here is invalidated. But it means every rolled result in this report carries a boundary condition we had not stated — **the world outside the window is held at its climatological mean** — and that the fraction of a model’s input owned by that assumption grows with its reach. §8.1 adds the second boundary condition of the same kind, on the other side of the input: a quarter of the pixels

these numbers are averaged over lie in a longitude block no stage of the model was trained on, and roughly half the stencil’s rolled advantage is earned there. Both caveats reward reach for the same reason, and neither was stated in the artefacts of the evaluations reported here. It is the most plausible single explanation for §8.8’s two surprises: a wide-and-far model rolls on a state that is half boundary assumption, a near-field one barely depends on the boundary, and input noise makes a model robust to exactly the kind of corrupted context the assumption produces. It also promotes a global tensor from a data-volume argument to a correctness requirement for long rolls at wide reach.

8.8 Standings

arm	tier	params	input pts	forecast ratio	corridor AUC
xl144 (200k)	1024 × 16	208.9M	144	0.12358/0.12146	0.6781
xl89 (200k)	1024 × 16	206.9M	89	0.12362/0.12158	0.6725
xl55 (60k)	1024 × 16	205.4M	55	0.1295–0.1331	0.6637
sun89 (200k)	768 × 12	89.7M	89	0.1355–0.1366	0.6341
sun89 (120k)	768 × 12	89.7M	89	0.1369–0.1384	—
sun89 (60k)	768 × 12	89.7M	89	0.1442–0.1462	0.6345
big55 (60k)	768 × 12	88.0M	55	0.1456–0.1500	0.6213
big34 (60k)	768 × 12	86.9M	34	0.1483–0.1519	0.6237
big-ring222 (60k)	768 × 12	—	8	0.1509–0.1557	0.6560
znoise-55 (60k)	768 × 12	88.0M	55	0.1539–0.1548	0.6785
base55 (60k)	576 × 8	34.1M	55	0.1738–0.1786	0.5710
ring-8@222 (base)	576 × 8	—	8	0.1848	0.6043
no neighbours (gate)	576 × 8	—	0	—	0.5890

Table 8: **Stage-2 standings, both scoreboards**, 16 August 2026. Forecast ratio ranges are seed min–max; corridor AUC is the seed mean, every value behind a passed gate; every evaluation the v6 draft of this table marked “in flight” has since landed and is included. The two scoreboards now *agree* at adequate capacity — the anti-correlation of Appendix A is confined to the 34M tier.

Table 8 is the current state of the programme, and the rolled column has just overturned the reading this section was drafted with. Capacity dominates the *forecast* axis and pays handsomely on the roll — both of those stand. What is no longer true is that capacity dominates *everything*: at a fixed 88M, adding Gaussian noise to the model’s own inputs is worth +0.057 corridor AUC and beats the 205M model, while a near-field 8-point stencil is worth +0.035 and also beats every wide-input arm of its own tier. The two cheapest interventions in the programme outrank its most expensive one.

The honest summary is therefore a rebalanced one. On one-step forecast, scale is the whole story and the axes are ordered parameters $\gg$ width $>$ steps. On the twelve-month roll, *robustness to the model’s own error* is at least as valuable as parameters; the ranking of input geometries does not follow the forecast ranking at all — the two scoreboards disagree again (§8.2) at a capacity where starvation cannot explain it — and the step-budget axis, worth −0.0088 on the forecast, is worth *zero* rolled (§8.4). Of the four axes measured at fixed 88M capacity, only two survive iteration: width, weakly (+0.013), and error robustness, decisively (+0.057). §8.7 gives what we think is the underlying reason. One qualification belongs on every corridor-AUC comparison in this table and is quantified in §8.1: about half of a stencil head’s rolled advantage over the no-neighbour gate is earned on the quarter of the window whose longitudes no stage of the model was ever trained on. The advantage is real and the ranking is unaffected — every arm here is scored on the same pixels — but part of what the stencil is being rewarded for is covering a hole in the model’s own coordinate input rather than forecasting the ocean — and §9.1 has since closed that hole for future heads, though not for the ones in this table. Of the three compositions this table’s v6 draft named as next, noise × 205M has been run and is §8.5; noise × near-field and the σ sweep have not, and the sweep now has a second reason to exist — §10.4 shows the untuned σ does not survive a change of cadence.

9 What the rolled numbers were measuring

Everything in §8 is a corridor AUC or a forecast ratio, and both are computed from a rolled state. This section is about two properties of that state which were not known when those numbers were produced.

The first is good news and closes a caveat this report has carried since v6. The second is not, and it withdraws a class of number.

9.1 Retiring the held-out longitude block

§8.1 located a band of collapsed skill at exactly 45°W – 25°W and identified it as the longitude block that `train.py --holdout-lon` withholds from training in both stages while the evaluation scores it anyway. §13(7) recorded the decisive experiment as un-run: retrain with the block returned and watch the band go. It has now been run, in two halves, because the holdout has two halves.

The codec half moves nothing. A fresh 40.7M monthly codec trained on all 481 columns — the anchor’s exact geometry with `--holdout-lon '0,0'`, so the training pool grows by exactly $4/3$ (40,514,400 train pixels against 30,376,800, verified against the run’s own log) — reads pooled k-fold RAPID $r = 0.613$ [0.493, 0.716], RMSE 2.20 Sv, against 0.627 for the tensor-matched anchor control. The difference is -0.014 , and it is not a result in either direction: the only codec-seed pair this programme has ever measured moved the same pooled ridge by 0.012, a re-build of the tensor on a different machine moved it by 0.004, and the whole $44\times$ capacity step from the pilot to the anchor was $+0.011$ and was logged as a null. This was the predicted outcome and it was predicted from a measurement: the retrained decoder audit of §10.5 already put the codec’s reconstruction error on held-out longitudes at 1.43% against 0.85% on trained ones, i.e. the representation crossed the block essentially intact. The band was never a stage-1 failure. It is also, and this is the honest gap, a codec with *no unpooled read-out at all*: its dispatch inherited the head probe’s off-by-default flag, so the one instrument §5 calls the verdict was never run on it. Table 4 shows that as a dash rather than filling it with the pooled figure. We note in passing a code gap the attempt exposed: no pooled k-fold result in this programme’s history is paired-testable, because the k-fold script computes its per-month predictions and then writes only the summary. Two kilobytes per target would fix every future comparison.

The stage-2 half moves everything, and then stops being readable. The clean test resumes the *existing* frozen anchor — so the codec, the embeddings and the byte-identical embedding cache are held fixed — and opens only the stage-2 training pool to all 481 columns, at the xl144 configuration of Table 5. Trained at two seeds and rolled beside the frozen gate (which reproduced its pinned 0.643 both times, the twentieth and twenty-first such reproduction):

corridor AUC	trained lon.	held-out lon.	gap
all-longitude pool, seed 0	0.93933	0.93283	0.0065
all-longitude pool, seed 1	0.93933	—	—
xl144 control, seed 0	0.86700	0.22058	0.646
xl144 control, seed 1	0.86808	—	0.667
frozen gate head (same run)	0.80425	0.05767	0.746

The hole is gone. A gap of 0.65–0.75 between the longitudes a head trained on and the ones it did not becomes 0.0065, and the two seeds agree on the trained-longitude figure to every digit the artefact stores (all twelve per-horizon values identical). That is the one claim in this subsection that nothing below qualifies, and it retires §13(7)’s decisive experiment: the band was a stage-2 coordinate-extrapolation failure, and returning the columns to the stage-2 pool removes it. It also means the 48% of stencil advantage §8.1 located inside the block was, as suspected, largely payment for covering a hole in the model’s own coordinate input.

Why the level beside it is not quotable. 0.93933 is the largest rolled number this programme has produced and it does not go in the standings. Four measurements, in the order they were made:

(i) *The skill does not decay with lead time, and nothing else in the archive does that.* Corridor MSSS at $h = 1 \dots 12$ runs 0.940, 0.939, $\dots$, 0.936 — a fall of 0.004 across a year, where the matched control falls 0.124 and the frozen gate 0.192. Anomaly correlation is flat at 0.966–0.970 and the amplitude ratio at 0.933–0.954, where the control decays $0.883 \rightarrow 0.751$. An anomaly correlation of 0.97 over 29,627 North Atlantic pixels at a twelve-month lead is not a skill this programme has any basis to expect.

(ii) *The one-step value is honest; the eleven steps after it are the anomaly.* The $h = 1$ figure is reproduced from the training run’s own channel-space error on both sides of the comparison (predicted 0.935, measured 0.940; the control predicts 0.769 and measures 0.774). So the roll does not disagree with the training. What differs is compounding: the control’s error grows $1.55\times$ over twelve steps and this head’s grows $1.07\times$.

(iii) *The gain includes channels the model cannot forecast.* Wind stress is an external forcing field that arrives from an atmospheric reanalysis and is not predicted by anything in the ocean state; at $h = 12$ it reads 0.935 here against the control’s 0.810. Every channel rises and every channel flattens. A capability gain from a third more training pixels does not have that shape. (An earlier draft called the gain *uniform*; it is not — across 39 channels it spans $+0.055$ to $+0.467$ at $h = 12$ — and the sentence is corrected here rather than dropped.)

(iv) *No transport read-out moves at all.* The banded transport correlations are 0.483/0.380/0.498 against the control pair’s 0.476/0.355/0.437 and 0.430/0.243/0.318: every one of them inside the pair’s own spread, which the replicate record prices at a pooled sd of 0.041. The head’s own pooled RAPID k-fold sits *below* both controls (0.389 against 0.437/0.429), which is well inside that read-out’s noise and is therefore not evidence of harm — but it is emphatically not corroboration of a $+0.072$ skill gain either.

Two alternative explanations were bought and both died. Re-rolling a *known* head on the new evaluation code reproduced its archived record to every stored digit, which clears the instrument. And rolling this head’s own step-600 milestone — identical geometry, identical seed, identical scope split, 600 optimizer steps instead of 200,000 — gives corridor 0.0297 with a *monotone* decay $0.179 \rightarrow -0.068$, which kills the structural reading: whatever produces the flat profile was acquired over 200,000 steps of all-longitude training. What is left is not a code question and not an instrument question. §9.2 is what it is.

9.2 Calendar replay: the long rolls are not forecasts

Every rolled evaluation in this report also produces two long trajectories: a hindcast rolled from a 2004 context across the whole record, and an unforced roll twenty years past its end (Fig. 10). v6 reported the hindcast’s correlation with observed transport as a weak skill number and read the flat future as a damped attractor. The first of those readings is now withdrawn.

The observation that started it. Every head’s unforced future mode-locks to an integer number of years. The frozen gate locks at 12 months. The all-longitude pair of §9.1 locks at exactly 36.0 months — peaks at November 2027, $+36$, $+36$ — *phase identical on both seeds*, with an autocorrelation of 0.85 at lag 36 and ≈ 0 at 35 and 37. A twelve- or thirty-six-month period in a rolled ocean is not by itself damning; the calendar is a genuine input, through the season token. But from one starting context it admits two readings: the phase belongs to the calendar (replay), or the phase is *selected by the state* (a dynamical mode with a preferred period). Those differ in a testable way.

The test. Roll the same two heads from six different context ends — 2004-12, 2014-12, 2018-09, 2020-06, 2022-03, 2024-03 — and ask what changes. Under the dynamical reading, six different initial states spanning a decade should place their peaks differently. Under replay, they should not. Two signatures came back, and both are the replay branch:

- **The post-record peaks are pinned to the calendar.** From every one of the six context ends the smoothed trajectory peaks at November 2027, November 2030, November 2033, and so on. Six initial states, one attractor branch, the same months.
- **The within-record tracking correlation is flat in lead time.** Rolls launched from 2014-12, 2018-09, 2020-06 and 2022-03 track the subsequently observed record at $r = 0.70, 0.68, 0.70, 0.71$. A ten-year-old context “forecasts” 2023 exactly as well as a fifteen-month old one. **Genuine forecast skill decays with lead. Replay does not.**

A third measurement closes the architecture off as an explanation: the xl-tier stencil head and the frozen one-pixel gate head — which share no input geometry, sit two capacity tiers apart, and differ more than sixfold in parameters — correlate 0.93 with *each other* over the 2004-context hindcast (0.91

on held-out months), against 0.79 and 0.47 with reality. Two very different models agree with one another far more than either agrees with the ocean, which is what two readings of the same memorized trajectory look like.

What this retires, and what it does not. The long hindcast’s tracking correlation is trajectory replay: the training record is embedded in the learned dynamics and the rolled state indexes it. Every archived *long* r — including the ones in Fig. 10’s legend and the 0.79/0.47 quoted above — is withdrawn as a forecast number and reported only as replay tracking. This reproduces at 205M scale, with a cleaner instrument, a finding this programme first made at small scale and had insufficiently generalized: that the twenty-year fan’s hindcast skill was memorization.

The scope of the withdrawal is the *long* rolls. The twelve-month scored blocks — the corridor AUC of §8 — are a different instrument: truth-anchored starts, scored against held-out years, with the two diagnostic controls of §9.1 behind them. But they inherit a caveat this finding sharpens, and it is stated here because it applies to every rolled number in this report: a stage-2 training window may *look at* held-out months as context, by documented design, so held-out-year skill on trained pixels is a softer claim than the words “held out” suggest. Read together with §9.1(i)–(iv), the most economical account of the 0.939 is that an all-longitude head has memorized the record more completely than a hole-carrying one, and that the corridor at twelve months is measuring how well it can recite it. That account is not proven — it is the reading with the fewest moving parts.

What would still rescue a dynamics reading. A mode that is real but weak would phase-lock to the calendar through the season token while still carrying state information in its *amplitude*. The falsifier is ensemble dispersion under context perturbation, and it has not been run: the replay reading already explains every observation with fewer parts, and buying a test for the more elaborate one is not the best use of the next GPU-hour.

10 Cadence: what a five-day step costs

Everything above runs on a monthly axis. The obvious way to a better ocean forecast is a finer one — a 5-day step should let the forecaster carry structure a 30-day step integrates away — and the pentad and daily tensors of §3.3 were built for exactly that. This section is what happened, and the headline is that finer is much harder, in a way that is now measured rather than suspected. Every number below is on the *pentad* tensor (5-day bins, $T = 3142$, the 40-channel r2 channel set), through a purpose-trained 38.0M pentad codec at $d_z = 32$, under the same 1024×16 xl144 head with input noise that tops the monthly standings. The codecs involved sit in two inventories: those that have returned a number are the bottom block of Table 4, and those still training or specified but not yet dispatched are Table 9.

10.1 The one-step ratio, and the roll

The pentad stage-2 head was trained twice, and it is one of the few configurations in this report whose headline number is pair-backed rather than single-seed. Both seeds reach 200,000 steps with gradient clipping at 128 (without it the arm diverges at 28k, which is its own small result), and the one-step forecast ratio reads **0.50560** and **0.50447**: $|\Delta| = 0.00113$. That level is therefore quotable. It is also enormous. The same instrument at monthly cadence on the same architecture reads ≈ 0.032 ; a pentad model’s one-step error is *half* of the no-change forecast’s, where a monthly model’s is a thirtieth.

Why, and it is not the head. The run measured its own embedding scale for the first time: $z_{\text{rms}} = 5.178$ against a one-step change of $\sqrt{\text{MSE}_{\text{pers}}} = 4.631$, a ratio of 0.894. For a stationary series $E[(z_t - z_{t+1})^2] = 2\sigma^2(1 - \rho)$, so a one-step change $0.894 \times$ the size of the field itself implies a five-day lag-1 autocorrelation of $\rho \approx 0.60$. **The pentad embedding sequence substantially decorrelates in five days.** The monthly and pentad ratios are answers to different questions and must never be quoted as a ladder — a fact this report states because its own v6 draft of this paragraph did exactly that.

The roll compounds it into collapse. Rolling that head 365 days forward — 73 autoregressive steps, day-matched to the monthly archive’s twelve — gives a corridor AUC of **−0.499**. Not worse by

a band: *negative*. The rolled forecast’s mean squared error exceeds climatology’s by about half over the year, where the monthly all-longitude pair reads +0.939 on the same scope definition. Window scope reads −0.352 and the gate scope −0.365; the raw 73-lead average is −0.492 and is quoted only beside the day-matched form. The long roll collapses the same way (replay tracking 0.256, amplitude 0.304, against 0.79 and 0.74 for the monthly heads). The arithmetic is coherent: six times as many steps, each injecting an order of magnitude more relative error. This is $n = 1$ — no second pentad roll exists — but the gap to refute is 1.44 AUC and that is not a seed-band question.

One thing the two headline AUCs do *not* share. All 32 Argo temperature and salinity channels scored as missing in the pentad roll, because `rg_*` is a monthly product written into exactly one pentad bin per month (252 of 3142 bins, 8.0%) and absent — not sparse — everywhere else. So −0.499 is an eight-channel weather score while +0.939 averages 39 channels dominated by persistent deep density. That does not rescue the comparison: restricting the monthly heads to the same eight fast channels still reads 0.925/0.926. The composition difference is real, it must be stated whenever the two numbers appear together, and it is not the explanation.

And on the transport read-out the codec loses to its own controls. §7.3 reported, on the `r1` pentad tensor, that a frozen monthly representation, a purpose-trained pentad one and no representation at all land within 0.011 of each other once the read-out sees unpooled section pixels. The `r2` baseline codec sharpens that into something less comfortable. Read through the identical unpooled head over the identical 1,459 pentad transport bins, run-415 scores 0.659 [0.598, 0.716] — against **0.693** [0.633, 0.746] for the same head fed *raw* 3×3 section data with no codec anywhere in the path, and **0.690** [0.620, 0.751] for the same head fed nothing but wind stress. The codec is below both of its own matched bars. Its *pooled* figure (0.637) sat below a pooled bar too, but that comparison was between two blunt instruments; this one is between the verdict instrument and the two controls that make it interpretable, and it is the same conclusion arrived at by a sharper route. The intervals overlap heavily and each cell is one seed, so what this licenses is a direction and not a level — and the direction is that at 5-day cadence this representation adds no transport information to the raw fields. Nothing about it is a statement on the codec’s job in §10, which is to make the state *attendable* so it can be rolled forward; that scoreboard has no raw-pixel entrant.

10.2 The cadence ladder, and the confound it carried

A factor of sixteen in a one-step error ratio is the size of effect that is usually a defect — some code path still assuming a monthly axis. The cheapest way to find such a path is to walk the axis, so the same head, the same frozen codec, the same embeddings and the same pixels were trained at four step sizes, varying only the stride at which the embedding sequence is sampled (Fig. 11, left):

step size	one-step ratio	how the states were selected
30 days (stride 6)	0.0721	the bin containing each month’s Argo anchor
30 days (stride 6)	0.0729	an Argo-free bin, the clean 8-channel regime
15 days (stride 3)	0.1620	
5 days (stride 1)	0.50560 / 0.50447	the pair above

Two things follow. First, **the ladder is smooth and monotone through three rungs**: no cliff, no non-monotonicity, and therefore no rung at which a hidden monthly assumption breaks. Second, **the pentad embedding is a sound monthly substrate**. Stepped at 30 days it lands squarely in the monthly class, and it does so whether the states are drawn from the 8% of bins that carry Argo or from the 92% that do not. The pipeline, the anomaly transform, the published embeddings and the head architecture are all exonerated at once.

What does *not* follow — though this report’s first reading said it did — is that the five-day difficulty is intrinsic to the step. The ladder above holds $K=24$ frames fixed while the stride varies, so **the context span co-varies with the step size**: the 30-day arm sees 720 days of history and the 5-day arm sees 120. “The step is harder” and “the head is starved of history” produce the identical monotone curve. The reader who caught the confound designed the factorial that separates them, and §10.3 reports it: the ladder was measuring the context axis almost entirely. The hierarchical repair the first reading

The K-fixed ladder, as first read — §the factorial shows its axis was really context span

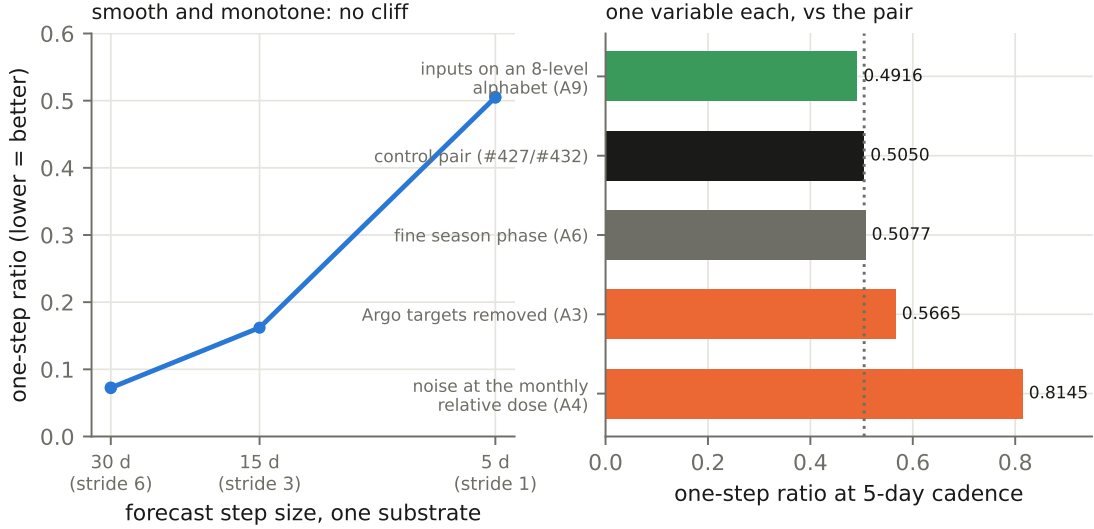


Figure 11: **Left: the cadence ladder.** One-step forecast ratio against step size, holding everything else fixed — same frozen pentad codec, same embeddings, same 1024×16 head with input noise, same pixels, 20,000 steps, each arm scored against its own persistence baseline. The two points at 30 days are the Argo-carrying and Argo-free bin selections. Smooth and monotone — but $K=24$ is fixed, so context span co-varies with the step, and §10.3 shows the span is what this curve is measuring. **Right: the component ladder at 5 days,** one variable per arm against the two-seed control (dotted). Rescaling the exposure-bias noise to the pentad embedding scale is catastrophic, removing the Argo targets makes training *worse*, a continuous season phase changes nothing, and only restricting the head’s inputs to an 8-level-per-dimension alphabet beats the control. Every arm is $n=1$ except the control, so these are directions; the control pair’s own $|\Delta|$ is 0.0011.

pointed at — roll at monthly stride *through* the pentad stack (§10.7) — survives, but for a different reason than the one first given.

10.3 The factorial: the ladder was measuring context, not step size

The confound is broken by completing the step $\times$ span factorial: hold one axis and move the other, in both directions, with everything else — codec, head, pixels, step budget, per-arm persistence baseline — exactly as in the ladder. Two cells were bought first because they were cheap, and each is a one-variable move from a cell already measured:

arm	moves	step	span	one-step ratio
control pair	—	5 d	120 d	0.50560 / 0.50447
A11	step only, vs the pair	30 d	120 d	0.5274
A2a/b	(the ladder’s far rung)	30 d	720 d	0.0713 / 0.0729
E-045.2	span only, vs the A8 rung	10 d	720 d	0.0804
A8	(the ladder’s 10-day rung)	10 d	240 d	0.3377
E-045.1	span only, vs the control pair	5 d	720 d	0.0820

Read the contrasts, not the rows. **Moving only the step size does almost nothing:** at a fixed 120-day span, 30-day steps score 0.527 against the 5-day pair’s 0.506 — the “easy” monthly cadence lands in the 5-day difficulty class the moment it is stripped of its long context. **Moving only the span does almost everything:** at a fixed 10-day step, restoring the span from 240 to 720 days takes 0.338 to 0.080, A2a-class. Figure 12 plots every arm against both axes: span organizes the ratio into one monotone family; step size organizes nothing. The white-innovation-floor account of the five-day regime is thereby weakened exactly where it was strongest — A2a’s model error is 2.0 on the same 30-day

The step x span factorial: the cadence ladder was measuring context, not step size

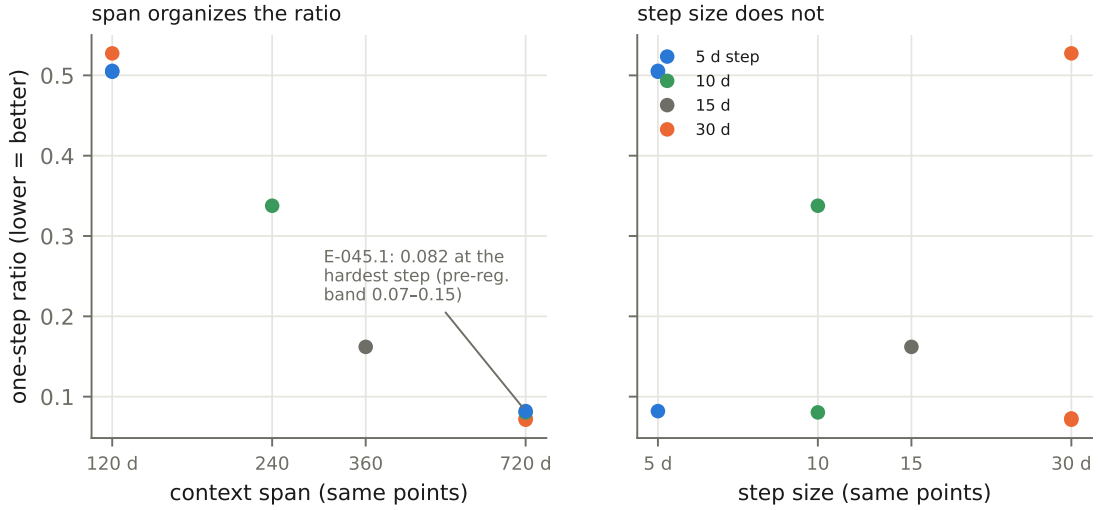


Figure 12: **The step $\times$ span factorial.** Every measured arm of E-044b/E-045, plotted twice: against context span (left) and against step size (right). Same points, same colors (step size). Span collapses the ratios onto one monotone family; step size scatters them. The decisive rung (E-045.1: 5-day steps at the full 720-day span) landed at 0.082, inside its pre-registered 0.07–0.15 band.

targets where A11’s is 15.1, so the content the first reading called irreducible is largely predictable *given long context*.

The mechanism candidate was registered before the remaining rungs ran: **the seasonal analog**. A 720-day window contains last year’s same-calendar frame; a 120- or 240-day window cannot. That is §9.2’s calendar-replay machinery in one-step form — the head reads the analog rather than integrating dynamics — and it made a sharp prediction for the decisive rung, on record in the experiment log ahead of the result: E-045.1 (5-day steps, $K=144$, the full 720-day span, so the analog is in reach at the hardest step size) would land near the 0.07–0.15 band if the context story is right, and near 0.5 if the step story is. **It landed at 0.0820** — inside the band, $6.2\times$ below the control pair at the identical step size and the identical held-out persistence denominator. The context account is thereby confirmed at the finest cadence the data supports: with the span held at two years, the one-step ratio is 0.071–0.082 whether the step is 30, 10, or 5 days — a flat line against the K -fixed ladder’s $0.07 \rightarrow 0.51$ cliff. (E-045.3, the 15-day interpolating rung, is unresolved for an infrastructure reason — its strided variant trains at CPU pace on both attempts — and its absence does not bear on the two completed contrasts.) A11 additionally moved span and frame count together (120 d $\wedge$ 4 frames), which the K -fixed-span rungs unbundle. Every cell here is $n=1$ (§5); the finding is the *pattern across six cells*, not any single level. The span contrasts are $4\text{--}7\times$ against a control-pair spread of 0.001.

What the factorial predicts for the roll, and the arm that tests it. The -0.499 of §10 was rolled from a $K=24$ head — five-day steps, so a *120-day* context span, which is precisely the configuration the factorial convicts: at that span even 30-day steps score 0.527. The context account therefore makes a sharp, falsifiable prediction about the roll itself: a pentad head with the full 720-day span ($K=144$) should roll materially better, and if its day-matched corridor AUC still reads E-044b-class negative, two years of context did not repair the pentad roll. That arm exists and has now finished training: the same 206.5M configuration at $K=144$ and the full 200,000-step budget, on the TPU tier of §11, its configuration certified by a same-geometry PyTorch twin at 20k steps (the 0.0820 decisive rung above, which is that twin). The reading order was pre-registered: the 12-month roll first — day-matched, on the trained-longitude corridor scope, against the monthly pair’s $+0.939$ and the pentad -0.499 — then the one-step ratio against the twin’s 0.0820, where a *flat* value was expected rather than disappointing ($K=24$ ’s own 20k $\rightarrow$ 200k curve was flat one-step). The one-step number has landed and the flat expectation is **refuted: 0.0330** (0.709/21.446), $2.5\times$ better than the twin — at $K=144$ the full budget buys what it never bought at $K=24$, making this the best pentad one-step on record and the first

evidence that budget and span *interact*. The roll — the decisive reading — is still owed and nothing here pre-judges it. Two qualifications are on record before that number. The roll is uncertified at pentad by construction — the frozen gate’s pinned reference exists only at monthly cadence, so the evaluator marks every pentad roll **certified: false** rather than inventing a reference — and the result will be $n=1$ on a training tier with no replicate band. And the named alternative if it fails has since been measured and eliminated: the fusion axis (§10.7) was the registered “missing ingredient elsewhere”, and its stage-2 verdict landed against fusion, so a negative roll here would leave the pentad-cadence programme without a registered repair candidate beyond the hierarchical fallback — roll at *monthly* stride through the pentad stack, for which the 0.0721 A2a head is already the trained object, keeping pentad steps for within-month detail rather than for the year-scale roll.

Where in the span the information lives: the stencil taken into the time dimension. The factorial says *that* span matters; it does not say *where* in the two years the information sits. The registered mechanism (the seasonal analog) makes a sharp prediction: if a 720-day window helps because it contains last year’s same-calendar frame, then a handful of frames pinned at $\Delta t \approx -1, -2$ years should recover the effect and most of the $K=144$ slab is redundancy. The stencil admits the test directly — its per-frame assembly takes the frame *times* as a parameter, so context frames can be placed non-uniformly in the past (the spatial sunflower’s far-heavy ramp, applied to the time axis) with the target step, the persistence denominator, and every parameter but the position table’s row count unchanged. Two \$0 measurements on the embedding field itself set the geometry first: the space–time cross-correlation ridge of the pentad z field sits at lag zero at every separation’s median out to 2,500 km — no single advection speed exists at that instrument, so the frames are placed by an agnostic ramp rather than an advective cone — and the centres’ own deseasonalized autocorrelation falls to 0.100 at 180 days then *rises* to 0.143 at one year and 0.113 at two: the analog is visible in the substrate itself, carrying anomaly information beyond climatology.

The first two arms have returned, each $n=1$ at 20k steps against the measured controls (0.5056/0.5045 at the uniform 120-day $K=24$; 0.0820 at the uniform 720-day $K=144$). **Sixteen frames — a dense recent month plus pins at one and two years — score 0.1858:** $2.7\times$ better than uniform $K=24$ at essentially the same frame budget, so the pins carry real span value, but well short of the pre-registered $\lesssim 0.12$ that would have confirmed the analog as the mechanism. **Twenty-four log-spaced frames over the full span score 0.1561:** coverage of the intermediate times helps, but at $1/6$ the frames it does not approach the slab’s 0.0820 either. Read together, the span effect is *distributed*: sparse skeletons recover 55–65% of it (in log-ratio terms) and the dense slab’s remaining $1.9\times$ is carried by the many intermediate frames that every sparse pattern skips. The redundancy hypothesis is at best half-right at this budget — and the mechanism story sharpens rather than closes, because two further arms are in flight as this revision is dated: a ten-year span (the first context beyond two years at any cadence in the programme) and a uniform 24-frame arm, registered before dispatch, that separates the *spacing* pattern from the sparse frame count. One danger is registered ahead of any roll from these heads: an analog pin is a lookup mechanism by construction, so the calendar-replay battery of §8 is mandatory before a roll number is quoted, and the evaluator refuses offset heads outright until an offset-aware assembly exists.

10.4 The component ladder: what breaks, one variable at a time

With the cadence localized, five one-variable arms were run at 5-day cadence against the two-seed control (Fig. 11, right). Each changes exactly one thing in the configuration that produced 0.5056/0.5045, and each is $n = 1$: at a cadence whose replicate record consists of the single pair above, these are *directions*, and none of them is a level. Three of the four resolved arms inverted their own hypothesis, which is why they are worth the page.

- **The monthly noise dose is fatal here** (0.8145, against 0.5056). Input noise at $\sigma = 0.7$ is the largest single effect in the monthly programme (§8.5), and it is calibrated as a *relative* quantity — $0.398\times$ the one-step persistence scale. Rescaled to the pentad embedding scale to preserve exactly that ratio (confirmed in-run at $0.3973\times$), it does not merely fail to help: it drives the one-step error to 0.81 of persistence, having passed through *worse than persistence* mid-run. The monthly relative dose is refuted as a transferable constant. The window between “helps the roll” and “drowns the one-step signal” is far narrower at five days, and any pentad exposure-bias noise must be sized from the pentad model’s own error rather than carried across.

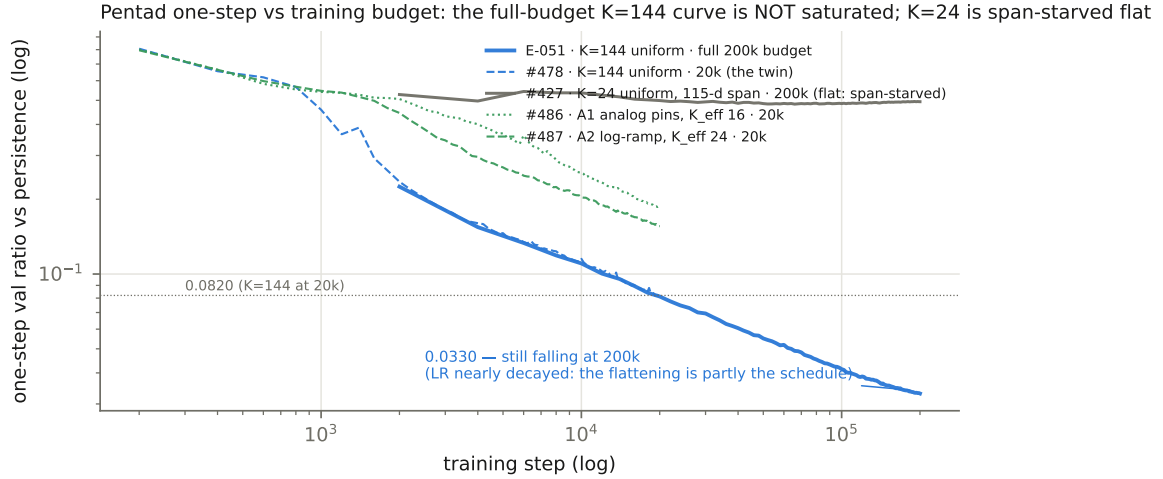


Figure 13: **Pentad one-step against training budget**, every curve the in-training validation ratio against the shared persistence baseline (21.44621). The full-budget $K=144$ head (E-051) is a clean power law to 200k with *no saturation* — and its terminal flattening is partly the LR schedule (half-life 40k, so the rate is $1/32$ of peak by 200k), not the model. The same budget bought $K=24$ nothing (0.506 $\rightarrow$ 0.494 over $10\times$ the steps: span-starved), which is the budget $\times$ span interaction in one picture. The sparse-time arms (A1, A2) track between. This figure is why the continuation and capacity arms (§10.3) are worth their price.

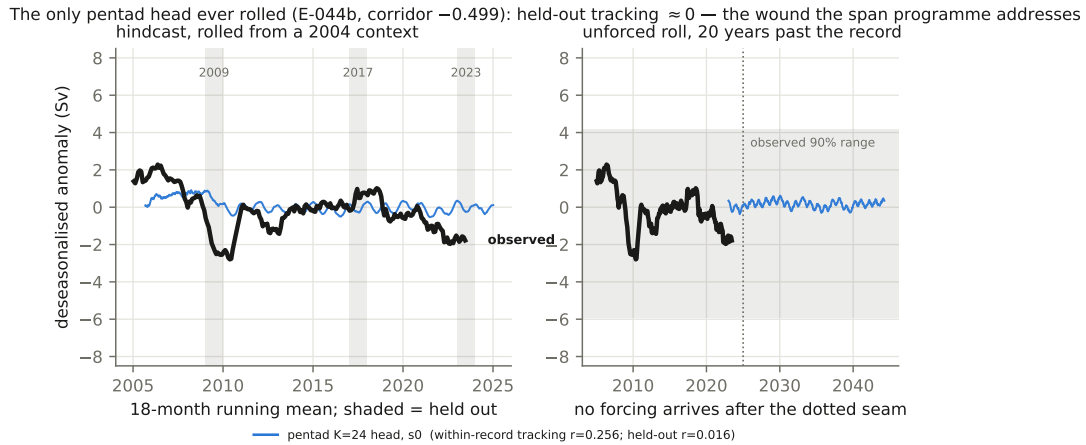


Figure 14: **The transport read-out of the only pentad head ever rolled** — E-044b's $K=24$, 115-day-span head, whose day-matched corridor AUC is -0.499 , below climatology. Its within-record tracking is 0.256 and its held-out-year tracking 0.016 — effectively decoupled from the observed series, the transport view of the pentad wound. The model curve is smoothed over the concatenated record+future series, so the prediction continues seamlessly across the end of the measurements. No frontier pentad head has a roll yet: E-051's (0.0330 one-step) is the registered decisive reading and the E-053 offset heads are refused by the evaluator until the replay battery and offset-aware assembly exist.

- **The Argo targets *stabilize* training** (0.5665). The hypothesis was the opposite: that scoring the head on the 8% of bins whose representation regime switches was the poison that made gradient clipping necessary. Excluding those targets makes the ratio worse and the gradient norm spike to 94.6 where the control settles at 2–3. The slow density channels are the part of the signal the head can actually predict, and removing them leaves it fitting weather.
- **The season-token staircase is not the problem** (0.5077, against a control mean of 0.5050). All six bins of a month share one integer-month season token, which is a genuine discretization; replacing it with a continuous fraction-of-year phase on the head side changes the one-step number

by about 2.4 control-spreads in the *wrong* direction, i.e. nothing. (Whether the same fix changes the calendar mode-locking of §9.2 is a separate question and needs a roll, which has not been run.)

- **Input quantization is the first arm to move it**, and it gets its own subsection below.

10.5 Copy reconstruction, and the Argo anchor

Before any of those arms, the pipeline itself was audited at zero GPU cost, because a factor of sixteen deserves a search for the trivial explanation. Three checks and one finding.

The anomaly transform reproduces the codec’s own recorded training loss to 1.7 standard errors, so the states being encoded are the states the codec was trained on. *The published embeddings* equal a local re-encode of the same bins to one `float16` storage ULP — against a control in which different bins differ by mean $|\Delta| = 4.478$ — which kills the wrong-codec hypothesis outright. *The round trip* is healthy: encoding and decoding at full visibility reads FVU 0.4–0.6% ($r = 0.997$) on the 92% of bins carrying only the eight fast channels, with held-out $\leq$ trained everywhere, so there is no memorization in the codec either.

The finding: 40 channels do not fit in 32 dimensions on the bins that carry Argo. On the 8% of bins that do, the fast channels’ reconstruction *collapses* — surface current speed loses 112% of its variance and sea-surface height 86%, both restored to 0.4–0.6% by hiding Argo from the encoder on the same bins and the same pixels — and the deep Argo channels themselves read 12–17% against the monthly $d_z=64$ anchor’s 6.9%, the direction and size that halving d_z while adding a channel predicts. So the sequence the head must forecast **switches representation regime every sixth step**, and the corridor scoring decodes through the lossy regime at exactly the rows where Argo truth exists.

The monthly anchor, for comparison, and what it costs. The same audit on the 40.7M monthly anchor at $d_z=64$ — the codec every number in §8 is built on, encoded and decoded at full visibility over the 265-pixel RAPID section and all 516 months — reads mean $r = 0.975$ per pixel and 0.979 pooled across 39 channels. Per channel group, as fraction of variance lost: surface winds 1.0–1.2%, sea-surface height 1.8% ($r = 0.990$, the best of the ocean channels), upper-ocean T and S to 700 dbar 2.1–2.3%, deep salinity 3.5%, and **deep temperature to 1900 dbar** 6.9% — three times the upper ocean, and the worst group in the tensor ($r = 0.938$ at 1900 dbar). It generalizes: held-out months and the held-out longitude block read within noise of trained (0.938/0.940/0.936 at 1900 dbar). The concentration is exactly adverse, because RAPID’s mid-ocean transport is thermal wind and thermal wind is the vertical integral of a density gradient — deep T and S . Pooling does not cancel it; the probe’s input genuinely lacks deep-density detail.

That deficit turned out to be *training emphasis* rather than an encoder tax. Retraining the decoder alone against the same frozen embeddings — z unchanged, so no probe and no head is disturbed — recovers most of it: a decoder *half* the production size reads 2.2% deep- T variance lost, and the durable 1536×3 replacement reads 0.85% trained, 1.90% on held-out months, 1.43% on the held-out longitudes. The information was in z all along; the masked-dominated objective simply never asked the decoder for it. (This is the measurement §9.1 used to predict, correctly, that returning the longitude block to the *codec* would move nothing.)

Fig. 15 puts all three codecs on one axis, which is the comparison §10.7 exists to make.

10.6 Input quantization

Of the five one-variable arms, one beat the control. Restricting the head’s *input* embeddings to an 8-level-per-dimension alphabet — three bits per dimension, straight-through gradients, targets left continuous — reads a one-step ratio of **0.4916** against the control pair’s 0.50560/0.50447. That is 0.0135 below the pair mean and about twelve times the pair’s own $|\Delta|$, with the in-training transport probe (0.677 [0.624, 0.725]) inside the control band, so nothing was traded away to get it. It is $n = 1$, so it is a direction and not a level; what it licenses is a decision, and the decision was pre-registered before the arm ran.

The reading is that at five-day cadence the head is not short of capacity so much as swamped by the resolution of its own input: an embedding coordinate carries more precision than the signal in it supports, and rounding it off costs nothing and helps. If that is right, the same alphabet belongs *inside* the codec’s bottleneck rather than bolted onto the head, which is finite scalar quantization. That

Full-visibility copy reconstruction: the monthly anchor loses 1-7%, the pentad codec collapses where Argo lands, and the month block cures that at a flat structural price

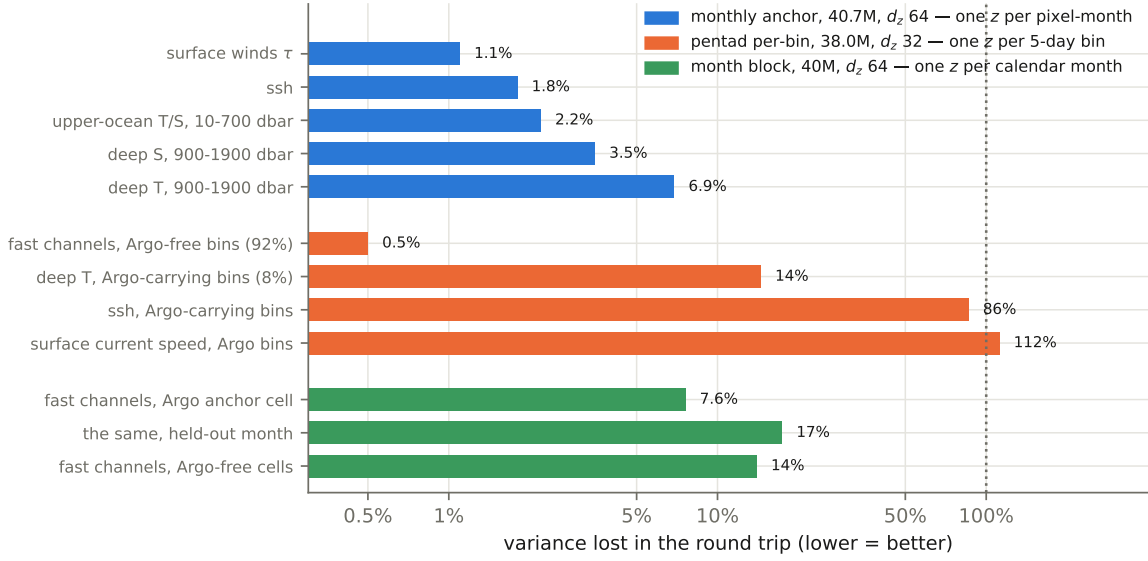


Figure 15: **What each codec’s round trip loses**, at full visibility — encode and decode with nothing masked and nothing forecast, so this is the representation tax alone. Bars are fraction of channel variance lost (rmse^2 in standardized units); the dotted line at 100% is the channel’s own variance, so a bar reaching it carries none of that channel and a constant would have done as well. The monthly anchor is orderly and loses most where the transport integral weights most (deep temperature, 6.9%). The per-bin pentad codec is near-perfect on the 92% of bins that carry no Argo and collapses on the 8% that do — 40 channels competing for 32 latent dimensions. The month-block codec cures that collapse at the anchor and pays a flat structural price everywhere else: one embedding per month is a genuine $\approx 4:1$ squeeze in time.

retrain — the same $L = 8$ lattice on all 32 dimensions of the pentad codec, one variable against the existing baseline — has now run to completion, and its pre-registered verdict landed on the strongest branch: the stage-2 head over the FSQ-trained codec’s z reads a 20,000-step ratio of **0.4394**, below the read-time-quantization arm’s 0.4916 and well below the continuous pair’s 0.5056/0.5045. Training *through* the lattice beats rounding at read time, which beats not rounding at all — the resolution story survives its strongest test. Two caveats travel with the number. It is effectively a seed pair by accident: the seed-0 attempt was cancelled when its trainer diverged fatally at step 15,800, and its last healthy reading (0.4395 at 15,600) matches the seed-1 completion to 10^{-4} . And the same two attempts measure a real cost: stage-2 training on this codec’s z is violently spiky — fifteen gradient-norm excursions above 10^4 across the two seeds, one above 7×10^5 , against *one* nonzero clipping event in 200,000 steps for each continuous control — and one of the two seeds died of it. The clipping mechanism of §10.2 absorbs these excursions when it can, but the lattice buys its forecast gain at the price of an optimization landscape that can kill a run. The off-pentad check also landed: the same lattice at half-month cadence reads 0.1692 against that rung’s 0.1620 (Table 10, A10) — the win is pentad-specific, consistent with the resolution reading, since coarser cadences have already averaged the excess precision away.

10.7 The month-block codec

The cadence ladder and the reconstruction audit point at the same repair from two directions: the monthly *step* is where the forecast works, and the once-a-month Argo bin is what makes the pentad representation oscillate. The month-block codec does both structurally. Its encoder reads a grid of 7×40 *cells* — up to seven pentad bins by forty channels — and emits one embedding for the whole calendar month, with learned within-block time-offset embeddings on the encoder’s cells and on the decoder’s queries, and padded or missing cells riding the existing unobserved-cell path. The mid-month Argo anchor therefore *fuses* with its neighbours into one uniform representation instead of switching

regime under the forecaster, and the resulting axis reads as monthly downstream — so a roll over it is day-matched comparable to the monthly archive while being built entirely from five-day inputs. The pre-registered hypothesis is that *fusion beats selection*: this codec’s head should beat the 0.0721 that the cadence ladder got by *selecting* one bin per month.

The first such codec exists: 38.0M parameters at $d_z=64$, 60,000 steps (the recipe family is named for a rounded 40M; parameter counts here and in Table 9 are measured from the model). Its Tier-1 reconstruction audit, paired against the per-bin codec’s own recorded numbers on the same blocks, is the reason it was accepted:

- **The per-bin Argo-anchor collapse is cured.** Fast channels at the anchor cell read FVU 7.6% trained and 17.4% held out, where the per-bin $d_z=32$ codec read 25–112% on the same rows; the Argo channels themselves come back at parity or better.
- **The price is structural and it is paid everywhere.** Argo-free cells read 9–19% where the per-bin codec read under 1%. That is what one embedding per month costs: a real $\approx 4:1$ squeeze in time, and it lands on the fast channels because they are the ones with within-month structure to lose. The winds carry most of it — held-out winter wind stress reads FVU 0.65–0.75 even at full visibility, and masked wind in-fill overfits (0.30 trained against >1 held out at 0.69 epochs).
- **The binding constraint is output capacity, not encoder scale.** At 38.0M parameters and $d_z=64$ the Chinchilla-style reading of these residuals is that the decoder and the bottleneck, not the encoder, are what limit the round trip — so the next rung is more data or more masking before more parameters. A Chinchilla-anchored sibling at 126.9M ($1.006\times$ the tensor’s own value-count anchor, $d_z=128$) has since finished training as a direct test of that reading; its paired reconstruction audit is owed and the reading stands untested until it runs.

The stage-2 verdict — the number that answers fusion-versus-selection — landed against the hypothesis. The 20k head on the month-block z (the same head configuration and the same two-year span as the cadence ladder’s arms) reads a one-step ratio of 0.2127 against its own space’s persistence — not below the selection arm’s 0.0721 but $2.9\times$ above it. One qualification is structural: each ratio is scored against its own z -space’s persistence, and a fused month is a much stronger persistence baseline (2.75 block-units against ~ 21 in the per-bin spaces) precisely because fusion averages away the fast variance a per-bin head gets credit for predicting — the instrument was chosen at dispatch knowing this, so the caveat qualifies the size of the gap, not its direction. The transport read-out agrees in direction: the year-blocked k -fold through the head’s features reads 0.394 [0.31, 0.48], under every per-bin head at this geometry and under the same run’s raw-pixel control (0.693). At this codec, bottleneck and budget, fusing a month of pentads does not beat selecting one bin per month. **Every number in this subsection is $n = 1$ at a tier with no measured pair**, and the codec was moreover trained on the JAX/TPU stack of §11, which is itself a new tier: a same-recipe PyTorch twin has finished training as the cross-framework check, and the paired Tier-1 audit that would certify the pair is owed. Nothing here is a level.

10.8 The codecs in flight, and the hillclimb behind them

Table 4 is a table of *results*: a codec enters it when it has a number. That rule leaves this section’s programme largely invisible, because most of it is still training. Table 9 is the other half — every codec now running or specified, as a configuration only, with its status stated rather than implied. Three properties of it are worth reading off directly.

Every block-codec design exists at two (batch, steps) points. A month block is 282 encoder tokens where a per-bin sample is 42, and attention is quadratic in that, so the first attempts at the recipes’ own batches died of device memory on 24GB cards; the batch was cut and the step budget raised to compensate, and then the original batch was restored on larger hardware. The two points are the same recipe family, they are reported side by side, and they are **never pooled** — $60k \times 512$ sees 30.7M block-samples where $200k \times 128$ sees 25.6M, so the “fast” arm is also the one that sees more data.

The 40M and 126.9M month-block codecs are a sizing experiment, not a ladder. The larger is $1.006\times$ the pentad tensor’s own Chinchilla-style anchor (the builder counts 2,524,251,443 observed values; at 20:1 that is ≈ 126.2 M parameters), with d_z raised to 128 on the argument that a month block compresses about $6\times$ as much input as a per-bin sample. §10.7’s reading of the smaller one — that output capacity

binds before encoder scale — is precisely what the pair tests, and its attention heads are sized at the 128 ceiling deliberately, a larger head dimension having killed an earlier 202M run outright.

Two rows are trained in JAX on a TPU and are a separate tier. They are labelled as such in the table and are never pooled with a PyTorch-trained number (§11); each has a same-recipe PyTorch twin in the table for exactly that reason.

What E-048 climbs, and why it is a hillclimb rather than a factorial. The two planned rows change three things at once against the month-block codec, deliberately. **A fixed window replaces the calendar month:** a pentad month is 6 or 7 bins, so a month block is ragged and about a sixth of its cells are padding, while a fixed 6-bin window is uniform, has no padding at all, and still contains exactly one Argo stamp — because the subsurface product is monthly, written into one pentad bin per month, at 8.02% of bins. **The second arm overlaps:** the window stays 30 days while the axis advances 15, so the forecaster gets twice the temporal resolution and consecutive embeddings share half their input, including that one Argo stamp. **And the bottleneck’s level placement is itself measured** rather than assumed: §10.6’s lattice is evenly spaced, and this one fits each latent dimension’s ladder — evenly spaced or geometric — to a sample of the run’s own pre-quantization activations, writing the fitted lattice into the checkpoint so that no loader ever re-fits and scores a different model from the one that trained.

Two things about that design are pre-registered here because they decide how its result may be read. **The overlapping arm’s one-step ratio is comparable with nothing else in this report.** At stride 3 the previous embedding shares half its input with the target, so “predict the next embedding” is a strictly easier question and persistence is stronger by construction; that arm is read at a fixed horizon in *days*, against its own persistence, and never against the non-overlapping arm or the pentad archive. **And a measurement made while building it already constrains the ladder claim:** at even L the evenly-spaced map of §10.6 is not antisymmetric — its lattice sits about half a step high, mean $+0.233$ on standard normal draws at $L=8$ — which is part of why a fitted ladder would choose the geometric form on almost any centred distribution. So the contrast that separates the two stories is registered in advance: at odd L the evenly-spaced map is unbiased, and if the geometric ladder still wins there the win is about companding, while if the margin collapses the win was a bias correction and the cheaper fix is a symmetric uniform map.

What the first two E-048 runs measured. The non-overlapping arm has now trained twice, and the pair of runs is a result about the *bottleneck*, not the window. The first run collapsed: by step ~ 300 its encoder had become a constant function of its input — one distinct z vector across a thousand probe inputs, pre-quantization activations at $|v| \approx 87$ against a saturation radius of 2 — and the training-time probe correlation read exactly zero until the collapse guard killed the run at step 10k, its first live kill. Reconstruction loss was structurally blind to the death, exactly as in the earlier latent collapse it was built against: a bottleneck that emits one vector still reconstructs at the decoder-side floor. The diagnosis exposed something about the *healthy* FSQ codec of §10.6 as well: its own pre-quantization activations measure $|v| \sim 3 \times 10^4$ — fully saturated, four orders of magnitude past the bound — and its information travels as *sign flips*, about one bit per dimension on a synthetic probe. The eight-level lattice is worn as a two-level code, because the codec-side bottleneck fixes its scale at $\sigma=1$ by design (“let the encoder learn the scale in”) and the straight-through estimator gives the encoder no gradient, and therefore no incentive, to comply.

The fitted ladder was therefore completed to fit the **scale** as well as the form: the per-dimension fit now measures the saturation radius on the run’s own activations, the fit string records it, and archived checkpoints rebuild bit-identically from their legacy strings. A detail worth recording against the pre-registered even- L contrast above: at the *default* radius the fit chose the evenly-spaced form on all 64 dimensions with zero measured gain — both ladders were equally wrong about where the mass was — while with the radius itself fitted the geometric form won nearly every dimension, on a distribution whose heavy tail was partly the drift itself. The rerun with fits at steps 50, 200 and 2,000 settles the two diseases separately: the collapse mode is *closed* (probe correlation alive from the first fit onward, the guard never fired, the encoder input-dependent to the end), but the drift is not — the pre-quantization scale ran from 0.7 to 114 over 60k steps with no restoring force, each fitted lattice outgrown within a few thousand steps, and reconstruction never left ~ 0.30 where the *continuous* month-block codec of §10.7 reaches 0.098 on nearly the same windowing. The design choice that paragraph left open — give the latent an intrinsic bound, or accept the sign code and size the lattice for it — has since been taken

and measured, on the E-049 rows of the table; the overlapping arm still waits on its outcome.

The bound branch, taken — and a second, distinct collapse under it. E-049 is the sharpest form of the quantization line: one 16-bit token per pixel-bin — d_z 6 under an FSQ ladder of [8, 8, 8, 5, 5, 5] levels, a 2^{16} implicit codebook — judged not by a probe but by the strongest non-linear decoder we run, with the falsifier registered at dispatch (any fast channel at $\sim 100\%$ FVU at that decoder ceiling kills the configuration, and the pre-registered next rung is two tokens, never a larger vocabulary). Its design takes the intrinsic bound: a parameter-free LayerNorm in front of the lattice, so the fit has a stationary target. The bound does exactly what it was specified to do — pre-quantization rms reads 1.0 at every fit, with fitted saturation radii $O(1)$ where the unbounded codec sat at $|v| \sim 3 \times 10^4$ — and the run then died anyway, of a disease the bound cannot see: *direction* collapse under an intact scale. By step 7,500 the encoder’s output was constant over time (persistence MSE 9×10^{-4} , $\sim 150\times$ down from a healthy start; by 15k, exactly zero), on both of two independent copies. The attribution experiment ran itself: the same width *without* the lattice — a continuous d_z 6 control, identical in every other respect — trained to 200k in perfect health. Cold-start codec-side quantization is convicted, not the width and not the bound; and this is consistent with the one place quantization has worked, which is on an *existing* representation (read-time input quantization, §10.6, and the FSQ retrain whose directions were spread before the lattice mattered). The repair under test as this revision is dated is exactly that observation made into a method — *warm-start quantization*: train the continuous codec first, switch the lattice on at resume, give it another 60k steps. Its early fits are the anti-collapse signature (input-dependent pre-quantization spread at every check where the cold start had slid to 0.005), and its registered verdict is the decoder-ceiling audit, not the training curve. Whether one warm 16-bit token can carry a pixel-bin is, at this writing, the open question of the quantization road.

11 A second implementation, and a new tier of hardware

The models now have a second, framework-independent implementation in JAX/Flax, alongside a one-way weight converter and a reverse export that writes a checkpoint the *unchanged* PyTorch stack loads. The point is not portability for its own sake. It is that a second implementation can be scored against the first, and that a model trained on hardware the PyTorch stack cannot reach is still evaluated by the PyTorch stack’s own eval ladder rather than by a second scoreboard of its own.

The gates. Each tier is accepted against an archived number nobody chose afterwards, and the reference backend is required to land on that number first — if it does not, the reproduction path differs from the archived protocol and the second backend would be scored against the wrong thing, which is a finding and never a tolerance to widen.

- **Forwards.** The converted 40.7M anchor agrees with PyTorch to max $|\Delta|$ 1.3×10^{-5} on **encode** and 6.6×10^{-7} on the decoder query, against a gate of 10^{-4} ; the synthetic suite (encoder layer, both patch sizes, the temporal transformer at two stencil widths with a causality check, the section head, and the converter’s refusal contract) agrees to $\leq 10^{-6}$.
- **Embeddings.** The pooled RAPID ridge over the real monthly tensor reads $r = 0.62696$ from each backend against the archived control 0.627; **the two backends differ by 5.7×10^{-8} in r ,** and their embedding arrays by mean $|\Delta|$ 1.2×10^{-6} (max 7.8×10^{-3} , one **float16** storage ULP).
- **The rolled evaluation.** The frozen gate head’s twelve-month roll — the number eighteen separate evaluation runs have returned identically, which is exactly why it is the right gate for a port — comes back at AUC 0.643 from both backends, with all twelve per-horizon skill, correlation, amplitude and sample-count rows *identical*. The rolled states differ by mean $|\Delta|$ 2.4×10^{-6} , compounding monotonically from 1.9×10^{-5} at $h = 1$ to 1.1×10^{-3} at $h = 12$, as an iterated map must.
- **The stage-1 trainer.** Identical weights, batch and mask give reconstruction and neighbour losses agreeing to 2.7×10^{-7} (gate 10^{-5}) at both patch sizes and at the block geometry; one plain SGD step gives max $|\Delta w|$ 7.5×10^{-9} (gate 10^{-6}); 300 real training steps of each trainer reduce the reconstruction loss by 2.082 $\times$ and 2.151 $\times$, a ratio of 1.033 inside its pre-registered band; and the export round trip returns state dictionaries that are *identical*, with a perturbed JAX codec

exported and re-encoded under PyTorch to 4.8×10^{-7} . Adam’s first update is approximately $\text{sign}(g)$ and is therefore hypersensitive where a gradient is near zero, so its bar is stated twice — 2×10^{-5} over all parameters and the SGD bar of 10^{-6} over the entries where $|g| > 10^{-6}$ — rather than loosened once.

The hardware result. On a cloud TPU (v5litepod-4) the JAX trainer runs the 38.0M month-block codec of §10.7 at batch 512 at 0.206 s/step measured over a clean 3,000-step run, and 0.167 s/step over the full 60,000-step run that produced the codec — 2.8 hours of training. The same configuration on a rented H100 SXM measures 0.93 s/step. Per sample that is $\approx 4.5\times$ the H100 and $\approx 8\times$ the RTX 4090s of §4. Two operational properties are worth recording because they are what make a spot-priced accelerator usable at all: the run survived two preemptions and resumed from its checkpoint bucket exactly as designed (the third node found the finished state, added nothing, exported, and reaped itself), and it publishes its weights as an ordinary PyTorch checkpoint, so the codec it produced entered the same probe ladder and the same reconstruction audit as every other codec in this report.

How its numbers are to be read. A JAX-trained result is a *new tier* in the replicate sense, and the first result at a tier buys its own replication. So the block codec’s numbers in §10.7 are $n = 1$ at a tier with no measured pair, they are cross-validated through the unchanged PyTorch eval ladder rather than through a JAX one, and a same-recipe PyTorch twin of that codec is training precisely so the pair exists. Nothing about the port licenses pooling a JAX-trained number with a PyTorch-trained one.

The stage-2 trainer followed. Since the paragraph above was first written, the stage-2 stencil trainer has been ported and gated the same way (loss, gradient and update parity against the PyTorch trainer; input noise drawn on-device in the jitted step with the RNG stream recorded; sharded host-to-device transfer that never materializes the full batch on one chip — each of these fixes was forced by a measured failure at $K=144$, not written speculatively). It is what trains the full-budget two-year-context pentad head of §10.3, at 0.166 s/step clean — about $7\times$ its own 20k PyTorch twin’s H100 pace — and its head exports to an ordinary PyTorch checkpoint whose roll runs on the unchanged GPU eval ladder, keeping the one-eval rule intact.

What is not ported. The multi-output reconstruction decoder; the head’s fold-fitting and the transport read-out. The full probe deliberately *refuses* in the JAX trainer rather than running a reduced version of itself, because its second half trains a small temporal model inside the probe — stage-2 machinery — and running the light probe under the full probe’s name would put a different estimator into the archive under a name that already means something. Mixed-precision autocast refuses for the same class of reason: honouring the flag would mean transcribing another framework’s per-operation casting rules, and rolling at full precision under a flag that says half precision is worse than refusing.

12 The static-channel lesson

An ablation found the two climatology input channels contribute *exactly nothing* to any metric: a static map is a function of position, the encoder receives position, and so the channel carries no information the model does not already have. The general rule — a channel is worth what position and season cannot explain of it — now gates every data-acquisition decision. Climatological knowledge is still essential, but it enters as preprocessing arithmetic (the anomaly transform), never as a feature the network must carry through its bottleneck.

13 Limitations and open questions

(1) The wind-only baseline bounds honest claims: monthly AMOC skill is substantially Ekman, though the unpooled head now clears the baseline by $+0.10$ – 0.16 where the pooled probes had shrunk the margin to noise. (2) The head result is new and strong, and strength is when scrutiny matters most. The second codec seed has now been run and it removed the pretraining margin (§7.3); what remains outstanding is a paired significance test, and the fact that the head has been run only on RAPID — the MOVE and low-frequency versions may move too. The head is also demonstrably the noisiest probe

we own (seed spread 0.036 against the ridge’s 0.012), so single-seed head numbers should not be quoted anywhere, including by us. (3) $d_z=64$ was chosen on a 12-channel tensor and carried unchanged into 24–25 channels; the sweep has not been repeated at the new width. (4) Absolute k-fold values are mildly optimistic — the codec saw non-holdout months’ *fields* during self-supervised pretraining (transports were never seen by anything); codec-to-codec comparisons are unaffected. (5) The rollout’s horizon is measured only to the holdout-year boundary; the crossover to no skill lies beyond 12 months and is not yet located. (6) Transport forecasting at range is unsolved. (7) *The held-out longitude block is scored anyway* — **resolved in this revision, but only forward**. 45°W – 25°W is excluded from training in both stages and included in every rolled evaluation, unrecorded in the artefacts of every evaluation in §8 (§8.1, Fig. 7); the evaluator now emits the split, and §9.1 closes the diagnosis: returning the block to the *stage-2* pool collapses the trained-minus-held-out corridor gap from 0.65–0.75 to 0.0065 on both seeds, while returning it to the *codec* moves nothing. So the band was a stage-2 coordinate extrapolation failure and it is fixable. Every number in §8 nonetheless still carries it, because those heads were trained with the hole: their levels are deflated (no published number is inflated) and their stencil *contrasts* are not, with about half of the contrast earned inside the block. (8) *A methodological casualty worth recording*: the stage-2 results for two runs were withdrawn after we found their embedding cache had been populated by a different codec — the shape check (T, P, d_z) matched, so training proceeded happily on the wrong representation, and the signature was healthy embedding-space skill beside catastrophic decoded skill. The cache key now carries a hash of the codec’s weights, so a stale cache is a miss rather than a lie. We report the affected numbers as withdrawn rather than regenerating them, because both codecs belong to the superseded coarse tensor.

Three limitations are new in this revision and they are the largest ones here. (9) **Long rolls are replay, and we do not know how much of the twelve-month roll is too**. §9.2 withdraws every long-hindcast correlation in the archive as a skill number. The corridor AUC is a different instrument and is not withdrawn — but the same mechanism has a documented route into it (a stage-2 training window may look at held-out months as context, by design), the all-longitude head’s flat lead-time profile is what a recited trajectory looks like, and no measurement in this report separates “rolled twelve months well” from “recited twelve months of a memorized record” on trained pixels. The cleanest available test is the one §9.2 declines to buy on cost grounds — ensemble dispersion under context perturbation — and it should be bought before any twelve-month number is quoted as a forecast. (10) **The finer time axis does not work yet, but what is broken is now localized**. At 5-day steps the $K=24$ one-step ratio is ≈ 0.505 against ≈ 0.032 monthly and the year-long roll is *below climatology* — and the factorial of §10.3 shows the difficulty tracks *context span*, not step size: restore the two-year span and the ratio returns to 0.082 at the same step. The two repairs this item once listed as unjudged have since returned stage-2 verdicts, one each way — input quantization helps (0.4394, §10.6); month-block fusion does not (0.2127 against the selection arm’s 0.0721, §10.7) — so the pentad roll’s repair now rides on one arm: the full-budget two-year-context head, now trained to a record one-step of 0.0330, whose day-matched roll is the registered decisive number and is still owed (§10.3), with the monthly-stride hierarchical roll as the remaining fallback. The span effect that head banks on has meanwhile been localized as *distributed* rather than analog-only: sparse time-skeletons recover 55–65% of it and none of them reach the dense slab (§10.3), all of it $n=1$. Every pentad number except the one-step control pair is $n=1$ at a cadence with no measured replicate band, and none of them is a level. (11) **A second training tier now exists and is unreplicated**. The month-block codec was trained in JAX on a TPU (§11), and the same tier now trains stage-2 heads; the port is gated hard against the PyTorch stack and its products are evaluated by the unchanged PyTorch eval ladder, but a first result at a new tier buys its own replication. The codec’s same-recipe PyTorch twin has finished training and the paired audit that would turn the two into a cross-framework certificate is owed; the stage-2 side has no twin at all beyond its 20k-step configuration certificate.

For the rolled-forecast programme of §8, the mechanical follow-ups of v6 have landed — the width, step-budget and exposure-bias corridor evaluations, the widest-input $\times$ largest-head runs, and the seed pairs they owed. What remains open there is unchanged in kind: the one-hop unroll arms await a resume decision, and the capacity ladder has no measured top, so the next tier is still the programme’s standing next experiment. The corridor AUC itself carries one structural caveat: it scores the model’s own input fields rolled forward, not transport — the bridge from rolled field skill to transport skill at range is the same open problem as (6) above.

The training-time ceiling has now been located directly: a 1,000,000-step run at pilot size (LR decayed to a constant 10% floor by 50k steps, probes every 50k) completed in 2.6 h on one RTX 4090

and is *flat from the first probe to the last* — linear r oscillates in $[0.43, 0.48]$, channel-space skill vs. persistence is pinned at 32%, and the final checkpoint’s k-fold (0.571) sits within seed noise of the 40k-step run. Twenty-five times the compute of the pilot regime buys nothing at 0.92M parameters: the pilot is capacity-limited, which is what the Chinchilla arithmetic predicted (~ 13 M parameters for this tensor), which is what the 10M-parameter codecs of that era, and in the end the 40.7M anchor of §7.4, were built to answer. Next levers, in expected-value order, and (9)–(11) have reordered them: the dispersion test that would say how much of the twelve-month roll is replay; the quantized-bottleneck retrain of §10, dispatched (the fusion-versus-selection verdict has since landed against fusion — §10.7); then the pentad noise dose, re-derived from the pentad model’s own one-step error rather than carried across from monthly. Behind those, and unchanged: paired significance for the head results; the head probe at MOVE and at low frequency; re-running the d_z sweep at $C=24$ — now with a second reason, since §10.5 shows a d_z of 32 is where 40 channels stop fitting; and label-efficiency curves over the 792 non-RAPID truth months. The v6 data ladder is largely spent: the time axis reaches 1982, the GLORYS channels are at 0.25° , and the Argo levels are doubled — what a data step buys now is a finer *time* axis, which is exactly what §10 is about.

14 Addendum: the training pool leaked the held-out years

Added 2 September 2026, after every section above was written. The numbers here are from the public result bundles `probes-510`, `-513` and `-516` and the stage-2 training records; the figures are made by `make_figs_addendum.py` beside this file.

Mechanism. Stage-2 training draws windows of $K = 144$ consecutive pentads and applies the one-step loss at every position of the window. The pool excluded a window only when its *final* target fell in a held-out year (2009, 2017, 2023). Every window whose last bin lay in a training year but which straddled a held-out year therefore teacher-forced that year’s transitions into the weights: of the 400,176 frame-targets scored inside the pool, 21,018 were held-out bins. Under this rule the pool holds 240,933,742 windows (2,779 end-bins $\times$ 86,698 pixels); the corrected rule, which drops any window touching a held-out bin, holds 209,549,066 (2,417 end-bins). Every stage-2 head in this report — all 98 archived heads, monthly and pentad, including the 211M pair of §8 and the 206.7M pentad head of §10 — was trained under the leaking rule. The codec (stage 1) is unaffected: it is trained per pixel and per bin with the held-out years excluded outright, so the probe results of §7 stand.

Signature 1: skill that does not decay with lead. The 206.7M pentad head (E-051, 398k steps) rolled from the nine held-out starts (`probes-510`) holds a corridor field anomaly correlation of 0.985 at five days and 0.973 at 365 days, mean 0.946 over the year; its unpooled transport read-out correlates with RAPID at 0.481 over 5–90 days, 0.568 over 95–180 and 0.580 over 185–365 — flat or rising with lead (Figure 16). No forecast of an ocean anomaly field holds $r = 0.97$ at twelve months; a recall curve does. The identical head architecture trained under the corrected pool (E-059, `probes-516`), on the identical battery, decays from 0.606 at five days to -0.031 at a year, and its transport bands read $+0.107$, -0.242 , $+0.163$.

Signature 2: no skill on longitudes never trained on. The longitude-holdout roll (`probes-513`) scores the $-45^\circ \dots -25^\circ$ E block, which both stages held out, separately from the rest. The 279.6M stencil head with an 8-member ensemble mean reads mean MSSS against climatology of 0.838 on trained longitudes and 0.176 on the held-out block (corridor; gate 0.821/0.330, window 0.834/0.266); the one-point gate head reads 0.804/0.058 (Figure 17). On ocean it was trained on, the head removes about 80 % of the anomaly variance; on ocean it was not, 6–18 %. The blended aggregates quoted throughout this report (corridor 0.648 for the stencil head, 0.589 for the gate) mix the two populations at roughly 3:1.

Signature 3: the ensemble is confident where it has memorised. The same 8-member head rolled 36 months with no truth, once inside the record (2005-01 to 2007-12) and once past its end (2025-01 to 2027-12). Inside the record the members’ transport spread is flat, 0.106Sv over the first twelve months and 0.102 over the last twelve, and the field variance across members grows 2.9 $\times$; past the

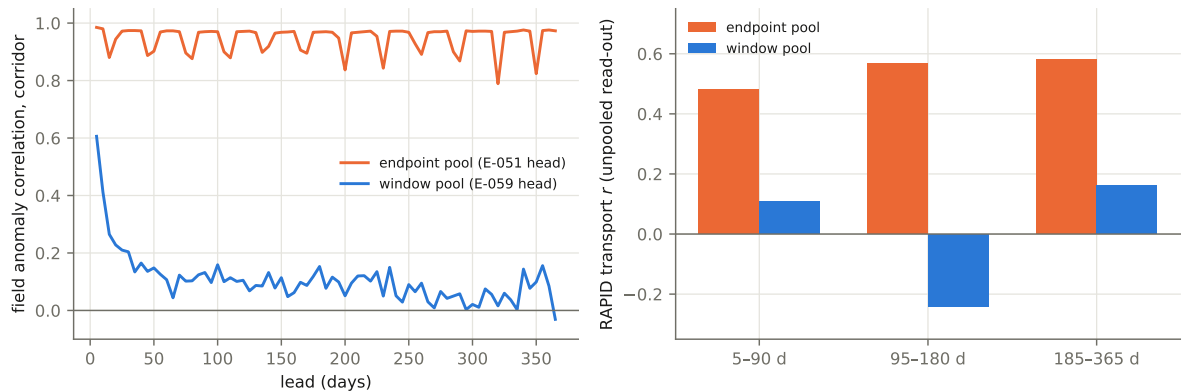


Figure 16: The same rolled battery under the two pools. Left: corridor field anomaly correlation against lead. Right: unpooled RAPID transport correlation by lead band.

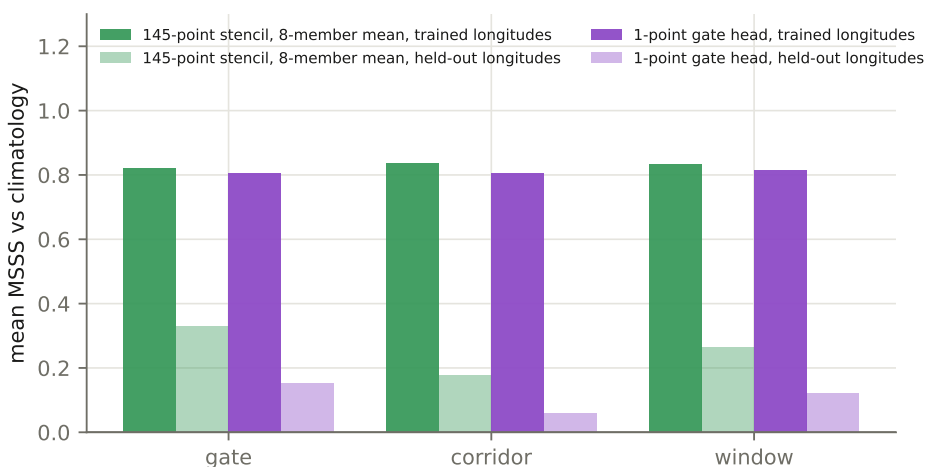


Figure 17: Mean MSSS against climatology on trained and held-out longitudes, by scope, for two heads of the longitude-holdout roll.

record the spread grows from 0.197 to 0.420 Sv and the field variance $7.3\times$ (Figure 18). Independently noised trajectories stay pinned together over years the model has seen and fan out over years it has not.

Signature 4: the held-out loss of a leaking pool. Under the leaking rule the 206.7M head’s “held-out” one-step z-MSE falls monotonically to 0.033 of the persistence error at 200k steps, within a third of its training loss (0.026) and far below anything a one-step ocean forecast reaches; under the corrected rule the same architecture bottoms at 0.611 at step 2,000 and rises to 0.686 by 200k while its training loss falls to 0.023 (Figure 19). The leaking pool’s validation set was, in effect, training data.

What this retires. Every rolled number in this report — corridor “AUC” at every tier, the capacity, noise and longitude-holdout effects, the long-hindcast correlations, the pentad and daily rolled skill — measured recall of training years, and the seed pairs that replicated them replicated the recall. The name “corridor AUC” is retired with them: the quantity is the mean over leads of $1 - \text{MSE}_{\text{model}}/\text{MSE}_{\text{clim}}$, where climatology is the zero-anomaly forecast, and it was reasoned about as an area under a curve in places. What survives: the data description, the codec architecture, its reconstruction curves and its probe results (§3–§7), the JAX port’s parity gates, and the replication arithmetic of §5 as a property of the protocol rather than of any skill. The measurements made under the corrected pool are reported in the current version of this report.

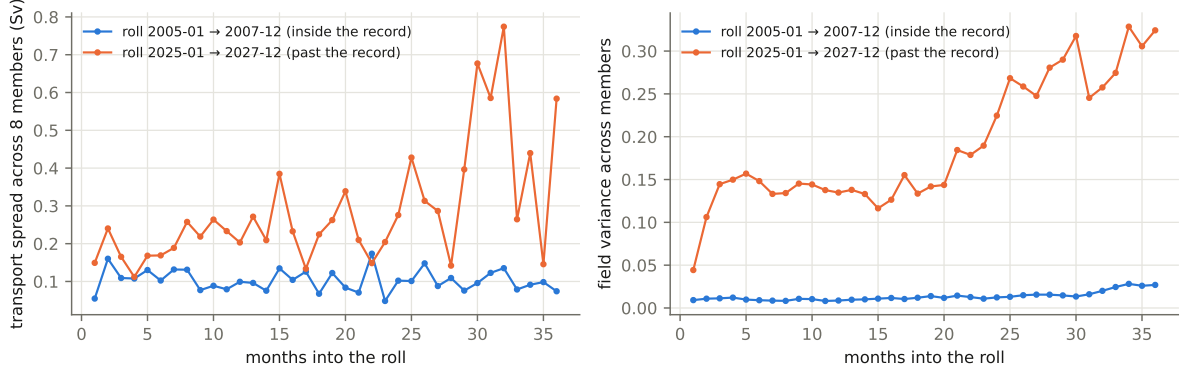


Figure 18: Ensemble dispersion of the 8-member stencil head over a 36-month roll inside and past the training record.

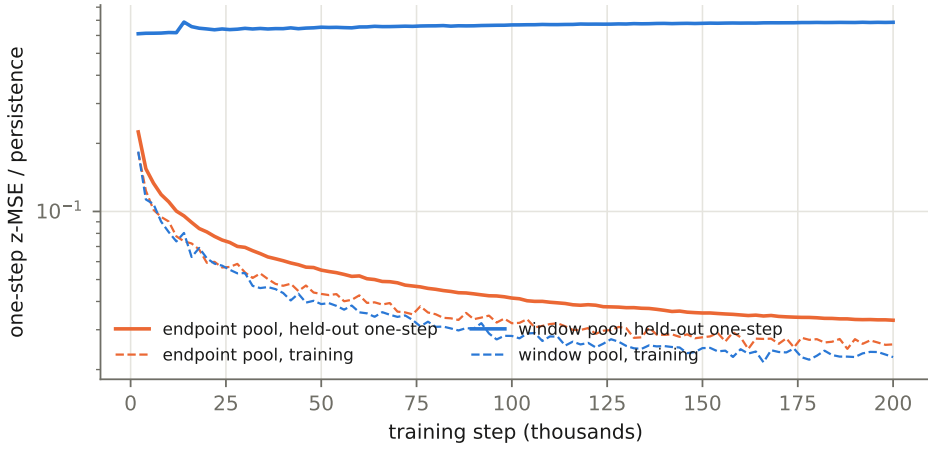


Figure 19: Training and held-out one-step loss of the 206.7M pentad head under the two pools, as a fraction of the persistence error.

A Base-scale results superseded by capacity

Everything in this appendix was measured at the 576×8 (34M) stage-2 tier, and §8.3 showed that tier to be capacity-starved for wide inputs: the geometry ranking below is a property of a too-small head, not of the ocean. It is preserved because the numbers are real, the discipline that produced them (pre-registered hypotheses, paired seeds, gate reproduction) is the same as the main text's, and because a ranking this clean that *dissolved* under one scaling step is itself a finding worth keeping in view.

A.1 The geometry factorial at 34M

Eleven stencil arrangements, three seeds each where completed, rolled corridor AUC (every evaluation gate-passed):

stencil	pts	reach km	AUC mean	vs champion
ring-8 @222	8	222	0.6043	0
spiral-8	8	890	0.5883	−0.016
no neighbours	0	0	0.5890	−0.015
three rings narrow	12	1000	0.589	−0.015
spiral-13	13	1000	0.5863	−0.018
two rings 8+8	16	555	0.5857	−0.019
three rings wide	24	1000	0.5813	−0.023
spiral-24	24	4444	0.578	−0.026
elliptic-24	24	4444	0.568	−0.036
spiral-34	34	4444	0.566	−0.038
ring-16 @222 ($n=1$)	16	222	0.564	−0.040
sunflower-34	34	4444	0.553	−0.051

The ranking is monotone in slot count within the spiral family ($8 \rightarrow 13 \rightarrow 24 \rightarrow 34$ gives $0.588 \rightarrow 0.586 \rightarrow 0.578 \rightarrow 0.566$), and two isolations pin the axes: doubling points at fixed 222 km radius costs -0.044 ; widening reach at fixed 8 points costs -0.016 . Meanwhile the *forecast* ordering of the same arms ran the other way — the sunflower and deep-spiral arms were the best one-step models in the programme at the time. That anti-correlation, audited clean in §8.2, is what §8.3 resolved: at 88M and 205M the wide sunflower geometry wins *both* scoreboards, and the production-geometry question was re-opened at scale rather than settled by this table. The base-scale champion’s ring-8@222 configuration is itself been re-evaluated at the 88M tier, where it rolls at 0.6560 and beats every wide-input arm of its own tier (Table 8).

A.2 Early stage-2 capacity sweep and codec training curves

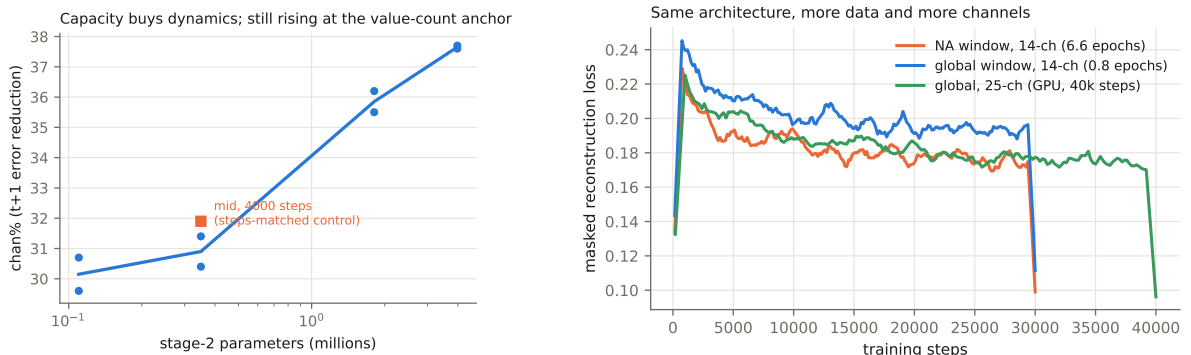


Figure 20: Left: the original stage-2 capacity sweep (0.11–4M parameters, 12-channel coarse tensor, no stencil) — the first sign, in retrospect, that stage-2 capacity was the binding axis; it was still rising at its top end. Right: codec training curves across generations.

The original stage-2 capacity sweep (Fig. 20, left) was run on the coarse tensor at 0.11–4M parameters and read, at the time, as “capacity buys dynamics.” It deserved more weight than it got: an early experiment at one slot and small K (“E-010”) found stage-2 skill insensitive to capacity and closed the axis; that negative was real *in its regime* (a 1-slot input barely exercises a large head) and wrong outside it, and re-opening the axis at $K=24 \times 55$ slots is what produced §8.3. A settled negative is settled only in the regime that settled it.

References

- [1] E. Frajka-Williams (2015). Estimating the Atlantic overturning at 26°N using satellite altimetry and cable measurements. *GRL* 42.
- [2] A. Sanchez-Franks et al. (2021). A dynamically based method for estimating the AMOC at 26°N from satellite altimetry. *Ocean Science* 17.

- [3] A. Solodoch et al. (2023). Machine learning-derived inference of the meridional overturning circulation from satellite-observable variables. *JAMES* 15.
- [4] Y. Meng et al. (2024). Circumpolar transport and overturning strength inferred from satellite observables using deep learning. *JAMES* 16.
- [5] E. Wölker et al. (2025). Estimating the AMOC from Argo profiles with machine learning trained on ocean simulations. *Ocean Science* 21.
- [6] L. Goddard et al. (2013). A verification framework for interannual-to-decadal predictions experiments. *Climate Dynamics* 40.
- [7] F. Lehmann et al. (2026). Frozen foundation-model backbones with shallow decoders as an evaluation standard. *JGR-MLC*.
- [8] E. Worthington et al. (2021). A 30-year reconstruction of the Atlantic meridional overturning circulation shows no decline. *Ocean Science* 17.
- [9] L. Caesar et al. (2018). Observed fingerprint of a weakening Atlantic Ocean overturning circulation. *Nature* 556.
- [10] Y.-G. Ham, J.-H. Kim, J.-J. Luo (2019). Deep learning for multi-year ENSO forecasts. *Nature* 573.
- [11] J. Taylor, M. Feng (2022). A deep learning model for forecasting global monthly mean sea surface temperature anomalies. *Frontiers in Climate* 4.
- [12] K. Bi et al. (2023). Accurate medium-range global weather forecasting with 3D neural networks. *Nature* 619.
- [13] R. Lam et al. (2023). Learning skillful medium-range global weather forecasting. *Science* 382.
- [14] K. He et al. (2022). Masked autoencoders are scalable vision learners. *CVPR*.
- [15] T. Nguyen et al. (2023). ClimaX: a foundation model for weather and climate. *ICML*.
- [16] C. Bodnar et al. (2024). Aurora: a foundation model of the atmosphere. arXiv:2405.13063.
- [17] J. Jakubik et al. (2023). Foundation models for generalist geospatial artificial intelligence (Prithvi). arXiv:2310.18660.
- [18] Y. Cong et al. (2022). SatMAE: pre-training transformers for temporal and multi-spectral satellite imagery. *NeurIPS*.
- [19] C. Brown, M. Kazmierski, V. Pasquarella et al. (2025). AlphaEarth Foundations: an embedding field model for accurate and efficient global mapping from sparse label data. arXiv:2507.22291.
- [20] J. Hoffmann et al. (2022). Training compute-optimal large language models. arXiv:2203.15556.
- [21] D. Roemmich, J. Gilson (2009). The 2004–2008 mean and annual cycle of temperature, salinity, and steric height in the global ocean from the Argo Program. *Progress in Oceanography* 82.
- [22] E. Kalnay et al. (1996). The NCEP/NCAR 40-year reanalysis project. *BAMS* 77.
- [23] B. Huang et al. (2021). Improvements of the daily optimum interpolation sea surface temperature (DOISST) version 2.1. *Journal of Climate* 34.
- [24] R. Adler et al. (2018). The Global Precipitation Climatology Project (GPCP) monthly analysis: new release 2.3. *Atmosphere* 9.
- [25] R. Seager, D. Battisti, J. Yin, N. Gordon, N. Naik, A. Clement, M. Cane (2002). Is the Gulf Stream responsible for Europe’s mild winters? *QJRM* 128.
- [26] G. McCarthy et al. (2015). Measuring the Atlantic meridional overturning circulation at 26°N. *Progress in Oceanography* 130.
- [27] C. Meinen, M. Baringer, R. Garcia (2010). Florida Current transport variability: an analysis of annual and longer-period signals. *Deep-Sea Research I* 57.
- [28] U. Send, M. Lankhorst, T. Kanzow (2011). Observation of decadal change in the Atlantic meridional overturning circulation using 10 years of continuous transport data. *GRL* 38.

- [29] M. S. Lozier et al. (2019). A sea change in our view of overturning in the subpolar North Atlantic. *Science* 363.
- [30] M. Kersalé et al. (2020). Highly variable upper and abyssal overturning cells in the South Atlantic. *Science Advances* 6.

Reproduction: every number in this report is generated by scripts in `ml/` of github.com/blauewelt/earth (see `ml/FINDINGS.md` §8); the master table by `ml/make_table.py`; figures by `ml/paper/make_figs.py`. The stage-2 experiments of §8 are logged hypothesis-first in `ml/EXPERIMENTS.md` (entries E-022 through E-032), and §9–§10 in the same file’s E-043 through E-051 (the E-048 sweep design, including the pre-registered odd- L ladder contrast, is `ml/plans/E048_fsq_block_sweep.md`, and every configuration in Table 9 is a checked-in recipe under `ml/recipes/`); the JAX port’s tiering and acceptance gates are `ml/plans/JAX_PORT.md` and its code `ml/jaxport/`. Every corridor evaluation’s full per-horizon, per-channel output is archived on the repository’s `ml-metrics` branch (`probes-<run>.json`), and every head named in Table 8 is published as a release asset and can be re-evaluated without a GPU (`docs/INFRASTRUCTURE.md`). Raw source data is mirrored in the repository’s `data-cache-v1` release (RG Argo, cite Roemmich & Gilson 2009; NCEP R1, public domain); a DOI-carrying archive (Zenodo) is planned once the in-flight results settle.

B Every one-variable ablation at pentad cadence

This appendix collects, in one place, every arm of the E-044/E-045 programme that changes *exactly one thing* against a measured control — the component ladder of §10.4, the cadence and factorial arms of §10.2–10.3, and the quantization arms of §10.6. Every row is #427’s stage-2 configuration (206.5M 1024×16 head, stencil 145, input noise $\sigma=0.7$, gradient clip 128, seed 0, 20,000 steps) over the frozen 38.0M run-415 pentad codec, scored against its own persistence baseline; only the named variable moves. Every row is $n=1$ except the control pair; the pair’s own $|\Delta|$ of 0.0011 is the only replicate-backed spread at this cadence, so per §5 these are directions and contrasts, never levels.

recipe	params	one z per	bottleneck	steps $\times$ batch	tier	status
<i>E-047 — month blocks over the pentad tensor (§10.7)</i>						
f4r2-40M-monthblock-b512	38.0M	calendar month, 7×40 cells	d_z 64, continuous	$60k \times 512$	JAX/TPU	finished , audited
f4r2-40M-monthblock-b512	38.0M	the same	the same	$60k \times 512$	torch	finished — the cross-framework twin; paired audit owed
f4r2-40M-monthblock	38.0M	the same	the same	$200k \times 128$	torch	timed out at $\sim 190k$; curves archived
f4r2-126M-monthblock-b256	126.9M	calendar month, 7×40 cells	d_z 128, continuous	$60k \times 256$	JAX/TPU	finished
f4r2-126M-monthblock	126.9M	the same	the same	$200k \times 64$	torch	finished ; reconstruction audit owed
<i>E-046 — the same alphabet, moved into the bottleneck (§10.6)</i>						
f4r2-40M-fsq8	38.0M	5-day bin	d_z 32, FSQ [8] ³²	$200k \times 512$	torch	finished ; verdict landed — §10.6
<i>E-049/E-050 — one 16-bit token per pixel-bin, and the warm-start repair (see text)</i>						
f4r2-40M-dz6	38.0M	5-day bin	d_z 6, continuous	$200k \times 512$	torch	finished — the width-tax control and warm-start parent
f4r2-40M-dz6-fsq65k	38.0M	5-day bin	d_z 6, FSQ [8, 8, 8, 5, 5, 5], ln bound	$200k \times 512$	torch	dead : constant-encoder collapse, twice
f4r2-40M-dz6-fsq65k-warm	38.0M	5-day bin	the same, enabled <i>at resume</i>	$+60k \times 512$	torch	finished — trained $200k \rightarrow 260k$ through the lattice with <i>no collapse</i> (reconstruction still improving, $0.310 \rightarrow 0.270$); the decoder-ceiling audit that turns survival into a verdict is owed
<i>E-048 — windows instead of months, and the level placement itself under test</i>						

arm	vs	the one variable	ratio	reading
<i>The control</i>				
E-044b pair	—	(nothing — the two-seed control)	0.5056 / 0.5045	the only pair
<i>Sampling geometry (the step $\times$ span factorial, §10.3)</i>				
A2a	pair	stride 6: 30-d steps, 720-d span, Argo bins	0.0713	the ladder’s far rung
A2b	A2a	Argo-free bins	0.0729	bin regime is not the driver
A7	pair	stride 3: 15-d steps, 360-d span	0.1620	
A8	pair	stride 2: 10-d steps, 240-d span	0.3377	
A11	A2a	span cut to 120 d at 30-d steps	0.5274	step size exonerated
E-045.2	A8	span restored to 720 d at 10-d steps	0.0804	span convicted
E-045.3	A7	span restored to 720 d at 15-d steps	blocked	strided trainer runs at CPU pace, both copies
E-045.1	pair	span restored to 720 d at 5-d steps	0.0820	the decisive rung: in its pre-registered band
<i>Training composition (§10.4)</i>				
A4	pair	input noise at the monthly <i>relative</i> dose	0.8145	the transferable-constant reading refuted
A3	pair	Argo-carrying target bins excluded	0.5665	hypothesis inverted: Argo targets stabilize
A6	pair	continuous fraction-of-year season phase	0.5077	the token staircase is not the problem
<i>Quantization (§10.6)</i>				
A9	pair	head inputs on an 8-level lattice	0.4916	the first arm to beat the pair
A10	A7	the same lattice at 15-d cadence	0.1692	the win is pentad-specific
E-046	pair	the lattice moved inside the codec (retrained)	0.4394	below A9: training through the lattice beats read-time

Table 10: **Every one-variable arm at pentad cadence**, one row each. “vs” names the measured cell the arm differs from by exactly the stated variable. Ratios are one-step z -space MSE over each arm’s own persistence baseline at 20k steps; lower is better. The factorial block’s reading is §10.3’s: contrasts that move only the step change the ratio by $\sim 4\%$, contrasts that move only the span change it by 4–7 $\times$. Run keys, curves and dispatch configurations for every row are in the public experiment log under E-044/E-045.