



CrossSwap

Cross-Chain Multi-Blockchain Exchange with ChangeNOW
Integration

Official documentation · v1.1.0

Live demo: cross-swap.blockshark.com

Table of contents

1. Overview

2. Installation

3. Configuration

4. Customization

5. API Reference

6. FAQ


7. Troubleshooting

CHAPTER 1

Overview

CrossSwap Documentation

Welcome. CrossSwap is a self-hosted cross-chain swap front end powered by Laravel 12, Inertia, and React 19. This guide walks you through everything from server requirements to the admin panel and the internal API.

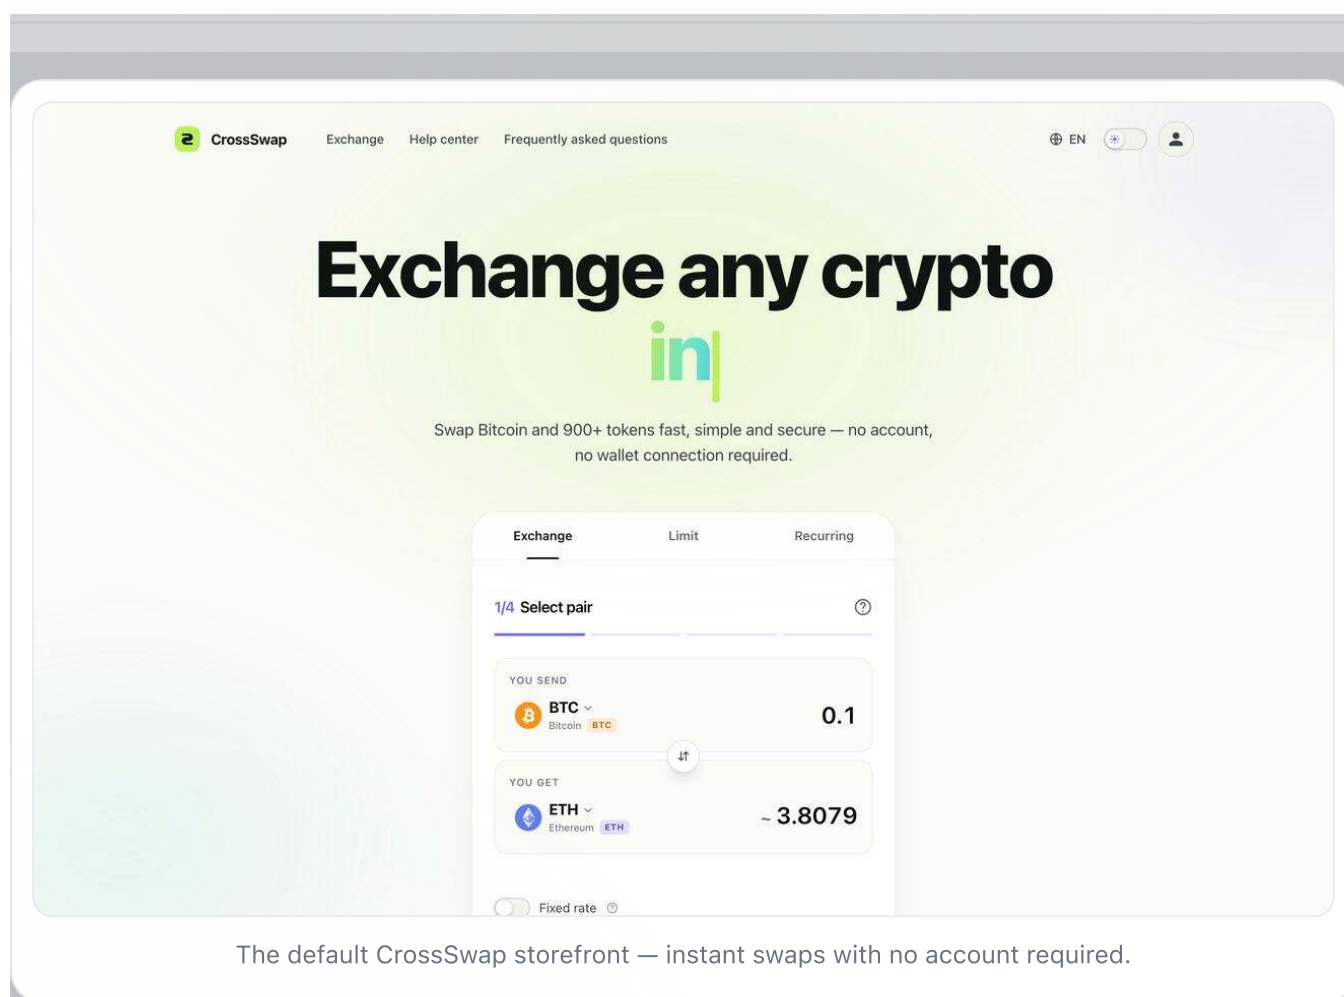

The default CrossSwap storefront — instant swaps with no account required.

Quick start. Set up CrossSwap in under 10 minutes — head to the [web installer walkthrough](#) and you'll be live by the end of your coffee.

Try the live demo

Skip the install — the full product is running at cross-swap.blockshark.com. Sign in with either of the demo accounts below:

Admin: admin@demo.com **Customer:** user@demo.com **Password:** password!321

What's new in 1.1.0

The 1.1.0 release lands a major content-management upgrade plus several storefront polish wins. Full notes live in the bundled [CHANGELOG.md](#).

- **Multi-locale Pages CMS** — one record per page, translated title/excerpt/body per language. Public `/p/{slug}` resolves the active locale with sane fallbacks.
- **Content CMS** — admins edit the four homepage marketing sections (Highlights, Reviews, Stats, How it works) per locale with no code.
- **Markdown editor** — the admin Pages screen ships a tabbed Write/Preview editor with a toolbar; no external dependency.
- **Rate slider** — the limit-order form now uses a slider from -50% to +200% around the live market rate, with quick chips.
- **Typewriter headline** — the homepage hero cycles through four localised taglines and respects `prefers-reduced-motion`.

Quick links

Installation

Requirements, browser installer, queue, scheduler.

Configuration

Brand, languages, currency lists, ChangeNOW key, AI chat.

Customization

Logo, theme tokens, translations, email templates.

API reference

REST proxy for exchange, support, chat, limit orders.

FAQ

Common questions about updates, languages, hosting.

Troubleshooting

Stuck swaps, 419 errors, mail delivery, HTTPS.

What is CrossSwap?

CrossSwap is a complete white-label cryptocurrency exchange storefront. Visitors can swap between 900+ tokens without creating an account or connecting a wallet. Behind the scenes, CrossSwap proxies the ChangeNOW partner API, signs transactions, tracks status, and provides a polished React-based UI plus a full admin panel for operators.

The application ships ready for production: queue workers, scheduled jobs, audit logging, role-based admins, multi-language storefront, ticket-based support, and a one-time browser installer all included.

Table of contents

Installation

Server requirements, hosting compatibility, the browser installer walked through screen-by-screen, manual install, HTTPS, and a post-install checklist.

Configuration

Branding, languages, ChangeNOW key, AI chat, legal URLs, and the featured / blacklist currency lists.

Customization

File layout, adding a new language, recolouring the theme, swapping the logo, and customising email templates.

API reference

The public REST proxy under `/api/exchange/*` plus the support, chat, limit-order, and recurring endpoints.

Troubleshooting

Stuck transactions, missing API keys, queue worker hiccups, mail delivery, migrations, and HTTPS mixed content.

FAQ

Quick answers about fees, accounts, KYC, shared hosting, refunds, and how updates are delivered.

System requirements at a glance


- PHP **8.2+** with extensions: `mbstring`, `openssl`, `pdo`, `curl`, `fileinfo`, and either `gd` or `imagick`.

- SQLite 3.35+, MySQL 8.0+ / MariaDB 10.6+, or PostgreSQL 14+.
- **Redis** for queues and cache (recommended; the database driver works as a fallback).
- A long-running queue worker via **Laravel Horizon** for status polling.
- Outbound HTTPS access to `api.changenow.io`.
- A free ChangeNOW partner API key — see [Configuration](#).

The full matrix with minimums and recommended versions lives on the [Installation page](#).

Architecture in a sentence

Visitors place swap requests through the React storefront; Laravel proxies upstream API calls, persists every transaction, and Horizon-backed queues poll status until each swap reaches a terminal state. Operators manage everything from the bundled admin panel shown below.

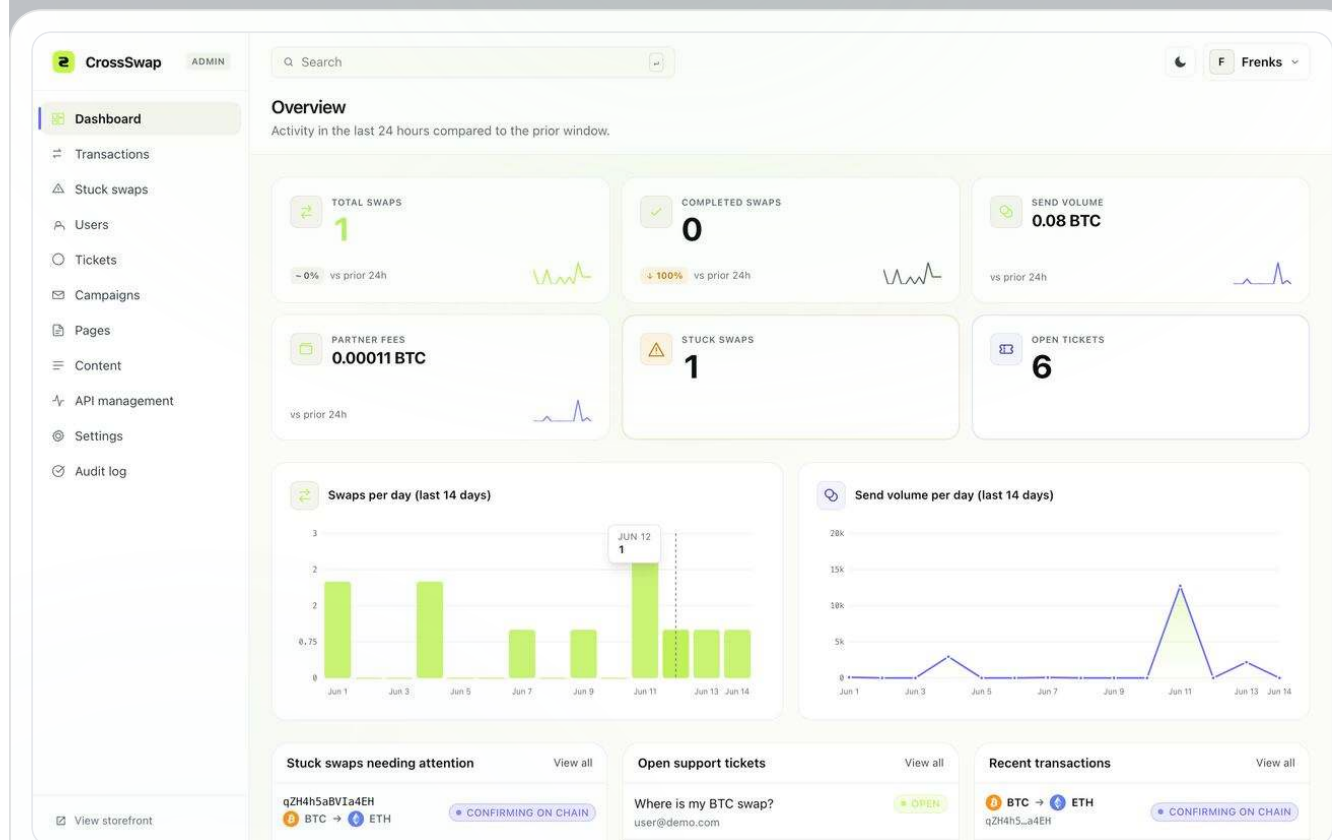

Admin dashboard — live counts, recent transactions, and Horizon health.

CrossSwap

ADMIN

Q Search

F Frenks

Export CSV

Dashboard

Transactions

Stuck swaps

Users

Tickets

Campaigns

Pages

Content

API management

Settings

Audit log

View storefront

Transactions

SEARCH

STATUS

FROM CURRENCY

TO CURRENCY

FLOW

FROM

TO

Search by provider id, address, or email

All

All

dd/mm,

dd/mm,

Apply


Reset

ID	PAIR	AMOUNT	EMAIL	COUNTRY	FLOW	STATUS	STUCK	CREATED
qZH4h5...a4EH	BTC → ETH	0.08 BTC	user@demo.com	NL	STANDARD	CONFIRMING ON CHAIN		6/14/2026, 11:18:00 AM
h3YfqX...iQ17	ARB → BTC	2,188 ARB	user@demo.com	BR	STANDARD	EXCHANGE COMPLETE	—	6/13/2026, 7:13:00 AM
Cyd2aJ...jSLJ	BTC → SOL	0.024 BTC	—	BR	STANDARD	EXCHANGE COMPLETE	—	6/12/2026, 10:46:00 AM
7Hu19c...0MHZ	DOT → ETH	303.2 DOT	—	SE	STANDARD	EXCHANGE COMPLETE	—	6/12/2026, 1:54:00 AM
kFjcno...dumb	USDC → USDT	557.5 USDC	user@demo.com	GB	STANDARD	EXCHANGING	—	6/11/2026, 8:20:00 PM
gLxAcq...Lpou	DOGE → BTC	11,890 DOGE	user@demo.com	GB	FIXED-RATE	EXCHANGE COMPLETE	—	6/11/2026, 6:50:00 PM
bo7uZm...NWHv	ETH → BTC	3.128 ETH	user@demo.com	US	STANDARD	EXCHANGE COMPLETE	—	6/9/2026, 2:49:00 PM
7iuzre...DnUU	AVAX → BTC	61.25 AVAX	user@demo.com	SG	STANDARD	EXCHANGE COMPLETE	—	6/7/2026, 11:43:00 AM
1owchj...FBKr	USDT → ETH	2,950 USDT	user@demo.com	SG	STANDARD	EXCHANGE COMPLETE	—	6/4/2026, 6:39:00 PM
Bsdha5...dNup	ETH → USDC	3.91 ETH	user@demo.com	GB	STANDARD	EXCHANGE COMPLETE	—	6/4/2026, 10:44:00 AM


Transactions screen — searchable, filterable, and CSV-exportable.

Storefront highlights

Hero, features, and a curated “Popular pairs” band ship out of the box — all editable per-locale from the new Content CMS.

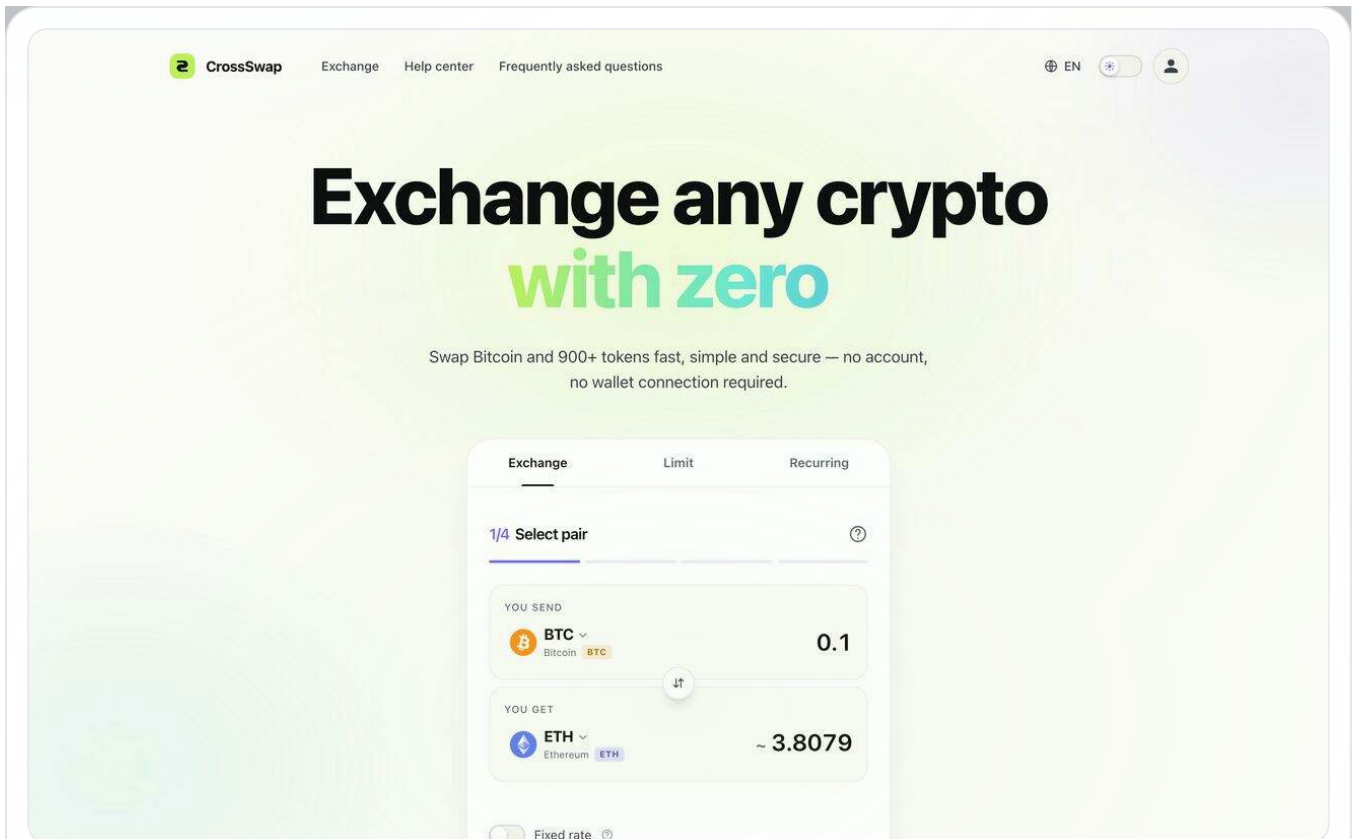


Features band — copy and stats are CMS-driven per locale.

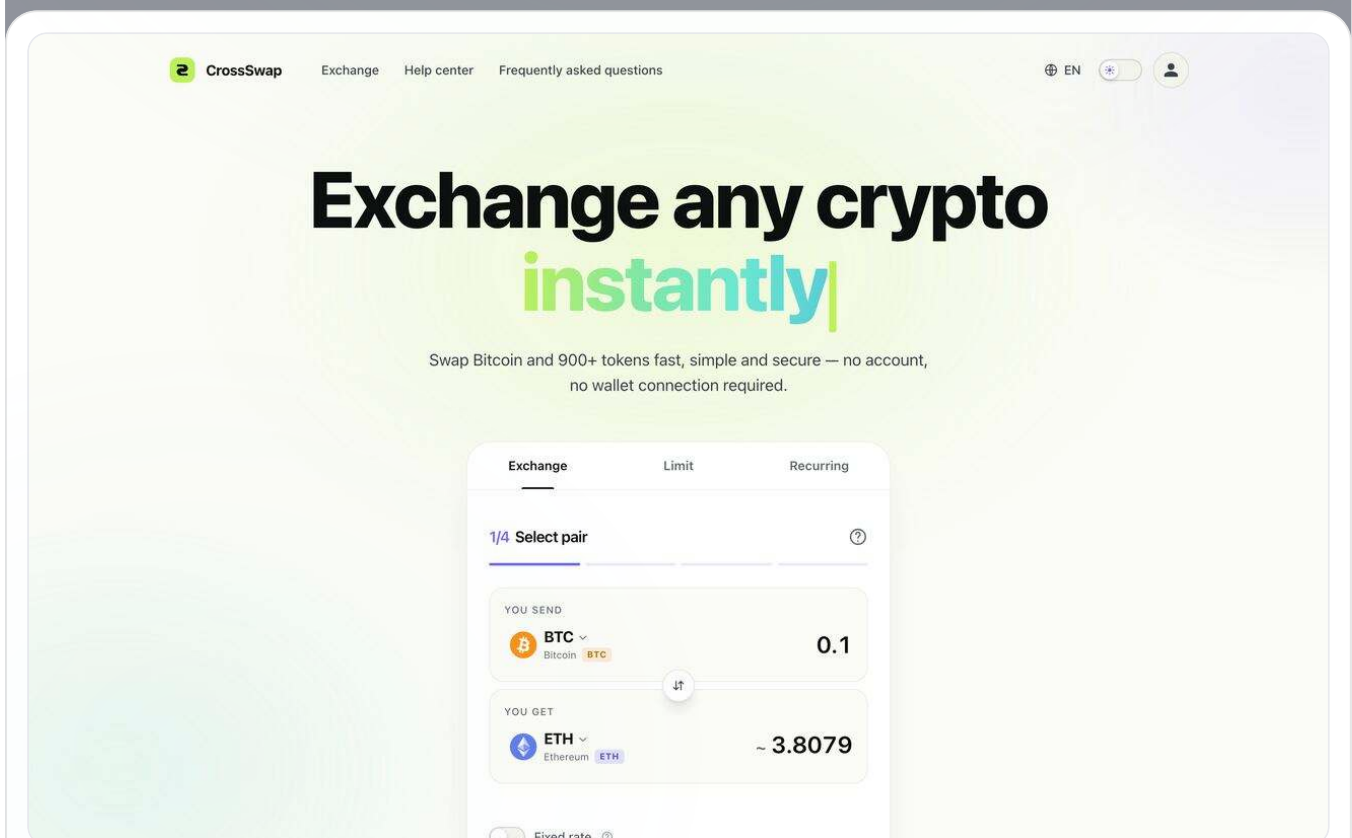


Popular pairs — tap to seed the swap card.

Need a hand?

The bundled **Help Center** mirrors the FAQ for end-customers and is fully translatable.

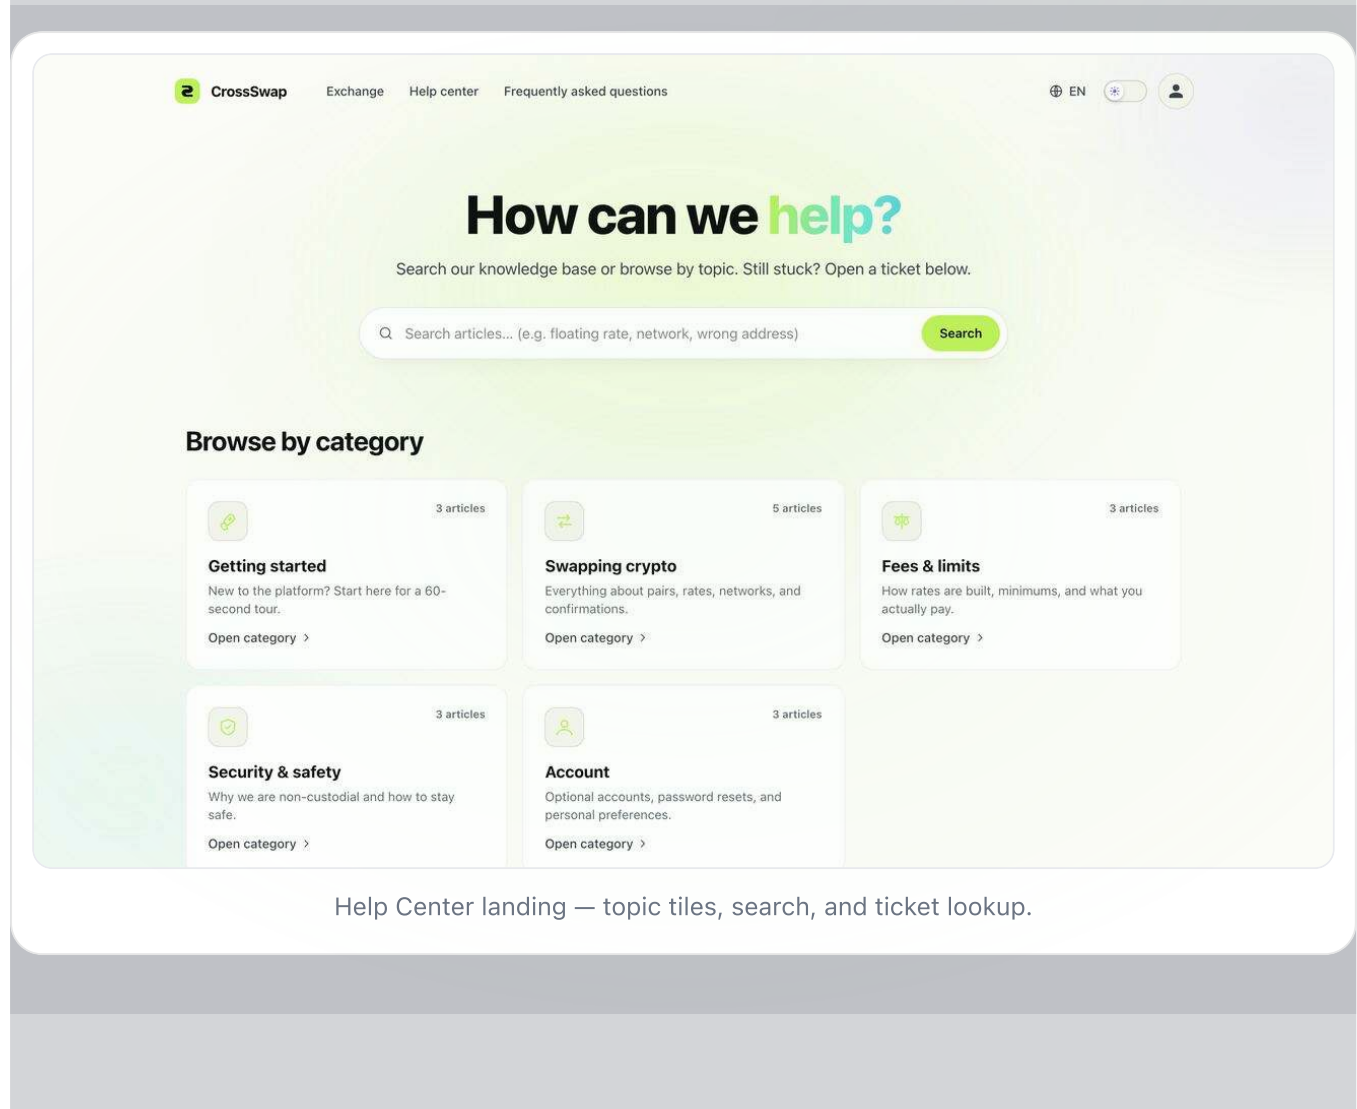

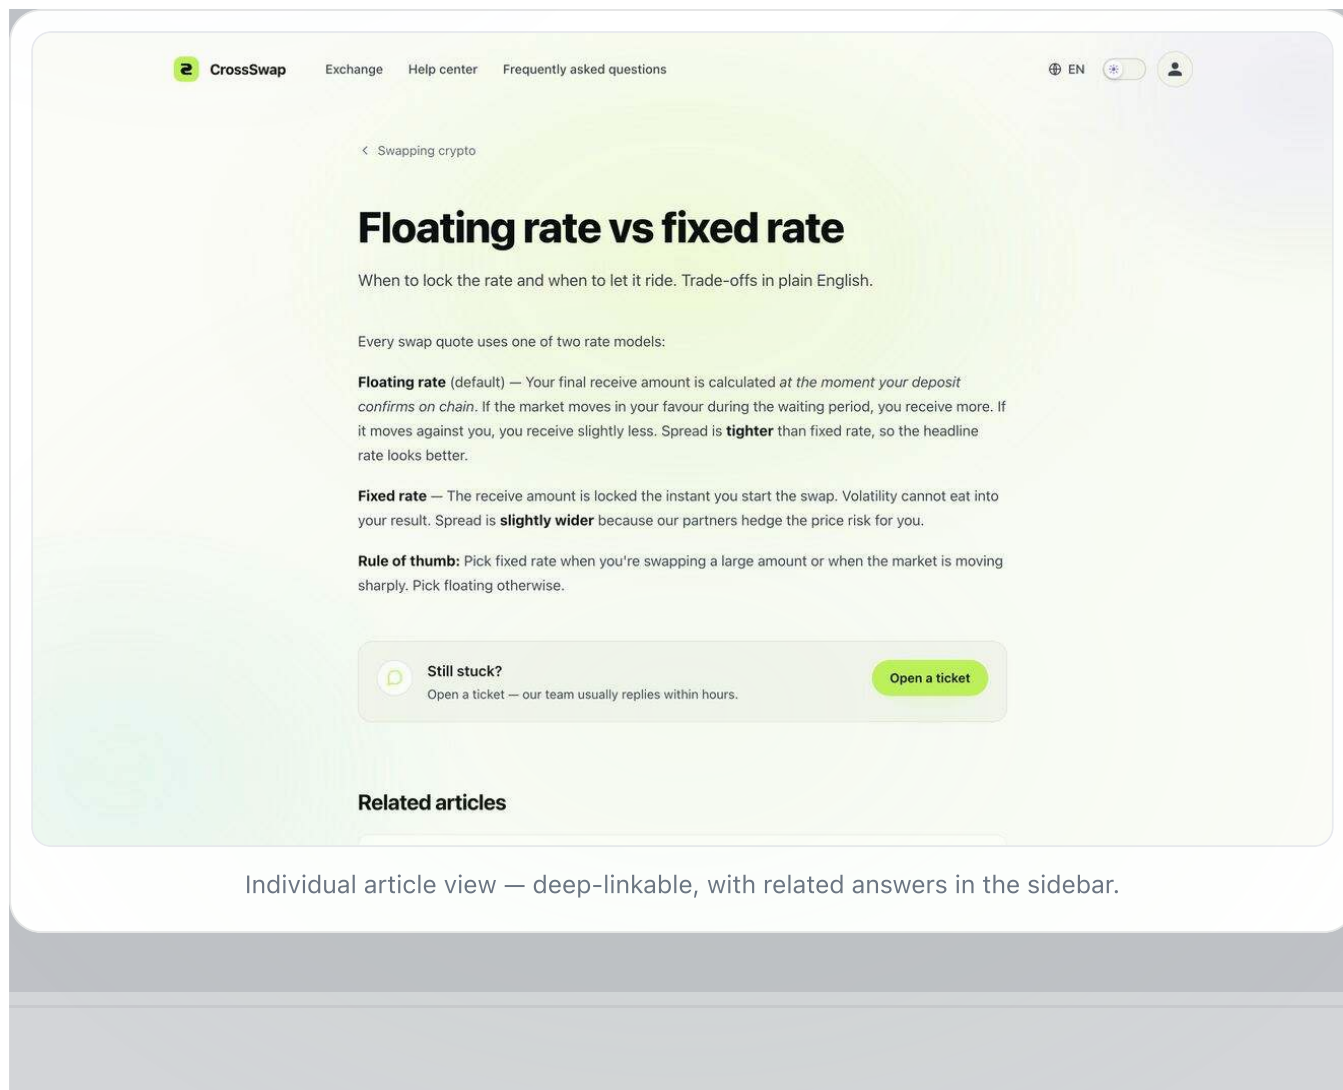

Individual article view — deep-linkable, with related answers in the sidebar.

Version **1.1.0** — released 2026.

Licence Envato Regular / Extended — see the bundled [LICENSE.md](#).

Copyright © 2026 CrossSwap. All rights reserved.

CHAPTER 2

Installation

Installation

CrossSwap installs through a guided browser-based wizard. On a server that already meets the requirements, the whole process takes about ten minutes — no command-line work required.

On this page: [Requirements](#) · [Hosting](#) · [Installer walkthrough](#) · [Manual install](#) · [Hosting checklist](#) · [Post-install](#) · [HTTPS](#) · [Verification](#)

Good news. The release archive ships a precompiled `public/build/` bundle and a complete `vendor/` folder. You can run CrossSwap with **no Node.js and no Composer** — the entire install boils down to uploading files and pointing the browser at `/install`.


1. System requirements

Before uploading anything, confirm your server meets the following matrix. The installer's first screen runs a live check — you can skip ahead to it if you want to verify your environment before reading the rest.

REQUIREMENT	MINIMUM	RECOMMENDED
PHP	8.2	8.3 / 8.4
PHP extensions	<code>bcmath</code> , <code>ctype</code> , <code>curl</code> , <code>dom</code> , <code>fileinfo</code> , <code>json</code> , <code>mbstring</code> , <code>openssl</code> , <code>pcre</code> , <code>pdo</code> (+ one of <code>pdo_sqlite</code> , <code>pdo_mysql</code> , <code>pdo_pgsql</code>), <code>tokenizer</code> , <code>xml</code> , <code>zip</code> , <code>intl</code> , <code>sodium</code> , and either <code>gd</code> or <code>imagick</code>	+ <code>redis</code>

REQUIREMENT	MINIMUM	RECOMMENDED
Composer (only if not using shipped vendor/)	2.x	2.7+
Node.js (only if rebuilding assets — buyers can skip)	20	22
Database	SQLite (default, zero setup) / MySQL 8+ / PostgreSQL 14+	MySQL 8.0.30+ or PostgreSQL 16
Web server	Apache 2.4 / Nginx 1.20 / Caddy 2	Nginx 1.24 + PHP-FPM
RAM	256 MB	512 MB+
Redis (optional — queue/cache acceleration)	—	7.0+

The installer's requirements step (Step 2 in the walkthrough) verifies each extension and shows a clear hint when something is missing.

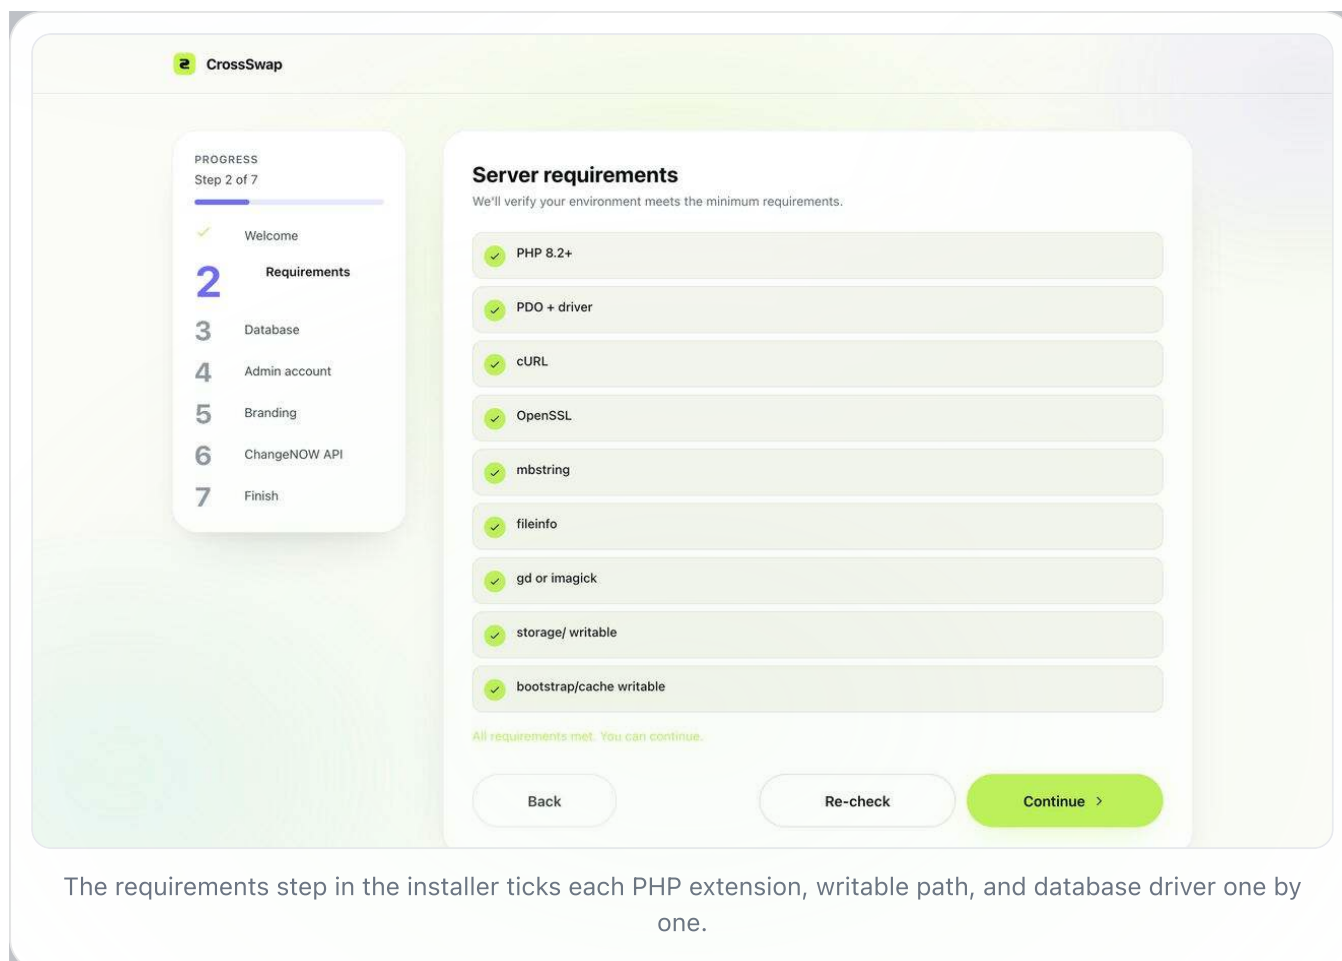

2. Hosting compatibility

CrossSwap runs on the same hardware as any other modern Laravel application. Specific shared-hosting notes:

- **cPanel** — create a Node app or PHP app, set the document root to `public/`, and use the bundled cron UI for the scheduler.
- **Plesk** — use the “Hosting Settings” panel to point the document root at `public/`, then enable PHP 8.2+ from the PHP Settings page.
- **CyberPanel** — create a website, set the `open_basedir` to include the parent of `public/`, and add the queue worker as a systemd service from the SSH terminal.
- **VPS** — the recommended setup. See the manual-install section below.


Shared hosting caveat. If your provider does not let you run a long-lived process or a 1-minute cron, status polling cannot work and swaps will stall at “Waiting”. Pick a host that offers either supervised processes or a cron job that runs every minute.

3. Step-by-step browser installer

Upload the archive contents to your web root (the document root must point at the `public/` directory), set permissions on `storage/` and `bootstrap/cache/` to `775`, then open the site in a browser. CrossSwap will automatically redirect to `/install`.

```
chmod -R 775 storage bootstrap/cache
```

STEP 01 Welcome

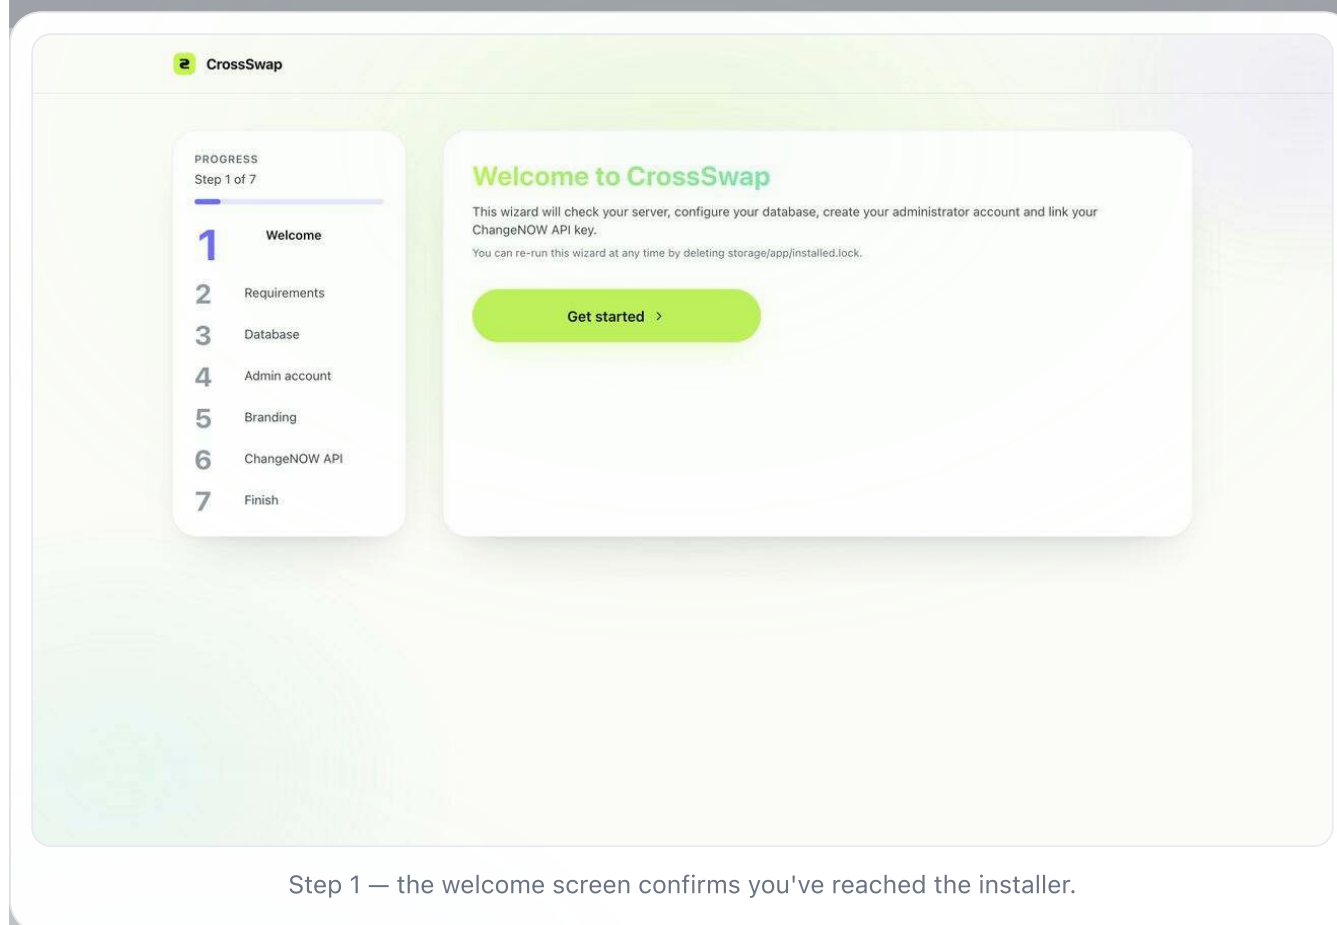

Step 1 — the welcome screen confirms you've reached the installer.

The welcome screen introduces the wizard and confirms the installer is reachable. Click **Begin install** to move on. No data is written.

STEP 02 Requirements check

CrossSwap

PROGRESS
Step 2 of 7

- 1 Welcome
- 2 Requirements**
- 3 Database
- 4 Admin account
- 5 Branding
- 6 ChangeNOW API
- 7 Finish

Server requirements

We'll verify your environment meets the minimum requirements.

- ✓ PHP 8.2+
- ✓ PDO + driver
- ✓ cURL
- ✓ OpenSSL
- ✓ mbstring
- ✓ fileinfo
- ✓ gd or imagick
- ✓ storage/ writable
- ✓ bootstrap/cache writable

All requirements met. You can continue.

[Back](#) [Re-check](#) [Continue >](#)

Step 2 — live environment check. The wizard refuses to advance until every required item is green.

This page runs `phpinfo()` internally, queries the file-system writability of `storage/` and `bootstrap/cache/`, and reports each one in real time. If a row is red, fix it on the server (install the extension, re-permission the directory) and click **Re-check**.

STEP 03 Database

CrossSwap

PROGRESS
Step 3 of 7

- ✓ Welcome
- ✓ Requirements
- 3 Database**
- 4 Admin account
- 5 Branding
- 6 ChangeNOW API
- 7 Finish

Database connection

Choose your storage driver and credentials. The migrator will run automatically.

DRIVER
Driver
SQLite (file) ▼

Database name
database/database.sqlite
Leave the path as database/database.sqlite to use the default file.

Back Test & migrate

Step 3 — pick a database driver and enter credentials. SQLite is the default for the fastest setup.

Fields on this screen:

Driver	SQLite, MySQL, or PostgreSQL. SQLite is the simplest — nothing else to install.
Host	Usually <code>127.0.0.1</code> . Ignored for SQLite.
Port	3306 for MySQL, 5432 for PostgreSQL.
Database	For SQLite, the path to the file (<code>database/database.sqlite</code> by default). For MySQL/PostgreSQL, the database name — create it first.
Username / Password	The DB user CrossSwap will connect as. Must have <code>CREATE / ALTER / DROP</code> privileges so migrations can run.

When you click **Test & migrate**, the installer opens a live connection, writes the credentials to `.env`, and runs `php artisan migrate --force` for you.

STEP 04 Admin account

CrossSwap

PROGRESS
Step 4 of 7

- ✓ Welcome
- ✓ Requirements
- ✓ Database
- 4 Admin account**
- 5 Branding
- 6 ChangeNOW API
- 7 Finish

Create your administrator

This account has full control of the admin panel. Pick a strong password.

Full name
Acme Crypto

Email address
you@your-domain.com

Password (12+ characters)

Confirm password

[Back](#) [Create administrator](#)

Step 4 — create the first administrator. The password must be at least 12 characters.

Name	Display name. Appears in the audit log.
Email	Used for sign-in and as the recipient for stuck-swap alerts.
Password / Confirm password	Minimum 12 characters. Stored as an Argon2id hash.

This admin is automatically assigned the `superadmin` role.

STEP 05 Branding

CrossSwap

PROGRESS
Step 5 of 7

- ✓ Welcome
- ✓ Requirements
- ✓ Database
- ✓ Admin account
- 5 Branding**
- 6 ChangeNOW API
- 7 Finish

Branding

Customize how the storefront presents itself.

Brand name
CrossSwap

Tagline
Cross-chain swaps in 30 seconds, no account required

Support email

Default theme
Dark

Back Save branding

Step 5 — set the public-facing identity. Everything here can be changed later from the admin panel.

Brand Public-facing product name — appears in the header, footer, and emails.

Tagline Optional. Shown under the hero on the homepage.

Support email Used as the reply-to on outbound mail and shown on the contact page.

Theme `dark` (default), `light`, or `auto` (follows the visitor's OS preference).

STEP 06 ChangeNOW API key

CrossSwap

PROGRESS
Step 6 of 7

- ✓ Welcome
- ✓ Requirements
- ✓ Database
- ✓ Admin account
- ✓ Branding
- 6 ChangeNOW API**
- 7 Finish

ChangeNOW API

Paste your API key from your ChangeNOW partner account. We will verify it before saving.

API key Show

Referral code (optional)
optional-affiliate-tag

Default exchange flow

☒ Standard (floating rate) ☐ Fixed-rate

Need a key? Visit your ChangeNOW partner dashboard.

Back Test connection Save & continue

Step 6 — paste your ChangeNOW partner key. The Test button probes the live API before saving.

API key

From the [ChangeNOW partner dashboard](#). Free to obtain.


Referral / partner address

Optional. Routes the commission to your preferred wallet.

Default flow


☐ standard (floating market rate) or ☐ fixed-rate (rate locked at the moment of swap).

The installer calls `/install/api` with `test_only=true` when you press **Test connection**; it briefly stores the key, fetches the currency list to confirm validity, then either keeps it or rolls back.

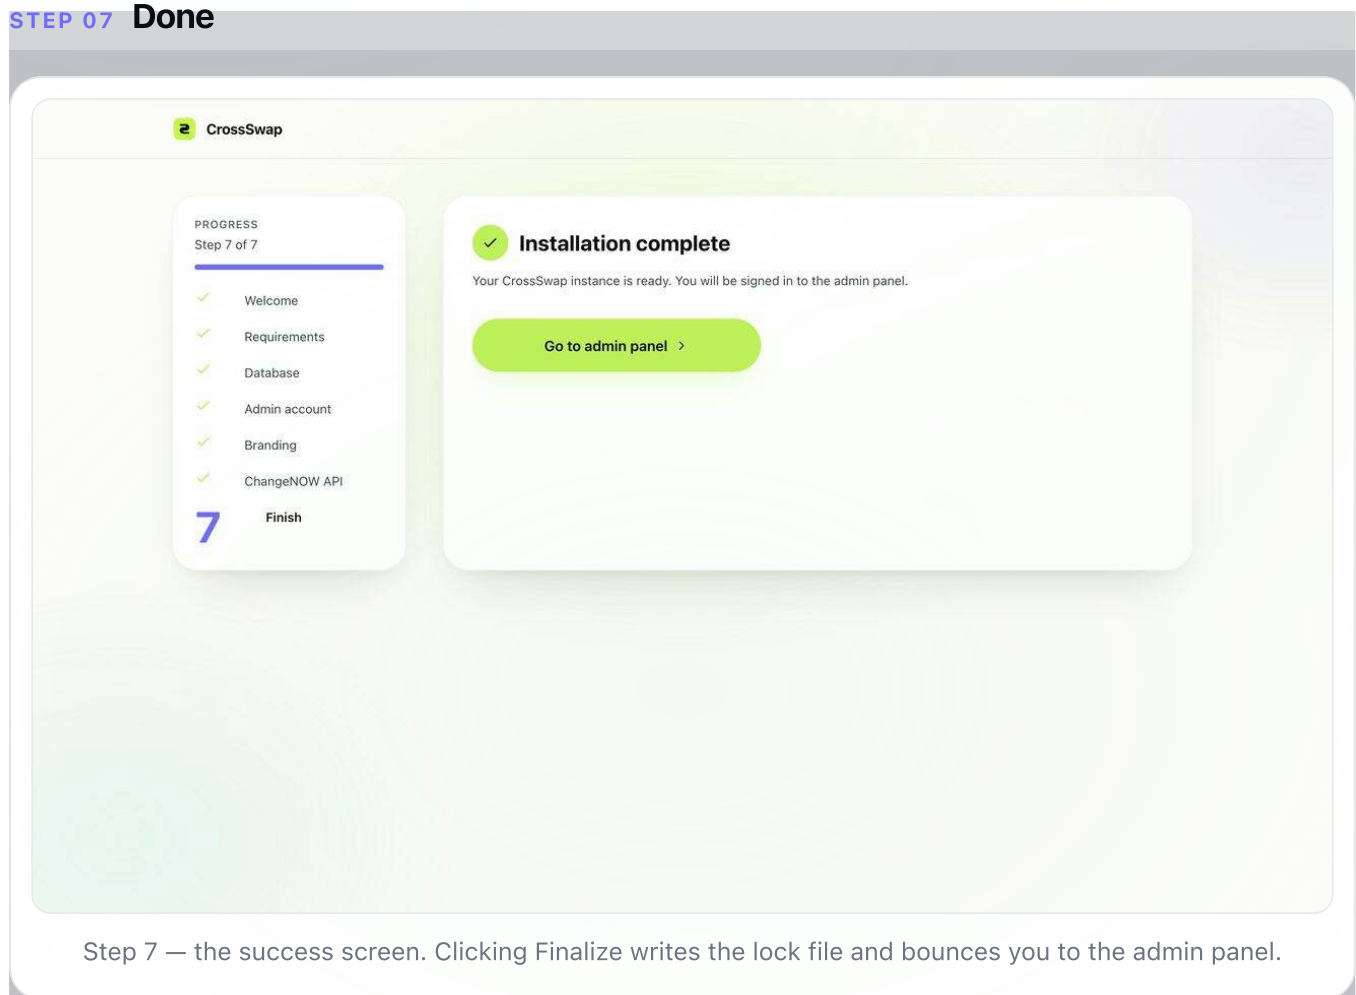STEP 07 Done

Step 7 — the success screen. Clicking Finalize writes the lock file and bounces you to the admin panel.

Pressing **Finalize** triggers `/install/finalize`, which writes `storage/app/installed.lock` so the installer cannot run again, logs you into the admin panel automatically, and lands you on the dashboard.

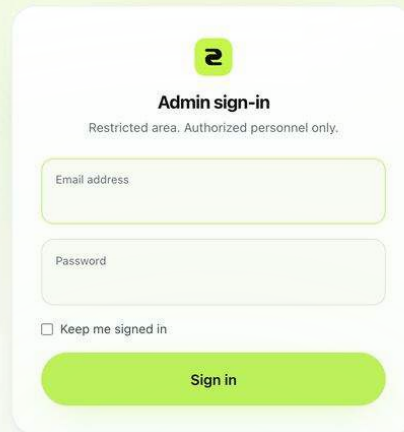

Admin sign-in
Restricted area. Authorized personnel only.


Email address

Password

☐ Keep me signed in

Sign in

Future visits to `/admin/login` show this screen.

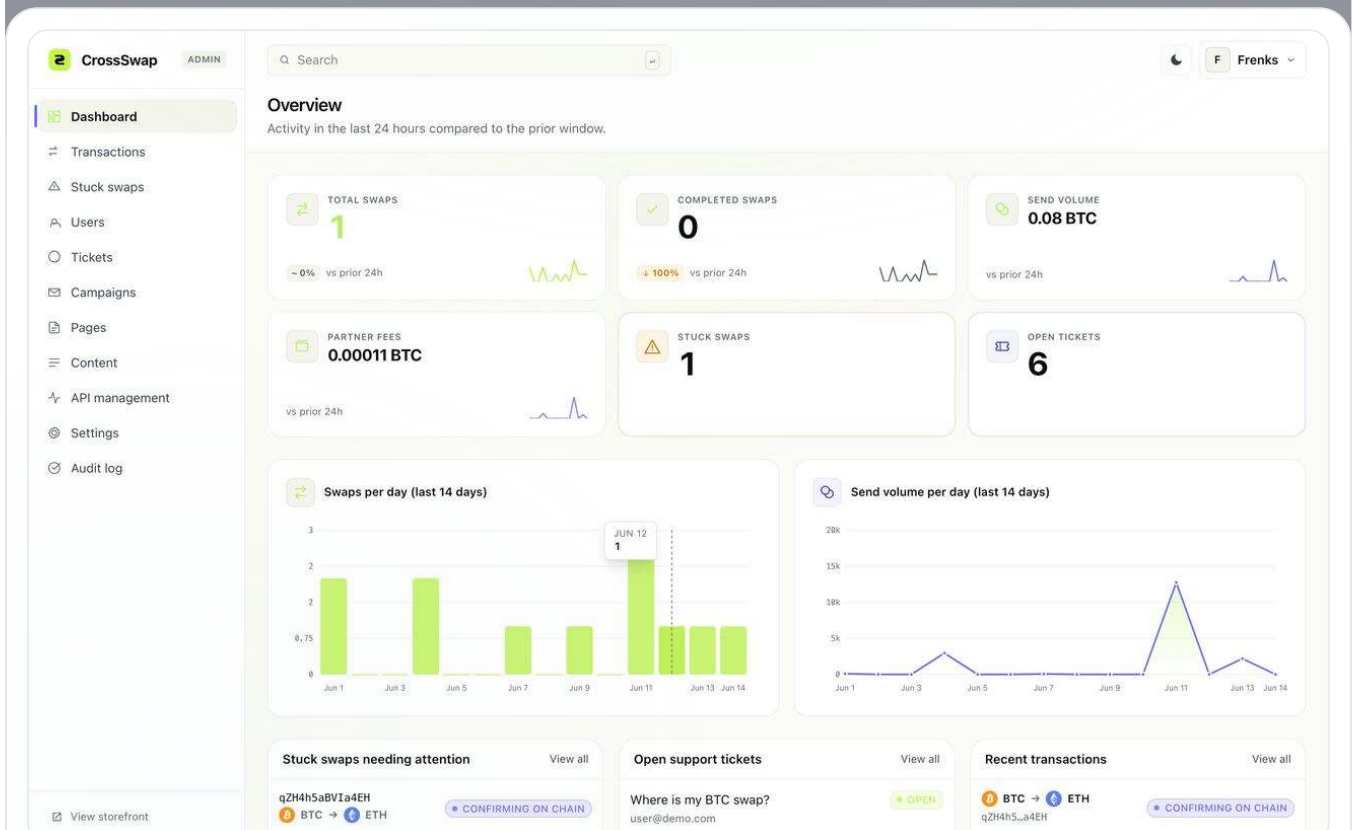

After sign-in you land on the dashboard with zero transactions on a fresh install.

4. Manual install (CLI)

For buyers who prefer the command line, the same flow boils down to:

```
git clone <your-repo> crossswap
cd crossswap
composer install --no-dev --optimize-autoloader
cp .env.example .env
php artisan key:generate
# Edit .env to set DB credentials, then:
php artisan migrate --force
php artisan db:seed --class=AdminRolesSeeder --force
php artisan storage:link
chmod -R 775 storage bootstrap/cache
```

Create the first admin and write the lock file directly:

```
php artisan tinker --execute="\
\\App\\Models\\Admin::create([
    'name' => 'Admin',\
    'email' => 'you@example.com',\
    'password' => bcrypt('change-me-12chars'),\
])->assignRole('superadmin');"
touch storage/app/installed.lock
```

Finally, drop your ChangeNOW key into the settings table by logging into `/admin` and using the **Settings → API management** page.

5. Hosting checklist

Run through these once before you start sending real traffic. Most stuck-swap reports trace back to a missing item in this list.

File permissions

The web user (typically `www-data`, `nginx`, or `apache`) must own and be able to write the two state directories:

```
sudo chown -R www-data:www-data storage bootstrap/cache
sudo find storage bootstrap/cache -type d -exec chmod 775 {} \;
sudo find storage bootstrap/cache -type f -exec chmod 664 {} \;
```

If your hosting panel runs PHP-FPM under a different user, swap `www-data` for that user.

Queue worker

CrossSwap polls the upstream exchange for swap status. You need a long-lived worker:

```
# simplest:
php artisan queue:work --tries=3 --timeout=120

# recommended in production (Horizon dashboard at /horizon):
php artisan horizon
```

Supervise it with `systemd` or `supervisord` so it restarts on failure and after deploys. A complete `systemd` unit is in [section 6](#) below.

Scheduler cron

The scheduler dispatches the polling, stuck-flagging, limit-order, and recurring jobs. Add this single line to the web user's crontab (`crontab -e` as that user):

```
* * * * * cd /var/www/crossswap && php artisan schedule:run >> /dev/null 2>&1
```

Critical. Without this cron, status polling, stuck-swap alerts, recurring DCA runs, and limit orders all stop. Most shared hosts offer a cron UI in cPanel / Plesk — use it if you cannot reach `crontab` directly.

HTTPS & APP_URL

Set `APP_URL=https://yourdomain.tld` in `.env` and serve the site over HTTPS. CrossSwap forces secure cookies and HSTS when `APP_ENV=production`.

6. Post-install: queue, scheduler, mail

Queue worker

CrossSwap polls the upstream exchange every minute. A long-lived worker must be running:

```
php artisan horizon
```

For production, supervise it with `systemd` or `supervisord` so it restarts on failure and after deploys. Example `systemd` unit (`/etc/systemd/system/crossswap-horizon.service`):

```
[Unit]
Description=CrossSwap Horizon worker
After=network.target

[Service]
Type=simple
User=www-data
WorkingDirectory=/var/www/crossswap
ExecStart=/usr/bin/php artisan horizon
Restart=always
RestartSec=3

[Install]
WantedBy=multi-user.target
```

Scheduler cron

The scheduler dispatches the polling, stuck-flagging, limit-order, and recurring jobs. Add this one line to the web user's crontab:

```
* * * * * cd /var/www/crossswap && php artisan schedule:run >> /dev/null 2>&1
```

Mail

Add SMTP credentials to `.env` :

```
MAIL_MAILER=smtp
MAIL_HOST=smtp.example.com
```



```
MAIL_PORT=587
MAIL_USERNAME=your-username
MAIL_PASSWORD=your-password
MAIL_ENCRYPTION=tls
MAIL_FROM_ADDRESS=hello@yourdomain.tld
MAIL_FROM_NAME="${APP_NAME}"
```

Then clear the cache so the new values take effect:

```
php artisan config:clear
```

7. HTTPS

Production traffic must be served over HTTPS — CrossSwap enforces secure cookies and HSTS when `APP_ENV=production`.

Option A — Cloudflare Flexible / Full

If your origin is HTTP-only, point the domain at Cloudflare, enable the SSL setting (Flexible or, ideally, Full Strict), then add this in `App\Providers\AppServiceProvider::boot()` if it isn't already enabled by env:

```
if ($this->app->environment('production')) {
    URL::forceScheme('https');
}
```

Option B — Let's Encrypt (Nginx)

```
sudo apt install certbot python3-certbot-nginx
sudo certbot --nginx -d yourdomain.tld -d www.yourdomain.tld
sudo systemctl reload nginx
```

Certbot installs a daily cron that auto-renews the certificate 30 days before expiry.

Option C — Caddy (zero config)

Caddy 2 obtains and renews certificates automatically. A complete Caddyfile:

```
yourdomain.tld {
    root * /var/www/crossswap/public
    php_fastcgi unix//run/php/php8.3-fpm.sock
    file_server
    encode gzip zstd
}
```

8. Post-install verification checklist

Tick these off after the installer completes to confirm the deployment is healthy:

- Visiting `/` shows the storefront with the swap card.
- Visiting `/install` redirects back to the home page (lock file is in place).
- Signing in at `/admin/login` lands on the dashboard.
- The dashboard shows **0 transactions** on a fresh install rather than an error.
- The currency selector on the homepage lists 50+ currencies (proves the ChangeNOW key works).
- A test swap reaches the **Waiting** state (and starts polling).
- The `queue:work` or Horizon process is running — `php artisan horizon:status` reports **running**.
- The scheduler cron has logged a run in the last minute — `php artisan schedule:list`.
- An outbound test email arrives in the inbox of the support address.
- Browsing the site over HTTPS shows a valid certificate and no mixed-content warnings in DevTools.

Next step. Head over to [Configuration](#) to fine-tune branding, languages, the chat assistant, and the featured currency lists.

CHAPTER 3

Configuration

Configuration

Everything visitors see — brand, languages, currency lists, the AI chat assistant, and your ChangeNOW key — is editable from the admin panel. No server access required.


On this page: [Features management](#) · [Branding](#) · [Languages](#) · [Translations](#) · [ChangeNOW key](#) · [AI chat](#) · [Legal URLs](#) · [Currencies](#) · [Queue & cron](#)

Features management

Every operational feature lives under one of the admin nav entries. This section maps each one to its URL and shows you the screen.

Dashboard

Open `/admin`. KPIs across the top (lifetime swaps, volume, fees, open tickets), a 14-day chart, recent transactions, and stuck-swap indicators — everything you need at a glance.

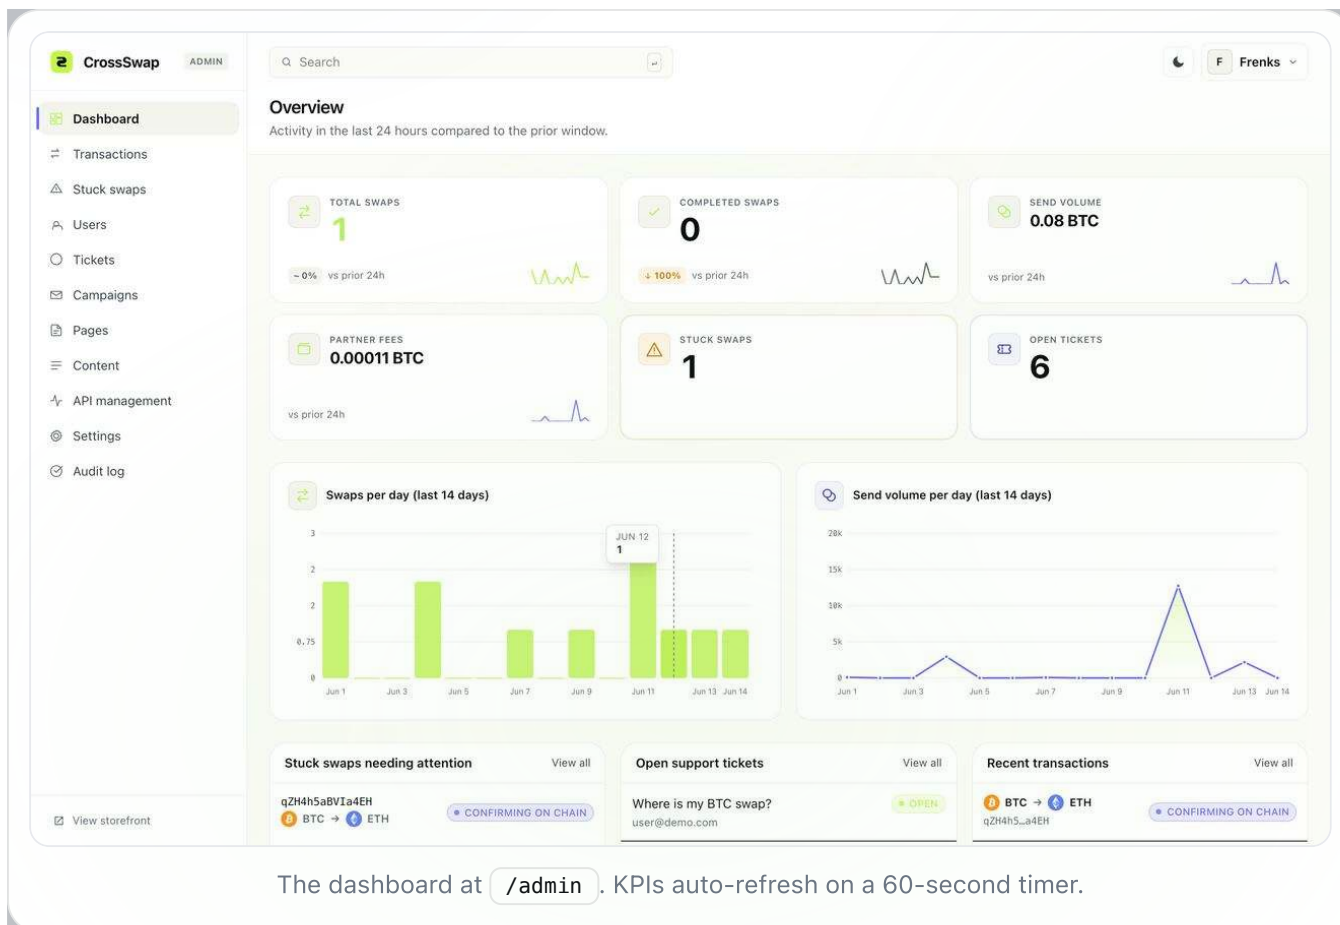

Transactions

Open `/admin/transactions`. Filter by status, currency pair, or date; click a row to view the on-chain hashes, the original payload sent to ChangeNOW, and the polling history. The **Export CSV** button respects active filters.

ID	PAIR	AMOUNT	EMAIL	COUNTRY	FLOW	STATUS	STUCK	CREATED
qZH4h5...a4EH	BTC → ETH	0.08 BTC	user@demo.com	NL	STANDARD	CONFIRMING ON CHAIN	1	6/14/2026, 11:18:00 AM
h3YfqX...iQ17	ARB → BTC	2,188 ARB	user@demo.com	BR	STANDARD	EXCHANGE COMPLETE	—	6/13/2026, 7:13:00 AM
Cyd2aJ...jSLJ	BTC → SOL	0.024 BTC	—	BR	STANDARD	EXCHANGE COMPLETE	—	6/12/2026, 10:46:00 AM
7Hu19c...0MHZ	DOT → ETH	303.2 DOT	—	SE	STANDARD	EXCHANGE COMPLETE	—	6/12/2026, 1:54:00 AM
kFjcmo...dumb	USDC → USDT	557.5 USDC	user@demo.com	GB	STANDARD	EXCHANGING	—	6/11/2026, 8:20:00 PM
gLxAcq...Lpou	DOGE → BTC	11,890 DOGE	user@demo.com	GB	FIXED-RATE	EXCHANGE COMPLETE	—	6/11/2026, 6:50:00 PM
bo7uZm...NMhv	ETH → BTC	3.128 ETH	user@demo.com	US	STANDARD	EXCHANGE COMPLETE	—	6/9/2026, 2:49:00 PM
7iuzre...DnUJ	AVAX → BTC	61.25 AVAX	user@demo.com	SG	STANDARD	EXCHANGE COMPLETE	—	6/7/2026, 11:43:00 AM
1owchj...FBKr	USDT → ETH	2,950 USDT	user@demo.com	SG	STANDARD	EXCHANGE COMPLETE	—	6/4/2026, 5:39:00 PM
Bsdha5...dNup	ETH → USDC	3.91 ETH	user@demo.com	GB	STANDARD	EXCHANGE COMPLETE	—	6/4/2026, 10:44:00 AM


The Transactions screen. Rows expand inline; the detail drawer shows the full upstream payload.

Content CMS

Open `/admin/content`. New in 1.1.0 — edit the four homepage marketing blocks per locale without touching code:

- **Highlights** — icon + title + body cards under the hero.
- **Reviews** — testimonial carousel (name, role, quote, optional avatar).
- **Stats** — the animated counter band (volume, swaps, chains, etc.).
- **How it works** — the 3-step explainer band.

Each section has locale tabs at the top. `Content::defaults()` seeds a clean install so the homepage renders before you customise anything.

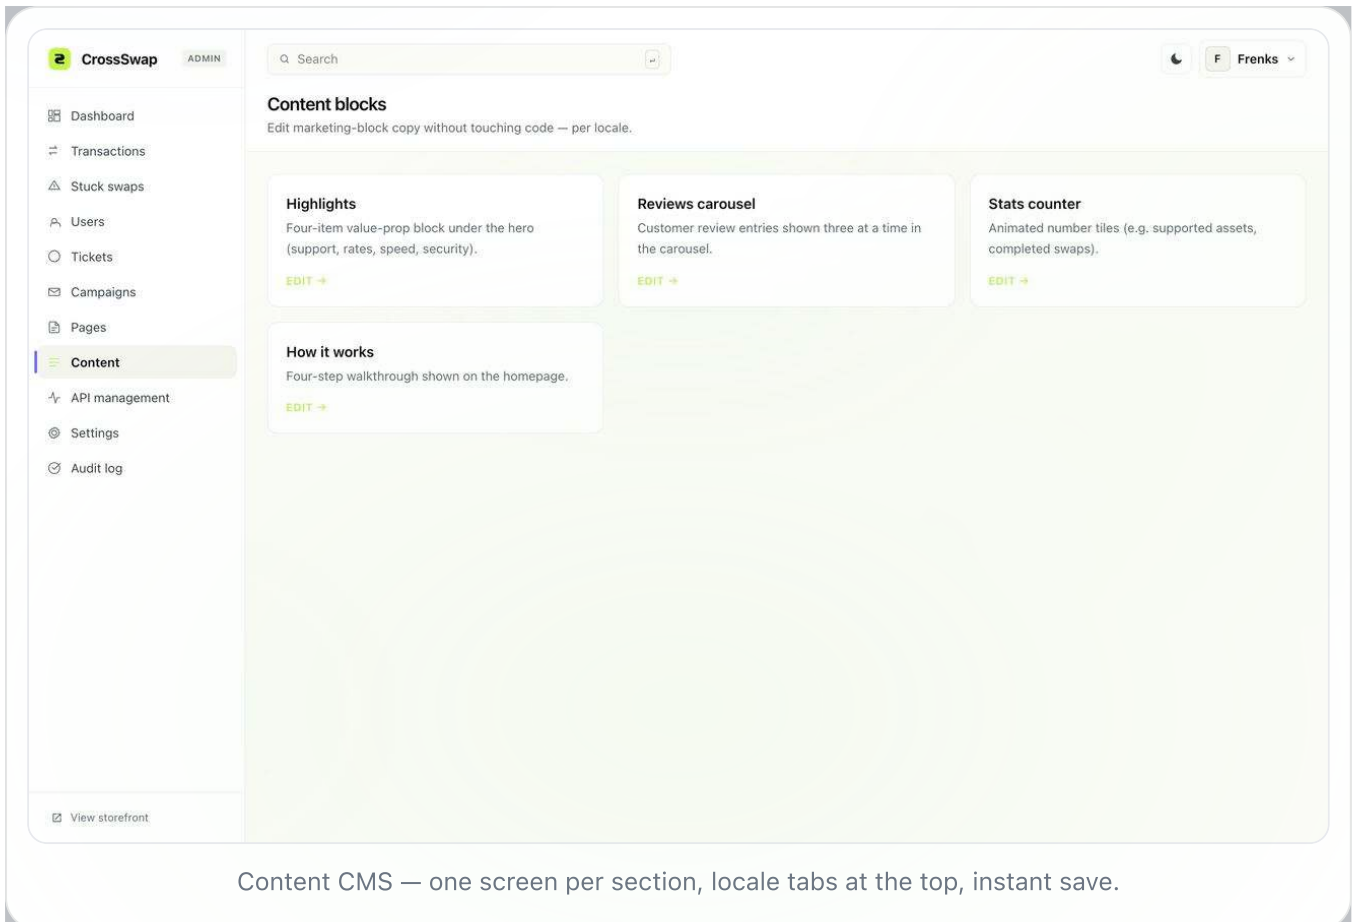

Pages CMS (multi-locale, Markdown)

Open `/admin/pages`. Each page lives at `/p/{slug}` on the public site. Per-locale title, excerpt, and body are backed by the `page_translations` table; filled-dot indicators in the locale-tab strip show which languages are complete.

The editor is a tabbed Write / Preview Markdown editor with a toolbar (headings, bold, italic, code, lists, links, blockquote). No external editor dependency — the preview reuses the storefront's own renderer so what you see is exactly what visitors get.

CrossSwap ADMIN

Q Search

Pages
Lightweight CMS for marketing and legal pages.

Create page

TITLE	SLUG	STATUS	HEADER	FOOTER	LAST EDITED	ACTIONS
Privacy Policy	/p/privacy-policy	EXCHANGE COMPLETE	—	FOOTER	6/14/2026, 6:18:00 PM	Edit Delete
Terms of Service	/p/terms-of-service	EXCHANGE COMPLETE	—	FOOTER	6/14/2026, 6:18:00 PM	Edit Delete
About Us	/p/about-us	EXCHANGE COMPLETE	—	FOOTER	6/14/2026, 6:18:00 PM	Edit Delete

View storefront

Pages CMS index — status badges and the locale-completeness pill strip.

CrossSwap ADMIN

Q Search

Edit page
Privacy Policy

EN ES DE FR

TITLE
Privacy Policy

SLUG
privacy-policy
Used in the public URL: /p/<slug>

EXCERPT
How we collect, use, and protect data when you swap crypto with us.
Short summary shown as a lede on the public page. Optional.

BODY (MARKDOWN)
Write Preview
H B I </> • 1. ↗ **

Our commitment

We built this service so you can swap crypto without handing over more personal information than is strictly necessary. This policy explains what we collect, why we collect it, and what we do with it.

What we collect

When you initiate a swap we record the swap parameters (amounts, currencies, networks, destination address), a hashed reference of your IP address, and a coarse country code derived from that IP for fraud-prevention purposes. If you create an account we additionally store your email address and a securely hashed password.

STATUS
Draft Published

Show in header ☐

Show in footer ☒

SORT ORDER
1
Lower numbers appear first in navigation.

PUBLIC URL
http://127.0.0.1:8123/p/privacy-p... Copy URL

Cancel Save changes

The Markdown editor with Write / Preview tabs and the formatting toolbar.

Tickets, Users, Campaigns

- **Tickets** — `/admin/tickets`. Customer support queue. Reply inline; replies go out by email and are mirrored to the customer's ticket portal.
- **Users** — `/admin/users`. Customer accounts (lifetime swaps, volume, last seen, suspend/restore).
- **Campaigns** — `/admin/campaigns`. Newsletter / promo campaigns to the customer list with per-locale templates.
- **Audit log** — `/admin/audit`. Owen-It powered — every admin action is logged with before/after values.
- **API logs** — `/admin/api-logs`. Raw ChangeNOW request/response history, useful when debugging stuck swaps.

Settings tabs

Open `/admin/settings`. The page is split into tabs — each tab maps to a controller method and a dedicated form:

- **Brand** — name, tagline, logo (light / dark), favicon, social URLs, legal URLs.
- **Theme** — primary colour override, default theme (dark / light / auto), typography tweaks.
- **SMTP** — mail host / port / credentials / from address with a **Send test email** button.
- **API** — ChangeNOW key + referral address with a **Test connection** probe.
- **AI** — chat provider (OpenAI / Anthropic / disabled), key, model, assistant name, system prompt.
- **Security** — 2FA toggle, session lifetime, IP allow-list for the admin panel.


Branding

Open **Admin** → **Settings** → **Branding**. You can change everything below without rebuilding assets.

Brand name	Header, footer, emails, and the <code><title></code> tag.
Logo	SVG or PNG. Saved to <code>storage/app/public/brand/</code> .
Logo (dark)	Optional alternate for light backgrounds. The storefront swaps automatically.
Tagline	Optional. Shown under the hero on the homepage.
Theme	<code>dark</code> (default), <code>light</code> , or <code>auto</code> .
Brand colour	Hex value — the lime <code>#bff15a</code> by default. Applied via CSS variables, so no rebuild needed.

Settings are cached for ten minutes — clear the cache after a change if you want to skip the wait:

```
php artisan cache:clear
```

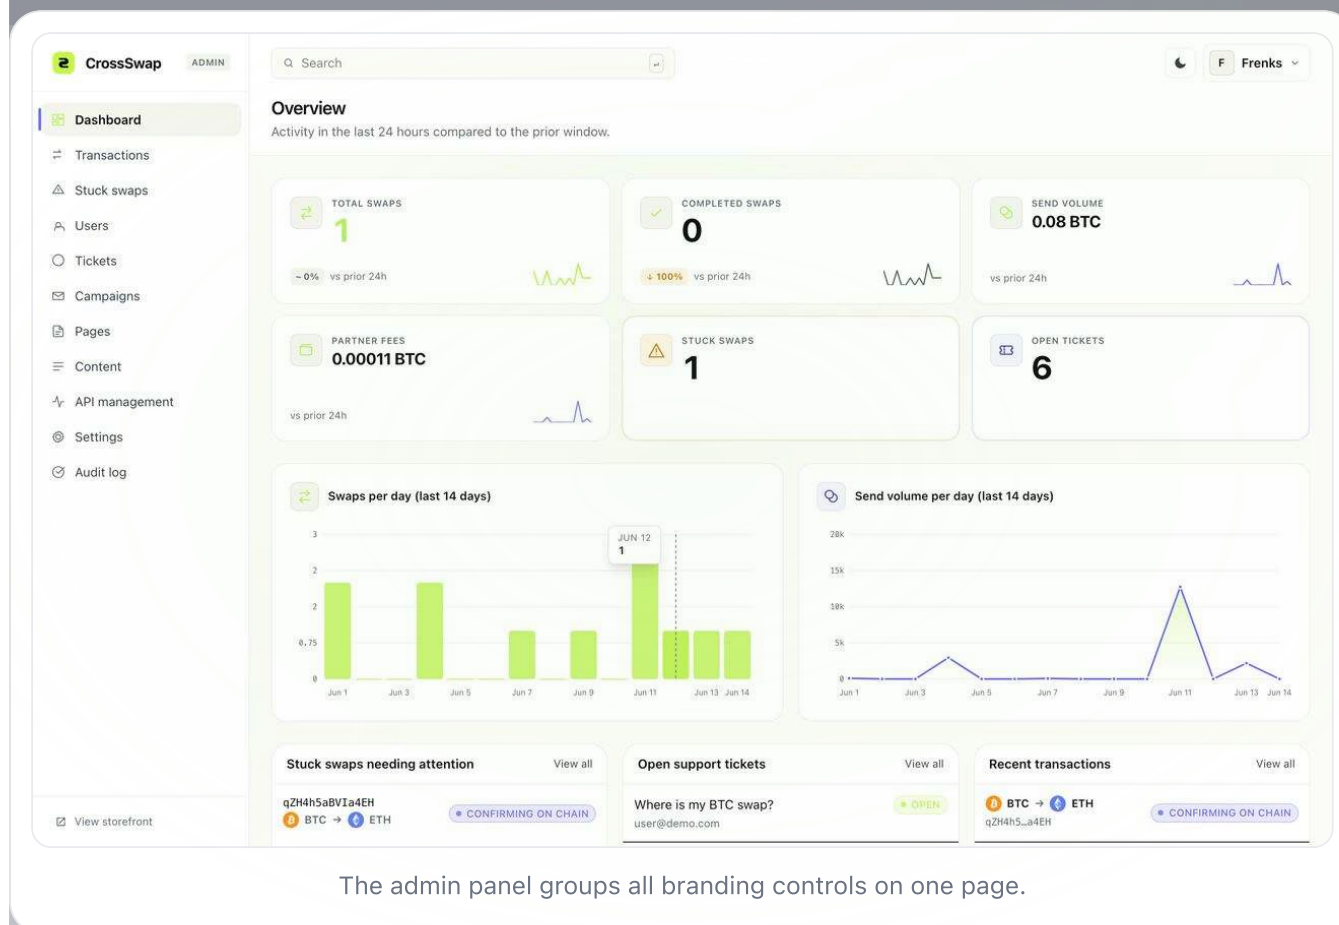

Languages

CrossSwap ships with English, Spanish, German, and French translations. Toggle which ones are user-selectable from **Settings → Languages**.

To add a new language, see the [Translations](#) section below.

Visitor language is detected from:

1. The `crossswap_lang` cookie if set (user explicitly picked one).
2. The `Accept-Language` header otherwise.
3. The first enabled language as a final fallback.

Translations

All storefront strings live in flat PHP arrays under `lang/<locale>/`. Shipped locales:

<code>lang/en/site.php</code>	English storefront strings (the canonical source).
<code>lang/es/site.php</code>	Spanish.
<code>lang/de/site.php</code>	German.
<code>lang/fr/site.php</code>	French.
<code>lang/<locale>/emails.php</code>	Strings used inside transactional email templates.
<code>lang/<locale>/help_articles.php</code>	Help center article content.

Add a new locale

1. Copy the English file as the starting point:

```
cp lang/en/site.php lang/it/site.php
cp lang/en/emails.php lang/it/emails.php
cp lang/en/help_articles.php lang/it/help_articles.php
```

2. Translate the values in each file. Every key must exist; missing keys fall back to the default locale.

3. Append the new locale code to the `languages` array in `config/swapforge.php`:

```
'languages' => ['en', 'es', 'de', 'fr', 'it'],
```

4. Rebuild the cache so the new locale is picked up:

```
php artisan optimize:clear
```

5. Open **Admin → Settings → Languages** and toggle the new locale on so the language picker exposes it on the storefront.

Translation parity verification

This one-liner counts the flat keys per locale — the four numbers should match. Any divergence points to missing translations:

```
php -r '$flat=function($a,$p="") use (&$flat){$o=[];foreach($a as $k=>$v){$n=$p=="en"?$k:$p.".".$k;foreach(["en","es","de","fr"] as $l){printf("%s: %d keys\n", $l, count($flat($n,$l)));}}}
```

Sample output on a clean install:

```
en: 412 keys
es: 412 keys
de: 412 keys
fr: 412 keys
```

Tip. Drop the snippet into a `tests/Feature/TranslationParityTest.php` assertion if you want CI to catch missing keys when you add a new locale.

ChangeNOW API key

CrossSwap integrates with **ChangeNOW**, a non-custodial cross-chain swap provider. A free partner account gets you an API key plus a commission on every swap.

1. Sign up at changenow.io/affiliate.
2. From the partner dashboard, copy your **API key**.
3. In CrossSwap admin, open **Settings → API management** and paste it into the **ChangeNOW API key** field.
4. (Optional) Paste your **Referral / partner address** — this routes commission to your preferred wallet.
5. Click **Save**. The form probes the live API before persisting.


Is it really free?

Yes. Partner accounts cost nothing. ChangeNOW earns from the spread baked into each swap rate and shares a percentage with you on every transaction your storefront produces. There is no monthly fee, minimum volume, or KYC requirement to obtain a key.

How do commissions work?

Every swap created through your CrossSwap installation is automatically attributed to your partner account. The commission percentage is set by ChangeNOW (typically 0.4% – 0.5% of swap

value). Payouts arrive on the schedule set in your partner dashboard — usually weekly or on demand.

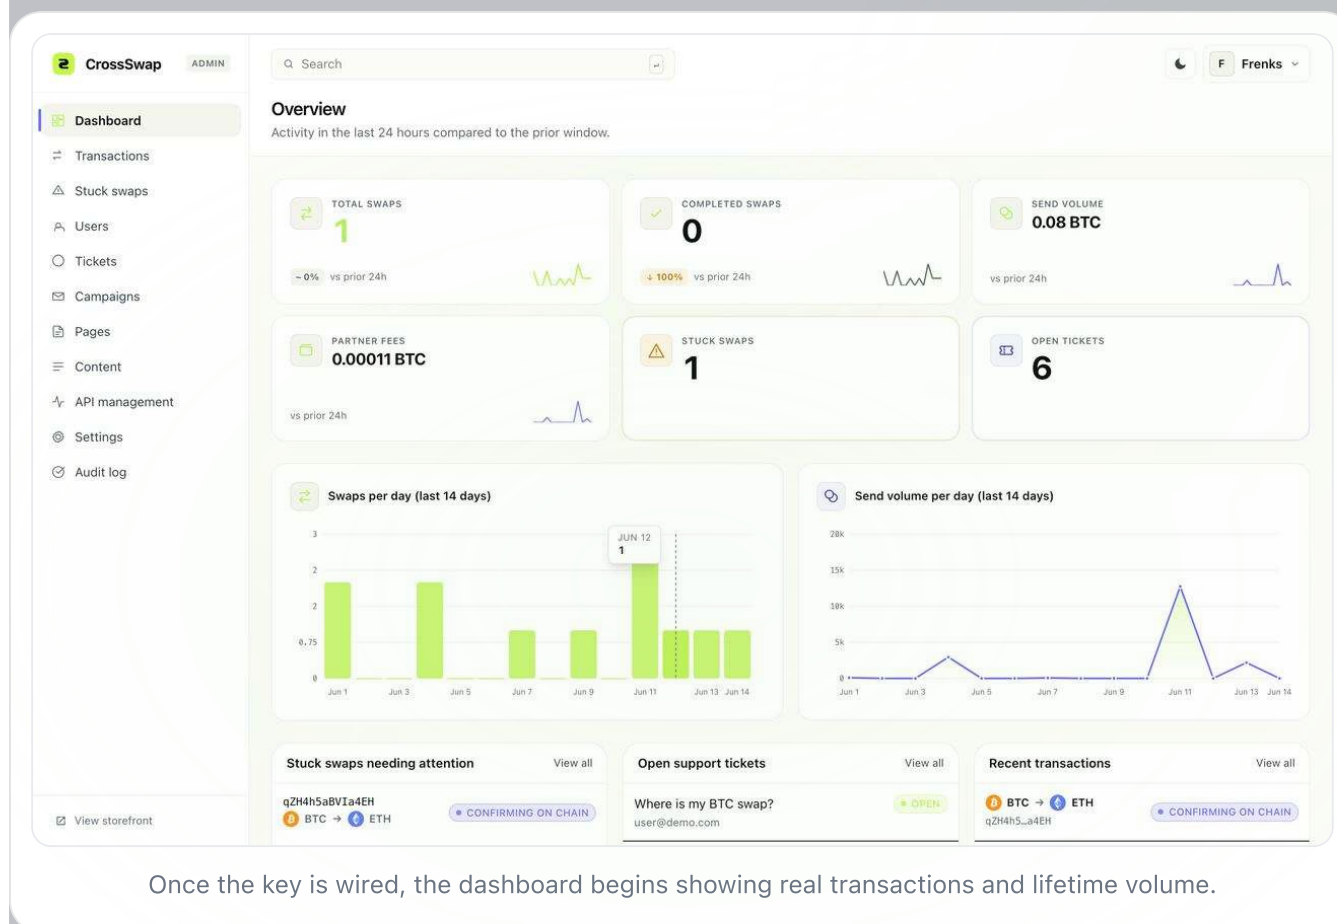

AI chat assistant

CrossSwap bundles an optional AI support assistant that answers visitor questions in real time. Open **Settings** → **Chat**.

Enabled	Toggles the floating chat bubble on the public site.
Provider	<code>none</code> , <code>openai</code> , or <code>anthropic</code> .
API key	The bearer token for the chosen provider.
Model	e.g. <code>gpt-4o-mini</code> (OpenAI) or <code>claude-haiku-4-5</code> (Anthropic).
Assistant name	Display name shown above the chat panel (e.g. "Lyra").
System prompt	Up to 4 000 characters. Pre-seeded with a sensible default.

OpenAI

1. Create an account at platform.openai.com.
2. Visit **API keys** and click **Create new secret key**.

3. Paste the key into CrossSwap, pick a model (`gpt-4o-mini` is the cheapest competent option), and save.

Anthropic

1. Create an account at console.anthropic.com.
2. Visit **Settings → API Keys** and create a key.
3. Paste it into CrossSwap, pick a model (`claude-haiku-4-5` for cost, `claude-sonnet-4-7` for quality), and save.

Testing

Use the **Send test message** button in the settings page. It calls the same code path the storefront uses and returns the assistant's reply inline. If the key is invalid or rate-limited, the panel shows the upstream error.

Rate limits. The chat endpoint is rate-limited to 20 requests per minute per IP. Bumps live in `routes/api.php`.

Legal URLs

The address-entry step links to your legal pages. Set them under **Settings → Legal**:

<code>terms_url</code>	Terms of Use.
<code>privacy_url</code>	Privacy Policy.
<code>aml_url</code>	AML / KYC Policy.

If you leave a field blank, the storefront hides the corresponding link instead of pointing at a broken URL.


Featured and blacklisted currencies

Pin the most popular tickers to the top of the currency selector under **Settings → Currencies**.

The defaults:

```
['btc', 'eth', 'usdt', 'bnb', 'sol', 'usdc', 'xmr', 'ada', 'trx', 'doge']
```

The **Blacklist** field hides any ticker you don't want available — useful if a coin is restricted in your jurisdiction or repeatedly causes stuck swaps.

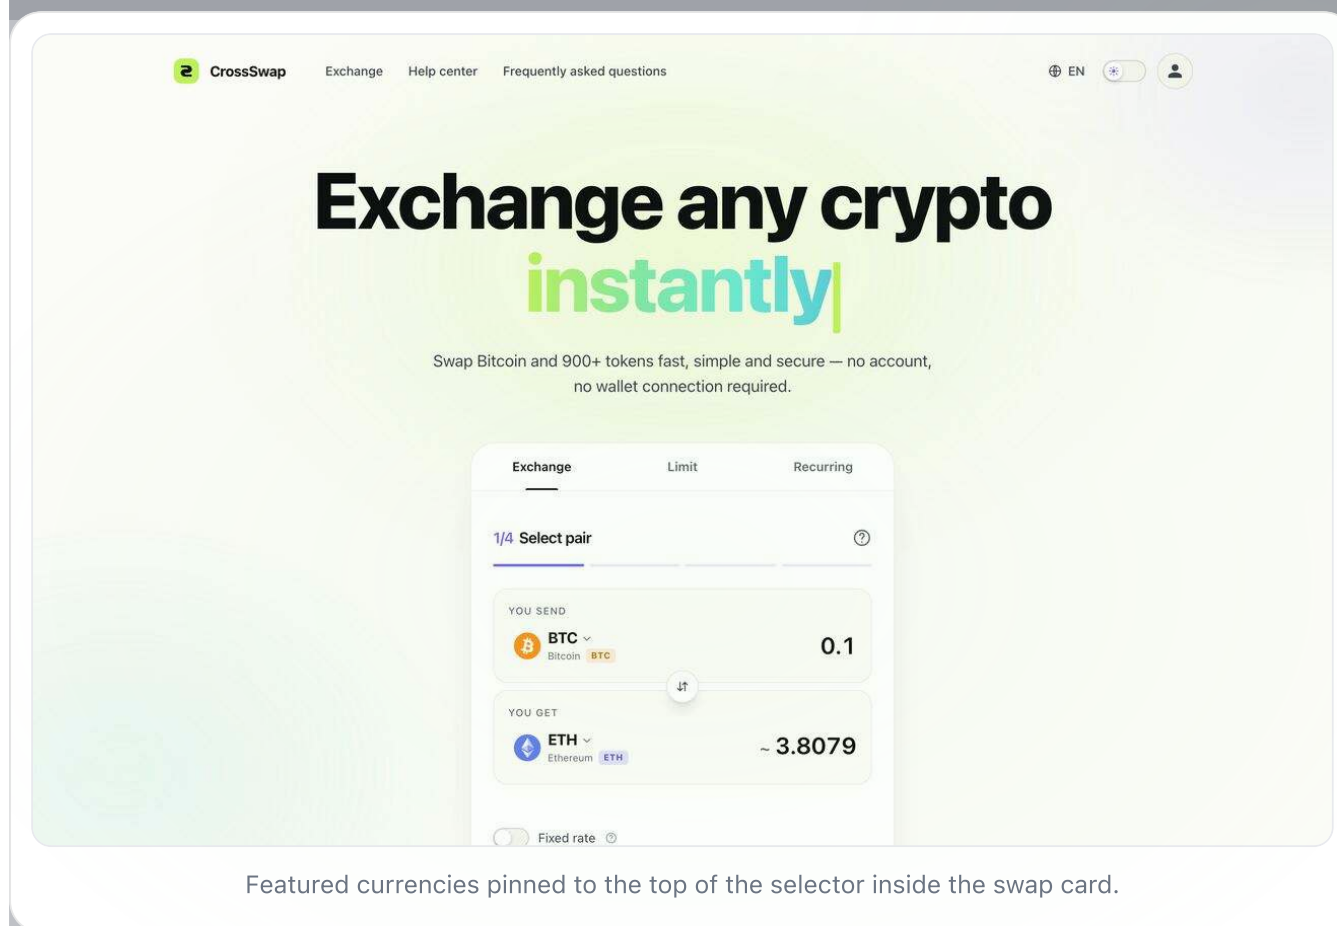

Featured currencies pinned to the top of the selector inside the swap card.

Queue worker & scheduler

CrossSwap defines two Horizon supervisors:

- `default` — handles emails and one-off jobs (4 workers in production).
- `exchange-polling` — polls in-flight swaps for status (6 workers in production).

Start Horizon:

```
php artisan horizon
```

Visit `/horizon` while signed in as an administrator to watch the queues in real time. The cron entry that ties everything together:

```
* * * * * cd /var/www/crossswap && php artisan schedule:run >> /dev/null 2>&1
```

Stuck-transaction thresholds

By default, swaps that remain in `waiting` for over 180 minutes or in `confirming` for over 360 minutes are flagged as stuck and admins are notified by email. Adjust the thresholds in

`config/swapforge.php` :

```
'tx_stuck' => [  
    'waiting_minutes'    => 180,  
    'confirming_minutes' => 360,  
],
```

Production checklist

- `APP_ENV=production` and `APP_DEBUG=false` in `.env`.
- HTTPS forced (already wired when `APP_ENV=production`).
- Horizon supervised by `systemd` or `supervisord`.
- Cron entry verified with `crontab -l`.
- Outbound HTTPS reachable to `api.changenow.io`.
- SMTP credentials tested with `php artisan tinker` → `Mail::raw(...)`.

Next step. Tweak look-and-feel deeper on the [Customization page](#), or read the [API reference](#).

CHAPTER 4

Customization

Customization

Brand colours, languages, logos, and email templates — this page covers the small handful of files you will edit when you want to go beyond the admin panel.


On this page: [Branding via admin](#) · [File structure](#) · [New language](#) · [Brand tokens](#) · [Logo](#) · [Favicon & OG](#) · [Email templates](#) · [Components](#)

Branding via the admin panel

For 90% of buyers, the admin panel covers everything — no code edits or rebuilds required. Open **Admin** → **Settings** → **Brand** and you'll find:

Logo	SVG or PNG, uploaded through <code>LogoUploader</code> . Saved to <code>storage/app/public/brand/</code> and served via the public symlink.
Logo (dark)	Optional alternate that the storefront uses on light backgrounds.
Name	Public-facing brand name. Header, footer, page titles, and emails all read this value.
Tagline	Optional. Appears under the hero on the homepage.
Social links	Twitter / X, Telegram, Discord, Reddit — left blank, the corresponding icon is hidden.
Legal URLs	Terms, Privacy, AML — these power the address-entry consent links and the footer.

Changes take effect immediately — settings are cached for 10 minutes but the admin form busts the cache on save.

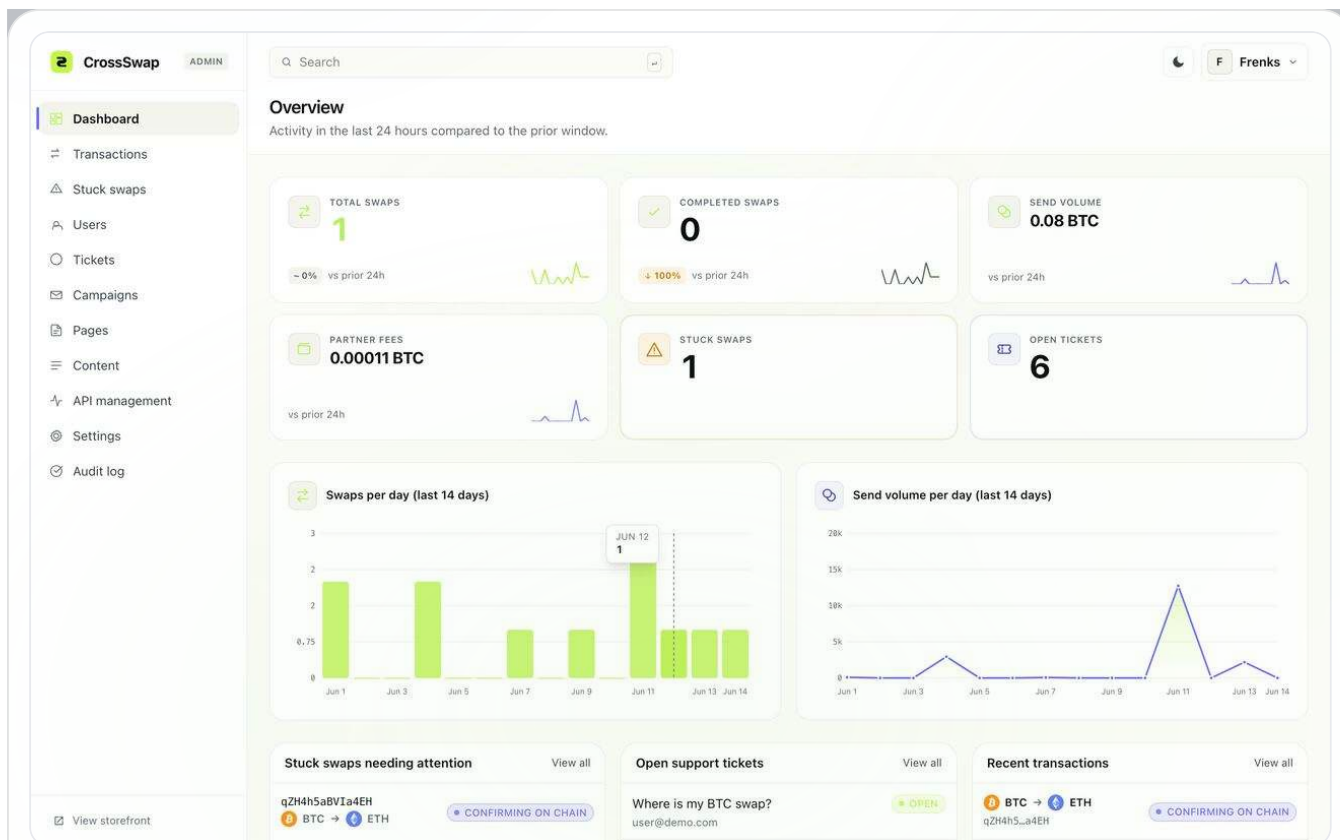

The admin panel groups every branding control on one page — no SSH required.

Tip. The `LogoUploader` component validates both file type and dimensions client-side. Keep the source SVG — you'll want it later for the favicon and OG card too.

File structure

The bits of the codebase you're most likely to touch:

- `app/` Laravel application code — controllers, models, services. Read-only for most users; out of scope for cosmetic edits.
- `resources/css/app.css` Tailwind 4 entry plus the `@theme` block with brand colours.
- `resources/js/Pages/` One Inertia page per route — `Home.tsx`, `Support.tsx`, etc.
- `resources/js/components/` Re-usable React components grouped by feature.
- `resources/views/emails/` Blade templates for outbound mail.
- `lang/<locale>/site.php` All storefront strings, including FAQ, hero, footer, errors.
- `lang/<locale>/emails.php` Strings used inside email templates.
- `config/swapforge.php` App-level config: language list, thresholds, social links.

`public/favicon.svg` / Static brand assets served as-is.

`public/og-image.svg`

Adding a new language

CrossSwap ships with English, Spanish, German, and French translations. Adding another locale takes three steps:

1. Edit `config/swapforge.php` and append the locale code to the `languages` array, e.g. `'it'` for Italian.
2. Copy `lang/en/site.php` to `lang/<code>/site.php` and translate the values. Every key must exist — missing keys fall back to English.
3. Optionally translate `lang/<code>/emails.php` and `lang/<code>/help_articles.php`.

The file is a flat PHP array. A truncated sample:

```
<?php
return [
    'hero' => [
        'title_a' => 'Scambia qualsiasi crypto',
        'title_b' => 'all\istante',
        'subtitle' => 'Scambia Bitcoin e oltre 900 token...',
    ],
    'nav' => [
        'home' => 'Home',
        'help' => 'Aiuto',
        'faq' => 'FAQ',
        'docs' => 'Documenti',
        'language' => 'Lingua',
        'track' => 'Traccia ordine',
    ],
    // ... continue for every top-level key in lang/en/site.php
];
```

Clear caches after the change:

```
php artisan cache:clear
php artisan view:clear
```

Tailwind v4 brand tokens

CrossSwap uses Tailwind CSS v4 with the new `@theme` block. Every brand colour, ink shade, font, and accent lives in `resources/css/app.css`:

```
@theme {
  --font-sans: 'Inter', system-ui, -apple-system, 'Segoe UI', Roboto, 'Helvetica I
  --font-mono: ui-monospace, SFMono-Regular, 'JetBrains Mono', Menlo, Consolas, m

  /* Brand – pastel lime that matches reference */
  --color-brand-50: #f3fce0;
  --color-brand-100: #e6f9b3;
  --color-brand-200: #d3f483;
  --color-brand-300: #bff15a; /* primary CTA */
  --color-brand-400: #b1ea3e;
  --color-brand-500: #97d722;
  --color-brand-600: #79b416;
  --color-brand-700: #56850e;
  --color-brand-ink: #0a0a0c;

  /* Cyan accent – used in gradient headline */
  --color-cy-300: #6ce7d2;
  --color-cy-400: #4cd1c1;

  /* Ink scale, calibrated for true near-black */
  --color-ink-50: #0a0c10;
  --color-ink-100: #0e1014;
  --color-ink-200: #14171c;
  --color-ink-300: #1a1d23;
  --color-ink-400: #232730;
  --color-ink-500: #353a47;
  --color-ink-600: #4a5160;
  --color-ink-700: #6b7281;
  --color-ink-800: #a8afbd;
  --color-ink-900: #ebeef3;

  --color-progress: #6f6df4;
  --color-progress-track: rgba(110, 109, 244, 0.16);
}
```

Edit the hex values then rebuild the assets:

```
npm install
```

```
npm run build
```

Tokens map directly to Tailwind utilities: `--color-brand-300` becomes `bg-brand-300`, `text-brand-300`, etc. The two surface scales (`--surface-*` and `--text-*`) are defined inside `@layer base` further down in the same file — tweak them to flip dark / light defaults.

No rebuild needed for the primary CTA. The admin panel's **Settings → Theme → Primary colour** field overrides `--color-brand-300` at runtime via an inline style block. Use it for one-off tweaks; reach for the `@theme` block when you want the change baked into the production bundle.

Replacing the logo

For the in-app logo (header and footer), upload from **Admin → Settings → Brand → Logo**; the file is saved to `storage/app/public/brand/` and a public symlink is created when you run `php artisan storage:link`. Both light and dark variants can be uploaded so the storefront swaps automatically.

Custom favicon & Open Graph image

Two static assets ship in `public/` and are referenced from every layout. Replace either file in place — no rebuild necessary because they're served directly:

`public/favicon.svg`

The browser tab icon. Keep it square; 32×32 is the design target. SVG renders sharp at every size and supports automatic dark-mode flipping via `prefers-color-scheme`.

`public/favicon.ico`

Fallback for older browsers. Optional — modern browsers always prefer the SVG.

`public/apple-touch-icon.png`

180×180 PNG used by iOS when a visitor adds the site to their home screen.

`public/og-image.png`

The 1200×630 Open Graph card used by Twitter, Discord, Slack, and Facebook link previews. Keep important content centred in a 1200×600 safe area.

`public/manifest.json`

PWA manifest. Update `name`, `short_name`, and the `icons[]` paths if you rename the icon files.

After replacing icons, hard-refresh (Cmd+Shift+R / Ctrl+F5) — browsers cache favicons very aggressively.

Reminder. Don't rely on `view:clear` for static assets — these files are served raw by your web server, never by Laravel, so the framework's cache commands have no effect on them.

Customising email templates

All transactional emails live in `resources/views/emails/`:

- `emails/swap_receipt.blade.php` Sent to the customer when a swap finishes.
- `emails/admin_swap_failed.blade.php` Sent to admins when a swap fails or gets flagged stuck.
- `emails/ticket_reply.blade.php` Sent when an admin replies to a support ticket.
- `emails/recurring_run.blade.php` Sent after a recurring (DCA) schedule fires.
- `emails/layout.blade.php` Shared shell — logo, footer, brand-coloured CTA button.

The templates use standard Blade. Strings come from `lang/<locale>/emails.php` so translations stay in sync. After editing, clear the view cache:

```
php artisan view:clear
```

Preview an email locally without sending it:

```
php artisan tinker --execute="\
    echo (new \\App\\Mail\\SwapReceipt(\\App\\Models\\Transaction::first()))->render(
```

Deeper UI edits

For component-level changes, the React source lives under `resources/js/`:

- `resources/js/Pages/Home.tsx` — the main storefront page.
- `resources/js/Pages/Support.tsx` — the contact form.
- `resources/js/Pages/Track.tsx` — order tracking.
- `resources/js/components/exchange/` — the swap widget components (currency picker, amount input, address entry).

- `resources/js/layouts/PublicLayout.tsx` — header & footer.

After editing JS or CSS, rebuild the assets:

```
npm install  
npm run build
```

During development, use the Vite dev server for hot reload:

```
npm run dev
```

Note. The admin panel pages live under `resources/js/Pages/Admin/` and follow the same convention. They use the same brand tokens, so colour changes propagate automatically.

CHAPTER 5

API Reference

API reference


CrossSwap exposes a small REST proxy under `/api/*`. The storefront uses these endpoints; you can call them from your own clients too.

On this page: [Overview](#) · [Exchange](#) · [Support](#) · [Chat](#) · [Limit orders](#) · [Recurring](#) · [Errors](#) · [Rate limits](#)

Overview

- Base URL: `https://yourdomain.tld/api`
- Content type: `application/json` for both requests and responses.
- Auth: anonymous for exchange / support / chat; the limit-order and recurring endpoints require a signed-in session (`auth:web`).
- All amounts are floats; currency tickers are lowercase.
- Rate-limited via Laravel's throttle middleware — see [Rate limits](#).

The ChangeNOW partner key the REST proxy uses is configured from the admin panel:

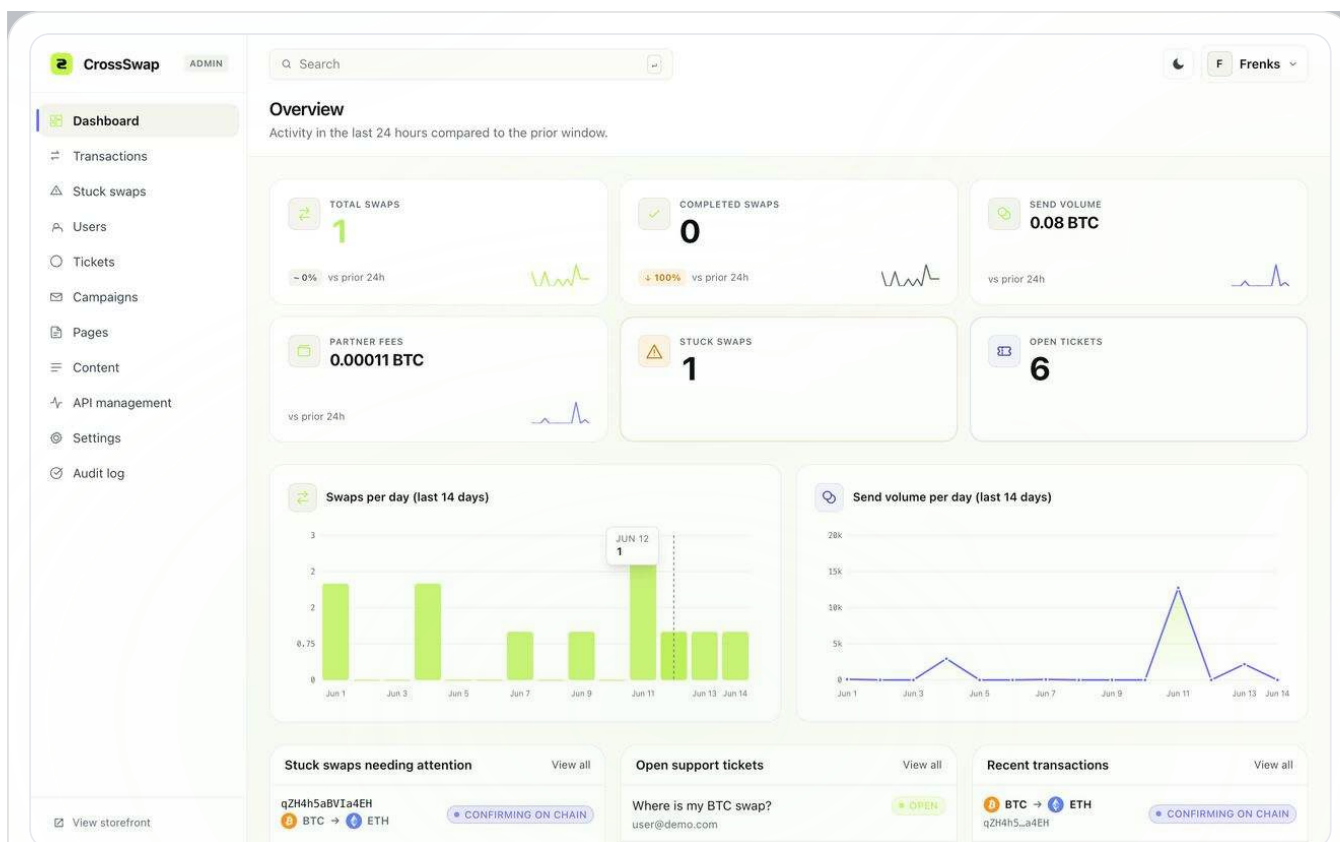

Settings → API — paste the partner key, optionally a referral address, then hit Test connection.

Exchange endpoints

Public, anonymous. Rate-limited to `throttle:api` (60 req/min by default).

GET `/api/exchange/currencies`

Returns the supported currency list. Cached for five minutes.

QUERY PARAMETERS

`flow`

Optional. `standard` (default) or `fixed-rate`.

EXAMPLE CURL

```
curl https://yourdomain.tld/api/exchange/currencies?flow=standard
```

EXAMPLE RESPONSE


```
[
  {
    "ticker": "btc",
    "name": "Bitcoin",
    "network": "btc",
    "image": "https://.../btc.svg",
    "featured": true,
    "has_external_id": false
  }
]
```

GET /api/exchange/min-amount

Minimum send amount for a pair. Cached for one minute.

QUERY PARAMETERS

from	Source ticker, e.g. <code>btc</code> .
to	Destination ticker.
from_network	Optional network override.
to_network	Optional network override.
flow	<code>standard</code> or <code>fixed-rate</code> .

EXAMPLE CURL

```
curl "https://yourdomain.tld/api/exchange/min-amount?from=btc&to=eth&flow=standard"
```

EXAMPLE RESPONSE

```
{ "min_amount": 0.0005 }
```

GET /api/exchange/estimate

Returns the expected receive amount and live exchange rate.

QUERY PARAMETERS

from	Source ticker.
to	Destination ticker.
amount	Send amount (float).
flow	standard or fixed-rate.

EXAMPLE CURL

```
curl "https://yourdomain.tld/api/exchange/estimate?from=btc&to=eth&amount=0.05"
```

EXAMPLE RESPONSE

```
{
  "from": "btc",
  "to": "eth",
  "amount_send": 0.05,
  "amount_receive": 0.834120000000,
  "rate_id": "f1a2...",
  "valid_until": "2026-06-14T12:31:00+00:00",
  "flow": "fixed-rate",
  "warning": null
}
```

POST /api/exchange/create

Creates a swap and stores it locally. Returns a CrossSwap transaction row.

REQUEST BODY

```
{
  "from": "btc",
  "to": "eth",
  "amount": 0.05,
  "address": "0x...",
  "refund_address": "bc1q...",
  "rate_id": "f1a2...",
  "flow": "fixed-rate",
}
```

```
"email": "user@example.com"
}
```

EXAMPLE CURL

```
curl -X POST https://yourdomain.tld/api/exchange/create \
-H "Content-Type: application/json" \
-d '{"from": "btc", "to": "eth", "amount": 0.05, "address": "0x...", "flow": "standa
```

EXAMPLE RESPONSE

```
{
  "id": 42,
  "provider_id": "abc123",
  "status": "waiting",
  "payin_address": "bc1q...",
  "amount_send": 0.05,
  "amount_receive": 0.8341,
  "valid_until": "2026-06-14T12:31:00+00:00"
}
```

GET /api/exchange/status/{id}

Returns the latest status for a transaction. `{id}` is the `provider_id` returned by `create`.

EXAMPLE CURL

```
curl https://yourdomain.tld/api/exchange/status/abc123
```

EXAMPLE RESPONSE

```
{
  "provider_id": "abc123",
  "status": "confirming",
  "payin_hash": "txhash...",
  "payout_hash": null,
}
```

```
"amount_receive": 0.834120
}
```

POST /api/exchange/validate

Checks whether an address looks valid for the given currency.

REQUEST BODY

```
{ "currency": "btc", "address": "bc1q..." }
```

EXAMPLE CURL

```
curl -X POST https://yourdomain.tld/api/exchange/validate \
-H "Content-Type: application/json" \
-d '{"currency":"btc","address":"bc1q..."}'
```

EXAMPLE RESPONSE

```
{ "valid": true }
```

Support

POST /api/support/ticket

Opens a support ticket. Used by the contact form.

REQUEST BODY

```
{
  "email": "user@example.com",
```

```
{
  "subject": "Swap is stuck",
  "message": "...",
  "tx_id": "abc123"
}
```

EXAMPLE CURL

```
curl -X POST https://yourdomain.tld/api/support/ticket \
-H "Content-Type: application/json" \
-d '{"email":"user@example.com","subject":"Swap is stuck","message":"My swap is stuck"}
```

EXAMPLE RESPONSE

```
{ "id": 17, "status": "open" }
```

Chat

POST /api/chat/message

Send a message to the AI assistant and receive a streamed reply. Throttled to 20 requests per minute per IP.

REQUEST BODY

```
{
  "history": [
    { "role": "user", "content": "How long does a BTC -> ETH swap take?" }
  ]
}
```

EXAMPLE CURL

```
curl -X POST https://yourdomain.tld/api/chat/message \
-H "Content-Type: application/json" \
-d '{"history": [{"role": "user", "content": "How long does a BTC -> ETH swap take?"}]}'
```

```
-d '{"history":[{"role":"user","content":"hi"}]}'
```

EXAMPLE RESPONSE

```
{
  "reply": "Most BTC to ETH swaps complete in 15-30 minutes...",
  "provider": "anthropic",
  "model": "claude-haiku-4-5"
}
```

Limit orders

Customer-only. Requires a signed-in session via `auth:web` ; the request must include the CSRF token from `<meta name="csrf-token">` . Rate-limited to `throttle:api` .

GET `/api/limit-orders`

Lists the signed-in customer's open and historical limit orders.

EXAMPLE RESPONSE

```
[
  {
    "id": 12,
    "from": "btc",
    "to": "usdt",
    "amount": 0.01,
    "target_rate": 75000,
    "status": "open",
    "created_at": "2026-06-10T11:02:00+00:00"
  }
]
```

POST `/api/limit-orders`

Creates a new limit order — fires when the live rate crosses `target_rate` .

REQUEST BODY

```
{
  "from": "btc",
  "to": "usdt",
  "amount": 0.01,
  "target_rate": 75000,
  "address": "0x...",
  "expires_at": "2026-07-01T00:00:00+00:00"
}
```

EXAMPLE RESPONSE

```
{ "id": 12, "status": "open" }
```

POST `/api/limit-orders/{id}/cancel`

Cancels a limit order before it fires. `{id}` is numeric.

EXAMPLE RESPONSE

```
{ "id": 12, "status": "cancelled" }
```

Recurring (DCA) schedules

Customer-only. Same auth + throttle rules as limit orders.

GET `/api/recurring`

Lists the signed-in customer's recurring (DCA) schedules.

EXAMPLE RESPONSE

```
[
  {
    "id": 4,
    "from": "usdt",
    "to": "btc",
    "amount": 50,
    "interval": "weekly",
    "next_run_at": "2026-06-21T10:00:00+00:00",
    "status": "active"
  }
]
```

POST /api/recurring

Creates a recurring schedule.

REQUEST BODY

```
{
  "from": "usdt",
  "to": "btc",
  "amount": 50,
  "interval": "weekly",
  "address": "bc1q...",
  "starts_at": "2026-06-14T10:00:00+00:00"
}
```

EXAMPLE RESPONSE

```
{ "id": 4, "status": "active" }
```

POST /api/recurring/{id}/cancel

Cancels a recurring schedule. Past runs are preserved.

EXAMPLE RESPONSE

```
{ "id": 4, "status": "cancelled" }
```

POST /api/recurring/{id}/pause

Pauses the schedule. Future runs are skipped until resumed.

EXAMPLE RESPONSE

```
{ "id": 4, "status": "paused" }
```

POST /api/recurring/{id}/resume

Resumes a paused schedule. The `next_run_at` is recalculated from the original interval.

EXAMPLE RESPONSE

```
{ "id": 4, "status": "active" }
```

Error responses

All endpoints return a JSON error body on failure:

```
{ "error": "min_amount", "message": "Amount is below the minimum for this pair." }
```

HTTP status codes follow standard conventions: `400` for validation, `422` for upstream rejection, `429` when rate-limited, `502` when the upstream API is unreachable.

Rate limits

The default `throttle:api` bucket is **60 requests per minute per IP**. The chat endpoint uses a stricter **20 requests per minute per IP** bucket because LLM calls are expensive.

Tune both in `app/Providers/AppServiceProvider.php` via the `RateLimiter::for('api', ...)` definition, or in `routes/api.php` at the middleware level.


CHAPTER 6

FAQ

Frequently asked questions

The customer-facing questions visible on the storefront, plus a handful of operator-facing ones about updates, hosting, refunds, and KYC.

Jump to: [Customer FAQ](#) · [Operator FAQ](#)

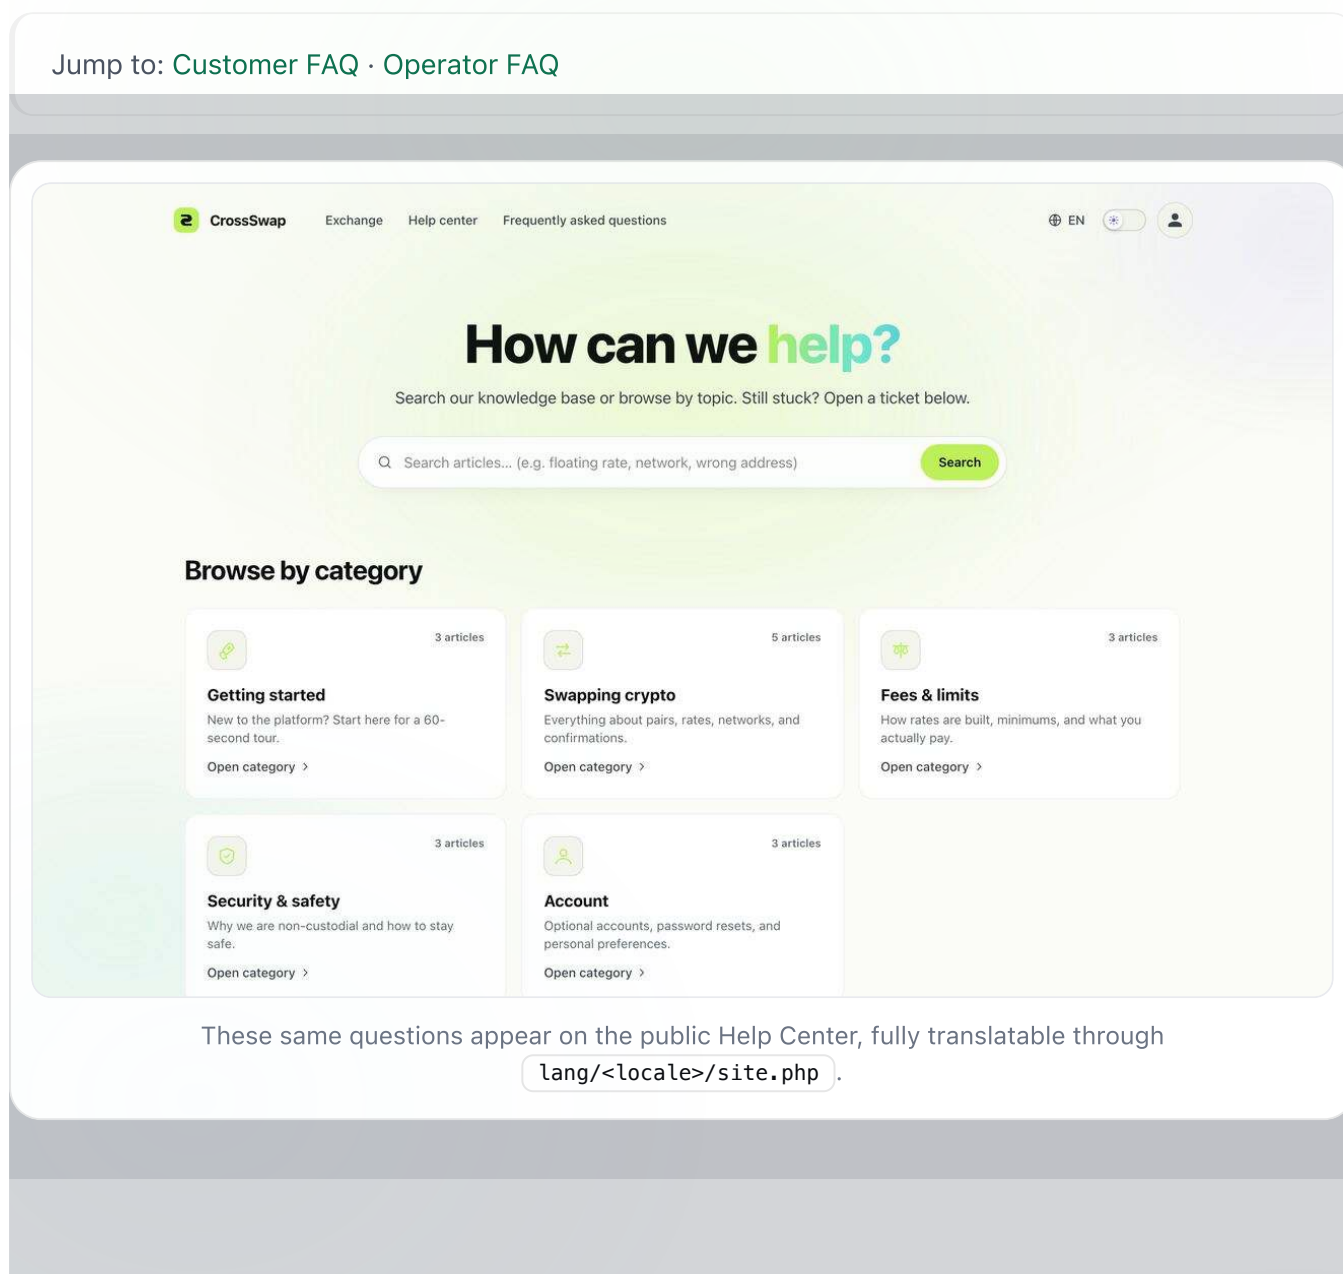

The screenshot displays the CrossSwap FAQ page. At the top, a navigation bar includes the CrossSwap logo, links for 'Exchange', 'Help center', and 'Frequently asked questions', along with language and user icons. The main heading is 'How can we help?' in a large, bold font. Below it, a search bar prompts users to 'Search our knowledge base or browse by topic. Still stuck? Open a ticket below.' The search bar contains the placeholder text 'Search articles... (e.g. floating rate, network, wrong address)' and a green 'Search' button. Underneath the search bar, the section 'Browse by category' is titled. It features five category cards arranged in a grid. Each card has an icon, a title, a brief description, and a link to 'Open category >'. The categories are: 'Getting started' (3 articles), 'Swapping crypto' (5 articles), 'Fees & limits' (3 articles), 'Security & safety' (3 articles), and 'Account' (3 articles). At the bottom of the page, a note states: 'These same questions appear on the public Help Center, fully translatable through `lang/<locale>/site.php`.'

The screenshot shows the CrossSwap website interface. At the top, there's a navigation bar with the CrossSwap logo, 'Exchange', 'Help center', and 'Frequently asked questions'. On the right, there are links for 'EN', a search icon, and a user profile icon. The main content area has a breadcrumb trail '< Swapping crypto' and a title 'Floating rate vs fixed rate'. Below the title is a subtitle 'When to lock the rate and when to let it ride. Trade-offs in plain English.' The text explains that every swap quote uses one of two rate models: 'Floating rate' (default) and 'Fixed rate'. It also includes a 'Rule of thumb' for choosing between them. At the bottom of the article, there's a 'Still stuck?' section with a 'Open a ticket' button. Below the article, there's a 'Related articles' section. A footer note states: 'Each FAQ entry doubles as a deep-linkable help-center article.'

Customer FAQ

These six questions are pulled verbatim from `lang/en/site.php → faq.*` and are the ones your visitors see on the public site.

Do I need an account?

No. There's no sign-up or wallet connection. Just enter your receive address and send your deposit.

How long does an exchange take?

Most swaps complete in 5 to 30 minutes. Chains with slower confirmations may take longer.

What's the difference between floating and fixed rate?

Floating uses the market rate at the moment your deposit confirms. Fixed locks the rate at the moment you start the swap.

What if my swap takes too long?

Open a ticket from the Support page with your transaction ID. We'll trace it on-chain and resolve quickly.

Are there limits?

Each pair has its own minimum. Maximum depends on available liquidity and is shown live during the swap.

How are fees calculated?

Fees are baked into the displayed exchange rate. No hidden surprises before you confirm.

Operator FAQ

Questions buyers ask the most after purchasing the script.

How do I update CrossSwap to a new version?

1. Back up `.env`, `storage/`, and your database.
2. Re-download the latest archive from your Envato purchases page.
3. Overwrite the files **except** `.env` and `storage/`.
4. Run the upgrade routine:

```
composer install --no-dev --optimize-autoloader
php artisan migrate --force
php artisan view:clear
php artisan config:clear
php artisan horizon:terminate
```

5. Hard-refresh the storefront and confirm Horizon shows new workers.

The migration runner is idempotent — running it twice will not re-apply already-applied migrations.

How do refunds work?

CrossSwap itself never holds customer funds, so refunds are issued by ChangeNOW. When a customer needs one (wrong network, wrong address, expired rate, etc.):

1. Open the transaction in **Admin → Transactions** and copy the `provider_id`.
2. Log into the ChangeNOW partner dashboard and use the “Request refund” flow on that transaction.
3. ChangeNOW will ask the customer for a refund address (different from the receive address). The address-entry step on the public storefront already collects a `refund_address` when the customer enables fixed-rate, which speeds this up.
4. Once ChangeNOW processes the refund, the CrossSwap transaction status updates automatically through the next polling pass.

Is CrossSwap KYC'd?

No. CrossSwap is a thin storefront on top of ChangeNOW, which is a non-custodial swap provider that doesn't require KYC for the vast majority of swap pairs and amounts. ChangeNOW may individually flag suspicious transactions and ask the sender to verify identity per their [AML policy](#), but you as the operator are not handling any KYC paperwork yourself.

That said: depending on your jurisdiction you may still need to publish a privacy policy and an AML notice. Set the URLs under [Settings → Legal](#).

Can I deploy CrossSwap on shared hosting?

Yes, with two caveats:

- You need PHP 8.2+ with the extensions listed under [Requirements](#). Most modern cPanel / Plesk / CyberPanel hosts offer this.
- You need either a long-lived process (rare on shared hosting) or a cron job that runs every minute. Without it, status polling will not work and swaps stall at “Waiting”.

For a smoother experience on a budget, a \$5-\$10/month VPS with SSH access is much easier than wrestling with shared-hosting quirks.

Where can I see my licence terms?

The bundled [LICENSE.md](#) covers both the Regular and Extended Envato licences and the conditions under which you may rebrand or sell access.

Is the source code obfuscated?

No. The PHP source ships unencoded — strict typing, full namespaces, fully readable. The compiled JS bundle is minified by Vite as is normal for production builds; the un-minified source under `resources/js/` is also included so you can rebuild.

Where do I report bugs?

Use the comments or item-support tab on the CrossSwap CodeCanyon listing. Include the version, PHP version, and a snippet from `storage/logs/laravel.log`.

More operator questions

The questions buyers ask once they're past the first install. See [Troubleshooting](#) for symptom-driven fixes; this section answers "how do I...".

How do I update CrossSwap?

The short version: back up `.env` and the database, drop the new files in (preserve `.env` and `storage/`), then run:

```
php artisan migrate --force
php artisan optimize:clear
php artisan horizon:terminate
```

Only run `npm run build` if the changelog mentions asset changes — the archive ships a compiled bundle. Full step-by-step is on the [Troubleshooting page](#).

Can I add a new language?

Yes — CrossSwap is fully translatable. Copy `lang/en/site.php` to `lang/<code>/site.php`, translate the values, add the locale code to `config/swapforge.php → languages`, then run `php artisan optimize:clear`. The detailed walkthrough lives on the [Configuration page](#).

Where do I edit the homepage copy?

Two places, depending on what you want to change:

- **Marketing sections** (Highlights, Reviews, Stats, How it works) — `/admin/content` with per-locale tabs. No code required.
- **Hero headline / tagline / nav copy** — `lang/<locale>/site.php` under the `hero.*` and `nav.*` keys. After editing, run `php artisan optimize:clear`.

How do I change theme colours?

For the primary CTA only, use **Admin → Settings → Theme → Primary colour** — no rebuild needed. For the full palette (brand 50–700, ink scale, accents), edit the `@theme` block in `resources/css/app.css` and run `npm run build`. Both flows are documented on the [Customization page](#).

Where are my customer emails?

Transactional emails (receipts, ticket replies, recurring runs) are sent via the SMTP credentials in **Admin → Settings → SMTP**. The **Send test email** button on that page round-trips a real message so you can confirm delivery. If mail isn't arriving, check `storage/logs/laravel.log` for transport errors and verify your `MAIL_FROM_ADDRESS` passes SPF/DKIM for the sending domain.

How do I disable the AI chat widget?

Open **Admin → Settings → AI** and set **Provider** to `none`, then hit Save. The floating chat bubble is removed from the public storefront immediately — the storefront checks the provider on render and skips the widget entirely when disabled. To re-enable later, set the provider back to `openai` or `anthropic` and paste the key.

Why isn't my SSL working?

The most common causes:

- `APP_URL` in `.env` still starts with `http://` — switch to `https://` and run `php artisan config:clear`.
- Behind Cloudflare or a load balancer — configure the `TrustProxies` middleware to honour `X-Forwarded-Proto`, otherwise Laravel keeps generating `http://` URLs internally.
- Mixed content from a hard-coded `http://` resource — check the browser console; the offending URL will be flagged.
- Certificate not yet issued — for Let's Encrypt, give Certbot a few seconds; for Cloudflare, ensure the SSL mode is at least **Full**, not **Flexible** with self-signed origin.

How do I migrate from SQLite to MySQL?

SQLite is great for installing fast, but you'll want MySQL or PostgreSQL once traffic picks up. The clean approach:

1. Create the empty MySQL database and a user with full privileges on it.
2. Export the SQLite data:


```
php artisan db:dump --database=sqlite > backup.sql  
# or use the bundled dumper:  
sqlite3 database/database.sqlite .dump > backup.sql
```

3. Update `.env` :

```
DB_CONNECTION=mysql  
DB_HOST=127.0.0.1  
DB_PORT=3306  
DB_DATABASE=crossswap  
DB_USERNAME=crossswap  
DB_PASSWORD=...
```

4. Run migrations against the empty MySQL database, then import the data:

```
php artisan migrate --force  
mysql -u crossswap -p crossswap < backup.sql
```

5. Clear caches and restart Horizon:

```
php artisan optimize:clear  
php artisan horizon:terminate
```

Back up first. Always copy `database/database.sqlite` and `.env` aside before touching either. If anything goes wrong, restoring is a one-line move-back.

CHAPTER 7

Troubleshooting

Troubleshooting

Quick recipes for the issues operators hit most often. If your problem isn't covered here, check `storage/logs/laravel.log` first — it almost always points at the root cause.

Jump to: [Updating CrossSwap](#) · [Common errors](#) · [Stuck transactions](#) · [ChangeNOW key](#) · [Queue worker](#) · [Mail](#) · [Migrations](#) · [Permissions](#) · [HTTPS mixed content](#) · [Installer loop](#) · [Admin login](#)

Updating CrossSwap

CrossSwap updates are delivered as a fresh archive on your Envato “Downloads” page. Every update is additive — you drop the new files over the old ones and run migrations.

Always back up `.env` and the database before upgrading. If anything goes wrong, restoring is a one-line move-back; without a backup, your only option is starting from scratch.

Step-by-step

1. **Back up** — copy `.env` and your database aside:

```
cp .env .env.backup-$(date +%F)

# SQLite
cp database/database.sqlite database/database.sqlite.backup-$(date +%F)

# MySQL
mysqldump -u crossswap -p crossswap > backup-$(date +%F).sql

# PostgreSQL
pg_dump crossswap > backup-$(date +%F).sql
```

2. **Put the site into maintenance mode** so visitors see a friendly notice while you upload:

```
php artisan down --refresh=30 --retry=60
```

3. **Drop the new files in place** — preserve `.env` and the entire `storage/` directory. Everything else can be overwritten safely. (Most operators use `rsync --exclude` or unzip with `overwrite`.)

4. **Run migrations** — the migration runner is idempotent, so it's safe to run even when there's nothing new:

```
php artisan migrate --force
```

5. **Rebuild assets only if the changelog says so** — the archive ships a compiled `public/build/` bundle. Skip this step otherwise.

```
npm install && npm run build
```

6. **Clear caches** so the new config, routes, and views are picked up:

```
php artisan optimize:clear
```

7. **Restart the queue worker** so it loads the new code:

```
php artisan horizon:terminate  
# or, if you use queue:work directly:  
sudo systemctl restart crossswap-horizon
```

8. **Bring the site back up:**

```
php artisan up
```

9. **Verify** — sign into the admin panel, confirm the dashboard renders, and place a tiny test swap to confirm the upstream API still works.

Common errors & copy-paste fixes

Symptoms first, fixes second. Most of these resolve in under a minute.

419 PAGE EXPIRED

Symptom: form submissions (sign-in, ticket reply, admin save) bounce back to a “Page Expired” error page.

Cause: CSRF token mismatch — usually a stale session, a session-driver misconfiguration, or a domain mismatch.

```
# 1. Clear session storage:
php artisan session:flush      # file/database driver
redis-cli flushdb              # if SESSION_DRIVER=redis

# 2. Rebuild config + view cache:
php artisan optimize:clear

# 3. Confirm SESSION_DOMAIN matches APP_URL:
#   SESSION_DOMAIN=.yourdomain.tld  # leading dot for subdomains
#   APP_URL=https://yourdomain.tld

# 4. Hard-refresh the browser (Cmd+Shift+R / Ctrl+F5).
```

500 server error

Symptom: every request returns a blank or branded “500” page.

The exception is always in `storage/logs/laravel.log` :

```
tail -n 100 storage/logs/laravel.log
```

If that log is empty, the failure happened before Laravel could boot. Check the web server log:

```
tail -n 100 /var/log/nginx/error.log
# or
tail -n 100 /var/log/apache2/error.log
```

Most common causes in order of frequency: `APP_KEY` blank in `.env` (run `php artisan key:generate`), missing PHP extension, wrong DB credentials, and read-only `storage/`.

Permission denied on storage/

Symptom: *"The stream or file could not be opened"* or *"failed to open stream: Permission denied"*.

```
# Replace www-data with your actual PHP-FPM user if different:
sudo chown -R www-data:www-data storage bootstrap/cache
sudo find storage bootstrap/cache -type d -exec chmod 775 {} \;
sudo find storage bootstrap/cache -type f -exec chmod 664 {} \;
php artisan optimize:clear
```

ChangeNOW returned 401

Symptom: every swap-create or estimate fails with *"Service is temporarily unavailable"*; `storage/logs/laravel.log` shows *"Authentication failed"* or a 401 from `api.changenow.io`.

```
# 1. Confirm the key is set in the admin panel:
#   /admin/settings → API → ChangeNOW API key.

# 2. Re-copy it from https://changenow.io/affiliate
#   (no leading or trailing whitespace).

# 3. Verify the key against the live API:
curl -H "x-changenow-api-key: YOUR-KEY" \
  https://api.changenow.io/v2/exchange/currencies | head

# 4. If the partner account is brand new, allow 5-10 minutes
#   for the key to activate on ChangeNOW's side.
```

HTTPS mixed content

Symptom: the browser console shows *"Mixed Content: The page was loaded over HTTPS, but requested an insecure resource"* — usually images, fonts, or API calls over plain HTTP.

```
# 1. Set APP_URL to your https domain in .env:
APP_URL=https://yourdomain.tld

# 2. Force https in AppServiceProvider::boot()
```

```
# (already wired when APP_ENV=production).

# 3. If behind Cloudflare / a load balancer,
# configure TrustProxies to honour X-Forwarded-Proto.

# 4. Clear caches:
php artisan optimize:clear
```

Stuck transactions

A swap that sits in `waiting` or `confirming` longer than the configured thresholds is automatically marked `stuck_flagged = true` and surfaced in **Admin → Stuck swaps**. To investigate:

1. Open the transaction in the admin panel.
2. Compare the `payin_hash` against the source blockchain explorer.
3. If the deposit never reached the payin address, the customer probably sent on the wrong network — issue a manual refund through the ChangeNOW partner dashboard.
4. If the deposit arrived but the swap isn't progressing, contact ChangeNOW support with the `provider_id`.

Tune the thresholds in `config/swapforge.php → tx_stuck`:

```
'tx_stuck' => [
    'waiting_minutes'    => 180,
    'confirming_minutes' => 360,
],
```

ChangeNOW API key not configured (or rejected)

Symptoms: every estimate or create request fails with a 401/403 from upstream; the storefront shows *"Service is temporarily unavailable"*.

1. Open **Admin → Settings → API management** and confirm the key is set.
2. Re-copy the key from the [ChangeNOW partner dashboard](#) (no leading or trailing whitespace).
3. Check **Admin → API logs** — recent failed calls log the raw upstream response.
4. If the partner account was just created, allow 5–10 minutes for the key to activate.

To verify the key against the live API from the command line:

```
curl -H "x-changenow-api-key: YOUR-KEY" \
  https://api.changenow.io/v2/exchange/currencies
```

Queue worker not running

If swaps stay `waiting` forever and the admin **Horizon** page is empty:

1. Confirm Horizon is running: `ps aux | grep horizon`.
2. If not, start it manually: `php artisan horizon`. For production, supervise it with `systemd` or `supervisord`.
3. Check `storage/logs/horizon.log` for fatal startup errors.
4. If Redis is in use, confirm it is reachable: `redis-cli ping` should return `PONG`.
5. Confirm the cron entry exists and runs every minute: `crontab -l`.

Tip. After deploying a code change, run `php artisan horizon:terminate` so a fresh worker picks up the new code.

Mail not sending

- Run the SMTP test: `php artisan tinker` → `Mail::raw('test', fn ($m) => $m->to('you@you.com')->subject('hi'));`
- Inspect `storage/logs/laravel.log` for transport errors.
- Verify your `MAIL_FROM_ADDRESS` uses a domain that passes SPF/DKIM — most providers reject anonymous senders.
- For Gmail / Google Workspace, use an [App Password](#), not your real password.

Migrations failed

If the installer's database step fails partway through, or you see `"SQLSTATE... relation already exists"`:

1. Confirm the DB user has `CREATE`, `ALTER`, and `DROP` privileges.

2. Drop the database and recreate it empty:

```
# MySQL
mysql -u root -p -e "DROP DATABASE crossswap; CREATE DATABASE crossswap CHARACTER SET utf8mb4 COLLATE utf8mb4_unicode_ci;"

# PostgreSQL
sudo -u postgres psql -c "DROP DATABASE crossswap; CREATE DATABASE crossswap;"

# SQLite
rm database/database.sqlite && touch database/database.sqlite
```

3. Re-run from the CLI to see the full error:

```
php artisan migrate --force
```

4. If a migration mentions a missing PHP extension (e.g. `bcmath`), install it via `apt` or your hosting panel.

Permissions errors on storage/ and bootstrap/cache/

Symptoms: *"The stream or file could not be opened"*, blank white screen, or 500 from the very first request.

1. Make sure the web server user (e.g. `www-data`, `nginx`, or `apache`) owns the writable directories:

```
sudo chown -R www-data:www-data storage bootstrap/cache
```

2. Set sane permissions:

```
find storage bootstrap/cache -type d -exec chmod 775 {} \;
find storage bootstrap/cache -type f -exec chmod 664 {} \;
```

3. On shared hosting where you cannot change ownership, use `777` as a last resort.

4. Clear caches once permissions are right:


```
php artisan cache:clear
php artisan config:clear
php artisan view:clear
```

HTTPS mixed-content warnings

If the browser console shows *"Mixed Content: The page was loaded over HTTPS, but requested an insecure resource"*:

1. Set `APP_URL=https://yourdomain.tld` in `.env`.

2. Force the scheme in `App\Providers\AppServiceProvider::boot()`:

```
if ($this->app->environment('production')) {
    \Illuminate\Support\Facades\URL::forceScheme('https');
}
```

3. If you're behind Cloudflare or a load balancer, configure the `TrustProxies` middleware so Laravel honours the `X-Forwarded-Proto` header.

4. Clear caches: `php artisan config:clear && php artisan view:clear`.

Installer redirect loop

If the site keeps redirecting to `/install` after you completed the wizard, the lock file probably wasn't written. Create it manually:

```
touch storage/app/installed.lock
chmod 644 storage/app/installed.lock
```

If the opposite is true and you can't reach the installer because the lock file pre-exists on a fresh install, move it aside:

```
mv storage/app/installed.lock storage/app/installed.lock.bak
```

Admin login fails

- Double-check the admin email in the `admins` table.

- Reset the password with a fresh bcrypt hash:

```
php artisan tinker --execute="\
\\App\\Models\\Admin::where('email','you@example.com')->first()\
->update(['password' => bcrypt('new-password-12chars')]);"
```

- If 2FA is enabled and you've lost the device, clear the `two_factor_secret` column to disable it.
- If the issue is a CSRF token mismatch, clear the session storage: `php artisan session:flush` (or `redis-cli flushdb` if you store sessions in Redis).

White screen / 500 error after upload

1. Check the permissions on `storage/` and `bootstrap/cache/` (see above).
2. Look at `storage/logs/laravel.log` — the exception will be there.
3. If the log is empty, check your web server's error log (`/var/log/nginx/error.log` or `/var/log/apache2/error.log`).
4. Make sure `APP_KEY` is set in `.env` — if blank, the app fails before logging. Re-generate with `php artisan key:generate` .