


Branch Strategy & CI Flow

Developer writes code on **feature/*** → PR to **dev** (CI checks run) → Tester adds tests on dev → PR to **staging** (tests run)

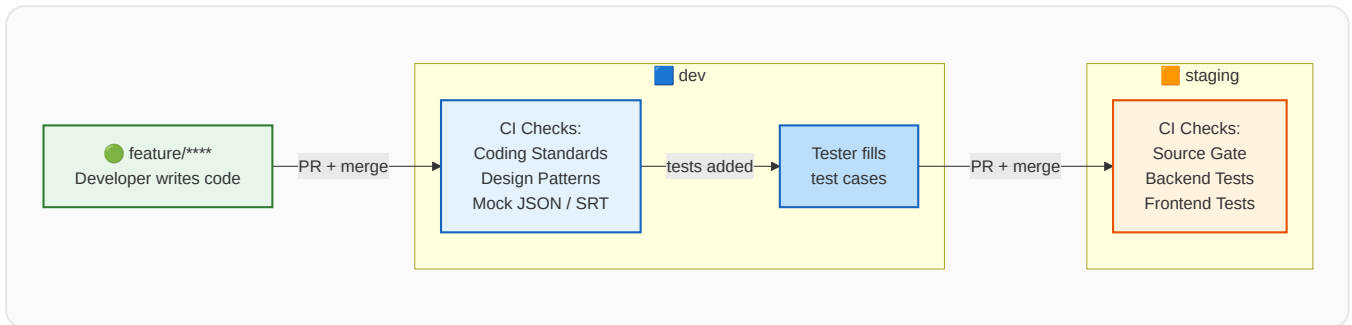

Developer Workflow

- 1 Branch off dev: feature/your-feature
- 2 Write code following naming & folder conventions
- 3 Open PR to **dev** — CI runs architecture checks
- 4 Fix failures, push to feature branch, CI re-runs
- 5 Merge to dev ✓

Tester Workflow

- 1 Branch off dev: test/your-test
- 2 Write tests only — no src / changes
- 3 Open PR to **staging** — source gate runs first
- 4 If gate fails → move source changes to a dev PR
- 5 Tests pass → merge to staging ✓

BRANCH	WHO	CI RUNS	CI SKIPS
dev	Developer	Coding standards, design patterns, mock JSON, SRT	Tests
staging	Tester	Source gate + backend/frontend tests	Coding standards, design patterns

