

Range and Linspace and Strings

In this notebook I started putting the answers to the harder questions at the end for your reference.

At the end of last class people were a little confused about the function range and functions in general and there interactions with lists. So we are going to do more.

Functions are defined here https://www.tutorialspoint.com/python/python_functions.htm You can define your own function or use built in functions. Every time we import a library we are giving ourselves the chance to use its functions. In essence we are cheating and using code that was already written. This code is great as we can pass different parameters and it will give us a result. I always forget that all of our plotting is done by functions and depending on what you pass then determines how the plots look. We used some simple functions last time and I want to go through them again as they will keep coming up over and over again.

What was range again? It was a function that returned numbers. lets return numbers 0-1000 by 5's. We are going to use the numpy version which is arange.

Remember you call the function and it has parantheses. This function returns a list.

```
In [2]: import numpy as np  
import matplotlib.pyplot as plt
```

```
In [3]: np.arange(0,1001,5)
```

```
Out[3]: array([  0,   5,  10,  15,  20,  25,  30,  35,  40,  45,  50,
                55,  60,  65,  70,  75,  80,  85,  90,  95, 100, 105,
                110, 115, 120, 125, 130, 135, 140, 145, 150, 155, 160,
                165, 170, 175, 180, 185, 190, 195, 200, 205, 210, 215,
                220, 225, 230, 235, 240, 245, 250, 255, 260, 265, 270,
                275, 280, 285, 290, 295, 300, 305, 310, 315, 320, 325,
                330, 335, 340, 345, 350, 355, 360, 365, 370, 375, 380,
                385, 390, 395, 400, 405, 410, 415, 420, 425, 430, 435,
                440, 445, 450, 455, 460, 465, 470, 475, 480, 485, 490,
                495, 500, 505, 510, 515, 520, 525, 530, 535, 540, 545,
                550, 555, 560, 565, 570, 575, 580, 585, 590, 595, 600,
                605, 610, 615, 620, 625, 630, 635, 640, 645, 650, 655,
                660, 665, 670, 675, 680, 685, 690, 695, 700, 705, 710,
                715, 720, 725, 730, 735, 740, 745, 750, 755, 760, 765,
                770, 775, 780, 785, 790, 795, 800, 805, 810, 815, 820,
                825, 830, 835, 840, 845, 850, 855, 860, 865, 870, 875,
                880, 885, 890, 895, 900, 905, 910, 915, 920, 925, 930,
                935, 940, 945, 950, 955, 960, 965, 970, 975, 980, 985,
                990, 995, 1000])
```

Now rememeber from the last class you made your own list of numbers

```
In [4]: FirstList=np.array([2,5,10,15,20])
```

Can we link this two ideas?

could we take those numbers from range and make them a list? Yes. Give your list a name (I called mine newList) and then set it equal to the arange from above. then print your list. You can use an equal sign to set the arange list to a variable.

```
In [6]:
```

Now you can access newList the same way we learned last class with square brackets.

```
In [7]: newList[5]
```

```
Out[7]: np.int64(25)
```

Aside.

You might hear me use newList=np.array([2,5,10,15,20])

- numpy is short for number python and is good for math. For programming we call numpy as np. so np means we are calling a numpy function.
- using a numpy array is just using a list that does math better
- in the beginning they are very similar but we are going to use numpy and then pandas

- pandas is our ultimate goal is the the best part of python for data analysis

```
In [8]: newList=np.array([2,5,10,15,20])
```

```
In [9]: newList
```

```
Out[9]: array([ 2,  5, 10, 15, 20])
```

```
In [ ]:
```

Now lets look at some more functions and try to learn more and do some math. By the time you finish this packet we will be plotting. I am going to step you through how to plot sine and cosine.

```
In [3]: ?np.sin
```

```
In [20]: ?np.pi
```

np.sin, np.cos, and np.pi are all numpy functions that we are calling and that are giving us results we can use.

Range only gives us integers.... This could be trouble. We can also use linspace. Lets get help.

```
In [22]: ?np.linspace
```

What does linspace do? how will this help us? Lets first start by using np.linspace to give us the number from 0 to 1000

```
In [11]: np.linspace(0,1000)
```

```
Out[11]: array([  0.          ,  20.40816327,  40.81632653,  61.2244898 ,
                81.63265306, 102.04081633, 122.44897959, 142.85714286,
               163.26530612, 183.67346939, 204.08163265, 224.48979592,
               244.89795918, 265.30612245, 285.71428571, 306.12244898,
               326.53061224, 346.93877551, 367.34693878, 387.75510204,
               408.16326531, 428.57142857, 448.97959184, 469.3877551 ,
               489.79591837, 510.20408163, 530.6122449 , 551.02040816,
               571.42857143, 591.83673469, 612.24489796, 632.65306122,
               653.06122449, 673.46938776, 693.87755102, 714.28571429,
               734.69387755, 755.10204082, 775.51020408, 795.91836735,
               816.32653061, 836.73469388, 857.14285714, 877.55102041,
               897.95918367, 918.36734694, 938.7755102 , 959.18367347,
               979.59183673, 1000.          ])
```

How is this different than arange? does it give us integers? this is better for giving us a set of numbers that are not an integer.

Could you give me a set of numbers from 0 to 2π ? you could type in 3.14 but in python pi can just be added and it will give you the number. As an aside which will become important later linspace is part of numpy so it gives you a numpy array which is like a super list. We will come back to this.

```
In [12]: np.pi
```

```
Out[12]: 3.141592653589793
```

now can you produce the set of numbers from 0 to 2π using linspace?

```
In [ ]:
```

I want to plot the sine from 0 to 2π . How can we do this. Lets set our x and y and then plot them. I will show you how to do this for sine and then you can do it for cosine. In python sine takes radians and not degrees

```
In [13]: x=np.linspace(0,2*np.pi)
         y=np.sin(x)
```

```
In [14]: print (x)
         print (y)
```

```
[0.          0.12822827  0.25645654  0.38468481  0.51291309  0.64114136
 0.76936963  0.8975979  1.02582617  1.15405444  1.28228272  1.41051099
 1.53873926  1.66696753  1.7951958   1.92342407  2.05165235  2.17988062
 2.30810889  2.43633716  2.56456543  2.6927937   2.82102197  2.94925025
 3.07747852  3.20570679  3.33393506  3.46216333  3.5903916   3.71861988
 3.84684815  3.97507642  4.10330469  4.23153296  4.35976123  4.48798951
 4.61621778  4.74444605  4.87267432  5.00090259  5.12913086  5.25735913
 5.38558741  5.51381568  5.64204395  5.77027222  5.89850049  6.02672876
 6.15495704  6.28318531]
[ 0.00000000e+00  1.27877162e-01  2.53654584e-01  3.75267005e-01
 4.90717552e-01  5.98110530e-01  6.95682551e-01  7.81831482e-01
 8.55142763e-01  9.14412623e-01  9.58667853e-01  9.87181783e-01
 9.99486216e-01  9.95379113e-01  9.74927912e-01  9.38468422e-01
 8.86599306e-01  8.20172255e-01  7.40277997e-01  6.48228395e-01
 5.45534901e-01  4.33883739e-01  3.15108218e-01  1.91158629e-01
 6.40702200e-02 -6.40702200e-02 -1.91158629e-01 -3.15108218e-01
 -4.33883739e-01 -5.45534901e-01 -6.48228395e-01 -7.40277997e-01
 -8.20172255e-01 -8.86599306e-01 -9.38468422e-01 -9.74927912e-01
 -9.95379113e-01 -9.99486216e-01 -9.87181783e-01 -9.58667853e-01
 -9.14412623e-01 -8.55142763e-01 -7.81831482e-01 -6.95682551e-01
 -5.98110530e-01 -4.90717552e-01 -3.75267005e-01 -2.53654584e-01
 -1.27877162e-01 -2.44929360e-16]
```

Now do it for cosine


```
In [24]:
```

```
[ 0.          0.12822827  0.25645654  0.38468481  0.51291309  0.64114136
 0.76936963  0.8975979  1.02582617  1.15405444  1.28228272  1.41051099
 1.53873926  1.66696753  1.7951958  1.92342407  2.05165235  2.17988062
 2.30810889  2.43633716  2.56456543  2.6927937  2.82102197  2.94925025
 3.07747852  3.20570679  3.33393506  3.46216333  3.5903916  3.71861988
 3.84684815  3.97507642  4.10330469  4.23153296  4.35976123  4.48798951
 4.61621778  4.74444605  4.87267432  5.00090259  5.12913086  5.25735913
 5.38558741  5.51381568  5.64204395  5.77027222  5.89850049  6.02672876
 6.15495704  6.28318531]
[ 1.          0.99179001  0.96729486  0.92691676  0.8713187  0.80141362
 0.71834935  0.6234898  0.51839257  0.40478334  0.28452759  0.1595999
 0.03205158 -0.09602303 -0.22252093 -0.34536505 -0.46253829 -0.57211666
-0.67230089 -0.76144596 -0.8380881  -0.90096887 -0.94905575 -0.98155916
-0.99794539 -0.99794539 -0.98155916 -0.94905575 -0.90096887 -0.8380881
-0.76144596 -0.67230089 -0.57211666 -0.46253829 -0.34536505 -0.22252093
-0.09602303  0.03205158  0.1595999  0.28452759  0.40478334  0.51839257
 0.6234898  0.71834935  0.80141362  0.8713187  0.92691676  0.96729486
 0.99179001  1.          ]
```

What makes these functions really nice is that they do the math on the whole list for you. If you look it went through the list element wise and took the sine of each element. That is really cool and makes our life really easy. Now we can plot the sine of x .

```
In [15]: x=np.linspace(0,2*np.pi)
y=np.sin(x)

fig,ax=plt.subplots()
ax.plot(x,y)
ax.set_xlabel('X') #added in
ax.set_ylabel('Y') #added in
ax.set_title('Sine of X')
plt.show()
```

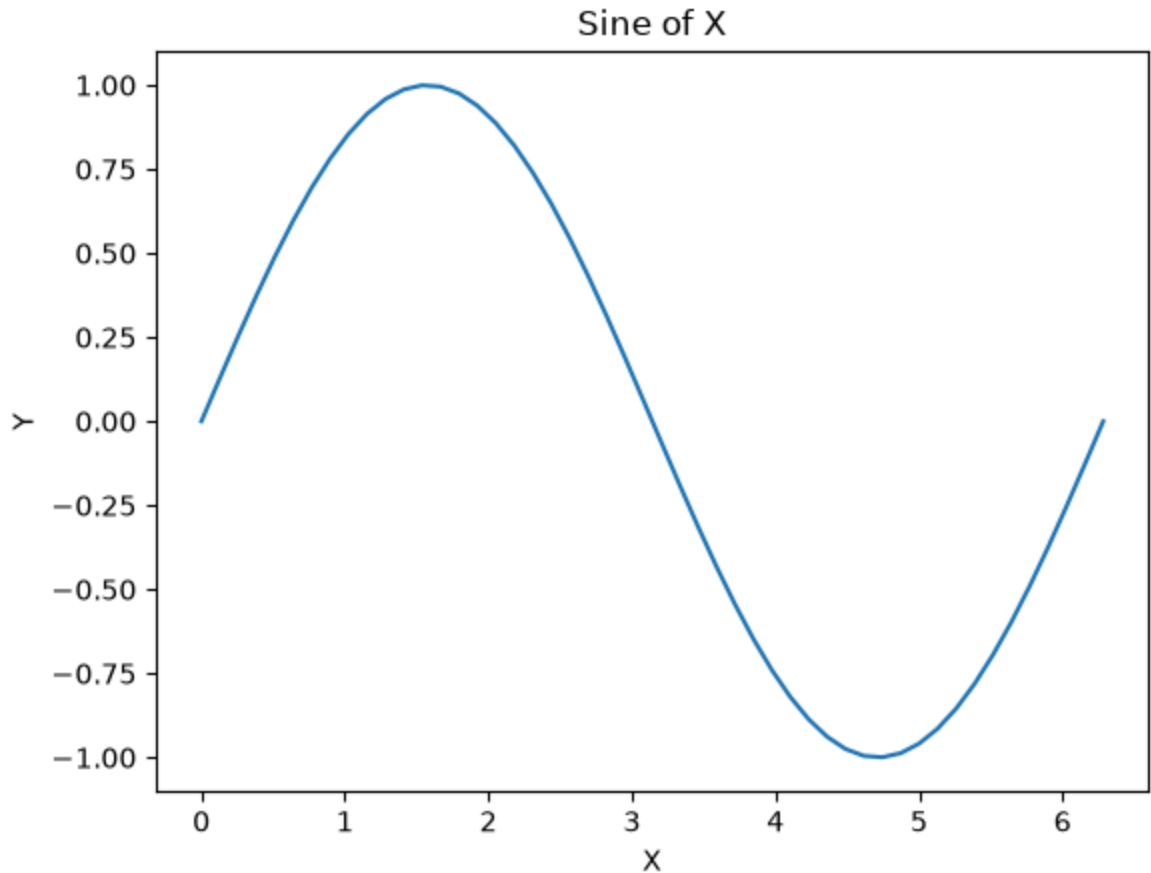

can you make the cosine and plot it?

In [49]:


In [49]:

Now to show you some interesting plotting. We can plot both sine and cosine on the same plot. I won't do it for you. But if you call plot twice in a row it will put the plots onto one figure. This is because they are both using the same axes which we called ax. So call it twice, once with your x and sin(x) list and a second time with your x and cos(x) data.

I added a legend and title. Again this is foreshadowing. Look in the answers or I will show you how soon.

In [13]:

Out[13]: <matplotlib.legend.Legend at 0x1105780d0>

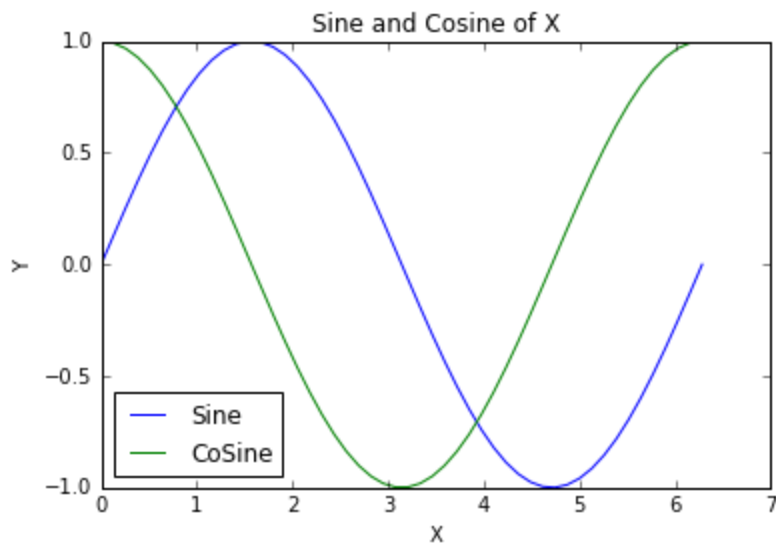

In []:

Remember

`np.arange` is for wanting a list of integers

`np.linspace` is for wanting evenly spaced numbers.

these are all functions that are easy to call

You can save these functions to a list(or array) you can call anything. We are calling them x and y right now.


Let's Make a parabola. Remember

$$y = ax^2 + bx + c$$

- set an a,b,and c.
- get an x with `np.linspace`
- solve for y
- plot it.

In [46]:

Out[46]: <matplotlib.text.Text at 0xbb71d30>

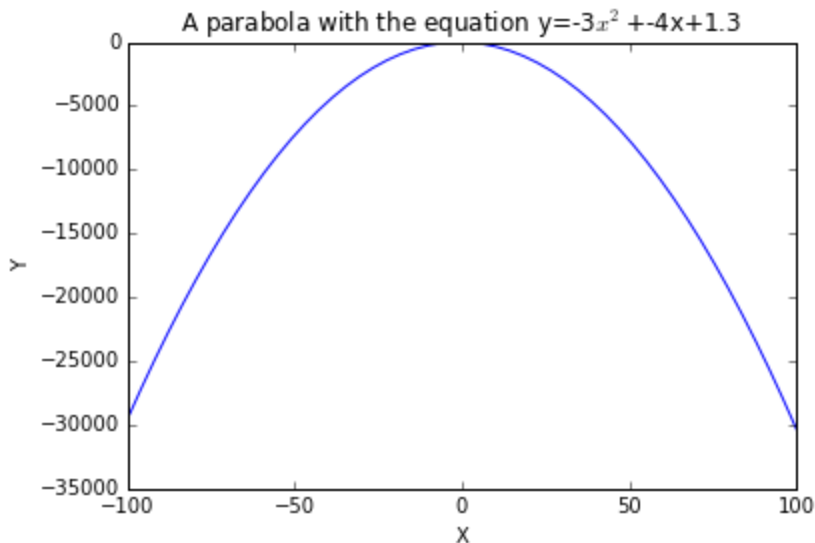

In class I asked if you could set part of a list and this caused confusion. so lets play with this. remember you can access part of a list using brackets. so lets use the brackets to reset a number.

```
In [16]: #here is our list
x=np.linspace(-100,100)
print(x)
```

```
[ -100.      -95.91836735 -91.83673469 -87.75510204 -83.67346939
  -79.59183673 -75.51020408 -71.42857143 -67.34693878 -63.26530612
  -59.18367347 -55.10204082 -51.02040816 -46.93877551 -42.85714286
  -38.7755102  -34.69387755 -30.6122449  -26.53061224 -22.44897959
  -18.36734694 -14.28571429 -10.20408163  -6.12244898  -2.04081633
    2.04081633   6.12244898  10.20408163  14.28571429  18.36734694
   22.44897959  26.53061224  30.6122449   34.69387755  38.7755102
   42.85714286  46.93877551  51.02040816  55.10204082  59.18367347
   63.26530612  67.34693878  71.42857143  75.51020408  79.59183673
   83.67346939  87.75510204  91.83673469  95.91836735 100.      ]
```

```
In [17]: x[0]=0
print(x)
```

```
[  0.      -95.91836735 -91.83673469 -87.75510204 -83.67346939
  -79.59183673 -75.51020408 -71.42857143 -67.34693878 -63.26530612
  -59.18367347 -55.10204082 -51.02040816 -46.93877551 -42.85714286
  -38.7755102  -34.69387755 -30.6122449  -26.53061224 -22.44897959
  -18.36734694 -14.28571429 -10.20408163  -6.12244898  -2.04081633
    2.04081633   6.12244898  10.20408163  14.28571429  18.36734694
   22.44897959  26.53061224  30.6122449   34.69387755  38.7755102
   42.85714286  46.93877551  51.02040816  55.10204082  59.18367347
   63.26530612  67.34693878  71.42857143  75.51020408  79.59183673
   83.67346939  87.75510204  91.83673469  95.91836735 100.      ]
```


I just changed the zeroth cell to zero. I could have changed it to anything.

```
In [18]: x[0]=-21
x
```

```
Out[18]: array([-21.          , -95.91836735, -91.83673469, -87.75510204,
        -83.67346939, -79.59183673, -75.51020408, -71.42857143,
        -67.34693878, -63.26530612, -59.18367347, -55.10204082,
        -51.02040816, -46.93877551, -42.85714286, -38.7755102 ,
        -34.69387755, -30.6122449 , -26.53061224, -22.44897959,
        -18.36734694, -14.28571429, -10.20408163, -6.12244898,
        -2.04081633,  2.04081633,  6.12244898, 10.20408163,
        14.28571429, 18.36734694, 22.44897959, 26.53061224,
        30.6122449 , 34.69387755, 38.7755102 , 42.85714286,
        46.93877551, 51.02040816, 55.10204082, 59.18367347,
        63.26530612, 67.34693878, 71.42857143, 75.51020408,
        79.59183673, 83.67346939, 87.75510204, 91.83673469,
        95.91836735, 100.          ])
```

So I set 0 cell/spot/item to -21. You can set and reset how you would like because lists are **mutable** this compares to strings which are **immutable**

```
In [52]: x[:]=-100
x
```

```
Out[52]: array([-100., -100., -100., -100., -100., -100., -100., -100., -100.,
        -100., -100., -100., -100., -100., -100., -100., -100., -100.,
        -100., -100., -100., -100., -100., -100., -100., -100., -100.,
        -100., -100., -100., -100., -100., -100., -100., -100., -100.,
        -100., -100., -100., -100., -100.])
```

```
In [53]: x[::3]=40
x
```

```
Out[53]: array([ 40., -100., -100.,  40., -100., -100.,  40., -100., -100.,
        40., -100., -100.,  40., -100., -100.,  40., -100., -100.,
        40., -100., -100.,  40., -100., -100.,  40., -100., -100.,
        40., -100., -100.,  40., -100., -100.,  40., -100., -100.,
        40., -100., -100.,  40., -100.])
```

Can you change the array in some fun way?

```
In [ ]:
```

```
In [ ]:
```

```
In [ ]:
```

Strings

Strings are text that you enter. We are going to learn more about strings and what we can do with them. You can have strings within lists.

```
In [1]: firststring='Hello World'
        print (firststring)
```

Hello World

```
In [2]: firststring[0]
```

Out[2]: 'H'

```
In [3]: firststring[:]
```

Out[3]: 'Hello World'

Can you remember how to slice and access and do a few examples yourself?

```
In [4]:
```

Out[4]: 'HlWl'

```
In [5]: firststring='hello again'
        print (firststring)
```

hello again

So you can change the whole value of firststring. But could we change one slice?

```
In [6]: firststring[1]='E'
```

```
-----
TypeError                                Traceback (most recent call last)
Cell In[6], line 1
----> 1 firststring[1]='E'

TypeError: 'str' object does not support item assignment
```

What does this error mean? It means it is immutable. You can change the whole item but not parts of it. What else can we do with strings? We can add them together. (when typing firststring press tab and see if it fills in....)

```
In [7]: bigstring=firststring+' '+firststring
        print (bigstring)
```

hello again hello again

Lets see what we can just learn from tabbing... so type bigstring. and then hit tab

```
In [8]: bigstring.capitalize()
```

```
Out[8]: 'Hello again hello again'
```

But I wanted them all capitalized. Can you capitalized all of them?

```
In [9]: bigstring.upper()
```

```
Out[9]: 'HELLO AGAIN HELLO AGAIN'
```

```
In [10]: print (bigstring)
```

```
hello again hello again
```

What happened to big string? It isn't capitalized???? you have to set it.

```
In [11]: bigstring=bigstring.upper()  
print (bigstring)
```

```
HELLO AGAIN HELLO AGAIN
```

what if we have a list of strings?

```
In [12]: list2=['one','two','three']  
print (list2)
```

```
['one', 'two', 'three']
```

```
In [13]: list2[0]
```

```
Out[13]: 'one'
```

```
In [14]: list2[0][1]
```

```
Out[14]: 'n'
```

What did I just do to you with the double set of brackets? We will return to 2d arrays soon..... You have a list of strings.

```
In [15]: list2[0]='four'  
print (list2)
```

```
['four', 'two', 'three']
```

```
In [16]: list2[2][:]
```

```
Out[16]: 'three'
```

```
In [17]: list2[2][0:2]
```

```
Out[17]: 'th'
```

```
In [18]: list2.upper()
```

```
-----  
AttributeError                                Traceback (most recent call last)  
Cell In[18], line 1  
----> 1 list2.upper()  
  
AttributeError: 'list' object has no attribute 'upper'
```

Why did I get this error?

```
In [19]: type(list2)
```

```
Out[19]: list
```

list 2 is a list, not a string. It is a list of strings..... So any one item is a string...

```
In [20]: list2[1].upper()
```

```
Out[20]: 'TWO'
```

```
In [21]: list2.sort()  
print (list2)
```

```
['four', 'three', 'two']
```

See, I just did a list function on the strings in the list.....

Make two string variables that are all lower case of your first and last name.

Write them out.

Combine them into a new string with your whole name with the first letters capitalized.

```
In [ ]:
```

```
In [ ]:
```


Answers

```
In [11]: newList=np.arange(0,1000,5)  
print(newList)
```

```
[ 0  5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85
 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170 175
180 185 190 195 200 205 210 215 220 225 230 235 240 245 250 255 260 265
270 275 280 285 290 295 300 305 310 315 320 325 330 335 340 345 350 355
360 365 370 375 380 385 390 395 400 405 410 415 420 425 430 435 440 445
450 455 460 465 470 475 480 485 490 495 500 505 510 515 520 525 530 535
540 545 550 555 560 565 570 575 580 585 590 595 600 605 610 615 620 625
630 635 640 645 650 655 660 665 670 675 680 685 690 695 700 705 710 715
720 725 730 735 740 745 750 755 760 765 770 775 780 785 790 795 800 805
810 815 820 825 830 835 840 845 850 855 860 865 870 875 880 885 890 895
900 905 910 915 920 925 930 935 940 945 950 955 960 965 970 975 980 985
990 995]
```


```
In [19]: x=np.linspace(0,2*np.pi)

fig,ax=plt.subplots()
ax.plot(x,np.sin(x),label='Sine') #setting the label in plot tells legend th
ax.plot(x,np.cos(x),label='CoSine')
ax.set_xlabel('X') #added in
ax.set_ylabel('Y') #added in
ax.set_title('Sine and Cosine of X')
ax.legend(loc='best')
plt.show()
```

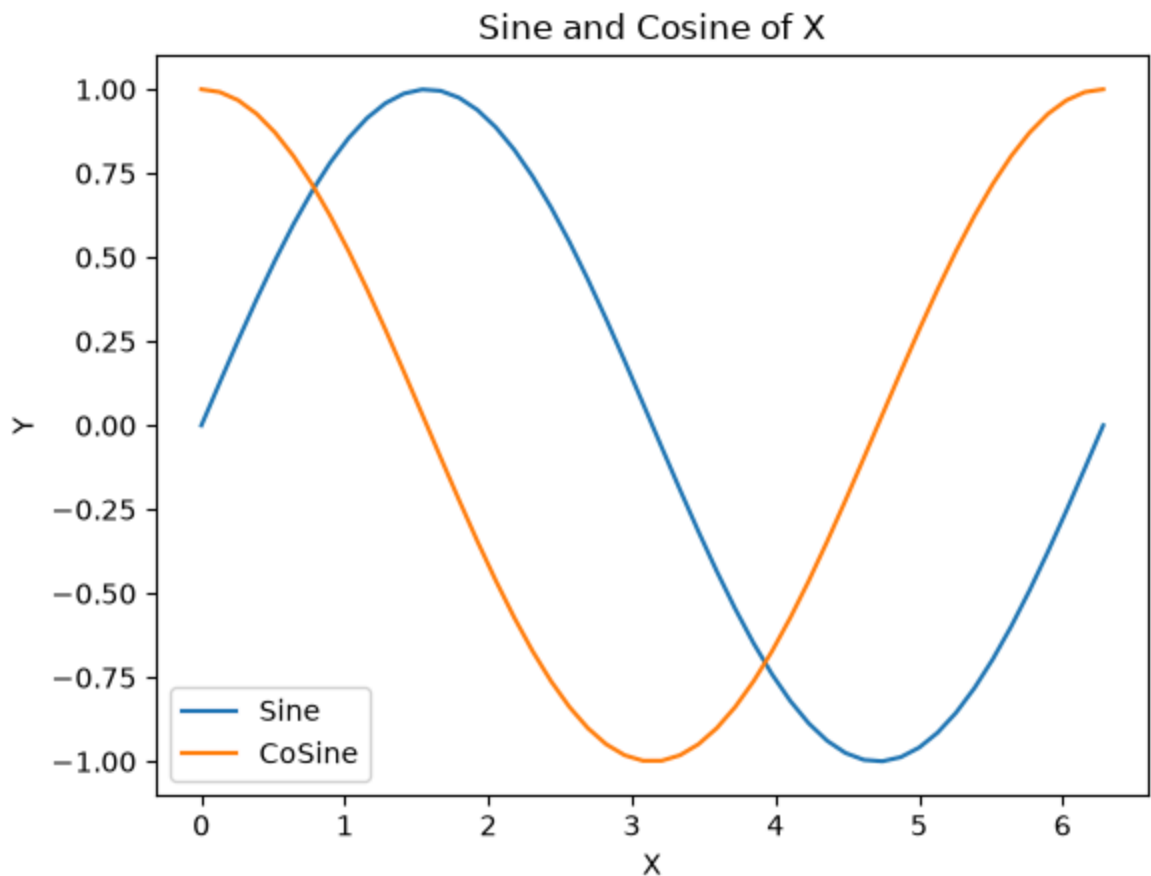

We could also have done it all right in `plt.plot` I find this harder to read and so it can be nice to set the list parameters. Especially as our code gets longer


```
In [20]: fig,ax=plt.subplots()
ax.plot(np.linspace(0,2*np.pi),np.sin(np.linspace(0,2*np.pi)),label='Sine')
ax.plot(np.linspace(0,2*np.pi),np.cos(np.linspace(0,2*np.pi)),label='CoSine')
ax.set_xlabel('X') #added in
ax.set_ylabel('Y') #added in
ax.set_title('Sine and Cosine of X')
ax.legend(loc='best')
plt.show()
```

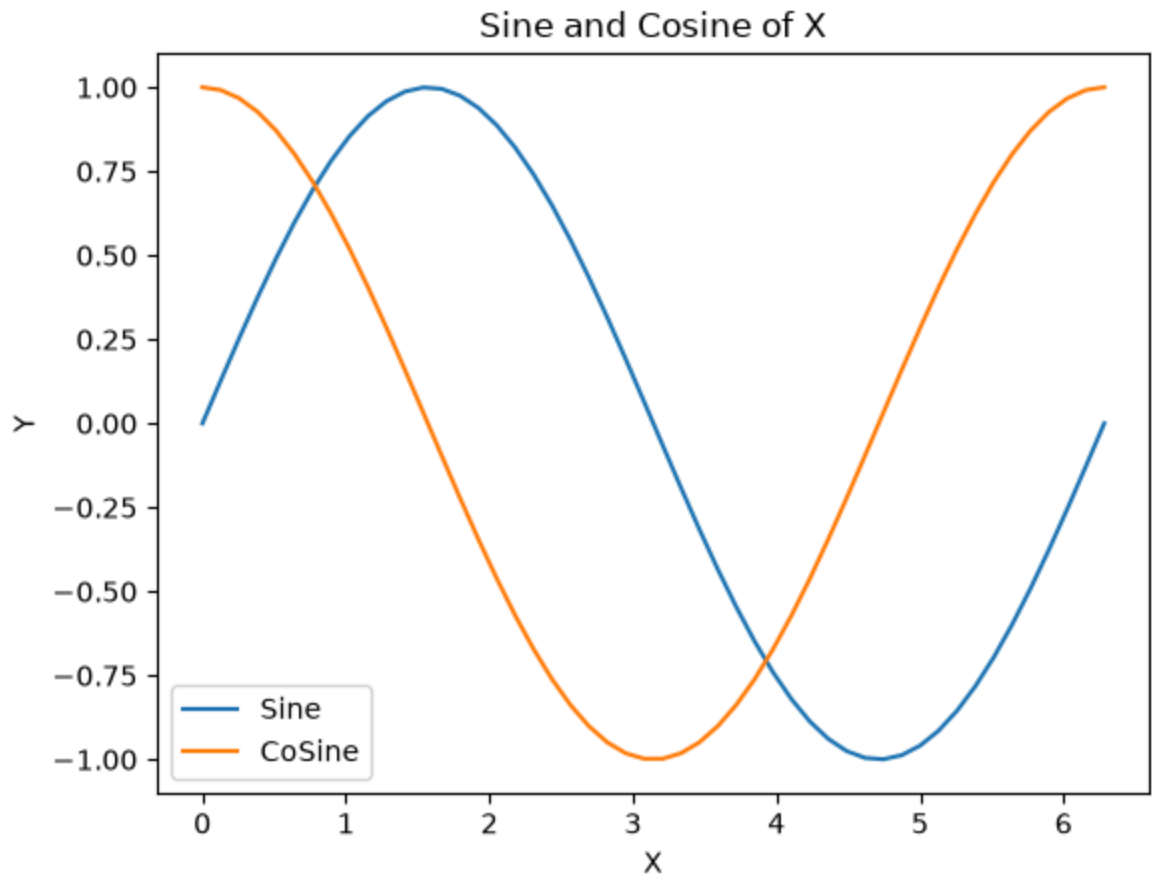

Parabola Answer

```
In [21]: a=-3
b=-4
c=1.3
x=np.linspace(-100,100)
y=a*x**2+b*x+c

fig,ax=plt.subplots()
ax.plot(x,y)
ax.set_xlabel('X') #added in
ax.set_ylabel('Y') #added in
ax.set_title('A parabola with the equation y={}x^2+{}x+{}'.format(a,b,c))
plt.show()
```

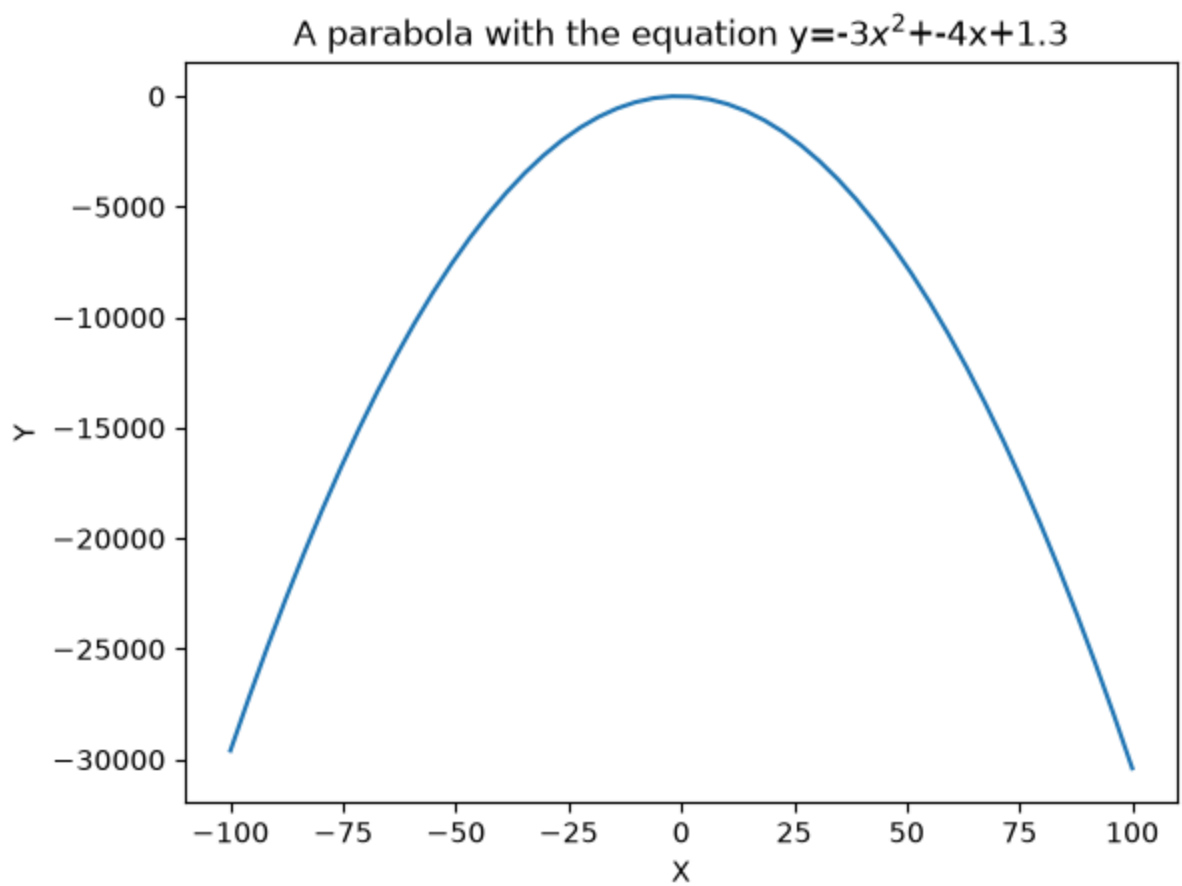

In []:

[new page](#)