


AttrA = 0 Condition AttrB <= 2: slope is 1.5, y-intercept is 0 => Equation: $y = 1.5 * \text{AttrB}$ Condition AttrB > 2: slope is -0.5 y-intercept is 4 => Equation: $y = 4 - 0.5 * \text{AttrB}$	AttrA = 1 Condition AttrB <= 1: slope is -1, y-intercept is 2 => Equation: $y = 2 - \text{AttrB}$ Condition $1 < \text{AttrB} \leq 4$: => Equation: $y = 1$ Condition AttrB > 4: slope is 3, y-intercept is -11 => Equation: $y = 3 * \text{AttrB} - 11$
---	---

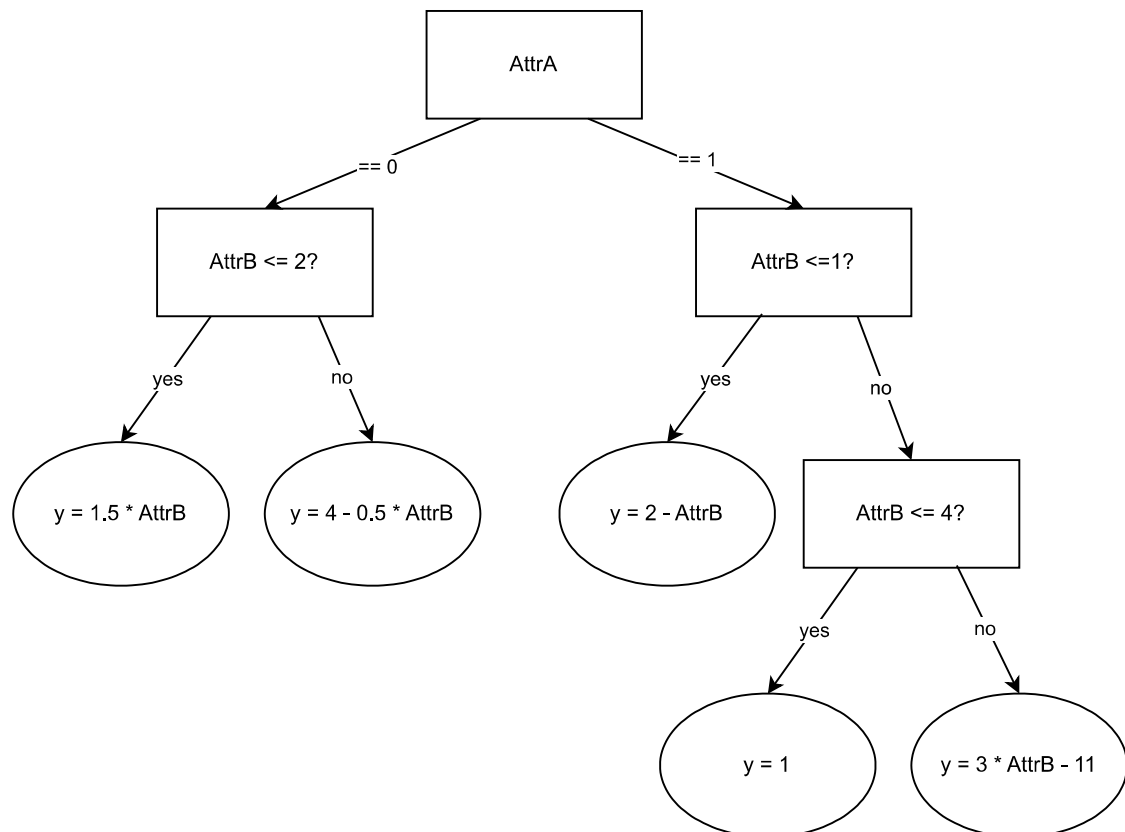

Task 3:

a)
Since the D1 model achieves 99% training accuracy but only 70% test accuracy, it indicates high variance and overfitting. Because of this, a bagging ensemble method suits well with this, since it reduces variance and improve the test accuracy without increasing bias.

The D2 model achieves 75% training accuracy and 72% test accuracy, which are lower than D1, which indicates underfitting. Boosting esemble method helps with that, since boosting sequentially trains models to correcct the errors, which reduces bias and learning more complex patterns.

b), c)
A1 for D1, since bagging relies on training many decision trees independently.

A2 for D2, because boosting is a sequential algorithm and A2 has extremely fast single-thread execution.