

User guide for pamfit: an R package for the study of photosynthesis-light curve parameters spatial heterogeneity.

2025-08-15

Contents

1	Installing the package	1
2	Testing pamfit	2
2.1	Upload data	2
2.2	Select ROI	2
2.3	Select fit parameters	2
2.4	View and export data	4
3	Technical details	6
3.1	Exported R objects	6
3.2	Models and other calculations	9
3.2.1	Fitting models	9
3.2.2	ETR calculations	9
3.3	Limitations and pitfalls	9



This guide aims to assist users in extracting light-curve image parameters —such as α , E_k , and $rETR_{max}$ — from Imaging-PAM data using the **pamfit** R package. It serves as supplementary material to the article “*PAMFIT: a new R package for studying the spatial heterogeneity of photosynthesis-light curve parameters*” by Jesus, B., Cartaxana, P., and Williamson, C. (submitted to *Limnology and Oceanography: Methods*).

Sections 1 and 2 provide quick-start instructions for getting the **pamfit** package up and running. Section 3 delves into more technical aspects, including the structure of the data objects generated by **pamfit**, details of the underlying calculations, and known limitations of the package.

1 Installing the package

The package is hosted on GitHub and can be installed using the `install_github()` function from the **devtools** package.

If **devtools** is not already installed, it can be added using the `install.packages()` function:

```
install.packages('devtools')
```

Once **devtools** is installed, you can install **pamfit** with the following command:

```
devtools::install_github('bmjesus/pamfit')
```

This command will download **pamfit** and install any required R package dependencies. Depending on your current R setup, this process may take some time. Some dependencies (e.g. **shiny**) have numerous additional

packages of their own.

2 Testing pamfit

To start using `pamfit`, you first need to load it using:

```
library('pamfit')
```

Then, run the `pamfit()` function in the R console to launch the Shiny app.

```
pamfit()
```

2.1 Upload data

`pamfit` requires two inputs: a `.tif` file exported from the Walz ImagingWin software, and a list of the light levels used in the RLC. The light levels can either be entered manually or provided in a simple comma-separated text file. `pamfit` will save any light levels input and hold these over if you continue to re-analyse the same image, or different images that used the same PAR settings.

To get started, we recommend using one of the sample images provided to test whether all functions are working correctly. Specifically, it's a good idea to begin with the smallest image (`slug_small.tif`, 676 pixels) along with its corresponding light levels file (`light_slug_small.txt`). Both files can be downloaded from the `pamfit` GitHub repository (<https://github.com/bmjesus/pamfit/tree/master/data>).

The first step in the workflow is to upload the `.tif` image file, followed by the input of the PAR (photosynthetically active radiation) levels, either manually or via a text file. The user may then optionally select an image smoothing level to reduce pixel noise, and choose whether to incorporate absorptivity values into the electron transport rate (ETR) calculations. It is important to note that if absorptivity-based ETR calculation is selected but the uploaded image does not contain valid absorptivity data, all ETR images will be returned as NA, and model fitting will not be possible. For guidance on generating absorptivity images and exporting datasets in TIFF format, refer to the Imaging PAM instruction manual.

After uploading, you should see something similar to the example below (Figure 1):

Click **Confirm** to proceed to the next step.

2.2 Select ROI

In this step, the user can define regions of interest (ROIs) on the image using the digitization tools: polygon, rectangle, or circle. Alternatively, it's possible to click **Import ROI** to load a previously saved ROI from an earlier analysis.

If you're using `pamfit` for the first time, you'll need to draw a new ROI. In the example below (Figure 2), we selected the entire image as the ROI using the rectangle tool.

Once you've finished selecting the ROI, click **Confirm ROI** to move to the next step.

2.3 Select fit parameters

In this step, the user needs to click on a pixel and select a fitting model (Figure 3). This allows `pamfit` to estimate suitable starting values for the fitting algorithm. Optionally, the user can reduce the number of light steps used by selecting a subset from the drop-down menu. This can be especially useful when light curves include many high-light levels that result in excessive photoinhibition.

http://127.0.0.1:3558 Open in Browser Publish

Imaging PAM RLC fit

- 1. Upload Image
- 2. Select ROI
- 3. Select Fit Parameters
- 4. View & Export Data

Load Pre-Processed GeoTIFF

Quit PAMfit

Input data and initial settings

1. Upload your TIFF file

Browse... slug_small.tif

Upload complete

2. Input PAR levels for each light step or load file

Light file

Browse... light_slug.txt

Upload complete

	Light_Step	PAR_level
1	1	0.00
2	2	12.00
3	3	33.00
4	4	44.00
5	5	62.00
6	6	82.00
7	7	146.00
8	8	181.00
9	9	223.00
10	10	270.00
11	11	322.00
12	12	493.00
13	13	700.00
14	14	1000.00
15	15	1200.00

3. Choose degree of pixel smoothing

☐ 0 ☒ 3 ☐ 5 ☐ 7 ☐ 9 ☐ 11 ☐ 13 ☐ 15

4. Identify whether data contains a PAR-absorptivity image

☐ Yes ☒ No

5. Confirm Settings to Proceed

Confirm




Figure 1: First step: upload the data

http://127.0.0.1:3558 Open in Browser Publish

Imaging PAM RLC fit

- 1. Upload Image
- 2. Select ROI
- 3. Select Fit Parameters
- 4. View & Export Data


Load Pre-Processed GeoTIFF

Quit PAMfit

Select ROI for analysis

Select image for ROI delineation

☒ Fo ☐ Fm

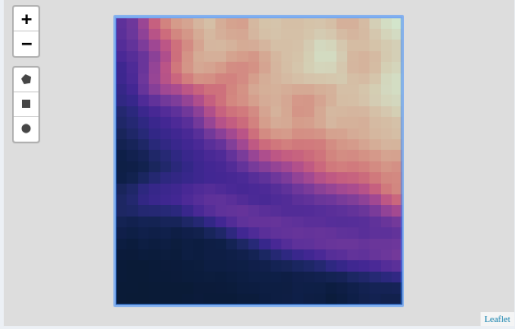

Export ROI?

Import ROI

Confirm ROI

Figure 2: Second step: select ROI

This is also where the user can specify how many CPU cores to use for the fitting process. For small images—such as the example provided—it is best to leave the number of cores set to 1. For larger images (e.g., more than 15,000 pixels), increasing the number of cores can significantly reduce processing time (see Jesus et al. for details). To assist with this, **pamfit** automatically detects the number of available cores. However, **do not** use all available cores, as this may cause your system to crash.

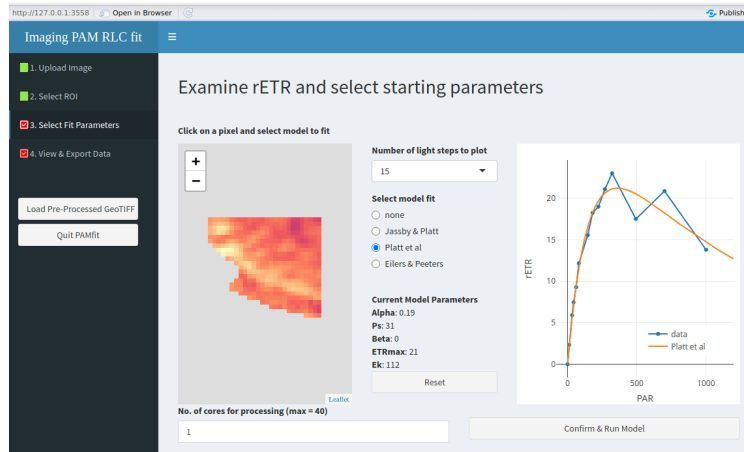


Figure 3: Third step: select the model and the starting values

The fitting process begins when the user clicks the **Confirm & Run Model** button. Once fitting is complete, the user will be directed to the fourth and final step.

In our example, the test image runs extremely fast (under 2 seconds on our system), but processing time for larger images may vary significantly depending on factors such as operating system, number of CPU cores, available memory, and processor speed. A progress bar is provided to indicate the fitting process. However, please note that when multiple CPU cores are used, the progress bar does not update in real time. As long as the bar remains visible, the fitting is ongoing, please be patient!

2.4 View and export data

This is the most complex section of the app, and some menus in the left panel dynamically change based on the tab selected by the user. The section begins with three tabs — **Raw Data**, **Model Outputs**, and **Settings** — and a fourth tab appears when the user selects ROIs or transects for analysis.

By default, the app displays the **Raw Data** tab. In the left-hand menu, the user can:

1. **Export to R** – sends all current results to the R workspace (see *Section 3* for details on the structure of the exported object).
2. **Save Data** – allows exporting results outside of R in two formats: **.csv** and **.tif** (see Figure 4).
 - The **.csv** format can be opened in any spreadsheet or numerical software (e.g., OpenOffice, Excel).
 - The **.tif** format can be opened in imaging software (e.g., ImageJ, QGIS), and includes all data layers: both the raw input and the fitted parameter outputs. The structure of this **.tif** image mirrors that of the R object (see *Section 3*).
3. **Load Pre-processed Image** – imports a previously saved **.tif** for further analysis.
4. **Quit pamfit** – exits the app.

Note: All objects exported to the R workspace will only be available **after** quitting **pamfit**.

Save Data

1. Choose Parameters

☒ All data
☐ alpha
☐ ps
☐ beta
☐ etrmax
☐ ek
☐ se_alpha
☐ se_ps
☐ se_beta
☐ RMSE
☐ F images
☐ Fm images

2. Choose Output Format

☒ TIFF file(s)
☐ CSV file(s)

3. Save Data

Save Data

Dismiss

Figure 4: Fourth step: saving data options

When the user selects the **Model Outputs** tab, they can draw either a region of interest (ROI) or a transect on the resulting images using the icons available for that purpose. Once this is done, a new tab will appear—named either **ROI** or **Transect** depending on the user’s choice. Upon entering the new tab, the left-hand menu will expand to offer options for **exporting** (to the R workspace) or **saving** the data associated with the selected ROI or transect.

The figures below illustrate an example of a transect (Figure 5), and the corresponding output showing an F_v/F_m gradient along the transect (Figure 6).

Important note: Fitting models occasionally return extreme values (outliers), which can distort image rendering by stretching the color scale. It is not uncommon for an image to appear entirely black, which can be caused by a single pixel with an extreme value. To correct this, you can manually define the upper and lower limits of the parameter being visualized. Clicking on a pixel in the image will return its value, which can guide you in choosing appropriate limits.

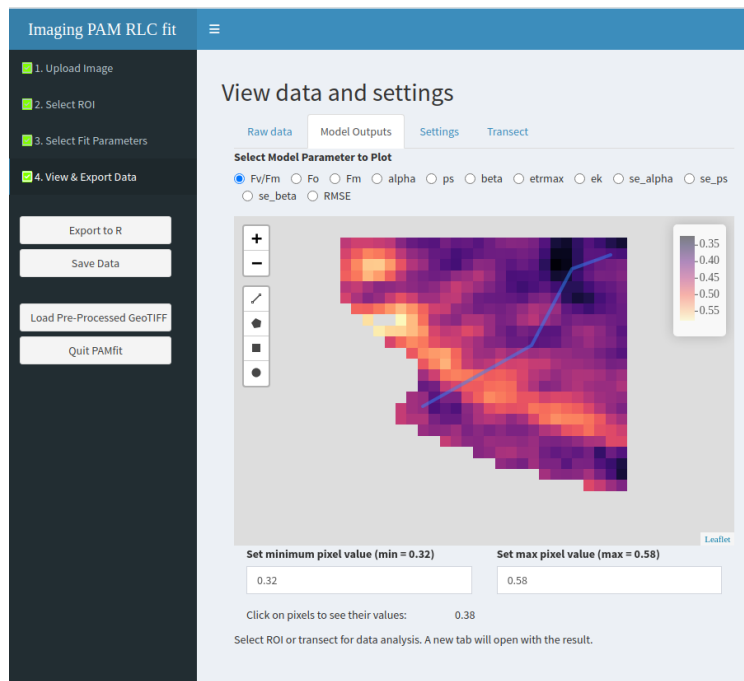


Figure 5: Drawing a transect

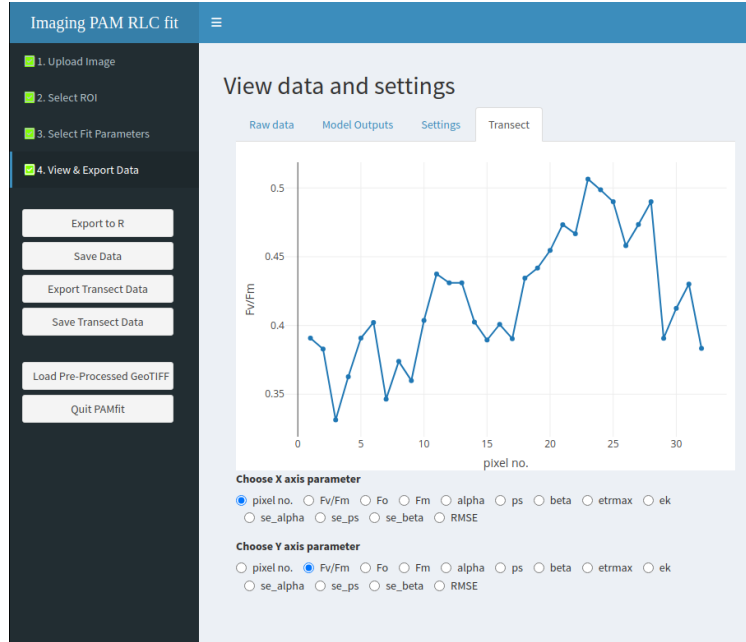


Figure 6: Plotting the transect results

When the user selects an ROI (Figure 7), the ROI tab provides the option to plot two images against each other and displays a boxplot analysis for each variable (Figure 8).

3 Technical details

3.1 Exported R objects

The objects exported to the R workspace are of two types. The first type are the results of the model fit and the second type are the result of the ROI/Transect analysis. The latter are exported in a simple dataframe format and the former in more complex list format described below.

When exporting the result to the workspace the user has the possibility of changing the default name `pamfit_results` and once `pamfit` is closed they will see the object appear on the workspace. The exported object is a list with 5 elements, all items are of the type `RasterBrick`. The 1st item contains all the minimum fluorescence images (one per light level), the 2nd item contains the maximum fluorescence images (one per light level), the 3rd the PSII quantum efficiency images (one per light level), the 4th the ETR images (one per light level) and the 5th contains the model parameters, their associated standard error and RMSE images.

Note: if an Absorptivity measurements is used then the R list object has eight elements, the first three being: “NIR”, “Red” and “abs”.

This the structure of an image processed with Eilers and Peeters (1988) model using 13 light levels and no Absorptivity measurement.

```
> str(pamfit_results)
List of 5
 $ f_images      :Formal class 'RasterBrick' [package "raster"] with 13 slots
 $ fm_images     :Formal class 'RasterBrick' [package "raster"] with 13 slots
 $ Y[PSII]_images:Formal class 'RasterBrick' [package "raster"] with 13 slots
 $ ETR_images    :Formal class 'RasterBrick' [package "raster"] with 13 slots
```

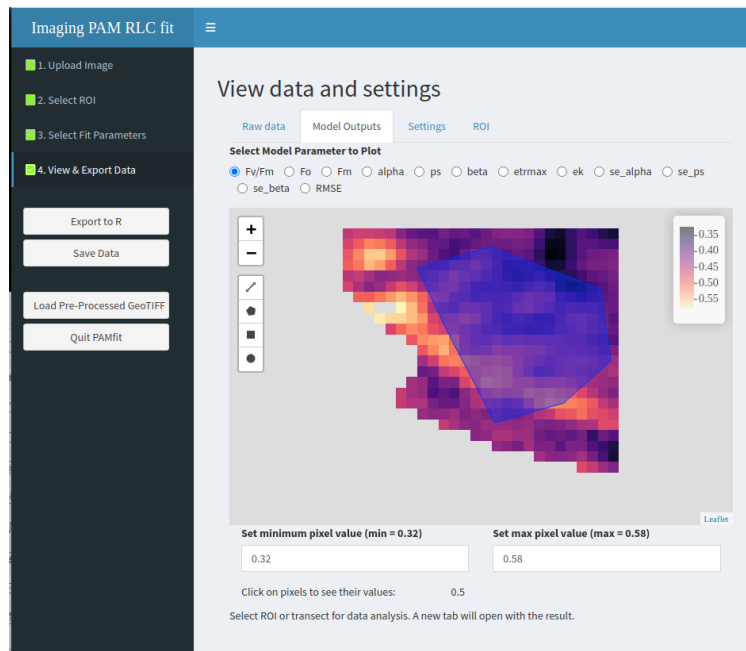


Figure 7: Drawing a ROI

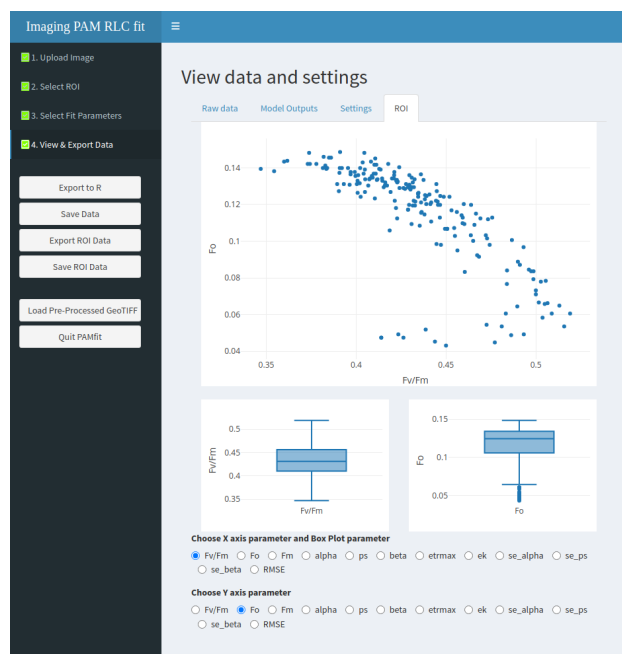


Figure 8: Boxplot and XY plot of ROI

```
$ model_outputs :Formal class 'RasterBrick' [package "raster"] with 13 slots
```

Using the function `names()` will return the name of each image in the respective list item.

```
> names(pamfit_results$model_outputs)
[1] "alpha"      "etrmax"     "eopt"       "Ek"         "se_alpha"   "se_etrmax"  "se_eopt"    "RMSE"
```

Plotting any image can be done by accessing the image using the conventional R object structure (`$`). This is the example of how the plot the alpha image (Figure 9).

```
terra::plot(pamfit_results$model_outputs$alpha)
```

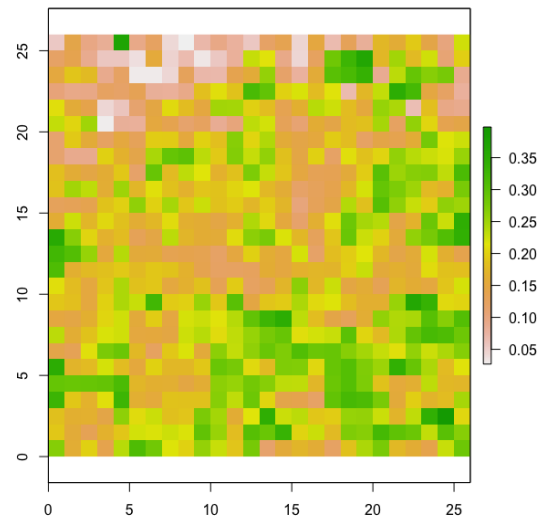


Figure 9: Alpha image

Accessing the pixel values for numerical analysis can be done using the `terra::values()` function. Here's an example of how to plot the pixel values distribution (Figure 10):

```
hist(terra::values(pamfit_results$model_outputs$alpha))
```

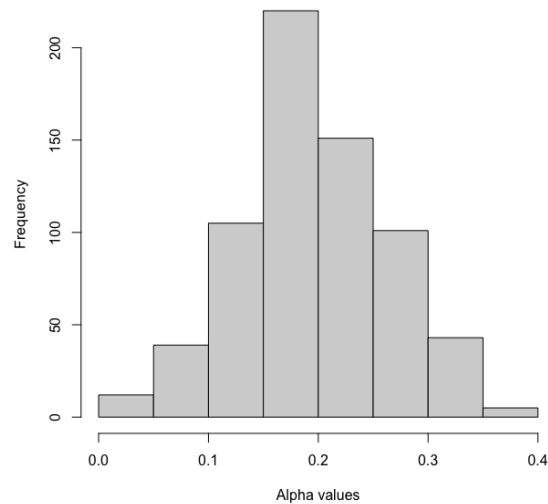


Figure 10: Frequency of alpha pixel values

3.2 Models and other calculations

3.2.1 Fitting models

`pamfit` can fit three photosynthesis-irradiance models.

The simplest one is the model described in *Jassby, A.D., Platt, T., (1976) Mathematical formulation of the relationship between photosynthesis and light for phytoplankton. Limnol. Oceanogr. 21: 540-547*. It is modeled with the following equation:

$$ETR = ETR_{max} \cdot \tanh\left(\frac{\alpha \cdot PAR}{ETR_{max}}\right)$$

The second model is the one described in *Platt, T., Gallegos, C.L., Harrison, W.G. (1980) Photoinhibition of photosynthesis in natural assemblages of marine phytoplankton. J. Mar. Res. 38, 687-701*.

$$ETR = P_s \cdot \left(1 - e^{-\frac{\alpha \cdot PAR}{P_s}}\right) \cdot e^{-\frac{\beta \cdot PAR}{P_s}}$$

The third model is the one described in *Eilers, P.H.C., and J.C.H. Peeters. 1988. A model for the relationship between light intensity and the rate of photosynthesis in phytoplankton. Ecological Modelling, 42, 199-215*. Modeled in `pamfit` using the equation:

$$ETR = \frac{PAR}{PAR^2 \cdot \left(\frac{1}{\alpha \cdot E_{opt}^2}\right) + \left(\frac{PAR}{ETR_{max}}\right) - \left(\frac{2 \cdot PAR}{\alpha \cdot E_{opt}}\right) + \left(\frac{1}{\alpha}\right)}$$

All models are fitted using a Levenberg–Marquardt algorithm from the function `minpack.lm::nlsLM` with the bounded, nonlinear least-squares optimizer “PORT”.

3.2.2 ETR calculations

Without absorptivity:

$$rETR = \Phi_{PSII} \times PAR \times 0.5$$

With absorptivity:

$$rETR = \Phi_{PSII} \times PAR \times 0.5 \times Abs$$

Absorptivity is calculated as: $Abs = 1 - red / nir$

3.3 Limitations and pitfalls

Noise: applying a small degree of smoothing consistently improved the results in all the samples we processed, likely by reducing electronic noise inherent to the image acquisition process. We recommend that users

identify the optimal smoothing level, i.e. the “sweet spot”, where noise is minimized without significant loss of spatial variability. In our samples, smoothing at three to five pixels consistently enhanced the results without compromising spatial structure.

Starting values and choosing the right model: the selection of model parameter starting values plays a crucial role in the fitting process. The PORT non-linear least-squares fitting algorithm demonstrated strong robustness to high spatial variability. However, if an image contains extreme differences in RLC response patterns, the selected pixel for the initial parameter estimates may significantly influence the results. To ensure consistency, we recommend that —if possible— samples with extreme differences be analyzed separately, using distinct images rather than a single composite image. This approach helps minimize potential biases introduced by variations in starting values. Using a model that includes a photoinhibition component (i.e., Platt or EP) consistently resulted in lower global RMSE values. However, this came at the cost of increased processing time, with the Platt model requiring more than twice the time of the Jassby model. Therefore, if processing time is a limiting factor and the dataset does not exhibit signs of photoinhibition, the Jassby model can be used as a faster alternative. Otherwise, the Platt and EP models generally provided better results.

Slow speeds with high parallelization: parallel processing is highly beneficial for large images, significantly reducing processing time. However, the greatest performance gains are observed between two and four CPU cores. Beyond this, increasing the number of cores resulted in only minor improvements or, in some cases, even slower processing. We recommend that users test processing speed on their own systems to determine the most efficient configuration. Memory limitations may occur when running pamfit in parallel mode, particularly on Windows systems where `clusterR()` launches multiple R sessions. Processing several images in a single session without closing pamfit can also increase memory usage, as RStudio retains objects until they are released to the workspace when pamfit is closed. The safest approach is to run pamfit in serial mode (one CPU core) and process one image per session. However, in most systems we tested, using two cores was stable and halved processing time.

Rendering issues due to outliers: fitting the P-I curve models may occasionally produce infinite or extreme values. Infinite values are handled internally by pamfit and excluded from calculations and image rendering. However, extreme outliers are retained and can distort the output by stretching the color scale, often resulting in mostly dark images with isolated bright pixels. This is a visual artefact of the outlier presence and can be manually compensated by the user by inputting the minimum and maximum values in the colour range input boxes. Finding the pixel values can be easily done by clicking on the image with the mouse.

Opening processed TIFF files: this functionality relies on the `terra::metags` function, which generates the metadata associated with each data layer. In the current `pamfit` version, the `metags` function used to open processed files must be the same version that was used to generate them.