A Standard for Exchangeable Magnetotelluric Data and Metadata

Working Group for Data Handling and Software - PASSCAL Magnetotelluric $Program^1$

¹Portable Array Seismic Studies of the Continental Lithosphere, Incorporated Research Institutions for Seismology

Version 0.0.1b - May 2020*

Contents

1	Introduction	2
2	2.2 Formatting Standards	2 2 2 3 3 3
3	Survey 3.1 Example Survey JSON Input String	5
4	Station 4.1 Example Station JSON Input String	7 8
5	Run 5.1 Example Run XML Input String	9
6	Data Logger 6.1 Example DataLogger JSON Input String	11 12
7	Electric Channel 7.1 Example Electric Channel JSON Input String	13 15
8	Magnetic Channel 8.1 Example Magnetic Channel JSON Input String	16 17
9	Filters 9.1 Example Filter JSON Input String	18 18
10	Auxiliary Channels 10.1 Example Auxiliary JSON Input String	19 19

 $^{^*} Corresponding \ Authors:$

Jared Peacock (jpeacock@usgs.gov)

1 Introduction

Researchers using magnetotelluric (MT) methods lack a standardized format for storing time series data and metadata. Commercially available MT instruments produce data in formats that range from proprietary binary to ASCII, and recent datasets from the U.S. MT community have utilized institutional formats or heavily adapted formats like miniSEED. In many cases, the available metadata for these time series are incomplete and only loosely standardized, and overall these datasets are not "user friendly". This lack of resources impedes the exchange and broader use of these data beyond a small community of specialists.

The IRIS PASSCAL MT facility maintains a pool of MT instruments that are freely available to U.S. Principal Investigators (PIs). Datasets collected with these instruments are subject to data sharing requirements, and an IRIS working group advises the development of sustainable data formats and workflows for this facility. Following in the spirit of the standard created for MT transfer function datasets, this document outlines a new metadata standard for MT time series. This standard is a key pillar of MTH5, a new data format which we propose for the international community of MT practitioners. Further information regarding MTH5 will be available later in 2020.

The Python 3 module written for these standards are found at https://github.com/kujaku11/MTarchive/tree/tables.

2 General Structure

The metadata for a full MT dataset are structured to cover details from single channel time series to the full survey. For simplicity each of the different scales of an MT survey and measurements have been categorized starting from largest to smallest (Figure 1. These categories are: Survey, Station, Run, DataLogger, Electric Channel, Magnetic Channel, and Auxiliary Channels. Each of these are described in subsequent sections.

2.1 Metadata Keyword Format

The metadata key names should be self explanatory and they are structured as follows: {category}.{name}, where:

- category refers to a metadata category that has common parameters, such as location which will have a latitude, longitude, and elevation location.latitude, location.longitude, and location.elevation. These can be nested, for example positive.location.latitude
- name is the description name, where words should be separated by an underscore, e.g. data_quality.

Alternatively, the metadata names can be nested under category headings as commonly done in XML or JSON formats. See examples below for various flavors of ways to represent the metadata.

Table 1: Permissible values for data types

Data Type
String
Double (float)
Integer
Boolean

2.2 Formatting Standards

Specific and required formatting standards for location, time and date, and angles are defined below.

2.2.1 Time and Date Format

All time and dates are given as an ISO formatted date-time string in the UTC time zone. The ISO date time format is YYYY-MM-DDThh:mm:ss.ms+00:00. Milliseconds can be accurate to 6 decimal places. Dates are formatted YYYY-MM-DD.

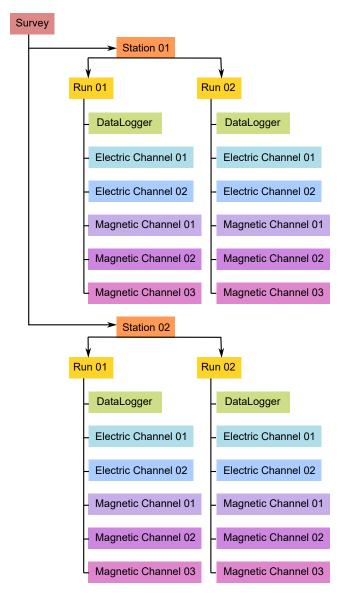


Figure 1: Schematic of a MT time series file structure with appropriate metadata.

2.2.2 Location

All latitude and longitude locations are given in decimal degrees in a well known datum.

- All latitude values must be < |90| and all longitude values must be < |180|.
- Elevation and other distance values are given in meters.
- Datum should be one of the well known datums, WGS84 is preferred, but others are acceptable.

2.2.3 Angles

All angles of orientation are given in degrees. Orientation of dipoles and magnetometers are relative to $station_orientation$. Otherwise angles are assumed to be clockwise positive from Geographic North = 0.

2.3 Units

Units should all be from the metric system. Abbreviations and full names are acceptable, for example mV and millivolts. Below are a summory of common acceptable units:

Table 2: Acceptable units

Measurement Type	Unit Long Name	Unit Short Name
Angles	degrees	deg
Distance	meters	m
Latitude/Longitude	decimal degrees	deg
Resistance	Ohms	Ohms
Resistivity	Ohm-meters	Ohm-m, Ohmm
Temperature	Celsius	С
Time	seconds	S
Voltage	Volts	V

3 Survey

A survey describes an entire dataset that covers a specific time span and region. This may include multiple PIs in multiple data collection episodes but should be confined to a specific experiment. The Survey metadata category describes the general parameters of the survey.

Table 3: Attributes for Survey category

Metadata Key	Description	Type	Required
project	alphanumeric name for the project e.g USGS-GEOMAG	string	compulsory
survey	long name of the survey, e.g. Magnetotelluric investigations of Mammoth volcanic system, California	string	optional
net_code	network code given by PASSCAL/IRIS/FDSN	string	compulsory
$time_period.start_date$	start date of survey [UTC]	string	compulsory
time_period.end_date	end date of survey [UTC]	string	compulsory
$northwest_corner.latitude$	location of northwest corner of survey [degrees]	float	compulsory
$northwest_corner.longitude$	location of northwest corner of survey [degrees]	float	compulsory
$southeast_corner.latitude$	location of southeast corner of survey [degrees]	float	compulsory
$southeast_corner.longitude$	location of southeast corner of survey [degrees]	float	compulsory
datum	datum of latitude and longitude coordinates, shoulc be a well-known datum [WGS84]	string	compulsory
geographic_location	geographic location of survey in general terms	string	optional
country	country/countries survey located in	string	optional
summary	summary paragraph of survey including the purpose, diffi- culties, data quality, summary of outcomes if the data have been processed and modeled.	string	compulsory
comments	comments about survey that are not in the summary	string	optional
acquired_by.author	principal investigator(s) responsible for survey	string	compulsory
$acquired_by.organization$	organization(s) associated with survey	string	compulsory
acquired_by.email	email address of PI(s)	string	compulsory
acquired_by.url	url(s) of organization(s)	string	compulsory
release_status	release status [open on request propriatary]	string	compulsory
conditions_of_use	condition of use information including licensing	string	optional
citation_data_set.doi	citation dataset doi number	string	compulsory
citation_journal.doi	citation journal doi	string	optional

3.1 Example Survey JSON Input String

```
"survey": {
        "acquired_by": {
            "author": "M. Tee, T. Luric, S. Spot, and A. Borealis",
            "organization": "MT Gurus",
            "url": "mt_guru.com",
            "email": "mtee@guru.com"
        },
        "citation_dataset": {
             "doi": "citation dataset doi number"
        },
        "citation_journal": {
            "doi": "citation journal doi"
        "comments": "Had complications due to snow",
        "conditions_of_use": "condition of use information including licensing",
        "country": "USA",
        "datum": "WGS84",
        "geographic_location": "Earth",
        "net_code": "XE",
        "northwest_corner": {
             "latitude": 90,
             "longitude": 179.
        },
        "project": "LONGTEST01",
        "release_status": "open",
        "southeast_corner": {
            "latitude": -90,
            "longitude": -179
        },
        "summary": "This survey is meant to image to the core.",
        "survey": "Large MT survey of planet Earth",
        "time_period": {
            "start_date": "2020-01-01",
            "end_date": "2021-01-01"
        }
    }
}
```

4 Station

A station encompasses a single site where data are collected. If the location changes during a run, then a new station should be created. If the sensors, cables, data logger, battery are replaced during a run but the station remains stations, then this can be recorded in the Run metadata but does not require a new station entry.

Table 4: Attributes for Station category

Metadata Key	Description	Type	Required
archive_id	5 char name A-Z; 1-9 for station	string	compulsory
id	general name for station	string	compulsory
$geographic_name$	closest geographic reference name to station	string	compulsory
location.latitude	longitude location [degrees (hh.mmss)]	float	compulsory
location.longitude	latitude location [degrees (hh.mmss)]	float	compulsory
location.elevation	elevation [m]	float	compulsory
location.datum	datum for lat, lon location should be a well known datum and same as the survey datum	string	compulsory
location.declination.value	declination value	float	compulsory
location.declination.epoch	declination epoch	string	compulsory
location.declination.model	declination model	string	compulsory
comments	any comments about station	string	optional
time_period.start	start time and date of data logging [ISO UTC]	string	compulsory
time_period.end	stop time and date of data logging [ISO UTC]	string	compulsory
num_channels	number of channels recording needs to be the same number as entries in channels_recorded	int	compulsory
$channels_recorded$	list of channels recorded [EX, EY, HX, HY, HZ], needs to be same length as num_channels	string	compulsory
data_type	type of data collected [BB LP AMT Combo]	string	compulsory
orientation.option	orientation coordinate system [geographic channel-measurement specific]	string	compulsory
orientation.method	[compass differential GPS gyroscope]	string	optional
provenance.creation_time	creation time of time series data for storing	string	compulsory
provenance.software.name	name of software used to store time series	string	compulsory
provenance.software.version	version of software used to store time series	string	compulsory
provenance.submitter.author	name of person or group submitting archive data	string	compulsory
${\bf provenance. submitter. organization}$	name of organization or institution submitting archive data	string	compulsory
provenance.submitter.url	url of group submitting archive data	string	compulsory
provenance.submitter.email	email of person or group submitting archive data	string	compulsory
provenance.comments	any comments on the history of the data	string	optional
provenance.log	log of any changes made to time series data	string	optional

4.1 Example Station JSON Input String

```
"station": {
        "archive_id": "test sta_code",
        "channels_recorded": "[ex, ey, hx, hy, hz]",
        "comments": "comments test",
        "data_type": "MT",
        "geographic_name": "Paris, TX",
        "id": "test name",
        "location.datum": "WGS84",
        "location.declination.epoch": "MTM01",
        "location.declination.model": "MTM01",
        "location.declination.value": -12.3,
        "location.elevation": 1230.0,
        "location.latitude": 40.019,
        "location.longitude": -117.89,
        "num_channels": 5,
        "orientation.method": "compass",
        "orientation.option": "geographic north",
        "provenance.comments": "goats",
        "provenance.creation_time": "2010-04-01T10:10:10+00:00",
        "provenance.log": "EY flipped",
        "provenance.software.author": "Peacock",
        "provenance.software.name": "mth5",
        "provenance.software.version": "1.0.1",
        "provenance.submitter.author": "submitter name",
        "provenance.submitter.email": "mt@em.edi",
        "provenance.submitter.organization": "mt inc",
        "provenance.submitter.url": "mt.edi",
        "time_period.end": "2010-01-04T07:40:30+00:00",
        "time_period.start": "2010-01-01T12:30:20+00:00"
}
```

5 Run

A run represents data collected at a single station with a single sampling rate. If the dipole length or other such station parameters are changed between runs, this would require adding a new run. If the station is relocated then a new station should be created.

Table 5: Attributes for Run category

Metadata Key	Description	Type	Required
id	run ID	string	compulsory
comments	comments on run, commonly station name with 0-90-9 or a-z, mt01a or mt01_01	string	optional
time_period.start	start date and time of data logging [ISO UTC]	string	compulsory
time_period.end	stop date and time of data logging [ISO UTC]	string	compulsory
sampling_rate	sampling rate of run (samples.second)	float	compulsory
num_channels	number of channels recorded	int	compulsory
channels_recorded	list of channels recorded [[EX, EY, HX, HY]]	string	compulsory
data_type	type of data collected [BB LP AMT Combo]	string	compulsory
acquired_by.author	person(s) responsible for run	string	compulsory
acquired_by.email	email of lead run operator	string	compulsory
provenance.comments	any comments on the history of the data	string	optional
provenance.log	log of any changes made to time series data	string	optional
data_logger.manufacturer	manufacturer name	string	compulsory
data_logger.model	model name	string	compulsory
data_logger.serial	serial number	string	compulsory
data_logger.comments	comments about data logger	string	compulsory
data_logger.timing_system.type	type of timing system [GPS internal]	string	compulsory
data_logger.timing_system.drift	any drift in internal clock [seconds]	float	compulsory
data_logger.timing_system.uncertainty	uncertainty associated with internal clock [seconds]	float	compulsory
data_logger.timing_system.comments	comments on timing system	string	optional
data_logger.firmware.version	firmware version	string	compulsory
data_logger.firmware.date	date on firmware	string	compulsory
data_logger.firmware.author	author of firmware	string	optional
data_logger.power_source.type	power source type [Pb-acid battery solar panel Li battery]	string	compulsory
data_logger.power_source.id	power source id	string	optional
${\tt data_logger.power_source.voltage.start}$	starting voltage of power source	float	compulsory
data_logger.power_source.volage.end	ending voltage of power source	float	compulsory
data_logger.power_source.comments	comments on power source	string	optional

5.1 Example Run XML Input String

<run>

<acquired_by>
 <author>mt</author>
 <email>mt@mt.org</email>

6 Data Logger

Data logger is a the digital acquisition system used to collect time series data at a single station for a single run. DataLogger metadata includes the type of data logger, timing system, firmware, number of channels, calibrations, and power source.

Table 6: Attributes for DataLogger category

Metadata Key	Description	Type	Required
manufacturer	manufacturer name	string	compulsory
model	model name	string	compulsory
serial	serial number	string	compulsory
comments	comments about data logger	string	compulsory
timing_system.type	type of timing system [GPS internal]	string	compulsory
timing_system.drift	any drift in internal clock [seconds]	float	compulsory
timing_system.uncertainty	uncertainty associated with internal clock [seconds]	float	compulsory
timing_system.comments	comments on timing system	string	optional
firmware.version	firmware version	string	compulsory
firmware.date	date on firmware	string	compulsory
firmware.author	author of firmware	string	optional
n_channels	number of channels	int	compulsory
n_channels_used	number of channels used	int	compulsory
power_source.type	power source type [Pb-acid battery solar panel Li battery]	string	compulsory
power_source.id	power source id	string	optional
power_source.voltage.start	starting voltage of power source	float	compulsory
power_source.volage.end	ending voltage of power source	float	compulsory
power_source.comments	comments on power source	string	optional

6.1 Example DataLogger JSON Input String

```
"manufacturer": "MT 'r Us",
"model": "Broadband 2000",
"serial": "0128947850230",
"comments": "Intern dropped the data logger on a shovel.",
"timingystem.type": "GPS",
"timingystem.drift": 0,
"timingystem.uncertainty": 0.0016,
"timingystem.comments": "only works when sky is clear",
"firmware.version": "1.0",
"firmware.date": "2020-01-01",
"firmware.author": "R. Phase",
"n_channels": 5,
"n_channels_used": 4,
"powersource.id": "battery 10"
"powersource.type": "solar panel and battery",
"powersource.voltage.start": 13.1,
"powersource.voltage.end": 12.0,
"powersource.comments": "Overcast all day reduced recharging"
```

7 Electric Channel

Electric channel refers to a dipole measurement of the electric field for a single station for a single run.

Table 7: Attributes for Electric category

Metadata Key	Description	Type	Required
dipole_length	length of dipole [m]	float	compulsory
$channel_number$	channel number [1 2 3 4 5 6]	int	compulsory
component	[Ex Ey Ez]	string	compulsory
azimuth	azimuth of dipole $N = 0$, $E = 90$ [degrees]	float	compulsory
positive.id	sensor id number	string	compulsory
positive.latitude	positive sensor location latitude [degrees (hh.mmss)]	float	optional
positive.longitude	positive sensor location longitude [degrees (hh.mmss)]	float	optional
positive.elevation	positive sensor location elevation [m]	float	optional
positive.datum	positive datum for location [WGS84]	string	optional
positive.type	type of electric sensor [Ag-AgCl Pb-PbCl]	string	compulsory
positive.manufacturer	electric sensor manufacturer	string	compulsory
positive.comments	comments on electric sensor	string	optional
negative.id	sensor id number	string	compulsory
negative.longitude	negative sensor location latitude [degrees (hh.mmss)]	float	optional
negative.latitude	negative sensor location longitude [degrees (hh.mmss)]	float	optional
negative.elevation	negative sensor location elevation [m]	float	optional
negative.datum	negative datum for location [WGS84]	string	optional
negative.type	type of electric sensor [Ag-AgCl Pb-PbCl]	string	compulsory
negative.manufacturer	electric sensor manufacturer	string	compulsory
negative.comments	comments on electric sensor	string	optional
$contact_resistance_1.start$	contact resistance at beginning of measurement, positive polarity [Ohm]"	float	optional
contact_resistance_2.start	contact resistance at beginning of measurement, negative polarity [Ohm]	float	optional
contact_resistance_1.end	contact resistance at end of measurement, positive polarity [Ohm]	float	optional
contact_resistance_2.end	contact resistance at end of measurement, negative polarity [Ohm]	float	optional
ac.start	AC at start of measurement [V]	float	optional
ac.end	AC at end of measurement [V]	float	optional
dc.start	DC at start of measurement [V]	float	optional
dc.end	DC at end of measurement [V]	float	optional

Table 8: Attributes for Electric category continued

Metadata Key	Description	Type	Required
units	units of electric field data [counts mV/km]	string	compulsory
sample_rate	sample rate of electric channel (samples.second)	float	compulsory
comments	comments about electric field measurement	string	optional
data_quality.rating	data quality rating based on some sort of statistic	integer	optional
data_quality.warning_comments	any warnings about data quality	string	optional
data_quality.warning_flags	a value flagging bad data	float	integer
data_quality.author	person who did QA/QC on data	string	optional
filter.name	filter name in filter table, can be a list. Needs to be ordered in which filters were applied	string	optional
filter.comments	any comments on the filtering	string	optional
filter.applied_b	have filters been applied [True False]	string	compulsory

7.1 Example Electric Channel JSON Input String

```
"dipole_length": 59.7,
 "channel_number": "1",
 "component": "EX",
 "azimuth": 0,
 "positive.id": "101",
 "positive.latitude": 35.5578,
 "positive.longitude": -117.38754,
 "positive.elevation": 103.4,
 "positive.datum": "WGS84",
 "positive.type": "Ag-AgCl",
 "positive.manufacturer": "Zaps",
 "positive.comments": "Sitting on the shelf since last year",
 "negative.id": "102",
 "negative.latitude": 35.5588,
 "negative.longitude": -117.38754,
 "negative.elevation": 105.8,
 "negative.datum": "WGS84",
 "negative.type": "Ag-AgCl"
 "negative.manufacturer": "Zaps",
 "negative.comments": "Sitting on the shelf since last year",
 "contact_resistance_1.start": 1200.0,
 "contact_resistance_2.start": 1210.0,
 "contact_resistance_1.end": 1205.0,
 "contact_resistance_2.end": 1205.0,
 "ac.start": 0.03,
 "ac.end": 0.04,
 "dc.start": 0.001,
 "dc.end": 0.002,
 "units": "counts",
 "sample_rate": 256,
 "comments": "cables chewed on 2020-01-07",
 "data_quality.rating": 3,
 "data_quality.warning_comments": "cables chewed 2020-01-07",
 "data_quality.warning_flags": "Nan",
 "data_quality.author": "Q. Sea",
 "filter.name": "[counts2mv, datalogger024]",
 "filter.comments": "comments on filters applied",
 "filter.applied_b": "true"
}
```

8 Magnetic Channel

A magnetic channel is a recording of one component of the magnetic field at a single station for a single run.

Table 9: Attributes for Magnetic category

Metadata Key	Description	Type	Required
sensor.type	type of magnetic sensor [Induction Coil flux gate $\mid \ldots \rceil$	string	compulsory
sensor.manufacturer	magnetic sensor manufacturer	string	compulsory
sensor.comments	comments on sensor	string	compulsory
sensor.id	sensor id number	string	compulsory
$channel_number$	channel number [1 2 3 4 5 6]	int	compulsory
component	[Hx Hy Hz]	string	compulsory
azimuth	azimuth in station_coordinates [degrees]	float	compulsory
longitude	sensor longitude degrees	float	compulsory
latitude	sensor latitude in degrees	float	compulsory
elevation	sensor elevation in meters	float	compulsory
datum	datum for location [WGS84]	string	compulsory
units	units of magnetic field data [counts mV]	string	compulsory
sample_rate	sample rate of magnetic channel (samples.second)	float	compulsory
h_field_min.start	minimum h-field value at beginning of measurement	float	optional
h_field_max.start	maximum h-field value at beginning of measurement	float	optional
h_field_min.end	minimum h-field value at end of measurement	float	optional
h_field_max.end	maximum h-field value at end of measurement	float	optional
h_field.units	units of h-field measurement [nT \dots]	string	optional
comments	comments on magnetic field measurments	string	optional
data_quality.rating	data quality rating based on some sort of statistic	integer	optional
data_quality.warning_comments	any warnings about data quality	string	optional
data_quality.warning_flags	a value flagging bad data	integer	optional
data_quality.author	person who did QC.QA on data	string	optional
filter.name	filter name in filter table, can be a list. Needs to be ordered in which filters were applied	string	optional
filter.comments	any comments on the filtering	string	optional
filter.applied_b	have filters been applied [True False]	string	compulsory

8.1 Example Magnetic Channel JSON Input String

```
"sensor.type": "Induction Coil",
 "sensor.manufacturer": "MT 'r Us",
 "sensor.comments": "new coil",
 "sensor.id": "2149",
 "channel_number": 5,
 "component": "HZ",
 "azimuth": 90,
 "longitude": -117.0,
 "latitude": 45.0,
 "elevation": 107.4,
 "datum": "WGS84",
 "units": "counts",
 "sample_rate": 256,
 "h_field_min.start": -10,
 "h_field_max.start": 10,
 "h_field_min.end": -9,
 "h_field_max.end": 9,
 "h_field.units": "nT",
 "comments": "not buried all the way ",
 "data_quality.rating": 4,
 "data_quality.warning_comments": "windy during the day",
 "data_quality.warning_flags": 0,
 "data_quality.author": "Q. Sea",
 "filter.name": "[counts2mv, datalogger024, coil2149]",
 "filter.comments": "Calibrated 2018-01-01",
 "filter.applied_b": "[true, false, false]"
}
```

9 Filters

Filters is a table that holds information on any filters that need to be applied to get physical units, and filters that were applied to the data to analyze the signal. This includes calibrations, notch filters, conversion of counts to units, etc. The actual filter will be an array of numbers contained within an array named name and formatted according to type. The preferred format for a filter is a look-up table which internally can be converted to other formats.

It is important to note that filters will be identified by name and must be consistent throughout the file. Names should be descriptive and self evident. Examples:

- $coil_2284 \longrightarrow induction coil number 2284$
- counts2mv \longrightarrow conversion from counts to mV
- ullet e_gain \longrightarrow electric field gain
- datalogger_024 data logger number 24 response
- notch_60hz --> notch filter for 60 Hz and harmonics
- lowpass_10hz \longrightarrow low pass filter below 10 Hz

In each channel there are keys to identify filters that can or have been applied to the data to get an appropriate signal. This can be a list of filter names or a single filter name. An applied_b key also exists for the user to input whether that filter has been applied. Can be a single Boolean true if all filters have been applied, false if none of the filters have been applied. Or can be a list the same length and the filter name list identifying if the filter has been applied. name: "[counts2mv, notch60hz, e_gain]" and applied_b: "[true, false, true]".

Table 10: Attributes for Filters

Metadata Key	Description	Type	Required
type	type of filter [look up poles-zeros converter FIR]	string	compulsory
name	unique name for the filter such that it is easy to query	string	compulsory
units_in	units of data going in [counts mV/km]	string	compulsory
units_out	units of data coming out [counts mV/km]	string	compulsory
calibration_date	date of calibration	string	compulsory
comments	any comments on the filtering	string	optional

9.1 Example Filter JSON Input String

```
{
  "type": "look up",
  "name": "coil_8897",
  "unitsn": "mV",
  "units_out": "mV",
  "calibrationate": "2015-07-01",
  "comments": "interpolated from poles and zeros"
}
```

10 Auxiliary Channels

Auxiliary channels include state of health channels, temperature, etc.

Table 11: Attributes for Auxiliary category

Metadata Key	Description	Type	Required
type	type of data recorded [temperature GPS]	string	compulsory
units	units of magnetic field data [counts mV]	string	compulsory
channel_num	channel number [1 2 3 4 5 6]	int	compulsory
component	channel number ['None']	string	compulsory
sample_rate	sample rate (samples.second)	float	compulsory
comments	any comments on the auxillary channel	string	optional
data_quality.rating	data quality rating based on some sort of statistic	integer	optional
data_quality.warning_comments	any warnings about data quality	string	optional
data_quality.warning_flags	a value flagging bad data	integer	optional
data_quality.author	person who did QC.QA on data	string	optional
filter.name	filter name in filter table, can be a list. Needs to be ordered in which filters were applied	string	optional
filter.comments	any comments on the filtering	string	optional
filter.applied_b	have filters been applied [True False]	string	compulsory

10.1 Example Auxiliary JSON Input String

```
{
    "channel": {
         "azimuth": 0.0,
         "channel_number": 1,
         "comments": null,
         "component": "hx",
         "data_quality.author": "mt",
         "data_quality.rating": 5,
         "data_quality.warning_comments": null,
         "data_quality.warning_flags": "0",
         "filter.applied": [false],
         "filter.comments": null,
         "filter.name": ["counts2mv"],
         "location.datum": "WGS84",
         "location.elevation": 1200.3,
         "location.latitude": 40.12,
         "location.longitude": -115.767,
         "sample_rate": 256.0,
         "time_period.end": "2010-01-04T07:40:30+00:00",
         "time_period.start": "2010-01-01T12:30:20+00:00",
         "type": "auxiliary",
         "units": "mV"
    }
}
```