




# Certified Kubernetes Administrator (CKA) Crash Course

*Kubernetes 1.21 Edition*

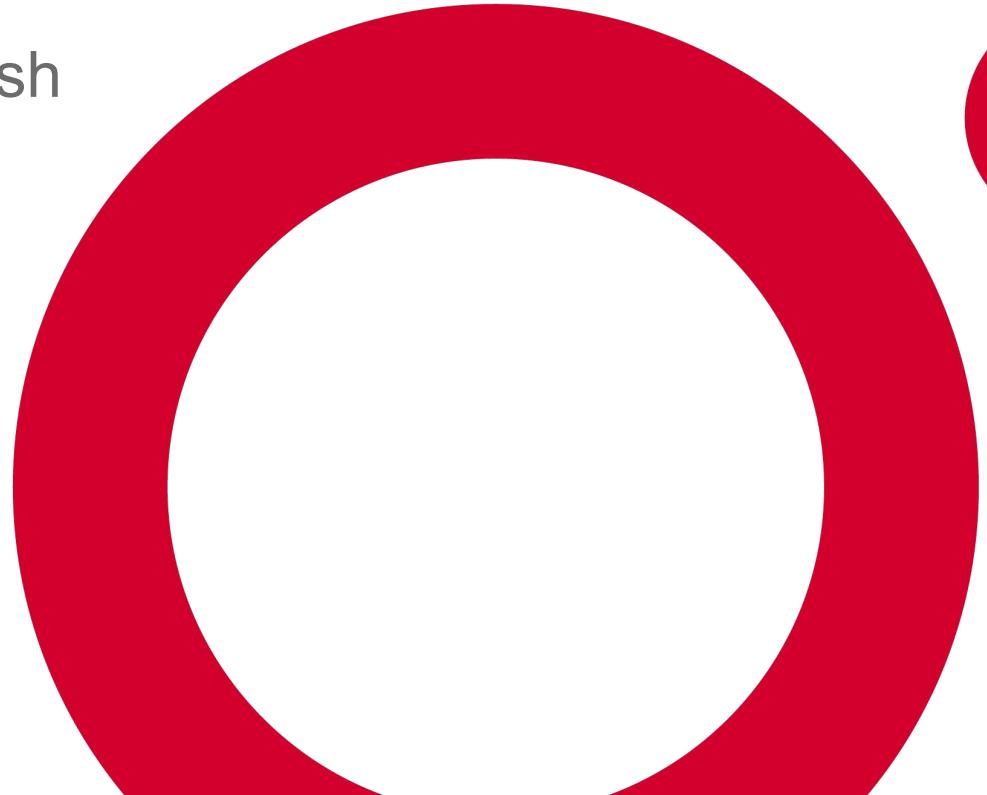

# About the trainer



**bmuschko**



**bmuschko**




**bmuschko.com**



O'REILLY®

# Certified Kubernetes Administrator (CKA) Study Guide

In-Depth Guidance and Practice

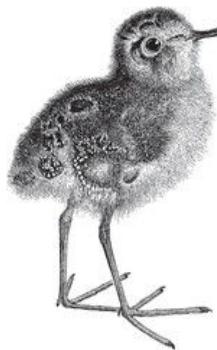

Early  
Release  
RAW &  
UNEDITED

Benjamin Muschko

*Companion study guide with  
practice questions*

**Estimated release early 2022**

Online access on O'Reilly  
learning platform:

<https://learning.oreilly.com/library/view/certified-kubernetes-administrator/9781098107215/>

O'REILLY®

# Certified Kubernetes Application Developer (CKAD) Study Guide

In-Depth Guidance and Practice



Benjamin Muschko

*Companion study guide with  
practice questions*

**Released in February 2021**

Online access on O'Reilly  
learning platform:

[https://learning.oreilly.com/library/view/  
certified-kubernetes-application/9781  
492083726/](https://learning.oreilly.com/library/view/certified-kubernetes-application/9781492083726/)

# Exam Details and Resources

Objectives, Environment, Time Management

# Exam Objectives

*“Perform typical responsibilities of a Kubernetes administrator.”*



**The certification program allows users to demonstrate their competence in a hands-on, command-line environment.**

<https://www.cncf.io/certification/cka/>



# Exam Domains & Weights

Domain	Weight
Cluster Architecture, Installation & Configuration	25%
Workloads & Scheduling	15%
Services & Networking	20%
Storage	10%
Troubleshooting	30%



# The Curriculum

## 25% - Cluster Architecture, Installation & Configuration

- Manage role based access control (RBAC)
- Use Kubeadm to install a basic cluster
- Manage a highly-available Kubernetes cluster
- Provision underlying infrastructure to deploy a Kubernetes cluster
- Perform a version upgrade on a Kubernetes cluster using Kubeadm
- Implement etcd backup and restore

## 20% - Services & Networking

- Understand host networking configuration on the cluster nodes
- Understand connectivity between Pods
- Understand ClusterIP, NodePort, LoadBalancer service types and endpoints
- Know how to use Ingress controllers and Ingress resources
- Know how to configure and use CoreDNS
- Choose an appropriate container network interface plugin

## 30% - Troubleshooting

- Evaluate cluster and node logging
- Understand how to monitor applications
- Manage container stdout & stderr logs
- Troubleshoot application failure
- Troubleshoot cluster component failure
- Troubleshoot networking

## 15% - Workloads & Scheduling

- Understand deployments and how to perform rolling update and rollbacks
- Use ConfigMaps and Secrets to configure applications
- Know how to scale applications
- Understand the primitives used to create robust, self-healing, application deployments
- Understand how resource limits can affect Pod scheduling
- Awareness of manifest management and common templating tools

## 10% - Storage

- Understand storage classes, persistent volumes
- Understand volume mode, access modes and reclaim policies for volumes
- Understand persistent volume claims primitive
- Know how to configure applications with persistent storage



# Candidate Skills



**kubernetes**

Architecture & Concepts



`kubectl`

Running Commands



container runtime

Underlying Concepts



---

# Exam Environment

*Online and proctored exam*




*The trinity of tooling you need to be familiar with*



# Using Documentation

*Know where and how to find relevant documentation*

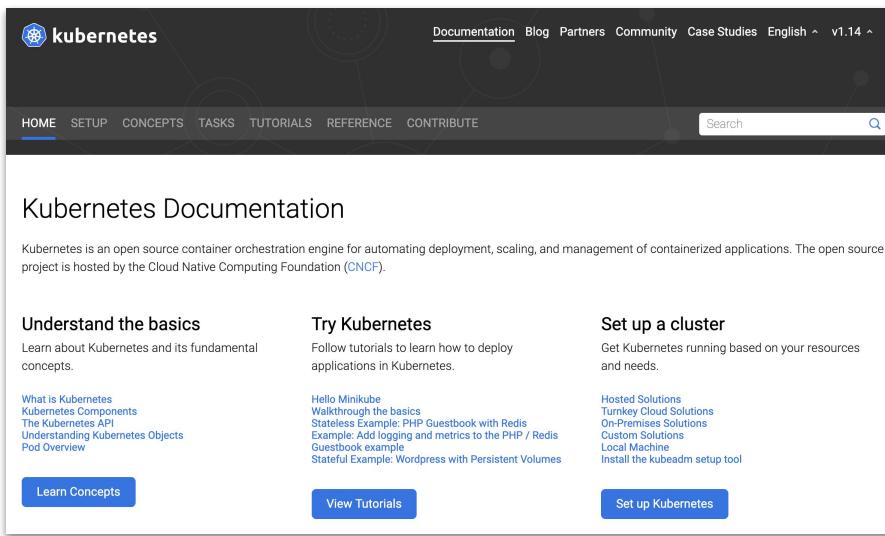

The screenshot shows the Kubernetes Documentation website. At the top, there's a navigation bar with links for Documentation, Blog, Partners, Community, Case Studies, English, and v1.14. Below that is a secondary navigation bar with links for HOME, SETUP, CONCEPTS, TASKS, TUTORIALS, REFERENCE, and CONTRIBUTE. A search bar is also present. The main content area features a title "Kubernetes Documentation" and a brief introduction: "Kubernetes is an open source container orchestration engine for automating deployment, scaling, and management of containerized applications. The open source project is hosted by the Cloud Native Computing Foundation (CNCF)." There are three main sections: "Understand the basics", "Try Kubernetes", and "Set up a cluster". Each section has a brief description and a list of related topics or tutorials. At the bottom, there are three blue call-to-action buttons: "Learn Concepts", "View Tutorials", and "Set up Kubernetes".

<https://kubernetes.io/docs>



# Getting Help on a Command

*Render subcommands and options with --help*

```
$ kubectl create --help
Create a resource from a file or from stdin.

JSON and YAML formats are accepted.

...
Available Commands:

...
  configmap      Create a configmap from a local file, directory or literal
  value
  deployment     Create a deployment with the specified name.
  ...

Options:
  ...
```



# Zeroing in on Command Details

*Drill into object details with the `explain` command*

```
$ kubectl explain pods.spec  
KIND:     Pod  
VERSION:  v1
```

```
RESOURCE: spec <Object>
```

```
DESCRIPTION:
```

```
...
```

```
FIELDS:
```

```
...
```


Most relevant information



---

# Time Management

*# of problems in 2 hours, use your time wisely!*

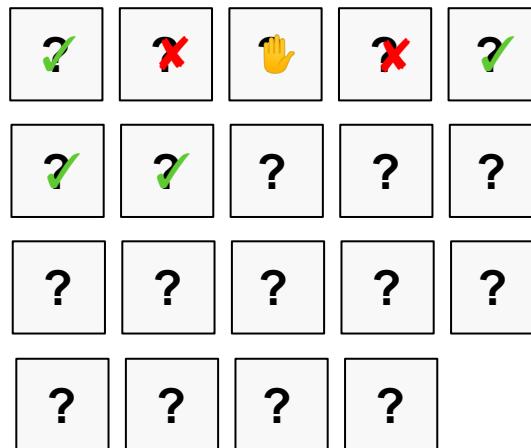

# Configuring Auto-Completion

*Allowed during exam, configurable on-demand*

```
$ kubectl cre<tab>
```

```
$ kubectl create
```



<https://kubernetes.io/docs/tasks/tools/included/optional-kubectl-configs-bash-linux/>



# Using an Alias for kubectl

*Your first action at the beginning of the exam*

```
$ alias k=kubectl  
$ k version  
...
```



# Setting a Context & Namespace

*Questions will ask you to run a command on a specific cluster - Make sure to execute it!*

```
$ kubectl config set-context <context-of-question>--  
--namespace=<namespace-of-question>
```



# Internalize Resource Short Names

*Some API resources provide a shortcut*

```
$ kubectl get ns
```

Usage of `ns` instead  
of namespaces

```
$ kubectl describe pvc claim
```

Usage of `pvc` instead of  
`persistentvolumeclaim`



# Deleting Kubernetes Objects

*Don't wait for a graceful deletion of objects...*

```
$ kubectl delete pod nginx --grace-period=0 --force
```



# Understand and Practice bash

*Practice relevant syntax and language constructs*

```
$ if [ ! -d ~/tmp ]; then mkdir -p ~/tmp; fi; while true; do echo $(date) >> ~/tmp/date.txt; sleep 5; done;
```



# Finding Object Information

*Filter configuration with context from a set of objects*

```
$ kubectl describe pods | grep -C 10 "author=John Doe"  
$ kubectl get pods -o yaml | grep -C 5 labels:
```

grep is your friend!



---

# How to Prepare


*Practice, practice, practice!*

**The key to cracking the exam**



---

# Q & A

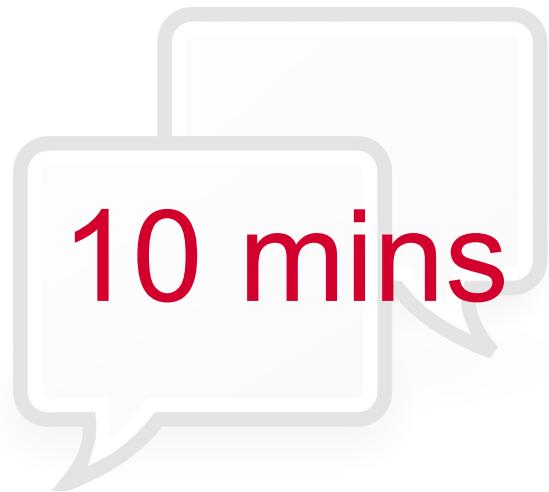

---

# BREAK



# Cluster Architecture, Installation & Configuration

RBAC, Kubeadm, HA, etcd Backup and Restore

# RBAC High-Level Overview

*Three key elements for understanding concept*

## Subject

Groups  
Users  
Service-  
Accounts

## API Resources

ConfigMap  
Pod  
Deployment  
Node  
...


## Operations (Verbs)

create  
list  
watch  
delete  
...



# Involved RBAC Primitives

*Restrict access to API resources based on user roles*

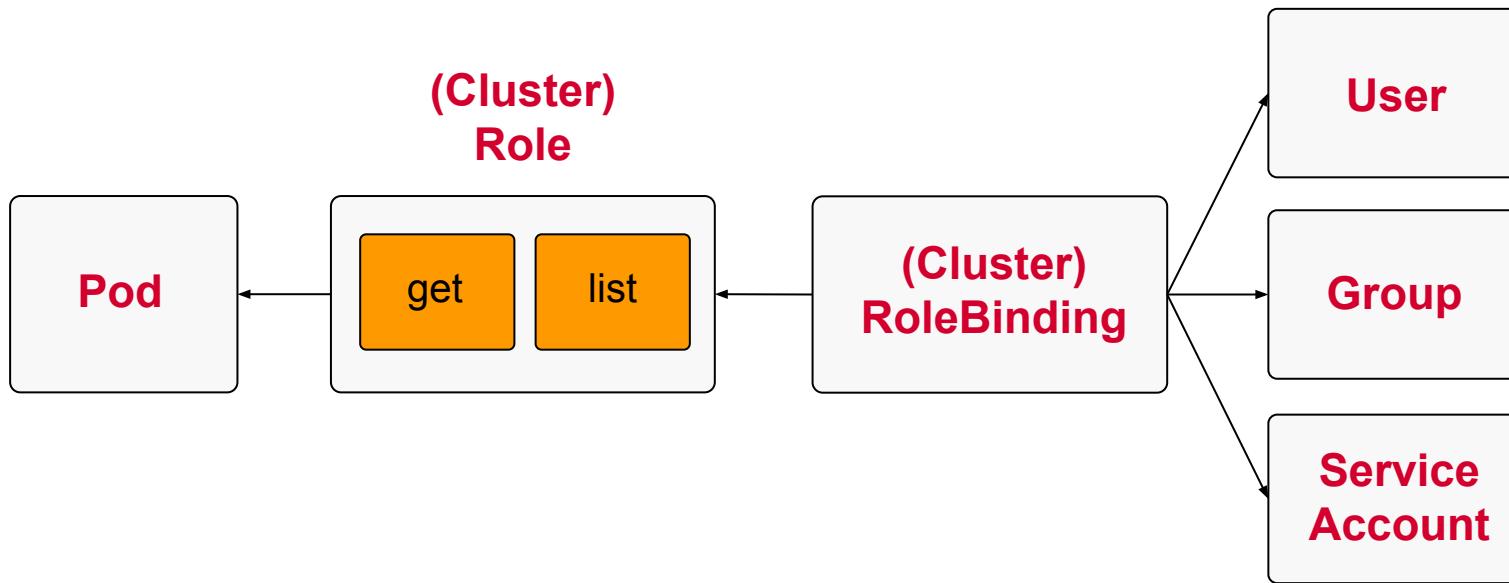

# Defining a Role

*Connects API resources and verbs*

```
apiVersion: rbac.authorization.k8s.io/v1
kind: Role
metadata:
  name: pod-reader
rules:
- apiGroups: []
  resources: ["pods"]
  verbs: ["get", "watch", "list"]
```

API Resources

Operations



# Defining a RoleBinding

*Grants the permissions defined in a role to subject*

```
apiVersion: rbac.authorization.k8s.io/v1
kind: RoleBinding
metadata:
  name: read-pods
subjects:
- kind: User      ←
  name: jane
  apiGroup: rbac.authorization.k8s.io
roleRef:
  kind: Role    ←
  name: pod-reader
  apiGroup: rbac.authorization.k8s.io
```

One or many subjects

Reference to role



---

# ClusterRole + ClusterRoleBinding

*Same as Role and RoleBinding but on cluster-level*

- ClusterRole
  - Can grant same permissions as Role.
  - Can grant access to nodes, non-resource endpoints and resources across all namespaces.
- ClusterRoleBinding
  - Can grant same access as RoleBinding.
  - Bind a ClusterRole to all the namespaces in the cluster.




# Aggregated ClusterRoles

*Combine multiple ClusterRoles into one*

```
apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRole
metadata:
  name: monitoring
aggregationRule:
  clusterRoleSelectors:
    - matchLabels:
        rbac.example.com/aggregate-to-monitoring: "true"
rules: []
```

Matching on labels

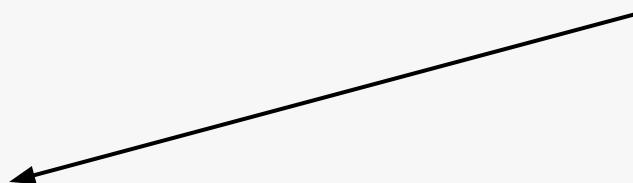

---

# EXERCISE

Regulating Access  
to API Resources  
with RBAC



# What is Kubeadm?

*Tool for creating and managing Kubernetes clusters*

- Needs to be installed separately from other tools like `kubectl`.
- Deals with cluster bootstrapping but not provisioning.
- Representative use cases
  - Bootstrap a control-plane node.
  - Bootstrap worker nodes and join them to the cluster.
  - Upgrade a cluster to a newer version.



---

# Installing a Cluster


*Start with master, join nodes*

- Initialize the control plane on master node using `kubeadm init`.
- Install a Pod network add-on.
- Join worker nodes using `kubeadm join`.

[Detailed installation instructions](#)



# Installing a Cluster

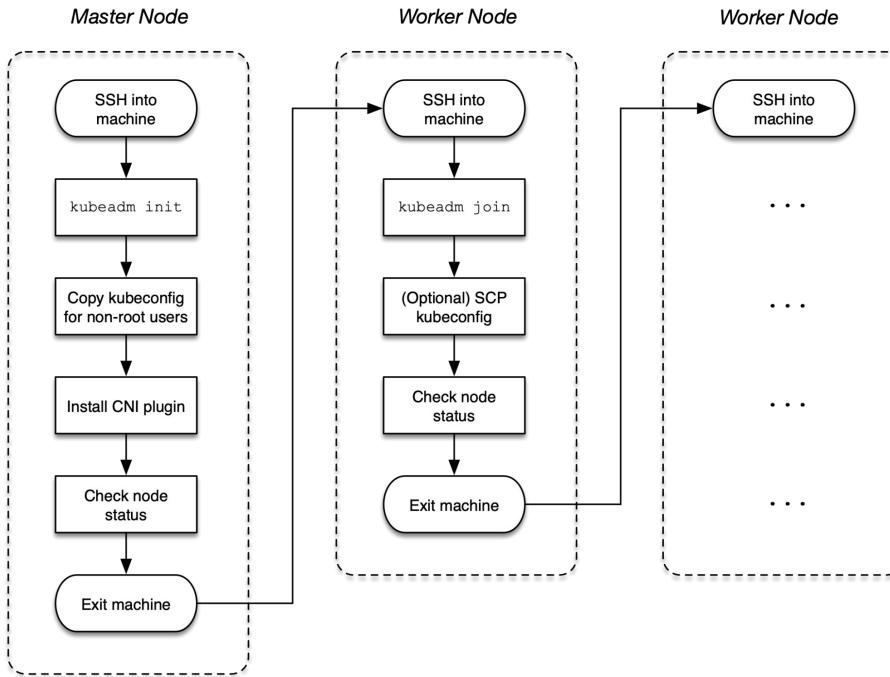

---

# DEMO


Creating a Cluster  
with Kubeadm



# Single-Master Cluster Setup

*Losing the master node causes issues*


- A ReplicaSet cannot recreate failing Pod as the worker node can't talk back to scheduler on master node.
- Cluster cannot be accessed externally as API server is not available anymore.

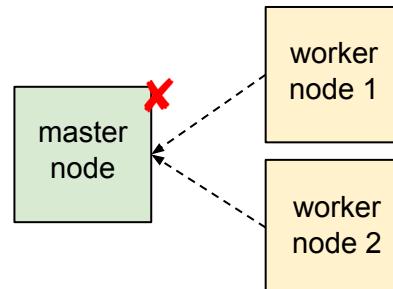


# High-Availability Cluster Setup

*Two configuration options available*

**Stacked etcd topology**

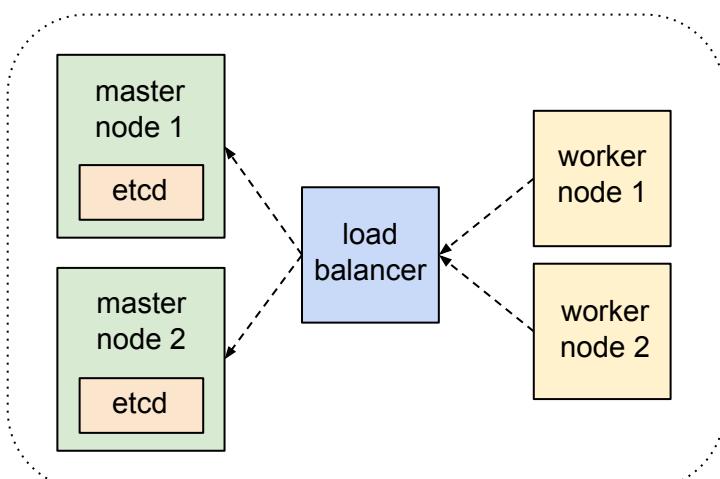

**External etcd topology**

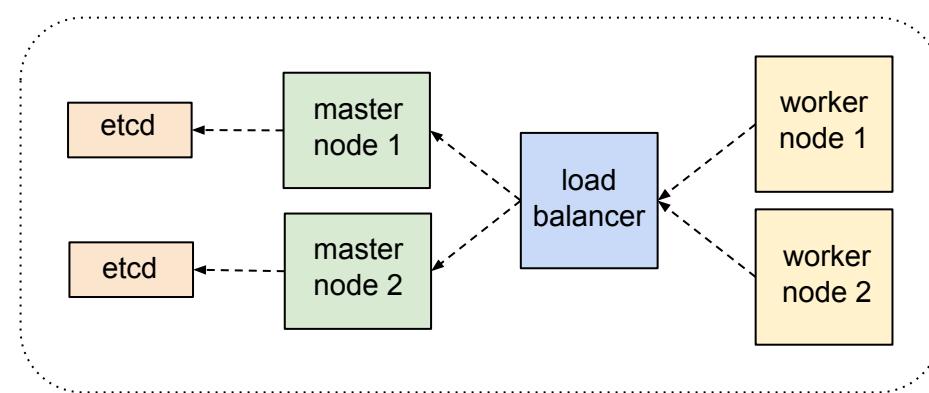

[Detailed installation instructions](#)



---

# Upgrading a Cluster Version


*Upgrading should be done in version increments*

- Determine which version to upgrade to.
- Upgrade control plane nodes.
- Upgrade worker nodes.
- Verify the status of the cluster.

[Detailed installation instructions](#)



# Upgrading a Cluster Version

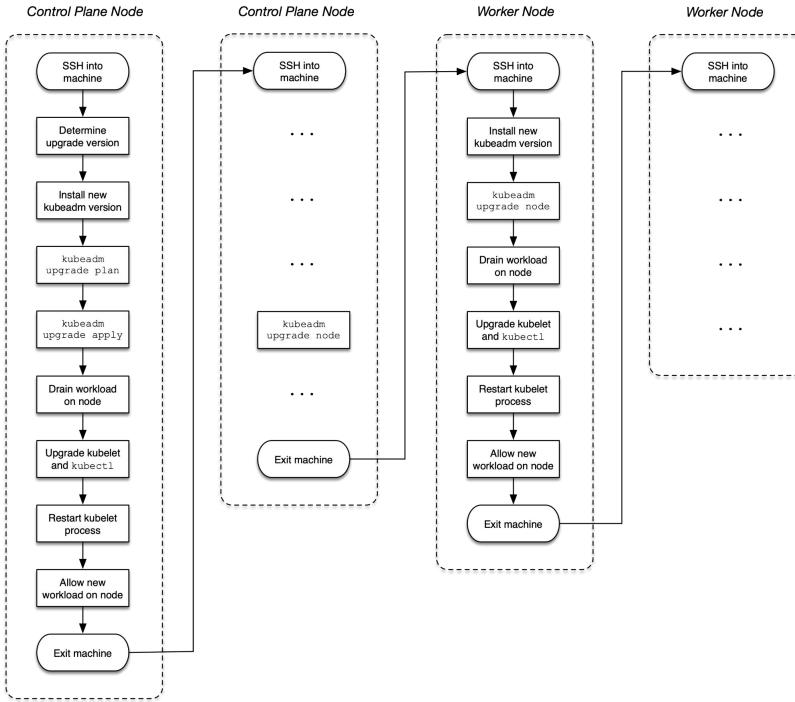

---

# DEMO

Upgrading a  
Cluster Version with  
Kubeadm



# Backing up & Restoring etcd


*Get etcdctl utility if it's not already present*

- Create backup with `etcdctl snapshot save` command. The options `--cert`, `--cacert` and `--key` are mandatory.
- Restore backup with `etcdctl snapshot restore` command. The option `--data-dir` is mandatory. Modify the `volumes.hostPath.path` in `/etc/kubernetes/manifests/etcd.yaml` to point to directory.

[Detailed installation instructions](#)



# Backing up & Restoring etcd

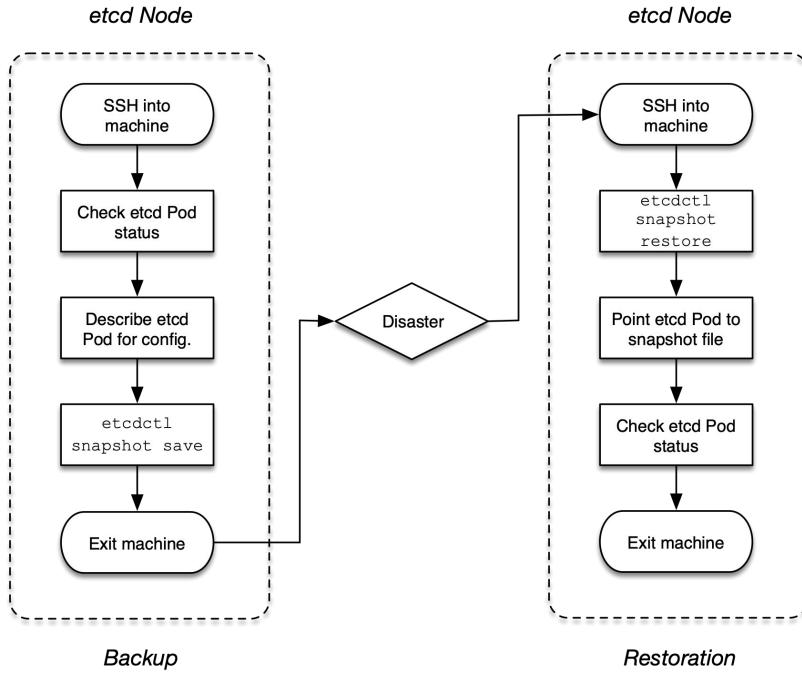

---

# DEMO

Backing Up and  
Restoring etcd



---

# Q & A



---

# BREAK




# Workloads & Scheduling

Deployments, ConfigMaps & Secrets, Health  
Probes, Pod Resource Limits, Node Affinity, Taints &  
Tolerations

# Understanding Deployments

*Scaling and replication features for a set of Pods*

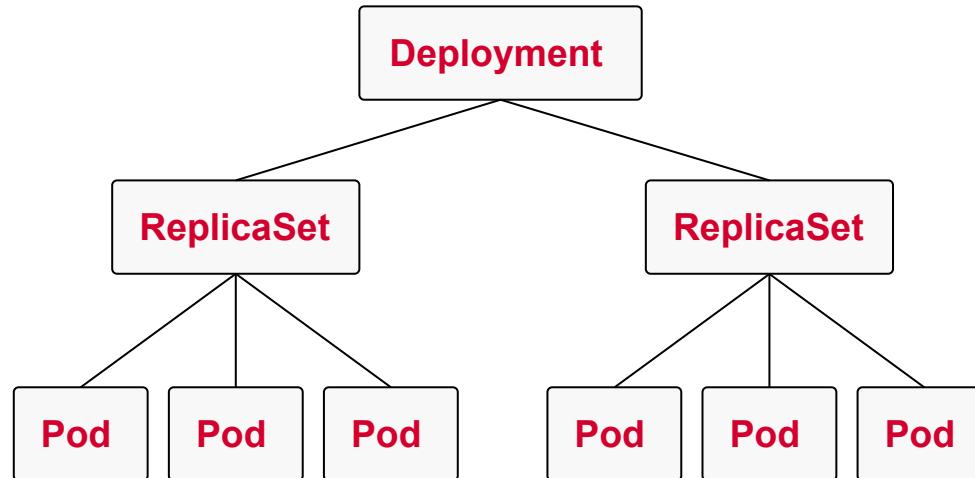

# Creating a Deployment

*The create command supports replicas option with 1.19+*

```
$ kubectl create deployment my-deploy --image=nginx --replicas=3  
--dry-run=client -o yaml > deploy.yaml  
$ vim deploy.yaml  
$ kubectl create -f deploy.yaml  
deployment.apps/my-deploy created
```



# Creating a Deployment

```
apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    app: my-deploy
    name: my-deploy
spec:
  replicas: 3
  selector:
    matchLabels:
      app: my-deploy
  template:
    metadata:
      labels:
        app: my-deploy
    spec:
      containers:
        - image: nginx
          name: nginx
```

The number of Pods running a specific set of containers

Selects the Pods for this deployment

The labels of the Pods



# Inspecting Deployment State

*Indicator between desired state and actual state*

```
$ kubectl get deployments  
NAME                      READY   UP-TO-DATE   AVAILABLE   AGE  
deployment.apps/my-deploy  3        3            3           25m
```



# Underlying Replication Feature

*Automatically created by Deployment, not meant to be modified*

```
$ kubectl get replicsets
NAME             DESIRED   CURRENT   READY   AGE
my-deploy-7786f96d67   3         3         3       6h


$ kubectl describe deploy my-deploy
...
OldReplicaSets:  <none>
NewReplicaSet:   my-deploy-7786f96d67 (3/3 replicas created)
...

$ kubectl describe replicsets my-deploy-7786f96d67
...
Controlled By:  Deployment/my-deploy
...
```



# Rolling Updates

*“Look ma, shiny new features. Let’s deploy them to production!”*

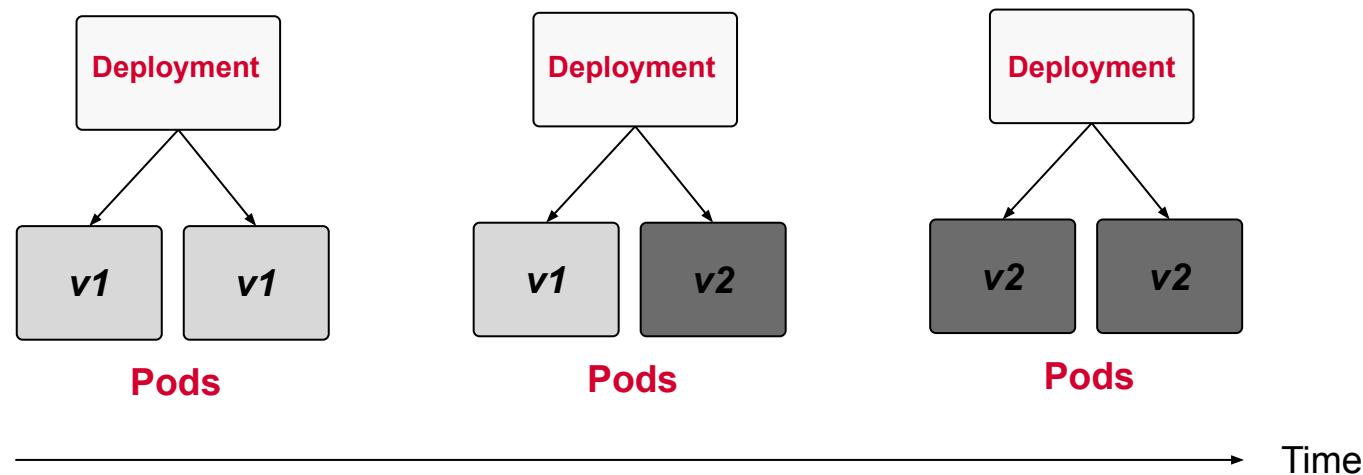

# Rollout Revision Log

```
# Check initial deployment revisions
$ kubectl rollout history deployments my-deploy
deployment.extensions/my-deploy
REVISION  CHANGE-CAUSE
1          <none>

# Make a change to the deployment
$ kubectl edit deployments my-deploy

# Revision history indicates changed version
$ kubectl rollout history deployments my-deploy
deployment.extensions/my-deploy
REVISION  CHANGE-CAUSE
1          <none>
2          <none>
```




# Rendering Revision Details

```
$ kubectl rollout history deployments my-deploy --revision=2
deployment.extensions/my-deploy with revision #2
Pod Template:
  Labels:    app=my-deploy
             pod-template-hash=1365642048
  Containers:
    nginx:
      Image:  nginx:latest
      Port:    <none>
      Host Port:   <none>
      Environment: <none>
      Mounts:   <none>
      Volumes:  <none>
```



# Rolling Back

*“Bug in the application. Let’s revert to the previous version!”*

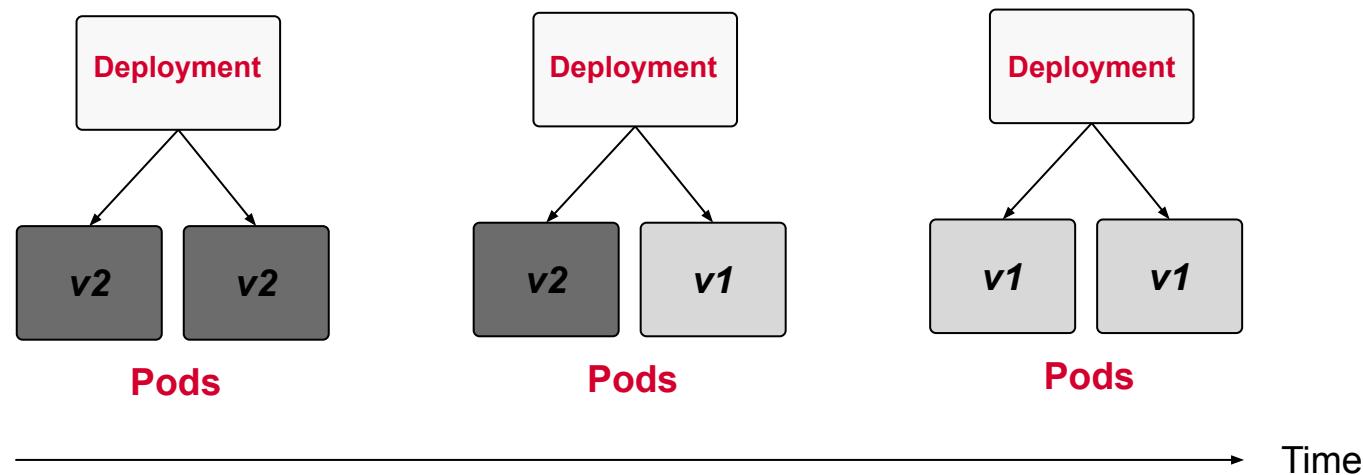

# Rolling Back to a Revision

```
# Roll back to previous revision
$ kubectl rollout undo deployments my-deploy
deployment.extensions/my-deploy



# Check rollout status
$ kubectl rollout status deployments my-deploy
deployment "my-deploy" successfully rolled out

# Revision history indicates changed version
$ kubectl rollout history deployments my-deploy
deployment.extensions/my-deploy
REVISION  CHANGE-CAUSE
2          <none>
3          <none>
```



# Manually Scaling a Deployment

*“Load is increasing. We need to scale up the application.”*

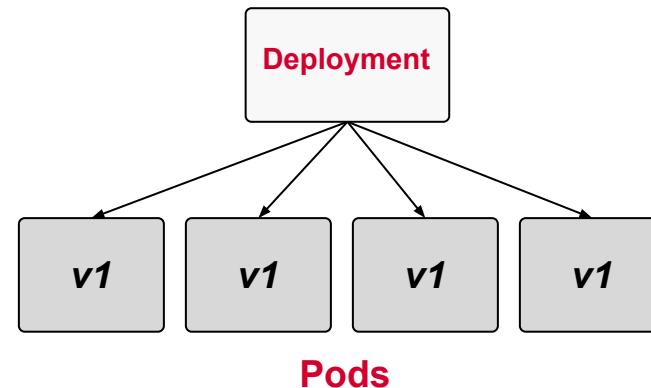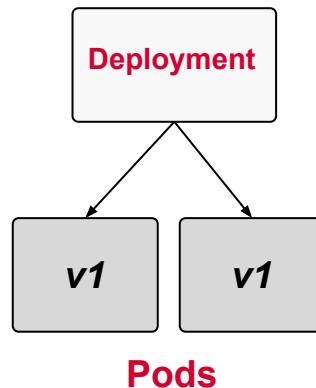

# Providing a Specific # of Replicas

```
# Check current deployment replicas
$ kubectl get deployments my-deploy
NAME        READY   UP-TO-DATE   AVAILABLE   AGE
my-deploy   2        2           2           9h

# Scaling from 2 to 4 replicas
$ kubectl scale deployment my-deploy --replicas=4
deployment.extensions/my-deploy scaled


# Check the changed deployment replicas
$ kubectl get deployment my-deploy
NAME        READY   UP-TO-DATE   AVAILABLE   AGE
my-deploy   4        4           4           9h
```



# Autoscaling a Deployment

*“Don’t make me think. Autoscale based on CPU utilization.”*

maximum, average CPU utilization: 70%

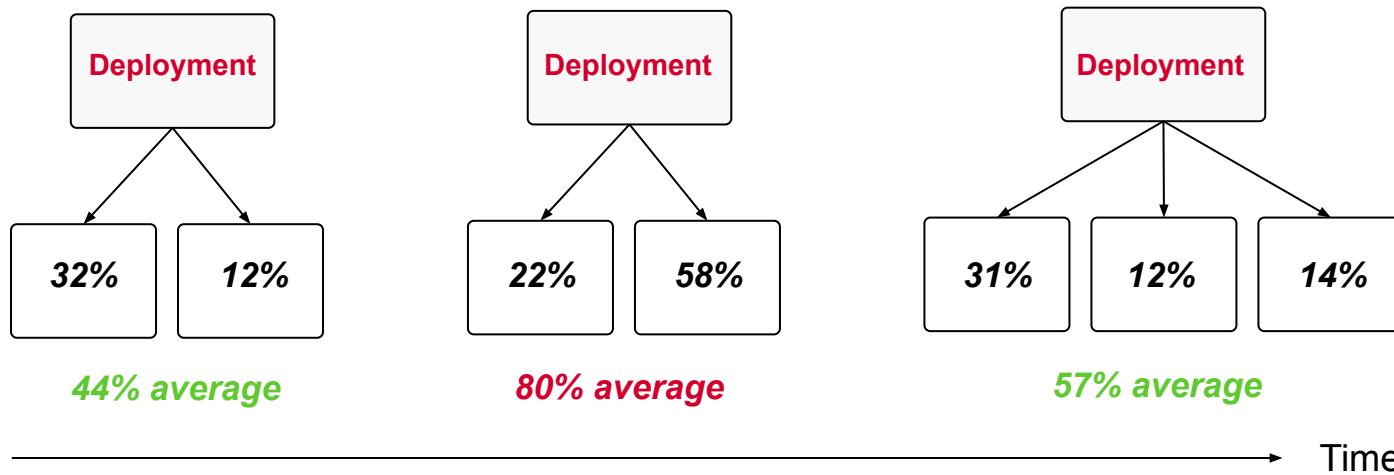

# Create Horizontal Pod Autoscaler

```
# Maintain average CPU utilization across all Pods of 70%
$ kubectl autoscale deployments my-deploy --cpu-percent=70 ←
  --min=1 --max=10
horizontalpodautoscaler.autoscaling/my-deploy autoscaled

# Check the current status of autoscaler
$ kubectl get hpa my-deploy
NAME          REFERENCE           TARGETS           MINPODS   ←
MAXPODS      REPLICAS      AGE
my-deploy    Deployment/my-deploy  0%/70%          1         ←
10           4                  23s
```



---


# EXERCISE

Performing Rolling  
Updates and Scaling  
a Deployment




# Centralized Configuration Data

*Injects runtime configuration through object references*

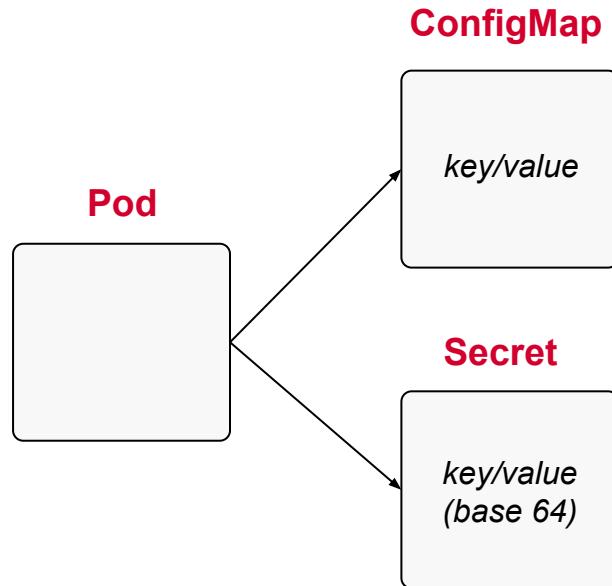


# Mounting a ConfigMap & Secret

*Two options for consuming data*

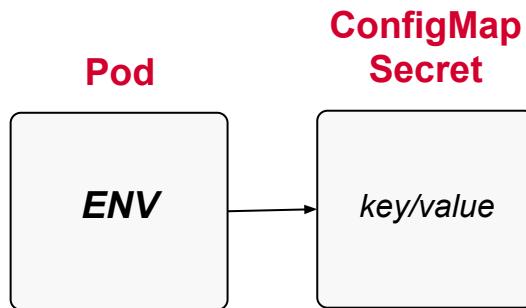

Injected as environment variables

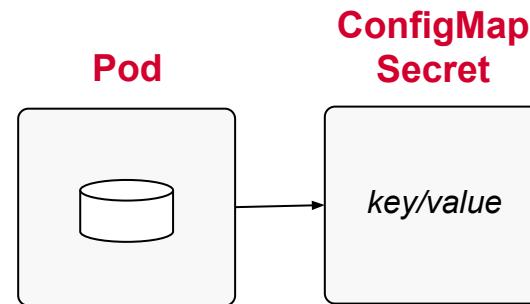

Mounted as volume



# Creating ConfigMaps (imperative)

*Fast, easy and flexible, can point to different sources*

```
# Literal values
$ kubectl create configmap db-config --from-literal=db=staging

# Single file with environment variables
$ kubectl create configmap db-config --from-env-file=config.env

# File or directory
$ kubectl create configmap db-config --from-file=config.txt
```



# Creating ConfigMaps (declarative)

*Definition of a ConfigMap is fairly short and on point*

```
apiVersion: v1
data:
  db: staging
  username: jdoe
kind: ConfigMap
metadata:
  name: db-config
```



# ConfigMap Env. Variables in Pod

*Convenient if ConfigMap reflects the desired syntax*

```
apiVersion: v1
kind: Pod
metadata:
  name: backend
spec:
  containers:
    - image: nginx
      name: backend
      envFrom:
        - configMapRef:
            name: db-config
```

```
$ kubectl exec -it nginx -- env
DB=staging
USERNAME=jdoe
...
```



# ConfigMap in Pod as Volume

*Each key becomes file in mounted directory*

```
apiVersion: v1
kind: Pod
metadata:
  name: backend
spec:
  containers:
    - name: backend
      image: nginx
      volumeMounts:
        - name: config-volume
          mountPath: /etc/config
  volumes:
    - name: config-volume
      configMap:
        name: db-config
```

```
$ kubectl exec -it backend -- /bin/sh
# ls /etc/config
db
username
# cat /etc/config/db
staging
```



# Secret Options

*Imperative command:* `kubectl create secret`

Option	Description
<code>generic</code>	Creates a secret from a file, directory, or literal value.
<code>docker-registry</code>	Creates a secret for use with a Docker registry.
<code>tls</code>	Creates a TLS secret.



# Creating Secrets (imperative)

*Similar usage to creation of ConfigMap*

```
# Literal values
$ kubectl create secret generic db-creds ←
  --from-literal=pwd=s3cre!

# File containing environment variables
$ kubectl create secret generic db-creds ←
  --from-env-file=secret.env

# SSH key file
$ kubectl create secret generic db-creds ←
  --from-file=ssh-privatekey=~/ssh/id_rsa
```



# Creating Secrets (declarative)

*Value has to be base64-encoded manually*

```
$ echo -n 's3cre!' | base64  
czNjcmUh
```

```
apiVersion: v1  
kind: Secret  
metadata:  
  name: mysecret  
  type: Opaque  
data:  
pwd: czNjcmUh
```



# Secret in Pod as Volume

*Value has to be base64-encoded manually*

```
apiVersion: v1
kind: Pod
metadata:
  name: backend
spec:
  containers:
    - name: backend
      image: nginx
      volumeMounts:
        - name: secret-volume
          mountPath: /etc/secret
  volumes:
    - name: secret-volume
      secret:
        secretName: mysecret
```

```
$ kubectl exec -it backend -- /bin/sh
# ls /etc/secret
pwd
# cat /etc/secret/pwd
s3cre!
```



---

# EXERCISE

Creating and  
Mounting a  
ConfigMap



---

# Container Health

*“How does Kubernetes know if a container is up and running?”*

Probes can detect  
and correct failures



# Health Verification Methods

Method	Option	Description
Custom Command	exec.command	Executes a command inside of the container e.g. a cat command and checks its exit code. Kubernetes considers an zero exit code to be successful. A non-zero exit code indicates an error.
HTTP GET Request	httpGet	Sends an HTTP GET request to an endpoint exposed by the application. A HTTP response code in the range of 200 and 399 indicates success. Any other response code is regarded as an error.
TCP socket connection	tcpSocket	Tries to open a TCP socket connection to a port. If the connection could be established, the probing attempt was successful. The inability to connect is accounted for as an error.





# Health Check Attributes

Attribute	Default Value	Description
initialDelaySeconds	0	Delay in seconds until first check is executed.
periodSeconds	10	Interval for executing a check (e.g., every 20 seconds).
timeoutSeconds	1	Maximum number of seconds until check operation times out.
successThreshold	1	Number of successful check attempts until probe is considered successful after a failure.
failureThreshold	3	Number of failures for check attempts before probe is marked failed and takes action.



# Understanding Readiness Probes

*“Is application ready to serve requests?”*

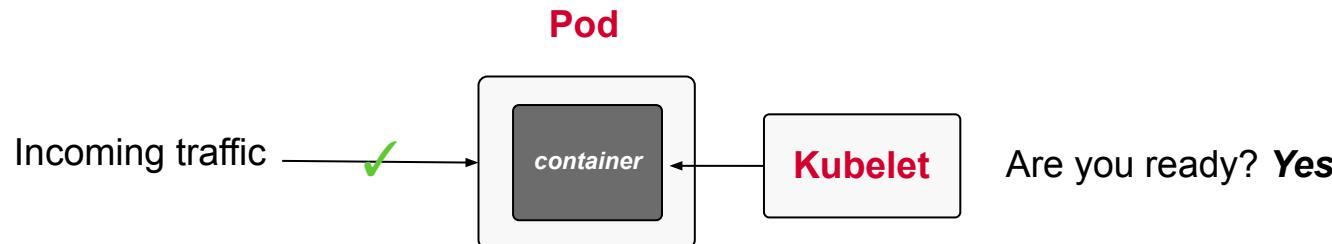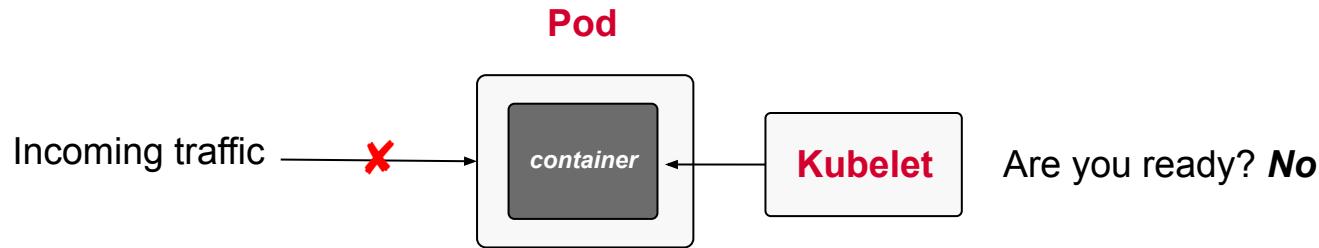

# Defining a Readiness Probe

*HTTP probes are very helpful for web applications*



```
apiVersion: v1
kind: Pod
metadata:
  name: web-app
spec:
  containers:
    - name: web-app
      image: eshop:4.6.3
      readinessProbe:
        httpGet:
          path: /
          port: 8080
        initialDelaySeconds: 5
        periodSeconds: 2
```

Successful if HTTP status code is  
between 200 and 399



# Understanding Liveness Probes

*“Does the application still function without errors?”*

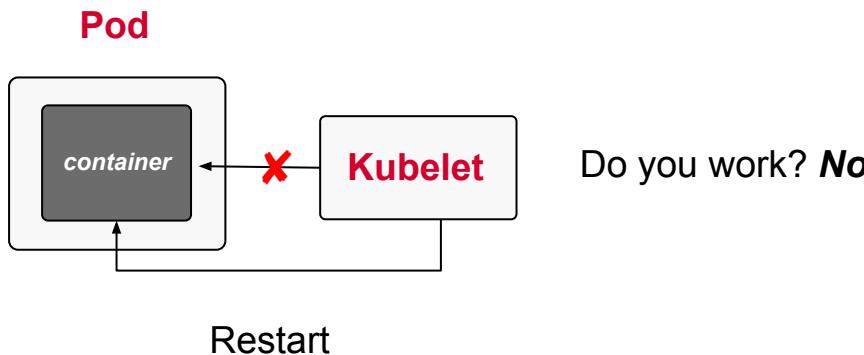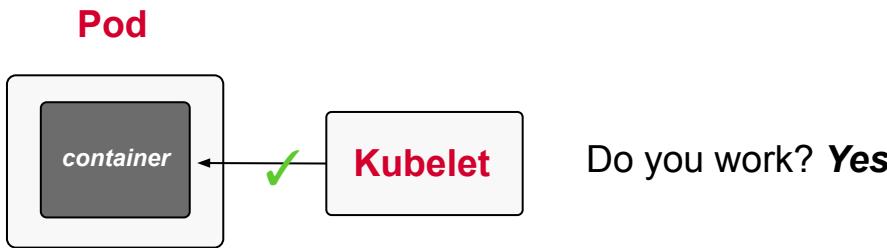

# Defining a Liveness Probe

*An event log can be queried with a custom command*



```
apiVersion: v1
kind: Pod
metadata:
  name: web-app
spec:
  containers:
  - name: web-app
    image: eshop:4.6.3
    livenessProbe:
      exec:
        command:
        - cat
        - /tmp/healthy
    initialDelaySeconds: 10
    periodSeconds: 5
```

It makes sense to delay the initial check as the application to fully start up first



# Understanding Startup Probes

*“Legacy application may need longer to start. Hold off on probing.”*

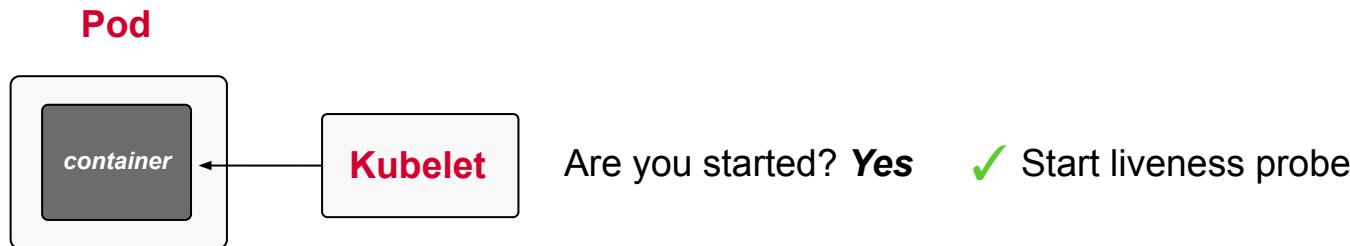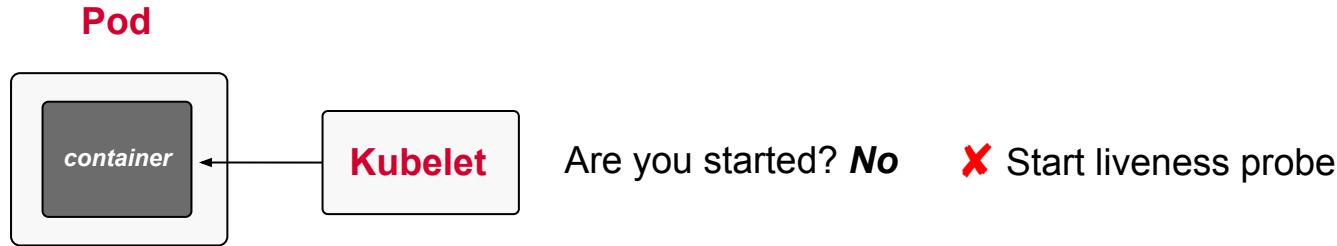

# Defining a Startup Probe

*TCP socket connection if exposed by application*

```
apiVersion: v1
kind: Pod
metadata:
  name: startup-pod
spec:
  containers:
    - image: httpd:2.4.46
      name: http-server
      startupProbe:
        tcpSocket:
          port: 80
        initialDelaySeconds: 3
        periodSeconds: 15
```

Tries to open a TCP socket  
connection to a port



---


# EXERCISE

Configuring Health  
Probes for a Pod



# Defining Resource Boundaries

*Defines # of Pods, CPU and memory usage per Namespace*

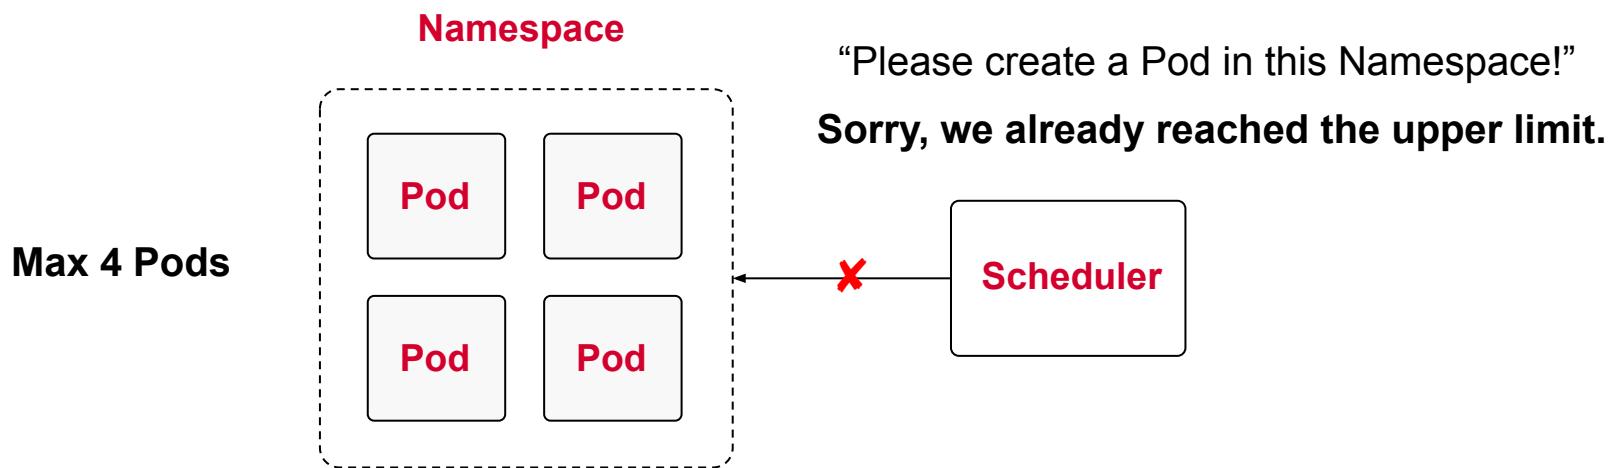

# Resource Units in Kubernetes

*CPU units and memory as fixed-point number or power-of-two equivalents*

Kubernetes measures CPU resources in millicores and memory resources in bytes. That's why you might see resources defined as 600m or 100Mib.

For a deep dive on those resource units, it's worth cross-referencing the section "[Resource units in Kubernetes](#)" in the official documentation.



# Creating a Resource Quota

*Definition on the Namespace-level*

```
apiVersion: v1
kind: ResourceQuota
metadata:
  name: app
spec:
  hard:
    pods: 2
    requests.cpu: "1"
    requests.memory: 1024m
    limits.cpu: "4"
    limits.memory: 4096m
```

```
$ kubectl create namespace rq-demo
$ kubectl create -f rq.yaml
--namespace=rq-demo
resourcequota/app created
$ kubectl describe quota --namespace=rq-demo
Name:          app
Namespace:     rq-demo
Resource       Used   Hard
-----  -----
limits.cpu      0      4
limits.memory   0      4096m
pods           0      2
requests.cpu    0      1
requests.memory 0      1024m
```



# Defining Container Constraints

*Required if Namespace defines Resource Quota*

```
apiVersion: v1
kind: Pod
metadata:
  name: mypod
spec:
  containers:
  - image: nginx
    name: mypod
    resources:
      requests:
        cpu: "0.5"
        memory: "512m"
      limits:
        cpu: "1"
        memory: "1024m"
```

Requires at least 0.5 CPU resources  
and 512m of memory

Limits resources to 1 CPU and  
1024m of memory



---

# EXERCISE

Defining a Pod's  
Resource  
Requirements



---

# Node Affinity & Taints/Tolerations

*Concepts with different purposes, but can go hand in hand*

- **Node Affinity:** Attract Pods to a node as soft or hard requirement.
- **Taint:** Allow a node to repel a set of Pods.
- **Tolerations:** Applied to Pods to allow scheduling them to nodes with a specific taint.



# Kubernetes Scheduler

*kube-scheduler is the default scheduler for Kubernetes*

```
$ kubectl get pods -n kube-system
NAME                  READY   STATUS    RESTARTS   AGE
kube-scheduler-minikube 1/1     Running   2          76d
...
```

[Detailed information on node selection](#)



# Pod to Node Assignment

*Once Pod is scheduled, the node is assigned automatically*

```
$ kubectl get nodes
NAME        STATUS    ROLES      AGE     VERSION
minikube   Ready     master    204d    v1.19.2


$ kubectl get pods -o=wide
NAME    READY    STATUS    RESTARTS   AGE     IP          NODE      ...
app     1/1     Running   0          22h    10.0.0.102  minikube  ...

$ kubectl get pod app -o yaml | grep nodeName:
nodeNodeName: minikube
```



# Node Selection Constraint

*Define a label selector in Pod's spec that matches node label*

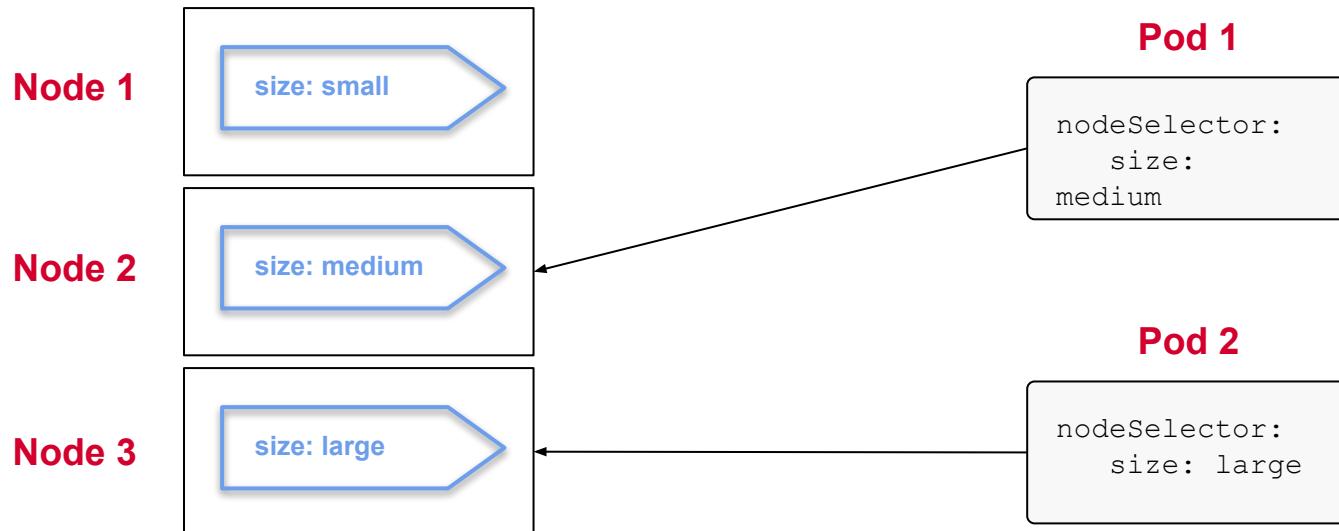

# Node Selection Constraint

*Add labels to nodes*

```
$ kubectl label nodes minikube size=medium
node/minikube labeled

$ kubectl get nodes --show-labels
NAME      STATUS   ROLES    AGE     VERSION   LABELS
...
minikube-m02   Ready    master   204d    v1.19.2   ...size=medium
minikube-m03   Ready    master   204d    v1.19.2   ...
minikube-m04   Ready    master   204d    v1.19.2   ...
```



# Node Selection Constraint

*Define the `nodeSelector` attribute upon Pod creation*


```
apiVersion: v1
kind: Pod
metadata:
  name: app
spec:
  containers:
    - image: nginx
      name: nginx
  restartPolicy: Never
  nodeSelector:
    size: medium
```

*Can't have multiple keys with the same value as the underlying data structure is a map*



# Node Affinity

*Similar to nodeSelector but more flexible and powerful*

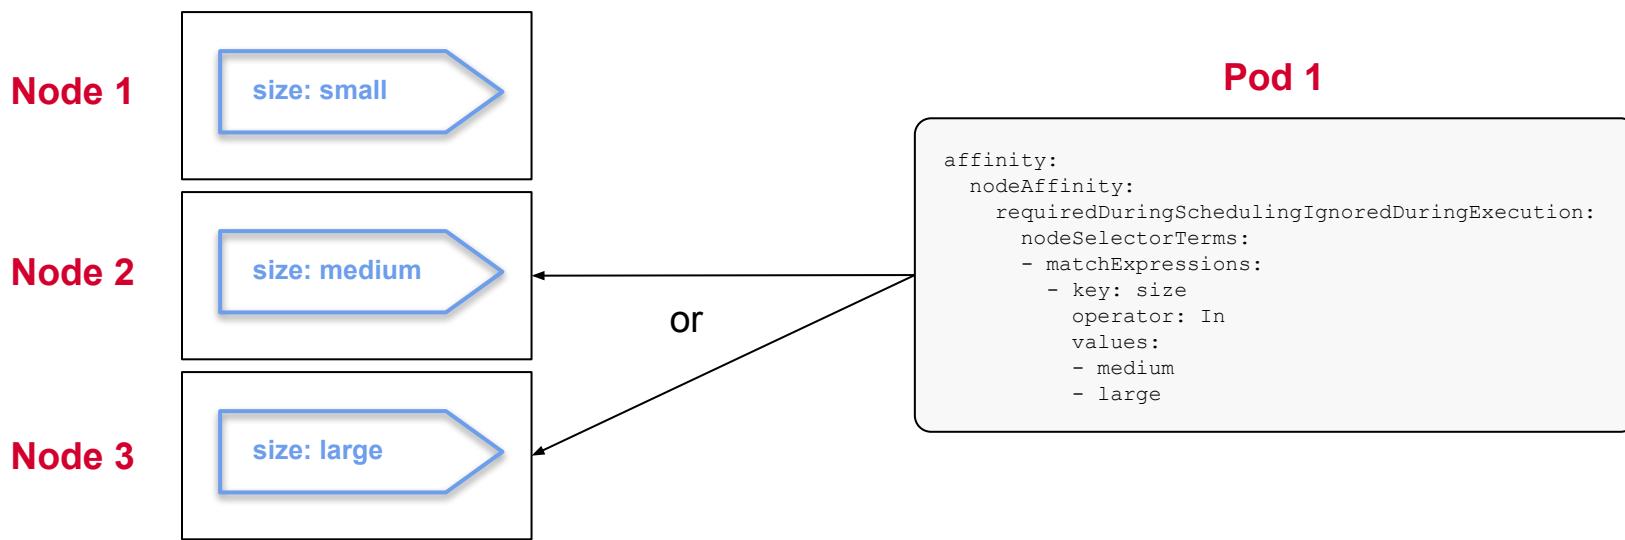

# Setting a Pod's Node Affinity

*Requires a lot of configuration in various shapes and forms*

```
apiVersion: v1
kind: Pod
metadata:
  name: app
spec:
  containers:
    - image: nginx
      name: nginx
  restartPolicy: Never
  affinity:
    nodeAffinity:
      requiredDuringSchedulingIgnoredDuringExecution:
        nodeSelectorTerms:
          - matchExpressions:
              - key: size
                operator: In
                values:
                  - medium
```

*Available operators:*  
*In, NotIn, Exists,*  
*DoesNotExist, Gt, Lt*



# Node Affinity Types

*Currently two types, potentially more in the future*

Type	Description
requiredDuringSchedulingIgnoredDuringExecution	Rules that must be met for a Pod to be scheduled onto a node.
preferredDuringSchedulingIgnoredDuringExecution	Rules that specify preferences that the scheduler will try to enforce but will not guarantee.

\**IgnoredDuringException means that changes to the affinity of a running Pod does not have an effect*



---


# EXERCISE

Scheduling a Pod  
on Specific Nodes



# Taints and Tolerations

*A Pod that doesn't have specific toleration is repelled*

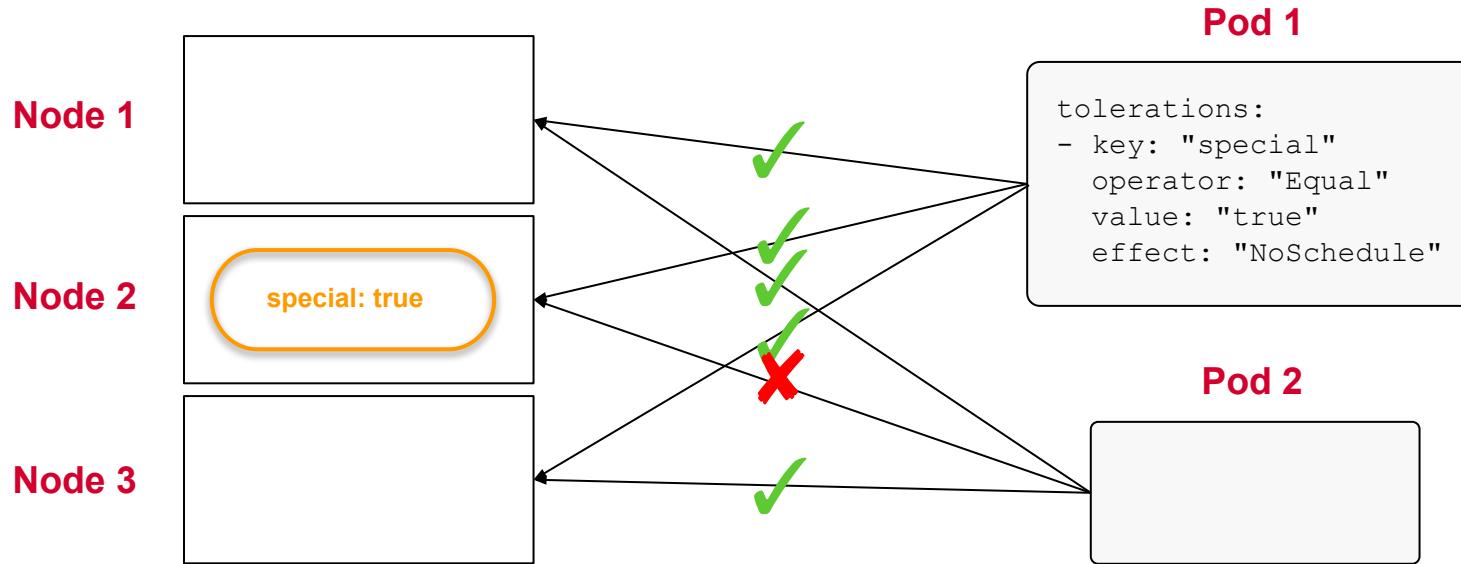

# Setting a Node Taint

*Add taint to nodes*

```
$ kubectl taint nodes minikube-m02 special=true:NoSchedule
node/minikube-m02 tainted
$ kubectl get nodes minikube-m02 -o yaml | grep -C 3 taints:
...
spec:
  taints:
  - effect: NoSchedule
    key: special
    value: "true"
```

*key=value:effect*



# Taint Effects

*Needs to be provided to node and Pod*

Effect	Description
NoSchedule	Unless a Pod has matching toleration, it won't be scheduled on the node.
PreferNoSchedule	Try not to place a Pod that does not tolerate the taint on the node, but it is not required.
NoExecute	Evict Pod from node if already running on it. No future scheduling on the node.



# Setting a Pod's Toleration

*Requires a lot of configuration in various shapes and forms*

```
apiVersion: v1
kind: Pod
metadata:
  name: app
spec:
  containers:
  - image: nginx
    name: nginx
  restartPolicy: Never
  tolerations:
  - key: "special"
    operator: "Equal"
    value: "true"
    effect: "NoSchedule"
```

*Available operators:*  
*Equal, Exists*



---

# EXERCISE

Configuring a Node  
to Only Accept  
Specific Pods




---

# Q & A



---

# BREAK

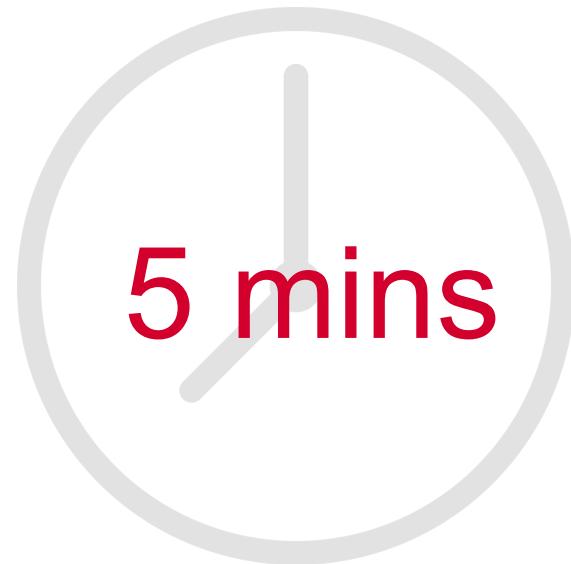


# Services & Networking

Inter-Pod Communication, Service Types, Ingress,  
CoreDNS, CNI plugins

# Understanding Services


*Enables network access for a set of Pods*

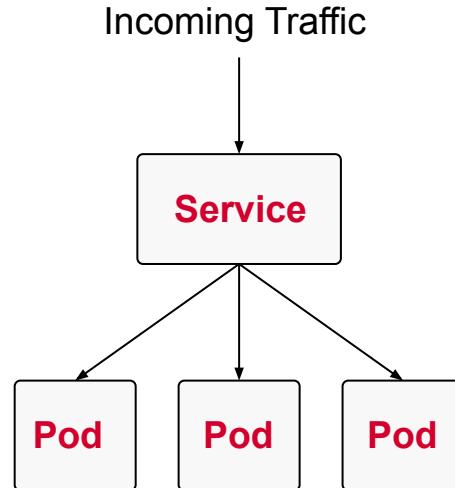

# Request Routing

*“How does a service decide which Pod to forward the request to?”*

*Label Selectors!*

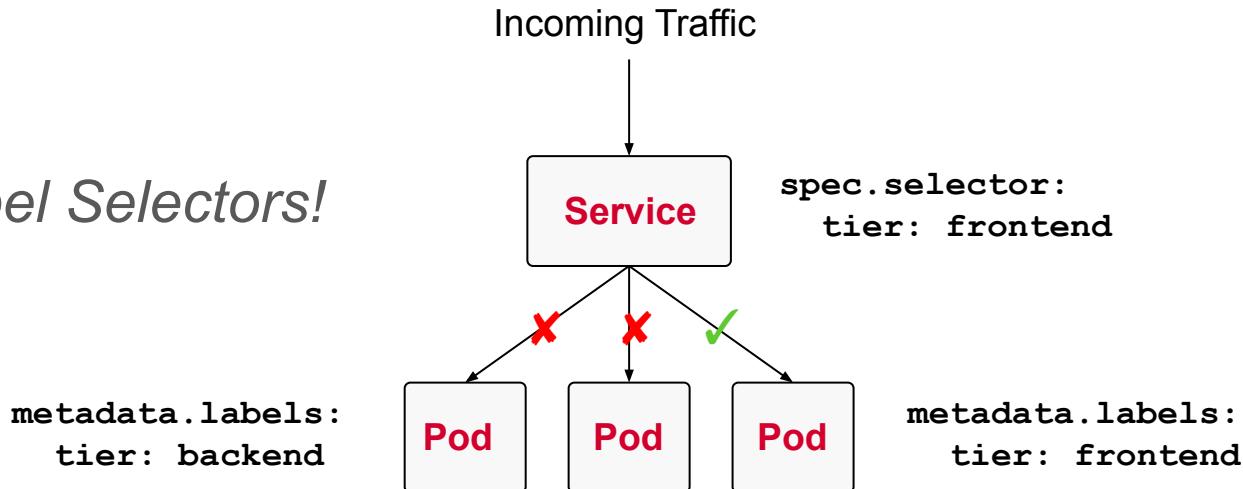

# Creating a Service (imperative)

*“Create a Service with explicit type”*

```
$ kubectl create service clusterip nginx --tcp=80:80  
service/nginx created
```



# Creating a Service (imperative)

*“Create a Pod and expose it with a Service”*

```
$ kubectl run nginx --image=nginx --port=80 --expose
service/nginx created
pod/nginx created
```



# Creating a Service (declarative)

```
apiVersion: v1
kind: Service
metadata:
  name: nginx
spec:
  selector: ←
    tier: frontend
  ports:
  - port: 3000 ←
    protocol: TCP
    targetPort: 80
  type: ClusterIP ←
```

Determines the Pod(s) for routing traffic


Maps incoming port to port of the Pod

Specifies how to expose the Service (inside/outside of cluster or LoadBalancer)



# Port Mapping

*“How to map the service port to the container port in Pod?”*

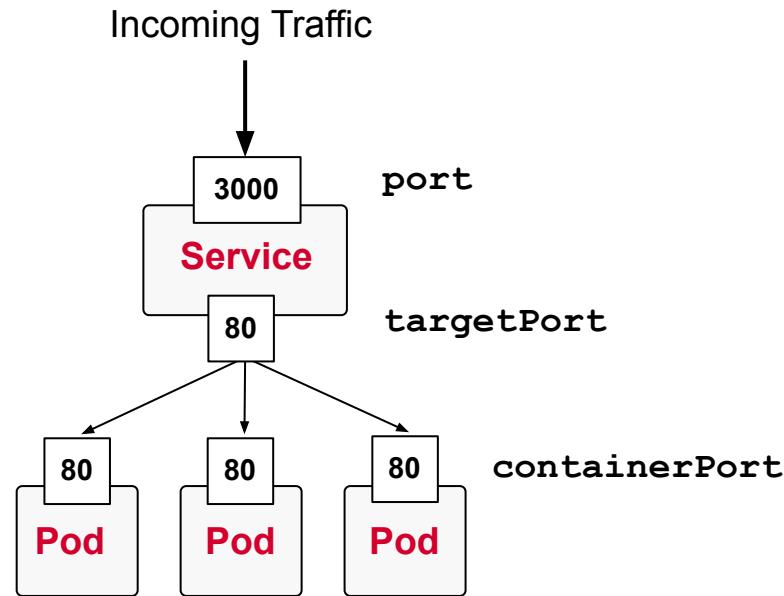

# Different Types of Services


Type	Behavior
ClusterIP	Exposes the service on a cluster-internal IP. Only reachable from within the cluster.
NodePort	Exposes the service on each node's IP at a static port. Accessible from outside of the cluster.
LoadBalancer	Exposes the service externally using a cloud provider's load balancer.
ExternalName	Map a Service to a DNS name.

`spec.type: xyz`



# ClusterIP Service Type

*Only reachable from within the cluster or API service via proxy*

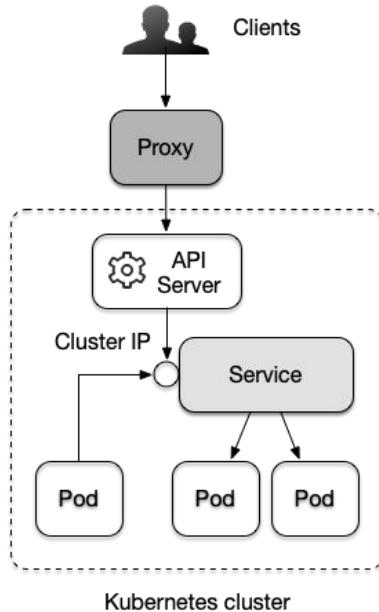


Exposes the Service on a cluster-internal IP address.

Can also be reached by proxy from outside of the cluster using the `kubectl proxy` command.



# NodePort Service Type

*Accessible from outside of the cluster*

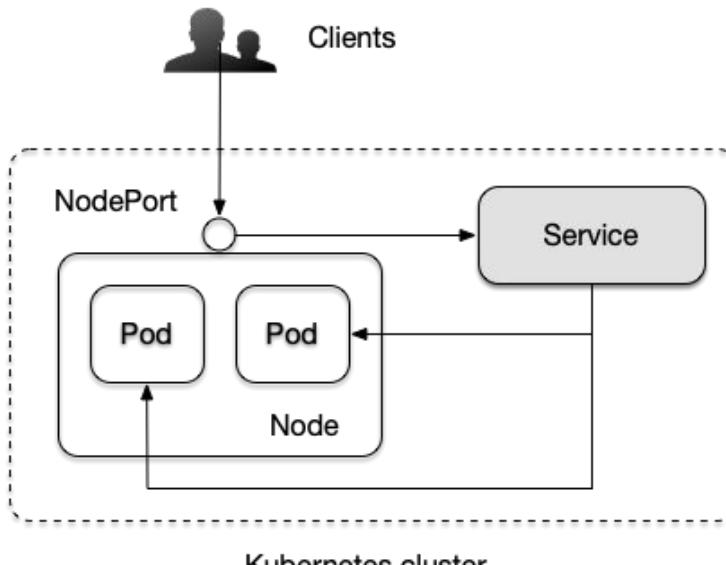

Node's IP address + port number in the range of 30000 and 32767, assigned automatically upon the creation of the Service.




# Inspecting a Service

```
# Only reachable from within the cluster
$ kubectl get service nginx
NAME      TYPE        CLUSTER-IP        EXTERNAL-IP      PORT(S)      AGE
nginx    ClusterIP   10.105.201.83   <none>          80/TCP     3h

# Accessible from outside of the cluster
$ kubectl get service nginx
NAME      TYPE        CLUSTER-IP        EXTERNAL-IP      PORT(S)      AGE
nginx    NodePort    10.105.201.83   <none>          80: 30184/TCP 3h
```



# Deployments and Services

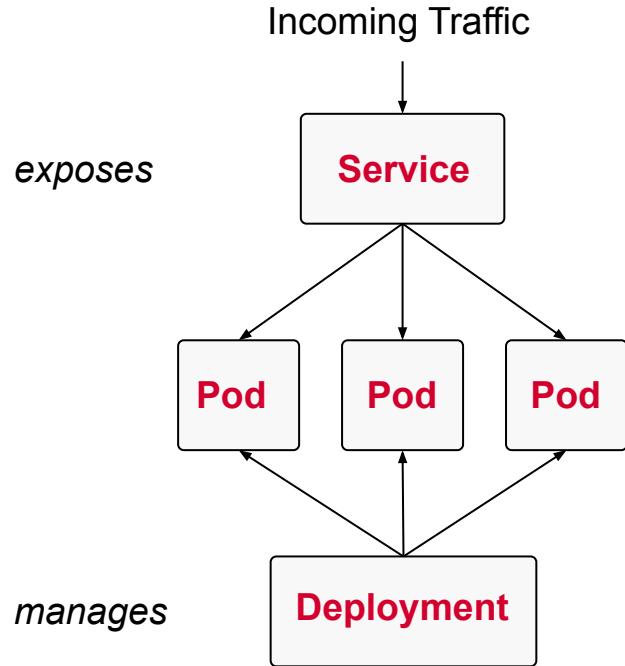

*Two distinct concepts that complement each other*



---


# EXERCISE

Routing traffic to  
Pods from Inside  
and Outside of a  
Cluster



# Understanding Ingress

*Manages external access to the services in a cluster via HTTP(S)*

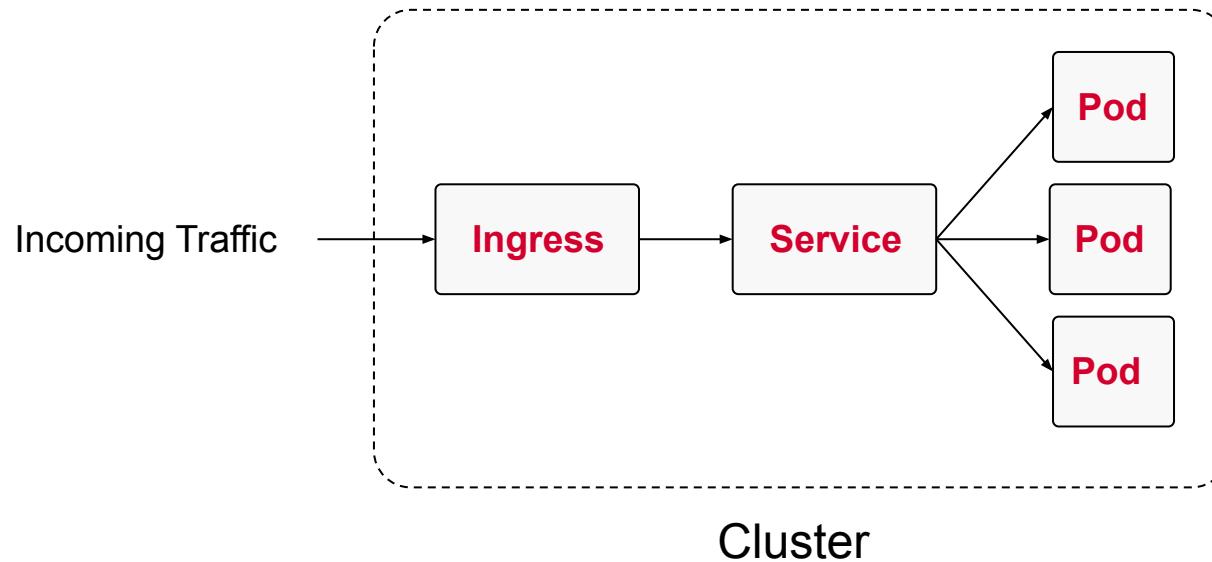

# Defining an Ingress

*Traffic routing is controlled by rules defined on Ingress resource*

```
apiVersion: networking.k8s.io/v1
kind: Ingress
metadata:
  name: minimal-ingress
  annotations:
    nginx.ingress.kubernetes.io/rewrite-target: /
spec:
  rules:
  - http:
      paths:
      - path: /testpath
        pathType: Prefix
        backend:
          service:
            name: test
            port:
              number: 80
```



# Ingress Rules

*Traffic routing is controlled by rules defined on Ingress resource*

- Optional host. If not host is defined, then all inbound HTTP traffic is handled.
- A list of paths e.g. /testpath.
- The backend, a combination of Service name and port.



# Path Types

*Incoming URLs match based on type*

	<i>Rule</i>	<i>Request</i>
<b>Exact</b>	/foo	/foo ✓ /bar ✗
<b>Prefix</b>	/foo	/foo, /foo/ ✓ /bar ✗



# Listing an Ingress

```
$ kubectl get ingress
Warning: extensions/v1beta1 Ingress is deprecated in
v1.14+, unavailable in v1.22+; use networking.k8s.io/v1
Ingress
NAME            CLASS      HOSTS    ADDRESS   PORTS   AGE
minimal-ingress <none>    *        80       17s
```



---


# EXERCISE

Defining and Using  
an Ingress



# DNS for Services

*Kubernetes DNS service creates record for Service*

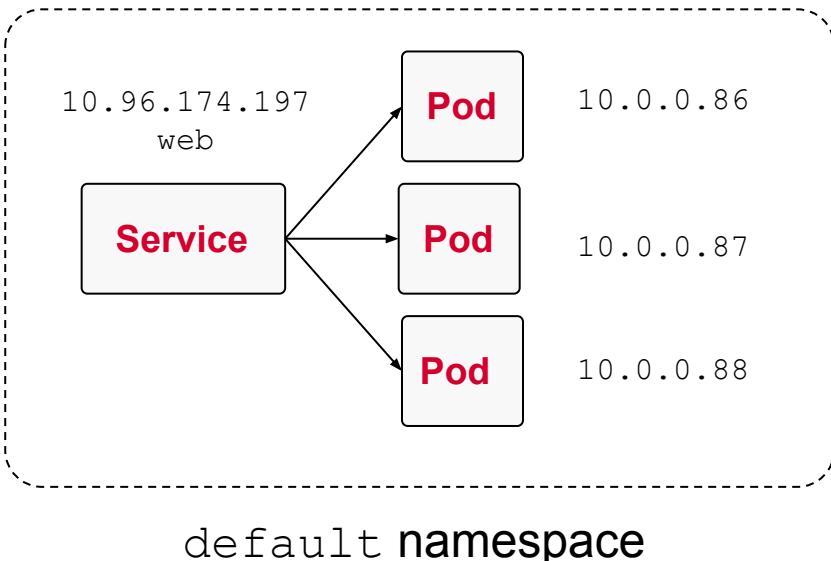


**Kubernetes DNS Service**

Hostname	IP Address
web	10.96.174.197



# Resolving a Service by DNS

*Resolve by hostname within the same namespace*

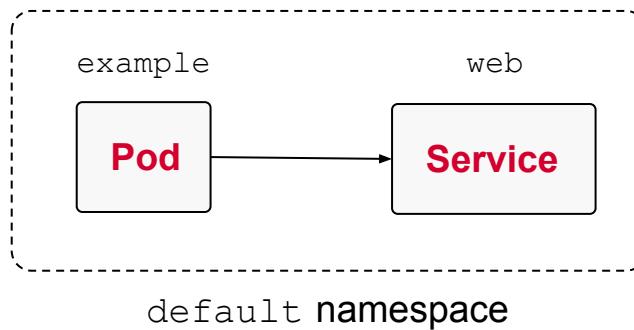


```
$ curl http://web  
Hello World
```



# Resolving a Service by DNS

*Resolve by namespace, type, root domain from another namespace*

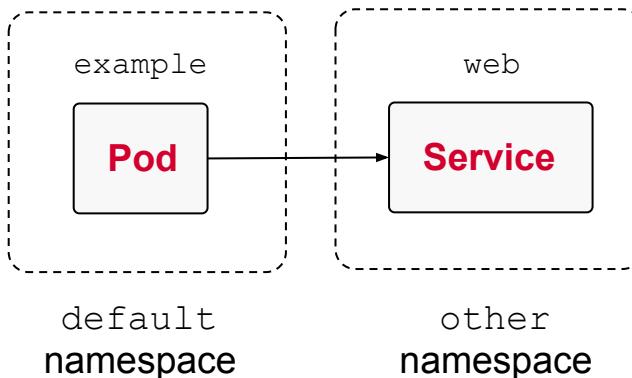

```
$ curl http://web.other
```

Hello World

```
$ curl http://web.other.svc
```

Hello World

```
$ curl http://web.other.svc.cluster.local
```

Hello World




Root Domain



# Resolving a Pod by DNS

*DNS records are not created by default, resolve by IP address*

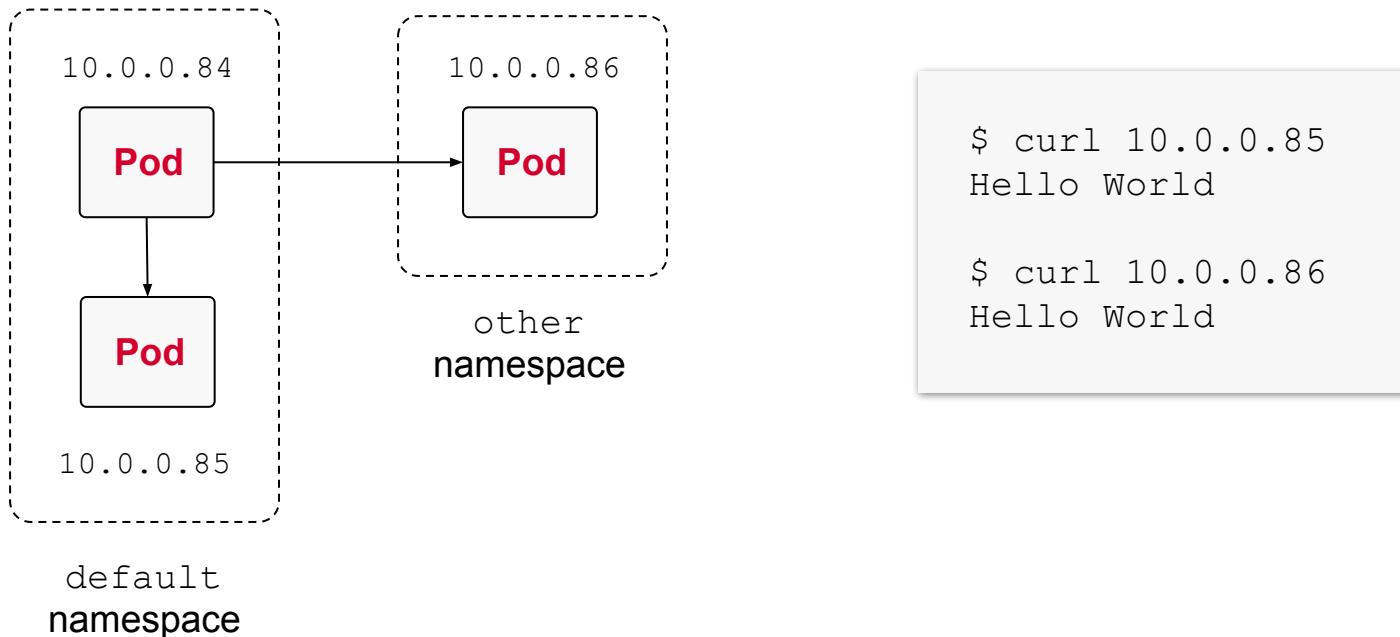

# Object Representation CoreDNS

*Recommended Kubernetes DNS server implementation*

```
$ kubectl get pods -n kube-system
NAME                  READY   STATUS    RESTARTS   AGE
coredns-f9fd979d6-skk6w   1/1     Running   2          67d

$ kubectl get services -n kube-system
NAME      TYPE      CLUSTER-IP      EXTERNAL-IP      PORT(S)      AGE
kube-dns   ClusterIP  10.96.0.10    <none>        53/UDP,53/TCP,9153/TCP  195d
```



# Configuring CoreDNS


*Sets root domain and enables DNS for Pods*

```
$ kubectl describe configmap coredns -n kube-system
Data
=====
Corefile:
-----
.:53 {
    ...
    kubernetes cluster.local in-addr.arpa ip6.arpa {
        pods insecure
        fallthrough in-addr.arpa ip6.arpa
        ttl 30
    }
    ...
}
```



# Resolving a Pod by DNS

*DNS records are not created by default, resolve by IP address*

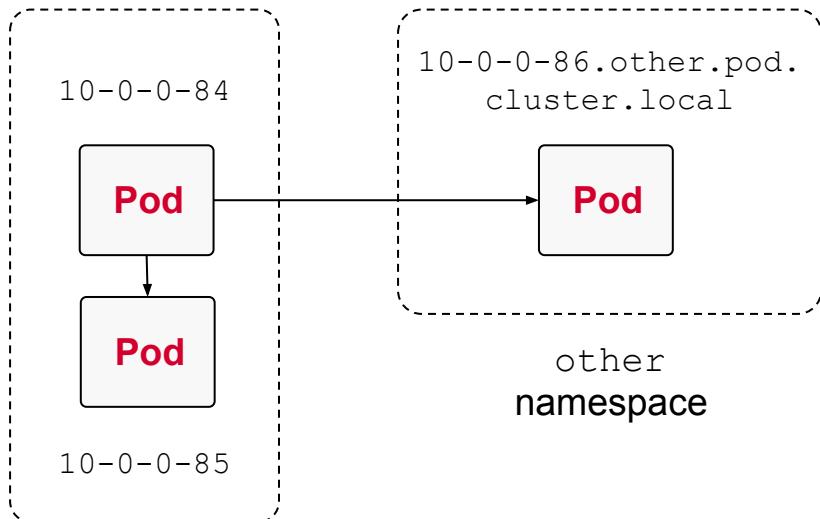

default  
namespace


```
$ curl 10-0-0-85
Hello World

$ curl
10-0-0-86.other.pod.cluster
.local
Hello World
```



# Understanding CNI

*Kubernetes uses CNI for Pod networking*

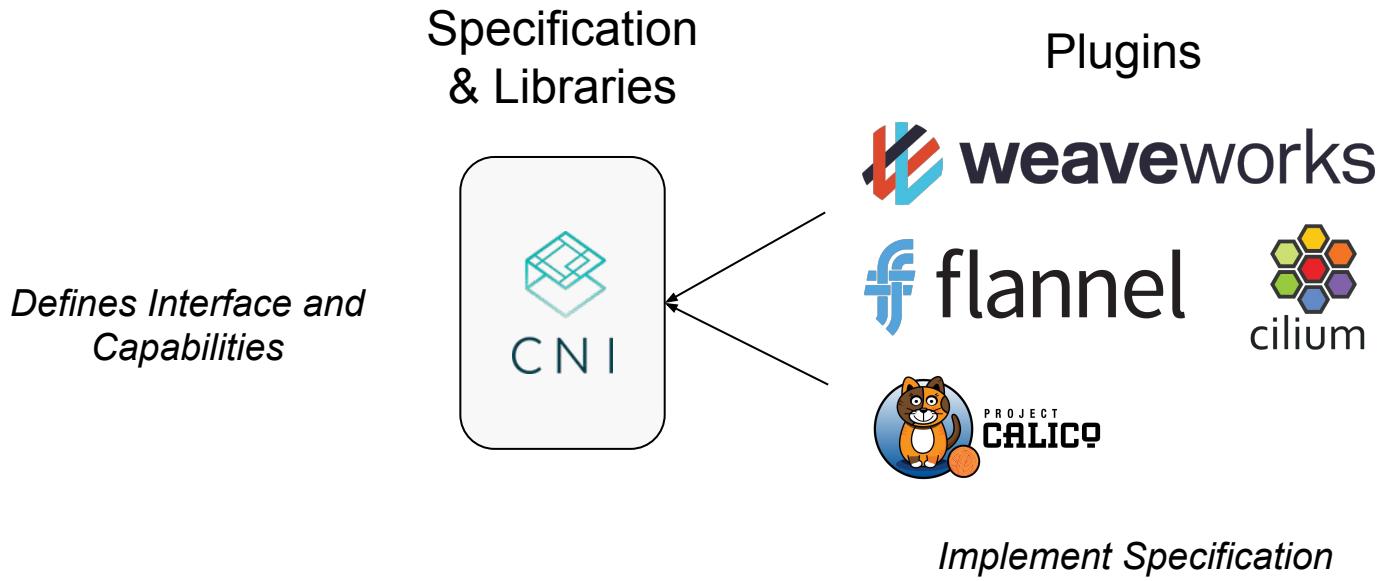

# Choosing a CNI Plugin

*Direct installation instructions only available for Weave Net*

**List of plugins:**

<https://kubernetes.io/docs/concepts/cluster-administration/addons/>

**Installation instructions for Weave Net:**

<https://kubernetes.io/docs/setup/production-environment/tools/kubeadm/high-availability/#steps-for-the-first-control-plane-node>



---

# Q & A



---

# BREAK




# Storage


Volumes, Volume Configuration Options,  
PersistentVolumes with Static & Dynamic Binding

# Understanding Volumes

*Persist data that outlives a Pod restart*

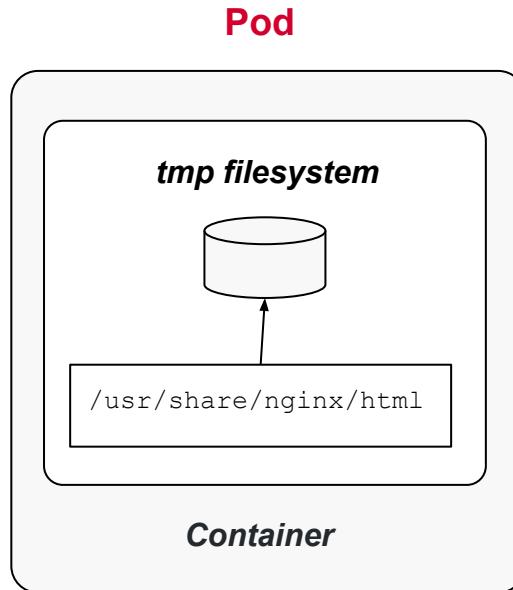

vs.

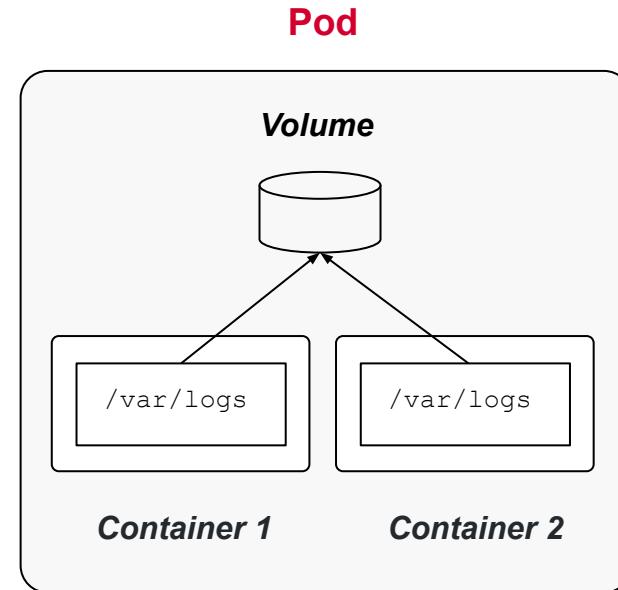

# Types of Volumes

Type	Description
emptyDir	Empty directory in Pod. Only persisted for the lifespan of a Pod.
hostPath	File or directory from the host node's filesystem into your Pod.
configMap, secret	Provides a way to inject configuration data and secrets into Pods.
nfs	An existing NFS (Network File System) share to be mounted into your Pod. Preserves data after Pod restart.
Cloud provider solutions	Provider-specific implementation for AWS, GCE or Azure.



# Creating a Volume

```
apiVersion: v1
kind: Pod
metadata:
  name: my-container
spec:
  volumes: ←
    - name: logs-volume
      emptyDir: {}
  containers:
    - image: nginx
      name: my-container
      volumeMounts: ←
        - mountPath: /var/logs
          name: logs-volume
```

*Define Volume with a type*

*Mount Volume to a path*



# Using a Volume


```
# Create Pod with mounted Volume
$ kubectl create -f pod-with-vol.yaml
pod/my-container created

# Shell into container and use Volume
$ kubectl exec -it my-container -- /bin/sh
# cd /var/logs
# pwd
/var/logs
# touch app-logs.txt
# ls
app-logs.txt
```




# Understanding PersistentVolumes

*Persist data that outlives a Pod, node, or cluster restart*

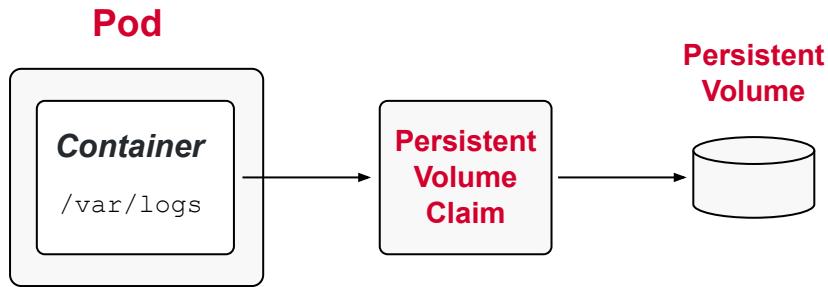

# Creating a PersistentVolume

```
apiVersion: v1
kind: PersistentVolume
metadata:
  name: pv
spec:
  capacity: ←
    storage: 512m
  accessModes: ←
    - ReadWriteOnce
  hostPath:
    path: /data/config
```

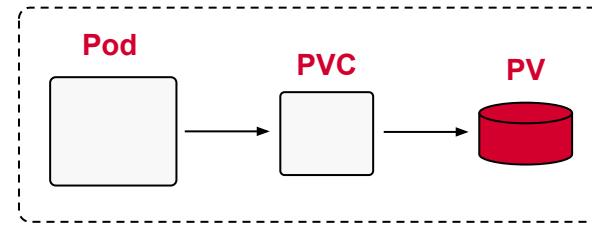

*Defines a specific storage capacity*

*Read and/or write access*

*How many nodes can access volume?*



# Access Mode & Reclaim Policy

*Configuration options for PersistentVolume*

## Access Mode

Type	Description
ReadWriteOnce	Read-write access by a single node.
ReadOnlyMany	Read-only access by many nodes.
ReadWriteMany	Read-write access by many nodes.


## Reclaim Policy

Type	Description
Retain	Default. When PVC is deleted, PV is “released” and can be reclaimed.
Delete	Deletion removes PV and associated storage.
Recycle	Deprecated. Use dynamic binding instead.



# Creating a Claim

```
kind: PersistentVolumeClaim  
apiVersion: v1  
metadata:  
  name: pvc  
spec:  
  accessModes:  
    - ReadWriteMany  
  resources:  
    requests:  
      storage: 256m
```

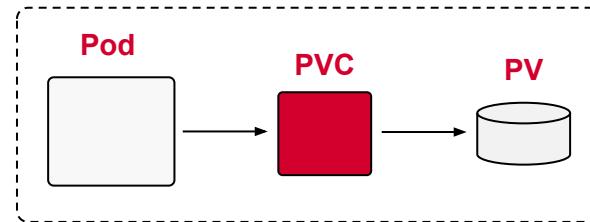


*Read and/or write access  
How many nodes can access volume?*

*Defines a specific storage capacity*



# Mounting a Claim

```
apiVersion: v1
kind: Pod
metadata:
  creationTimestamp: null
  name: app
spec:
  volumes:
    - name: configpvc
      persistentVolumeClaim:
        claimName: pvc
  containers:
    - image: nginx
      name: app
      volumeMounts:
        - mountPath: "/data/app/config"
          name: configpvc
```

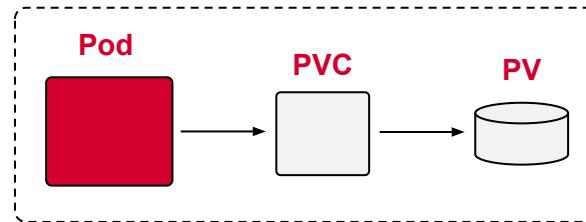

*References the Volume with the  
claim name*


*Mounts Volume to path*



# Static Provisioning

*Requires the physical storage to exist before PersistentVolume*

```
apiVersion: v1
kind: PersistentVolume
metadata:
  name: pv
spec:
  capacity:
    storage: 512m
  accessModes:
    - ReadWriteOnce
  storageClassName: shared
  hostPath:
    path: /data/config
```

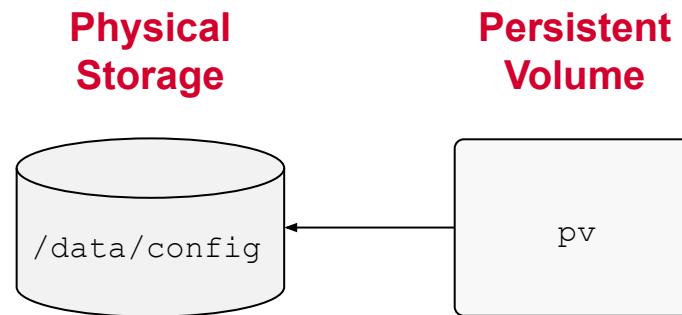

# Dynamic Provisioning

*Creates PersistentVolume object automatically via storage class*

```
apiVersion: storage.k8s.io/v1
kind: StorageClass
metadata:
  name: standard
provisioner: kubernetes.io/aws-ebs
```

```
kind: PersistentVolumeClaim
apiVersion: v1
metadata:
  name: pvc
spec:
  accessModes:
    - ReadWriteMany
  resources:
    requests:
      storage: 256m
  storageClassName: standard
```



---

# EXERCISE

Creating a  
Persistent Volume  
with Static or  
Dynamic Binding



# Troubleshooting

Cluster/Node Logging, Monitoring Applications,  
Identifying and Fixing Application, Cluster, and  
Networking Issues

---

# Monitoring Cluster Components

*What metrics are of interest?*

- Number of nodes in the cluster.
- Health status of nodes.
- Node performance metrics like CPU, memory, disk space, network.
- Pod-level performance metrics like CPU, memory consumption.



# Monitoring Solution

*Relevant to CKA exam: metrics server*

## Commercial Products



## Free Solutions

VS.


Heapster  
**X Retired**

Metrics  
Server



# Metrics Server

*Cluster-wide metrics aggregator*

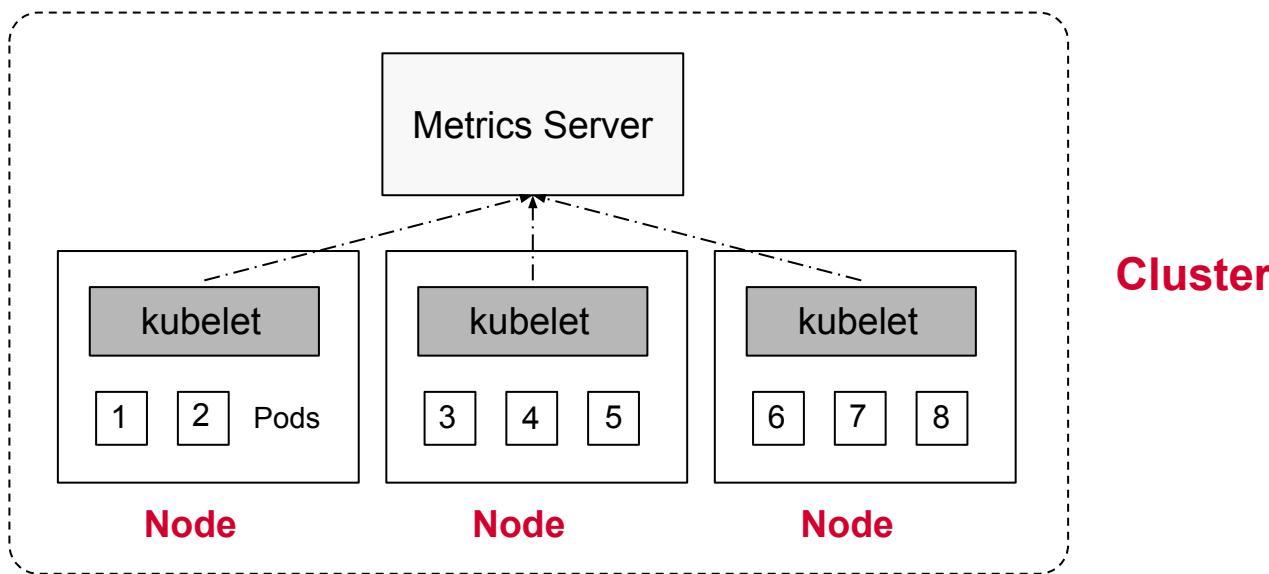

---

# Installing the Metrics Server

*Add on-component for Minikube or creating objects*



```
$ minikube addons enable  
metrics-server  
The 'metrics-server' addon is enabled
```



```
$ kubectl apply -f  
https://github.com/kubernetes-sigs/metrics-server/  
releases/latest/download/components.yaml
```



# Using the Metrics Server

*The kubectl top command can query nodes and Pods*

```
$ kubectl top nodes
NAME          CPU(cores)   CPU%     MEMORY(bytes)   MEMORY%
minikube     283m        14%      1262Mi         32%
```

```
$ kubectl top pod frontend
NAME          CPU(cores)   MEMORY(bytes)
frontend      0m           2Mi
```



# Accessing Container Logs

*Simply use the `kubectl logs` command*

```
$ kubectl logs hazelcast
...
May 25, 2020 3:36:26 PM com.hazelcast.core.LifecycleService
INFO: [10.1.0.46]:5701 [dev] [4.0.1] [10.1.0.46]:5701 is STARTED
```

*Use the command line option `-f`, `--follow` to stream the logs*



# Accessing Container Logs

*Specify container name for multi-container Pods*

```
$ kubectl logs hazelcast -c app
...
May 25, 2020 3:36:26 PM com.hazelcast.core.LifecycleService
INFO: [10.1.0.46]:5701 [dev] [4.0.1] [10.1.0.46]:5701 is STARTED
```

*Use the command line option `-c` or `--container`*



---

# Q & A



---

# BREAK



---

# Official Troubleshooting Docs

*Detailed advice and help during exam*

- Troubleshooting applications
- Troubleshooting cluster



# Troubleshooting Services

*Check Service type and call endpoint*

```
$ kubectl get service nginx
NAME      TYPE      CLUSTER-IP      EXTERNAL-IP      PORT(S)      AGE
nginx    NodePort  10.105.201.83  <none>        80:30184/TCP  3h
```

```
$ curl http://nginx:30184
curl: (6) Could not resolve host: nginx
```

 Connectivity issue



# Troubleshooting Services

*Ensure correct label selection*

```
$ kubectl describe service myapp
Name:           myapp
Namespace:      default
Labels:         app=myapp
Annotations:   <none>
Selector:    app=myapp
Type:          ClusterIP
IP:            10.102.22.26
Port:          80-80  80/TCP
TargetPort:    80/TCP
Endpoints:     10.0.0.115:80
Session Affinity: None
Events:        <none>
```

```
$ kubectl describe pod
myapp
Name:           myapp
...
Labels:       app=myapp
...
```

✓ Matching labels



# Troubleshooting Pods

*Check the status first - is it running?*

```
$ kubectl get pods  
NAME      READY     STATUS        RESTARTS   AGE  
myapp    1/1       Running      0          12m
```

✓ Healthy status



# Troubleshooting Pods

*Check the event log - does it indicate issues?*

```
$ kubectl describe pod myapp
...
Events:
Type      Reason     Age            From           Message
----      -----     --            ----          -----
Normal    Scheduled  <unknown>      default-scheduler  Successfully<
assigned   default/secret-pod to minikube
Warning   FailedMount 3m15s         kubelet, minikube  Unable to<
attach or mount volumes: unmounted volumes=[mysecret], unattached<
volumes=[default-token-bf8rh mysecret]: timed out waiting for the condition
Warning   FailedMount  68s (x10 over 5m18s)  kubelet, minikube  ↴
MountVolume.SetUp failed for volume "mysecret" : secret "mysecret" not found
...

```

**✗ Failed mount**



# Troubleshooting Pods

*Check the container logs - do you see anything suspicious?*

```
$ kubectl logs myapp
...
2019-03-05 10:57:51.112 DEBUG  Receiving order
2019-03-05 10:57:51.112 INFO   Processing payment with ID 345993
2019-03-05 10:57:51.112 ERROR  Can't connect to payment system
```

✗ Connectivity issues

*Use the command line option --previous to gets the logs from the previous instantiation of a container after a restart*



---

# EXERCISE

Troubleshooting an  
Issue for an  
Application



# Troubleshooting Control Plane

*Check the status of the cluster nodes first - are they running?*

```
$ kubectl get nodes
NAME        STATUS    ROLES      AGE
VERSION
master      Ready     master     198d
v1.19.2
worker-1    Ready     master     198d
v1.19.2
worker-2    Ready     master     198d
v1.19.2
worker-3    Ready     master     198d
v1.19.2
```

✓ Healthy status

*Use the `kubectl cluster-info dump` command for details*



# Troubleshooting Control Plane

*Check the status of control plane Pods - do they indicate issues?*

```
$ kubectl get pods -n kube-system
```

NAME	READY	STATUS	RESTARTS	AGE
kube-apiserver-minikube	1/1	Running	49	70d
kube-controller-manager-minikube	1/1	CashLoopBackoff	2	70d
kube-proxy-mpgd9	1/1	Running	2	70d
kube-scheduler-minikube	1/1	Running	2	70d

✗ Failing controller manager Pod



# Troubleshooting Control Plane

*Check the logs of API server Pod*

```
$ kubectl logs kube-apiserver-minikube -n kube-system
E1231 21:06:22.978390      1 controller.go:116] loading OpenAPI
spec for "v1beta1.metrics.k8s.io" failed with: OpenAPI spec does not
exist
I1231 21:06:22.978460      1 controller.go:129] OpenAPI
AggregationController: action for item v1beta1.metrics.k8s.io: Rate ↴
Limited Requeue.
I1231 21:06:49.825964      1 client.go:360] parsed scheme: ↴
"passthrough"
```

✓ No error messages



---

# EXERCISE

Troubleshooting an  
Issue with the  
Control Plane



# Troubleshooting Worker Nodes

*Check the status of the worker nodes - are they ready?*

```
$ kubectl get nodes
```

NAME	STATUS	ROLES	AGE	VERSION
master	Ready	master	198d	v1.19.2
worker-1	Ready	master	198d	v1.19.2
worker-2	NotReady	master	198d	v1.19.2
worker-3	Ready	master	198d	v1.19.2

✗ Issue with the node `worker-2`



# Troubleshooting Worker Nodes

*Check condition flags of failing worker node*

```
$ kubectl describe node worker-1
...
Conditions:
  Type        Status  LastHeartbeatTime                 LastTransitionTime               Reason                               Message
  ----        -----  ----涯---                   ----涯---                   ----                   -----
  NetworkUnavailable  False   Fri, 25 Dec 2020 10:33:34 -0700   Fri, 25 Dec 2020 10:33:34 -0700   CiliumIsUp
  MemoryPressure     False   Thu, 31 Dec 2020 14:39:42 -0700   Thu, 31 Dec 2020 06:31:36 -0700   KubeletHasSufficientMemory
  DiskPressure       False   Thu, 31 Dec 2020 14:39:42 -0700   Thu, 31 Dec 2020 06:31:36 -0700   KubeletHasNoDiskPressure
  PIDPressure        False   Thu, 31 Dec 2020 14:39:42 -0700   Thu, 31 Dec 2020 06:31:36 -0700   KubeletHasSufficientPID
  Ready              True    Thu, 31 Dec 2020 14:39:42 -0700   Thu, 31 Dec 2020 06:31:36 -0700   KubeletReady
  ...

```

✓ Conditions are healthy

*A node with condition status Unknown may have crashed*



# Troubleshooting Worker Nodes

*Based on conditions check CPU, memory, processes, disk space*

```
$ top
Processes: 568 total, 2 running, 566 sleeping, 2382 threads
15:30:40
Load Avg: 1.96, 1.80, 1.68 CPU usage: 2.49% user, 1.83% sys,
95.66% idle
SharedLibs: 706M resident, 108M data, 196M linkedit.
MemRegions: 192925 total, 6808M resident, 312M private, 5106M
shared. PhysMem: 33G used (4319M wired), 31G unused.
VM: 3461G vsize, 2315M framework vsize, 0(0) swapins, 0(0)
swapouts.
Networks: packets: 6818487/8719M in, 2169040/361M out. Disks:
1305228/17G read, 1354811/32G written.
```

✓ Sufficient memory

```
$ df -h
Filesystem      Size   Used  Avail Capacity iused
ifree %iused Mounted on
/dev/disk1s1s1  1.8Ti  14Gi  1.6Ti    1%  567557
19538461203   0%   /
devfs          187Ki  187Ki  0Bi   100%   648
0 100%  /dev
/dev/disk1s5   1.8Ti  20Ki  1.6Ti    1%     0
19539028760   0%   /System/Volumes/VM
/dev/disk1s3   1.8Ti  282Mi  1.6Ti    1%   799
19539027961   0%   /System/Volumes/Preboot
/dev/disk1s6   1.8Ti  520Ki  1.6Ti    1%   16
19539028744   0%   /System/Volumes/Update
/dev/disk1s2   1.8Ti  172Gi  1.6Ti   10%  1071918
19537956842   0%   /System/Volumes/Data
map auto_home  0Bi   0Bi   0Bi   100%   0
0 100%  /System/Volumes/Data/home
```

✓ Available disk space



# Troubleshooting Worker Nodes

## *Check Kubelet status*

```
$ systemctl status kubelet.service
● kubelet.service - kubelet: The Kubernetes Node Agent
   Loaded: loaded (/lib/systemd/system/kubelet.service; enabled; vendor preset: enabled)
   Drop-In: /etc/systemd/system/kubelet.service.d
             └─10-kubeadm.conf
     Active: active (running) since Thu 2021-01-21 22:59:54 UTC; 22min ago
       Docs: https://kubernetes.io/docs/home/
   Main PID: 6171 (kubelet)
     Tasks: 16 (limit: 1151)
    CGroup: /system.slice/kubelet.service
              └─6171 /usr/bin/kubelet --bootstrap-kubeconfig=/etc/kubernetes/bootstrap-kubelet.conf
                --kubeconfig=/etc/kub
```

✓ Kubelet active



# Troubleshooting Worker Nodes

*View and inspect systemd logs*

```
$ journalctl -u kubelet.service
Jan 22 15:51:25 kube-worker-1 systemd[1]: Started kubelet: The Kubernetes Node Agent.
Jan 22 15:51:25 kube-worker-1 systemd[1]: kubelet.service: Current command vanished from the
unit file, execution of the command list won't be resumed.
Jan 22 15:51:25 kube-worker-1 systemd[1]: Stopping kubelet: The Kubernetes Node Agent...
Jan 22 15:51:25 kube-worker-1 systemd[1]: Stopped kubelet: The Kubernetes Node Agent.
Jan 22 15:51:25 kube-worker-1 systemd[1]: Started kubelet: The Kubernetes Node Agent.
Jan 22 15:51:25 kube-worker-1 kubelet[4330]: F0122 15:51:25.656116    4330 server.go:198] failed
to load Kubelet config file /var/lib/kubelet/config.yaml, error failed to read kubelet config
file "/var/lib/kubelet/config"
...
```

 Failed to read config file



# Troubleshooting Worker Nodes

*Check certificate on node*

```
$ openssl x509 -in /var/lib/kubelet/pki/kubelet.crt -text
Certificate:
  Data:
    Version: 3 (0x2)
    Serial Number: 2 (0x2)
    Signature Algorithm: sha256WithRSAEncryption
Issuer: CN = kube-worker-1-ca@1611330698
    Validity
      Not Before: Jan 22 14:51:38 2021 GMT
      Not After : Jan 22 14:51:38 2022 GMT
    Subject: CN = kube-worker-1@1611330698
...
...
```

✓ Certificate issued by correct CA and not expired



---

# EXERCISE

Troubleshooting an  
Issue with a Worker  
Node



---

# Q & A



# Summary & Wrap Up

Last words of advice...

---

# Gaining confidence

- Run through practice exams as often as you can
- Read through online documentation start to end
- Know your tools (especially vim, bash, YAML)
- Pick time you are most comfortable, get enough sleep
- Take your first attempt easy but give it your best





Thank you

