FUNCTION AND POINTERS IN LINUX (UBUNTU)

Bui Ngoc Bao Tran – QE170086


Before starting, you have to download VMWare and Ubuntu Virtual machine.


If you haven't download it, you can install VMWare at: https://www.vmware.com/asean/products/workstation-pro/workstation-pro-evaluation.html

And download Ubuntu at: https://ubuntu.com/download/desktop

Make sure you install "gcc" to execute the code in our exercise.

Install “gcc” to easily excute C programme in Linux (Ubuntu).

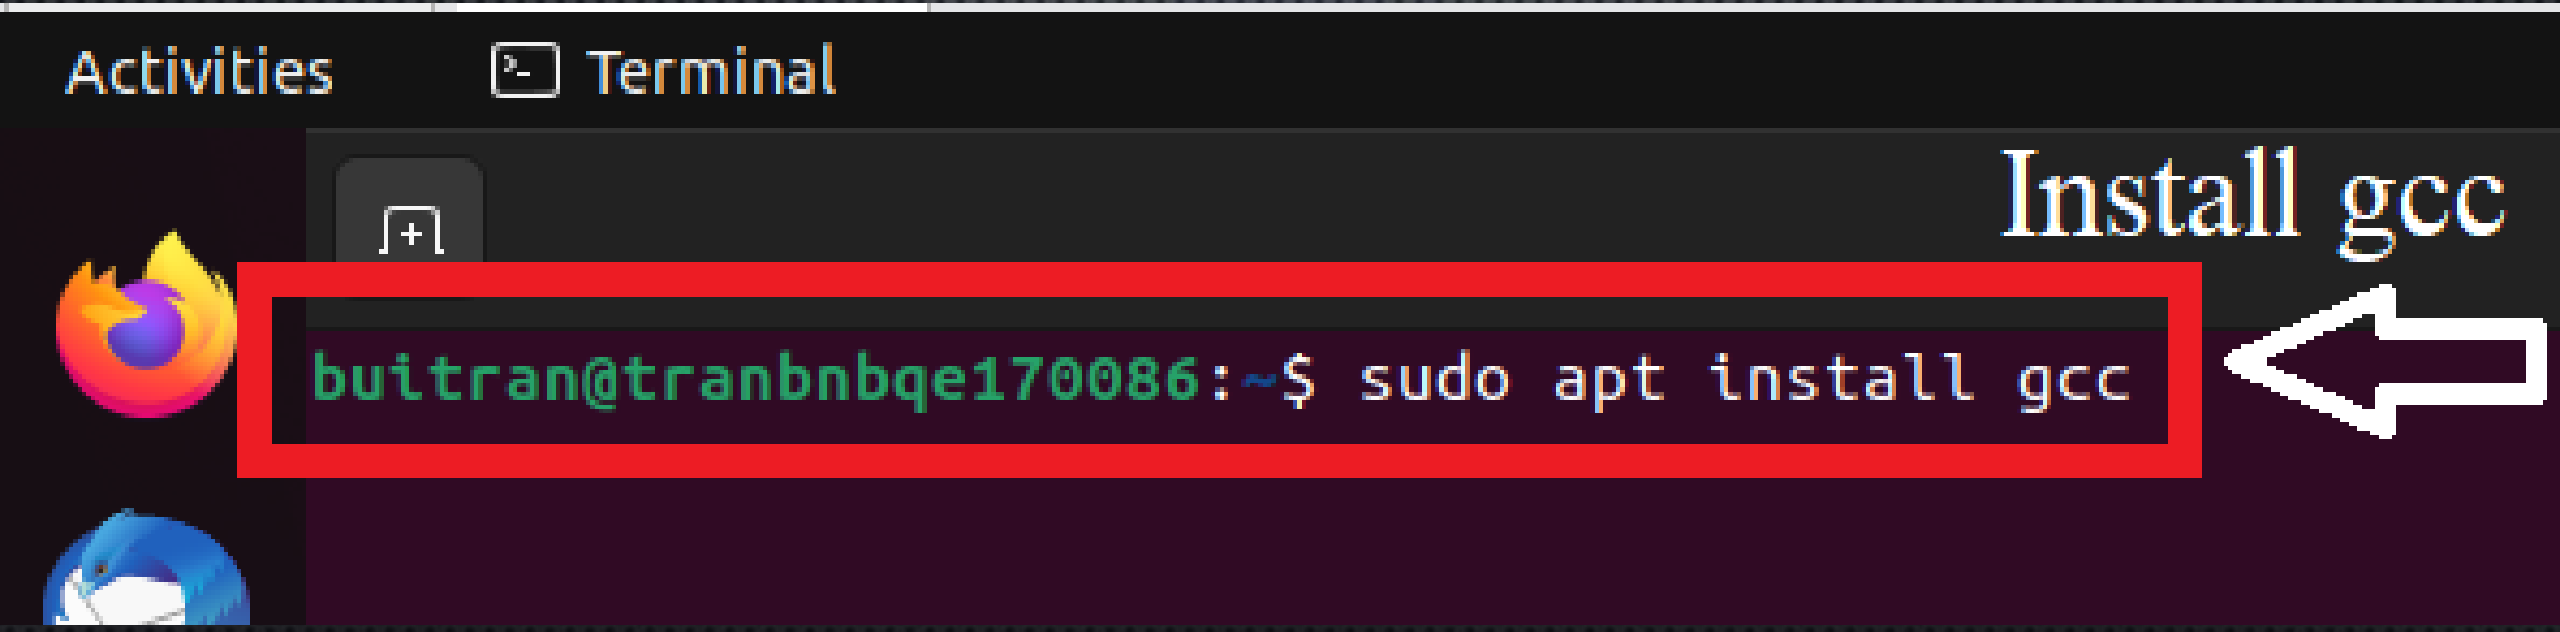

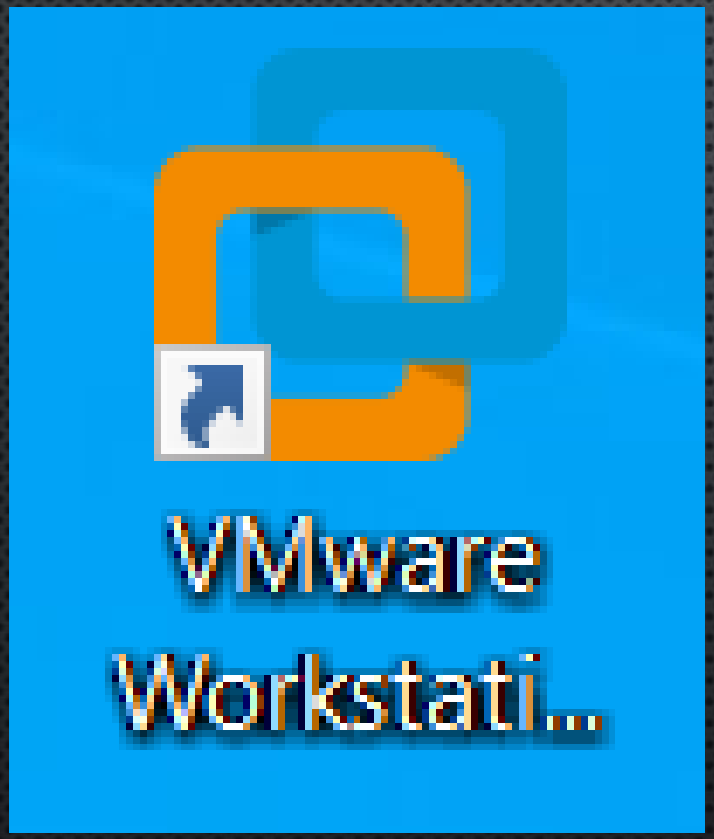

Access to the VMWare icon on your desktop.

Click "***Power on this virtual machine***" to start Ubuntu.

Home | Ubuntu

Ubuntu

Power on this virtual machine

Edit virtual machine settings

Click here to open Virtual machine.



Devices

Memory	4 GB
Processors	2
Hard Disk (SCSI)	20 GB
CD/DVD 2 (SATA)	Using file E:\PHA...
CD/DVD (SATA)	Using file autoin...
Floppy	Using file autoin...
Network Adapter	NAT
USB Controller	Present
Sound Card	Auto detect
Printer	Present
Display	Auto detect


Description

Type here to enter a description of this virtual machine.


Virtual Machine Details

State: Powered off
Configuration file: E:\PHAN MEM\UBUNTU\Ubuntu.vmx
Hardware compatibility: Workstation 16.2.x virtual machine
Primary IP address: Network information is not available


Double click to get access to your folder.

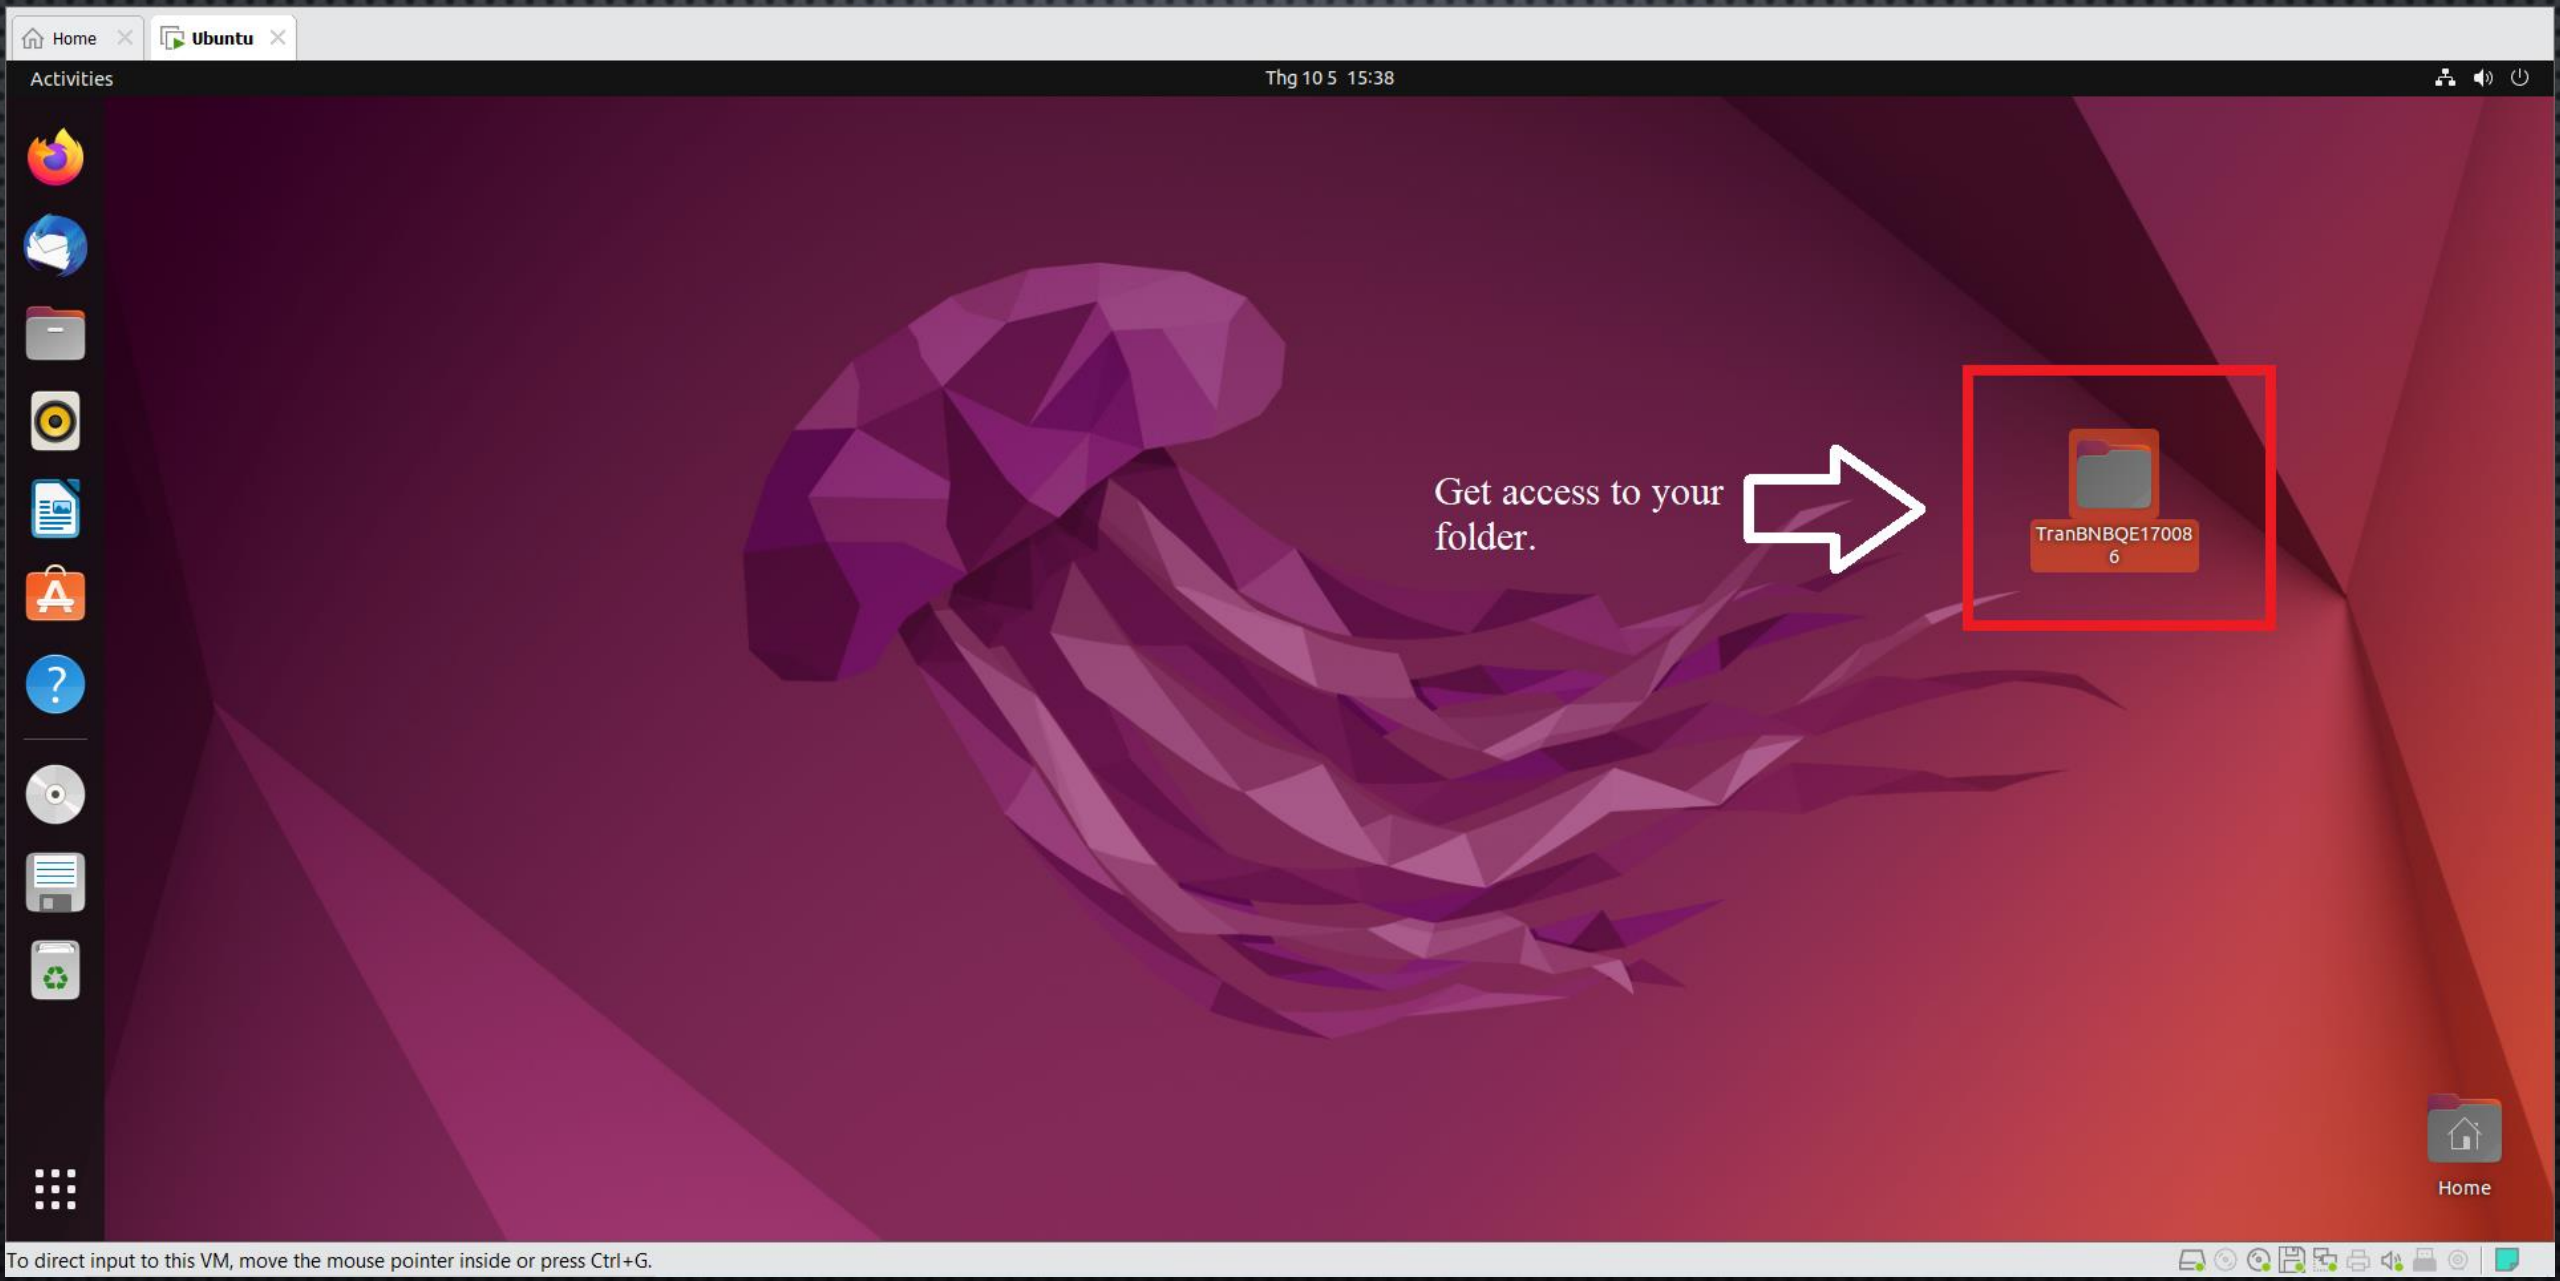

Rightclick mouse and choose "***New Folder***".

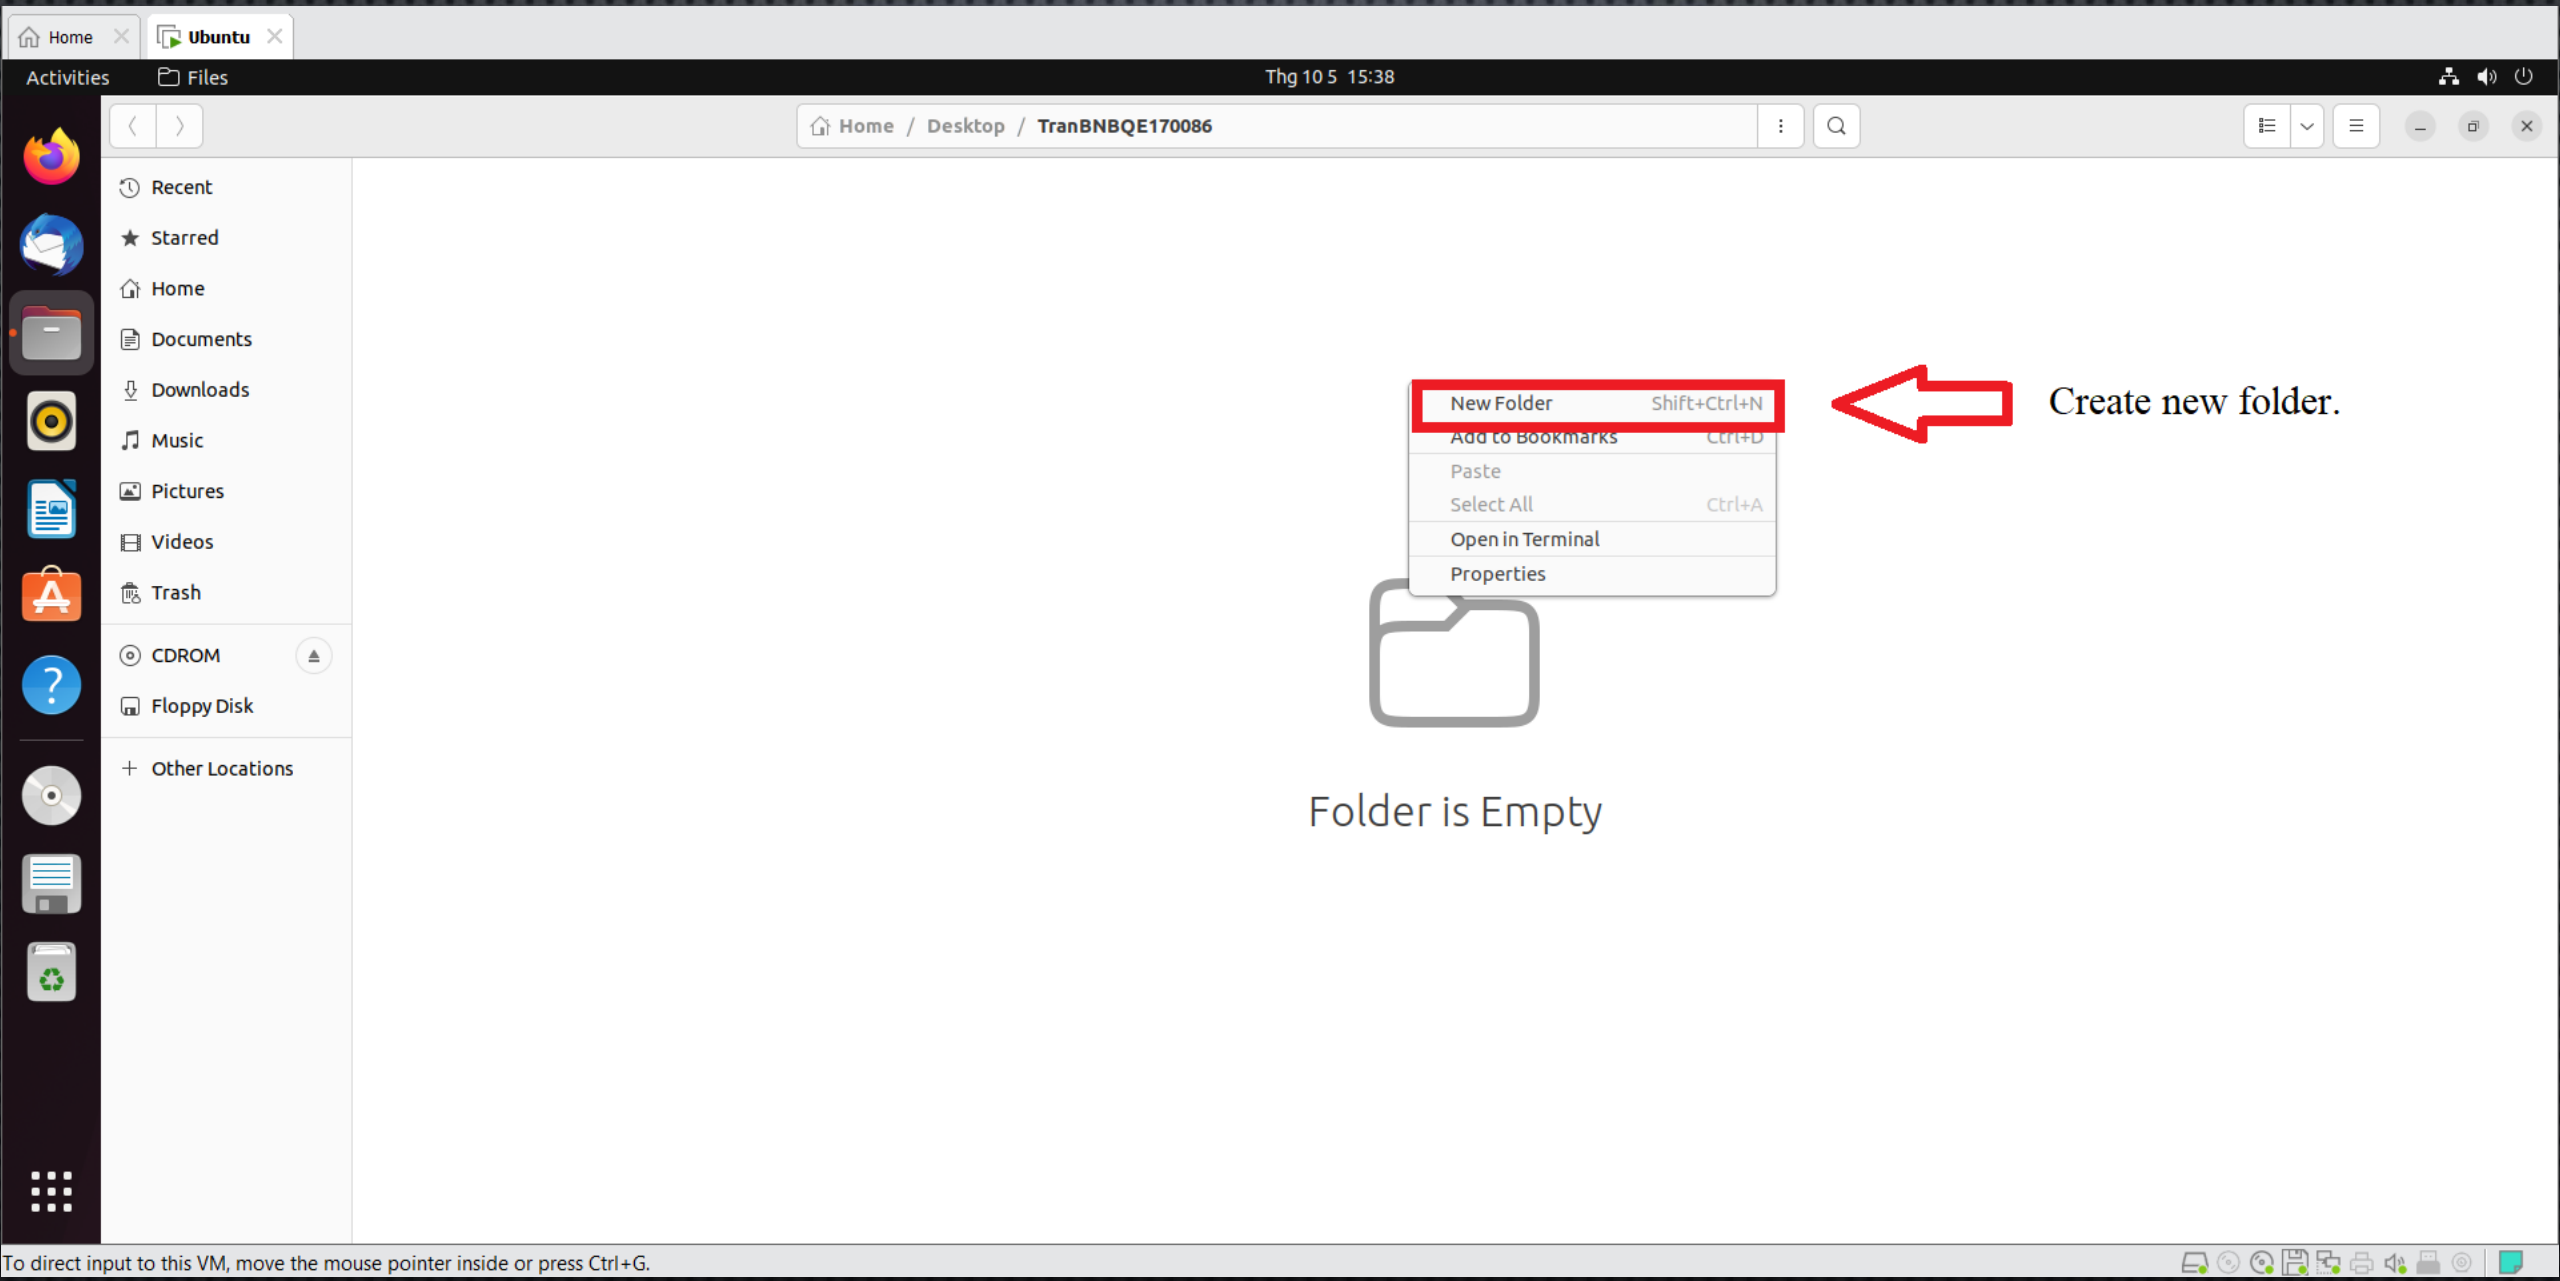

Rename your file and click "***Create***".

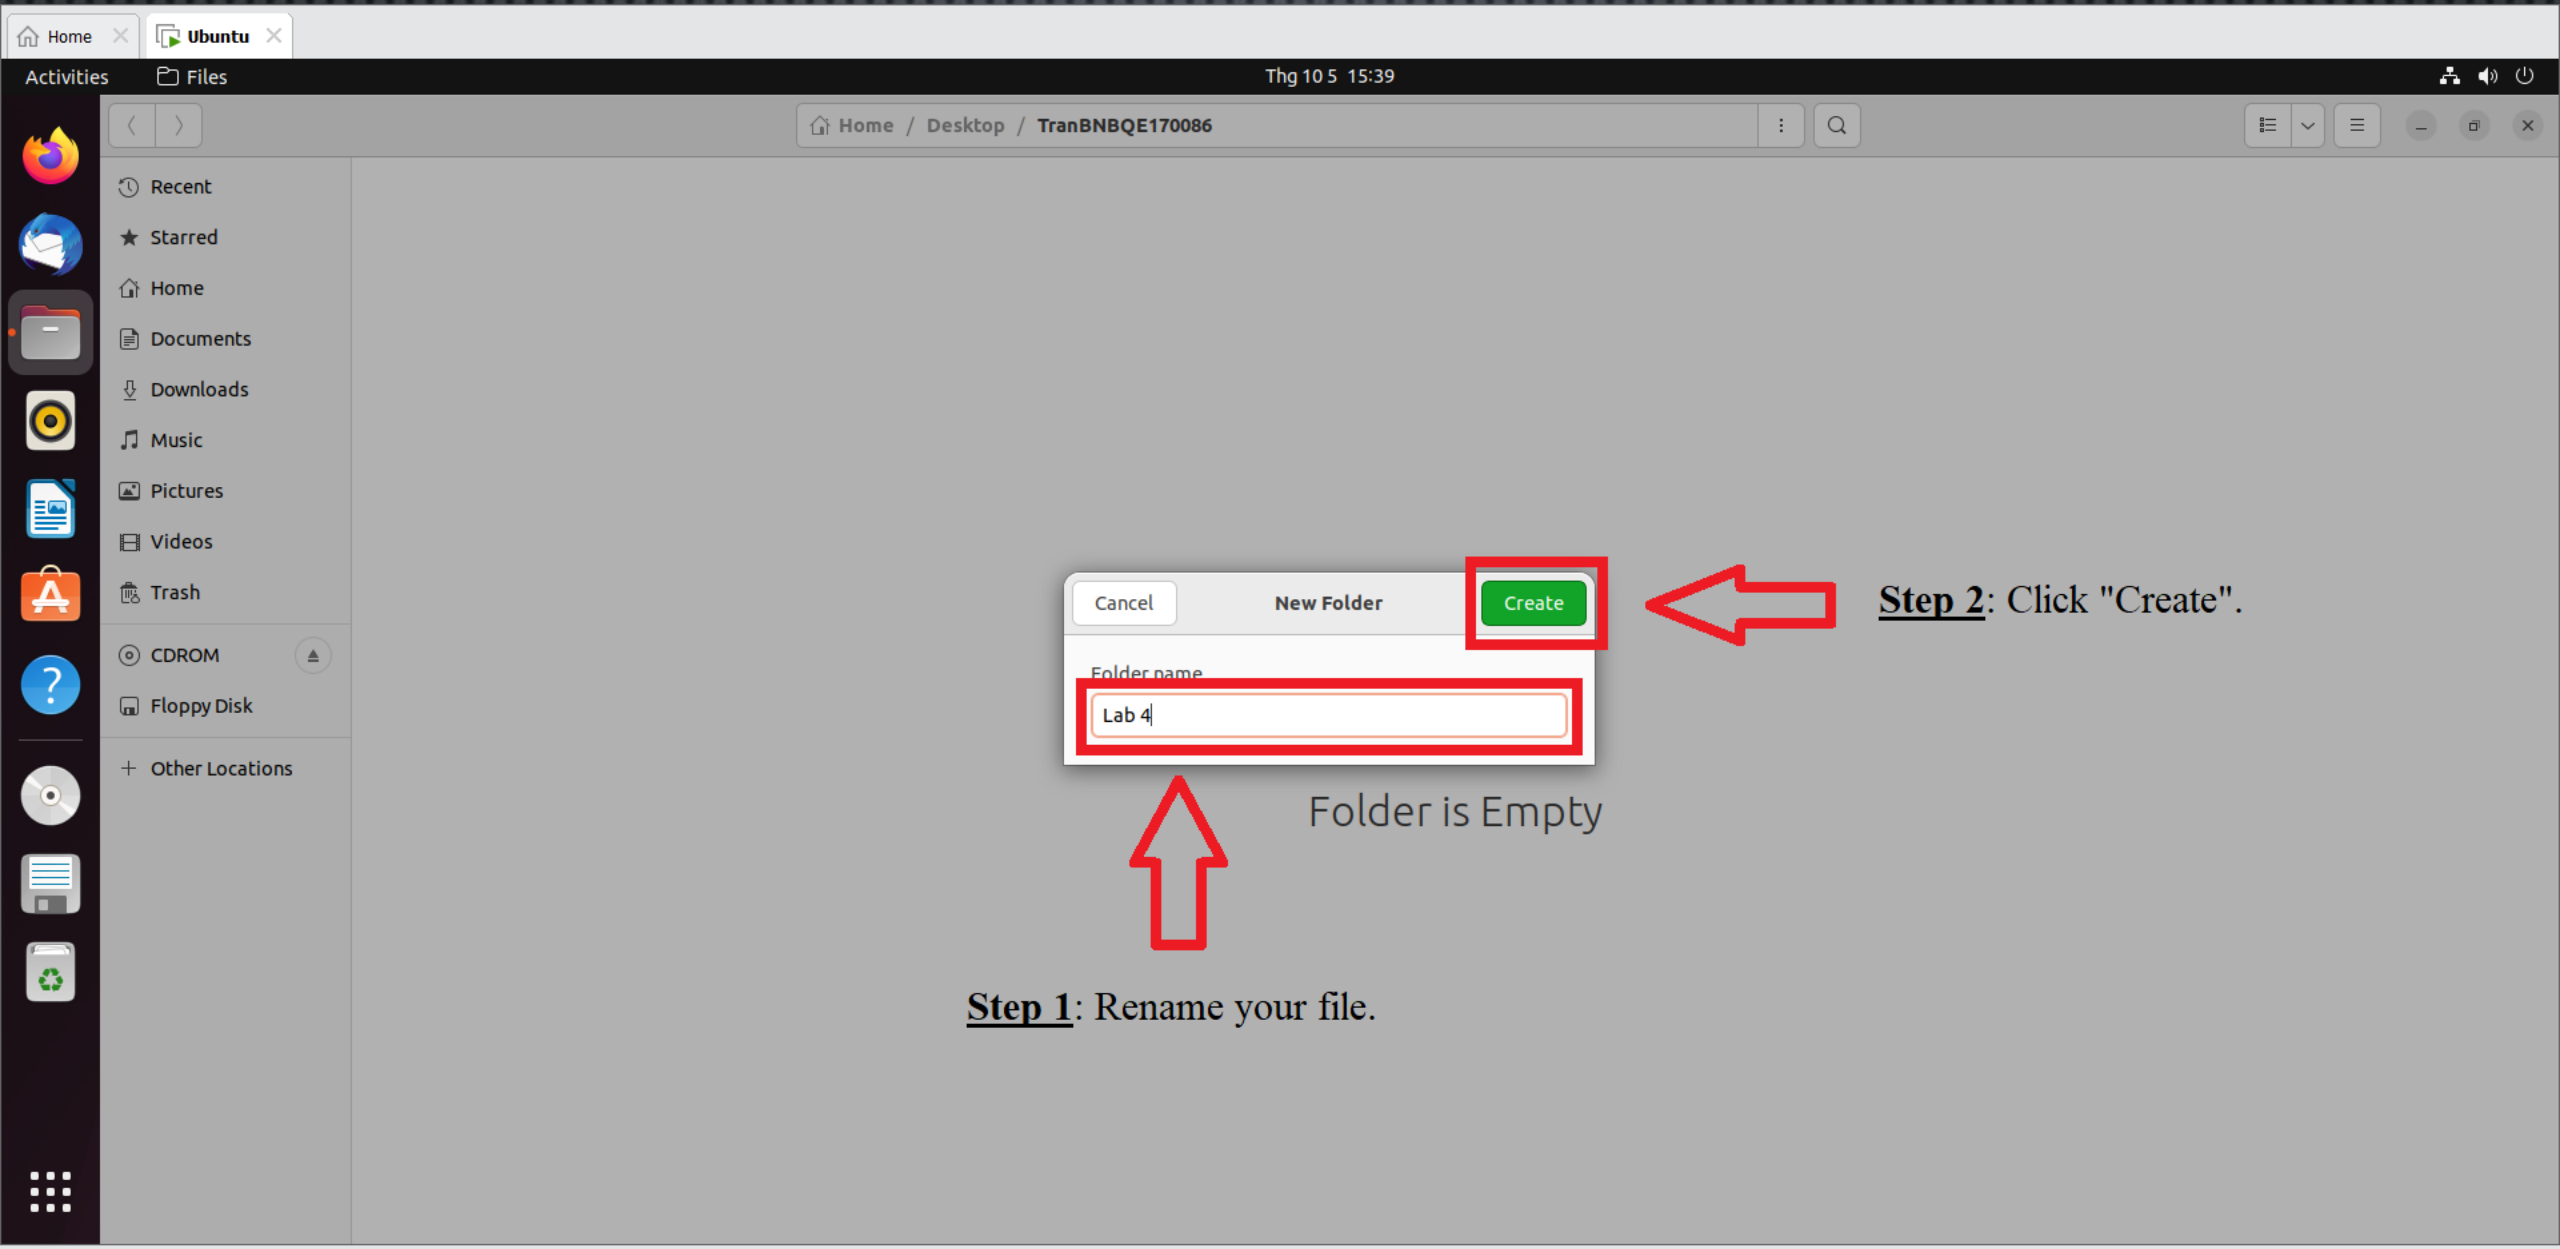

Code exercise 1 C programme.

Home | Ubuntu

Activities | Text Editor | Thg 10 5 16:14

Home / Desktop / TranBNBQE170086 / Lab 4

Open | *chapter3_1.c ~/Desktop/TranBNBQE170086/Lab 4 | Save

```c
#include <stdio.h>
#include <string.h>
#include <math.h>
#include <stdlib.h>

double doit(int number1, int number2)
        {
                return sqrt((double)(number1 + number2));
        }

int main(int argc, char *argv[], char *env[])
        {
                int n1 = 0, n2 = 0, i=0;
                n1 = atoi((char *) strtok(argv[1],":"));
                n2 = atoi((char *) strtok(NULL,":"));
                printf ("Content-type:text/html\n\n<html><body>\n");
                for (i = 1; i <= 100; i++)
                printf ("%f ",doit(n1+i,n2*i));
                printf ("</body></html>\n");
                printf ("Name: Bui Ngoc Bao Tran\n");
                printf ("ID: QE170086\n");
                printf ("Phone: 0859478679\n");
                return 0;
        }
```


C | Tab Width: 8 | Ln 20, Col 17 | INS

Insert the code.


"chapter3_1.c" selected (493 bytes)

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.


Select file’s location.

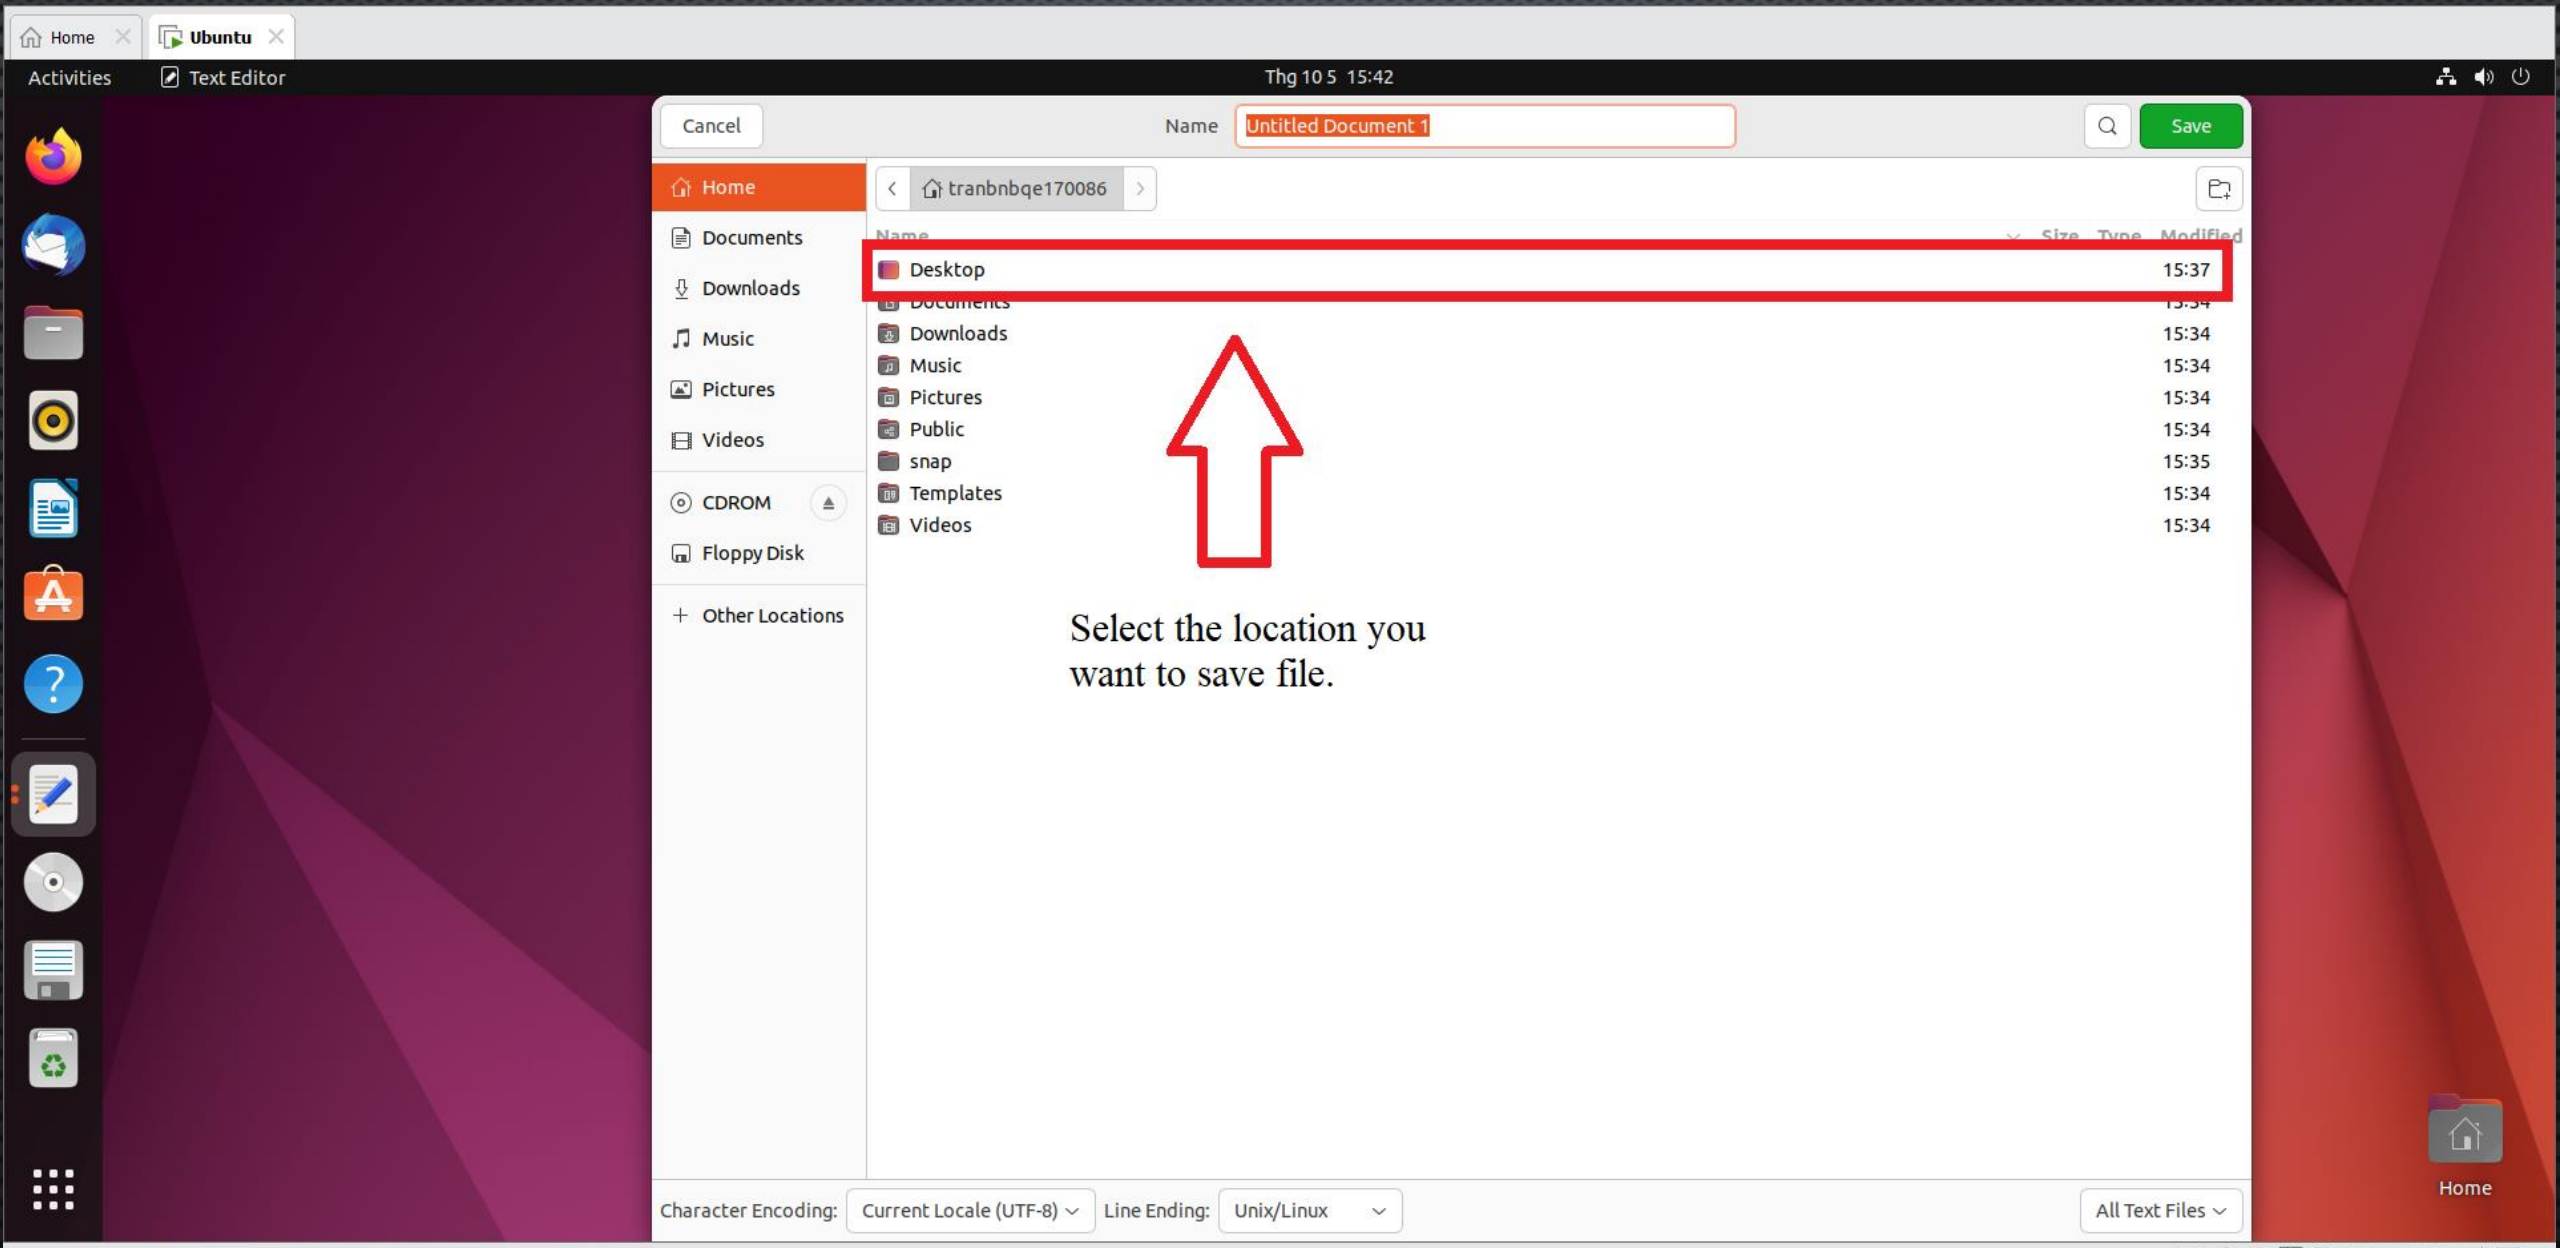


Select the destination.

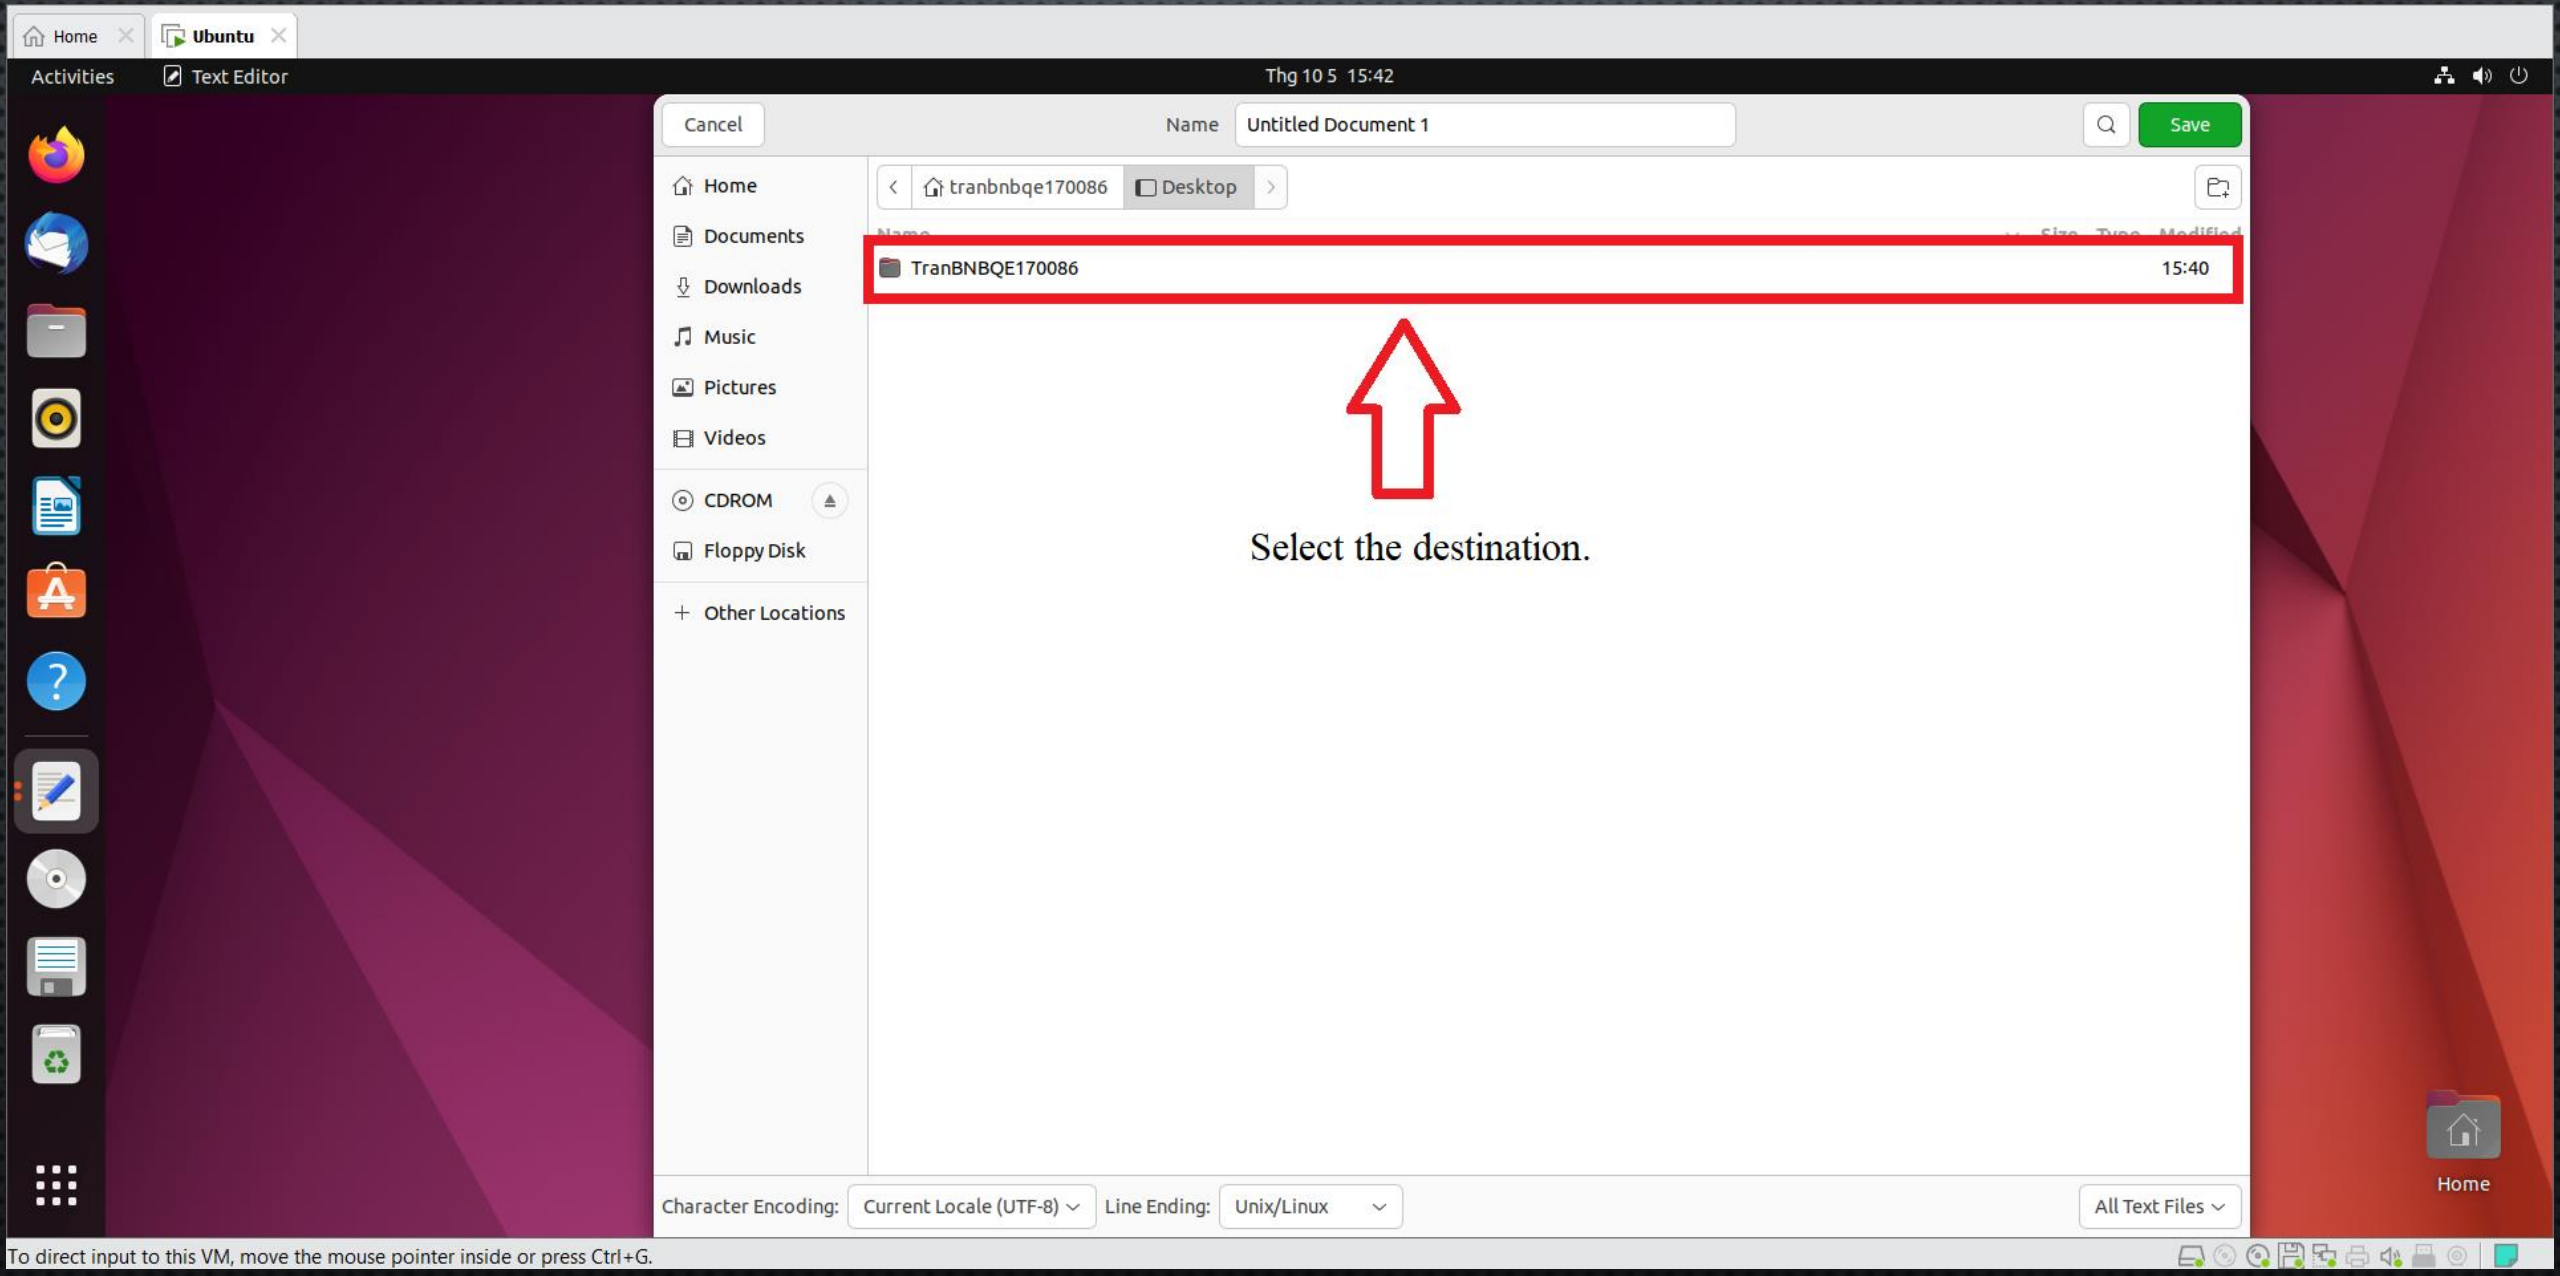


Choose the address.

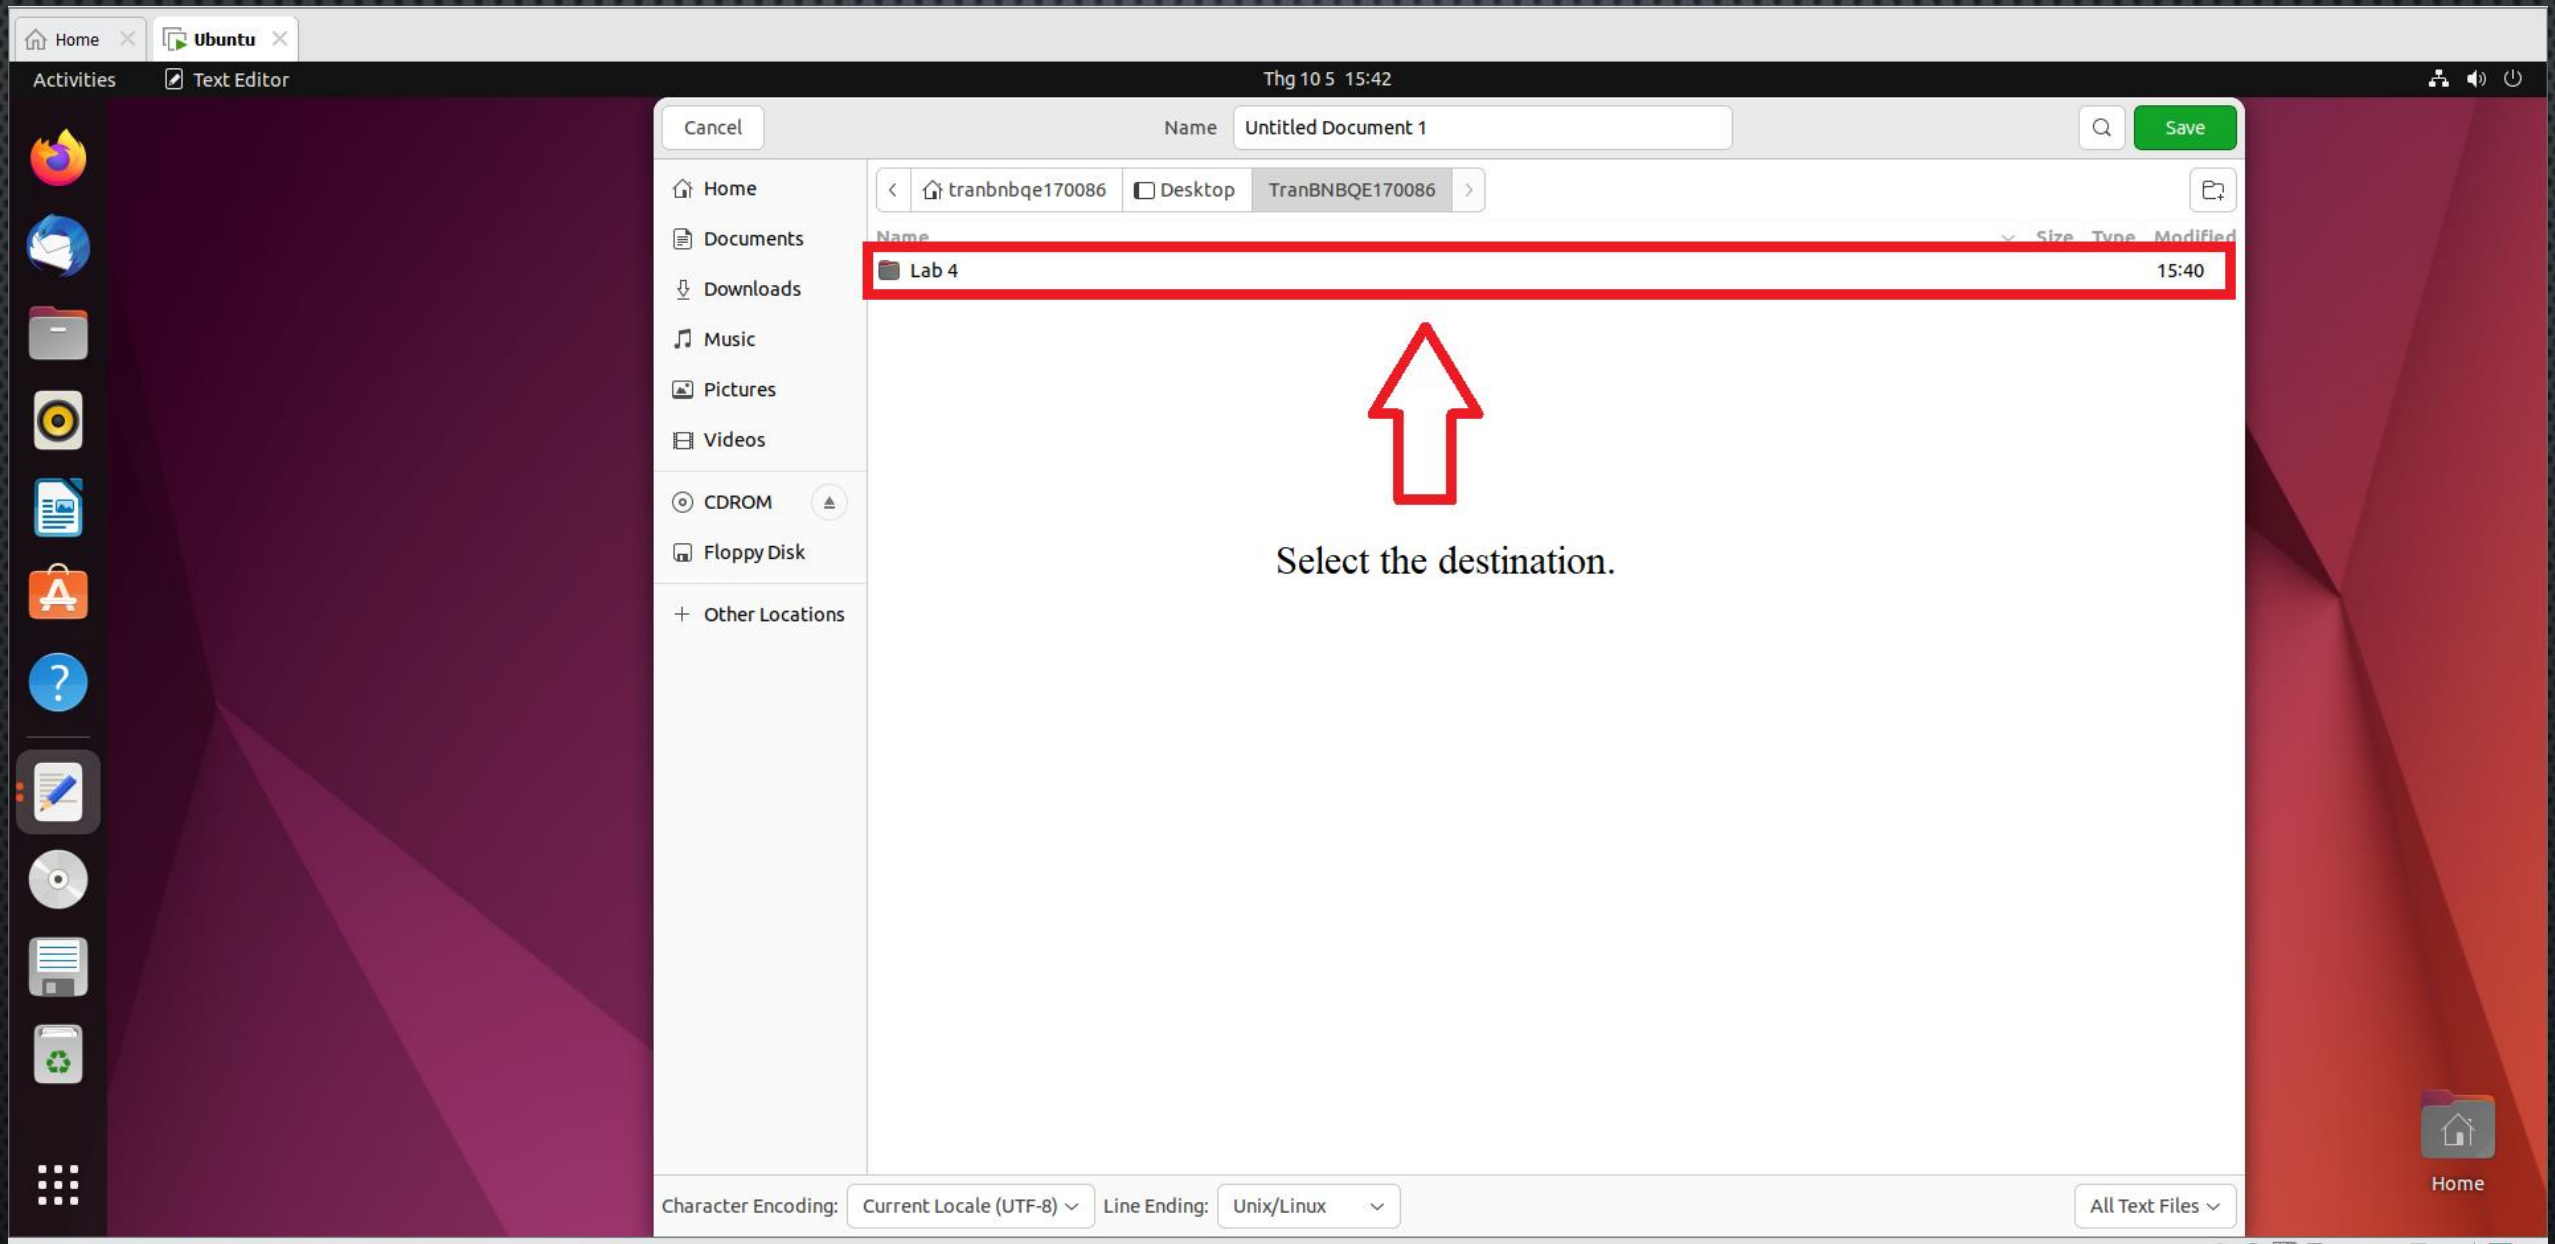


Rename your file and click "***Save***".

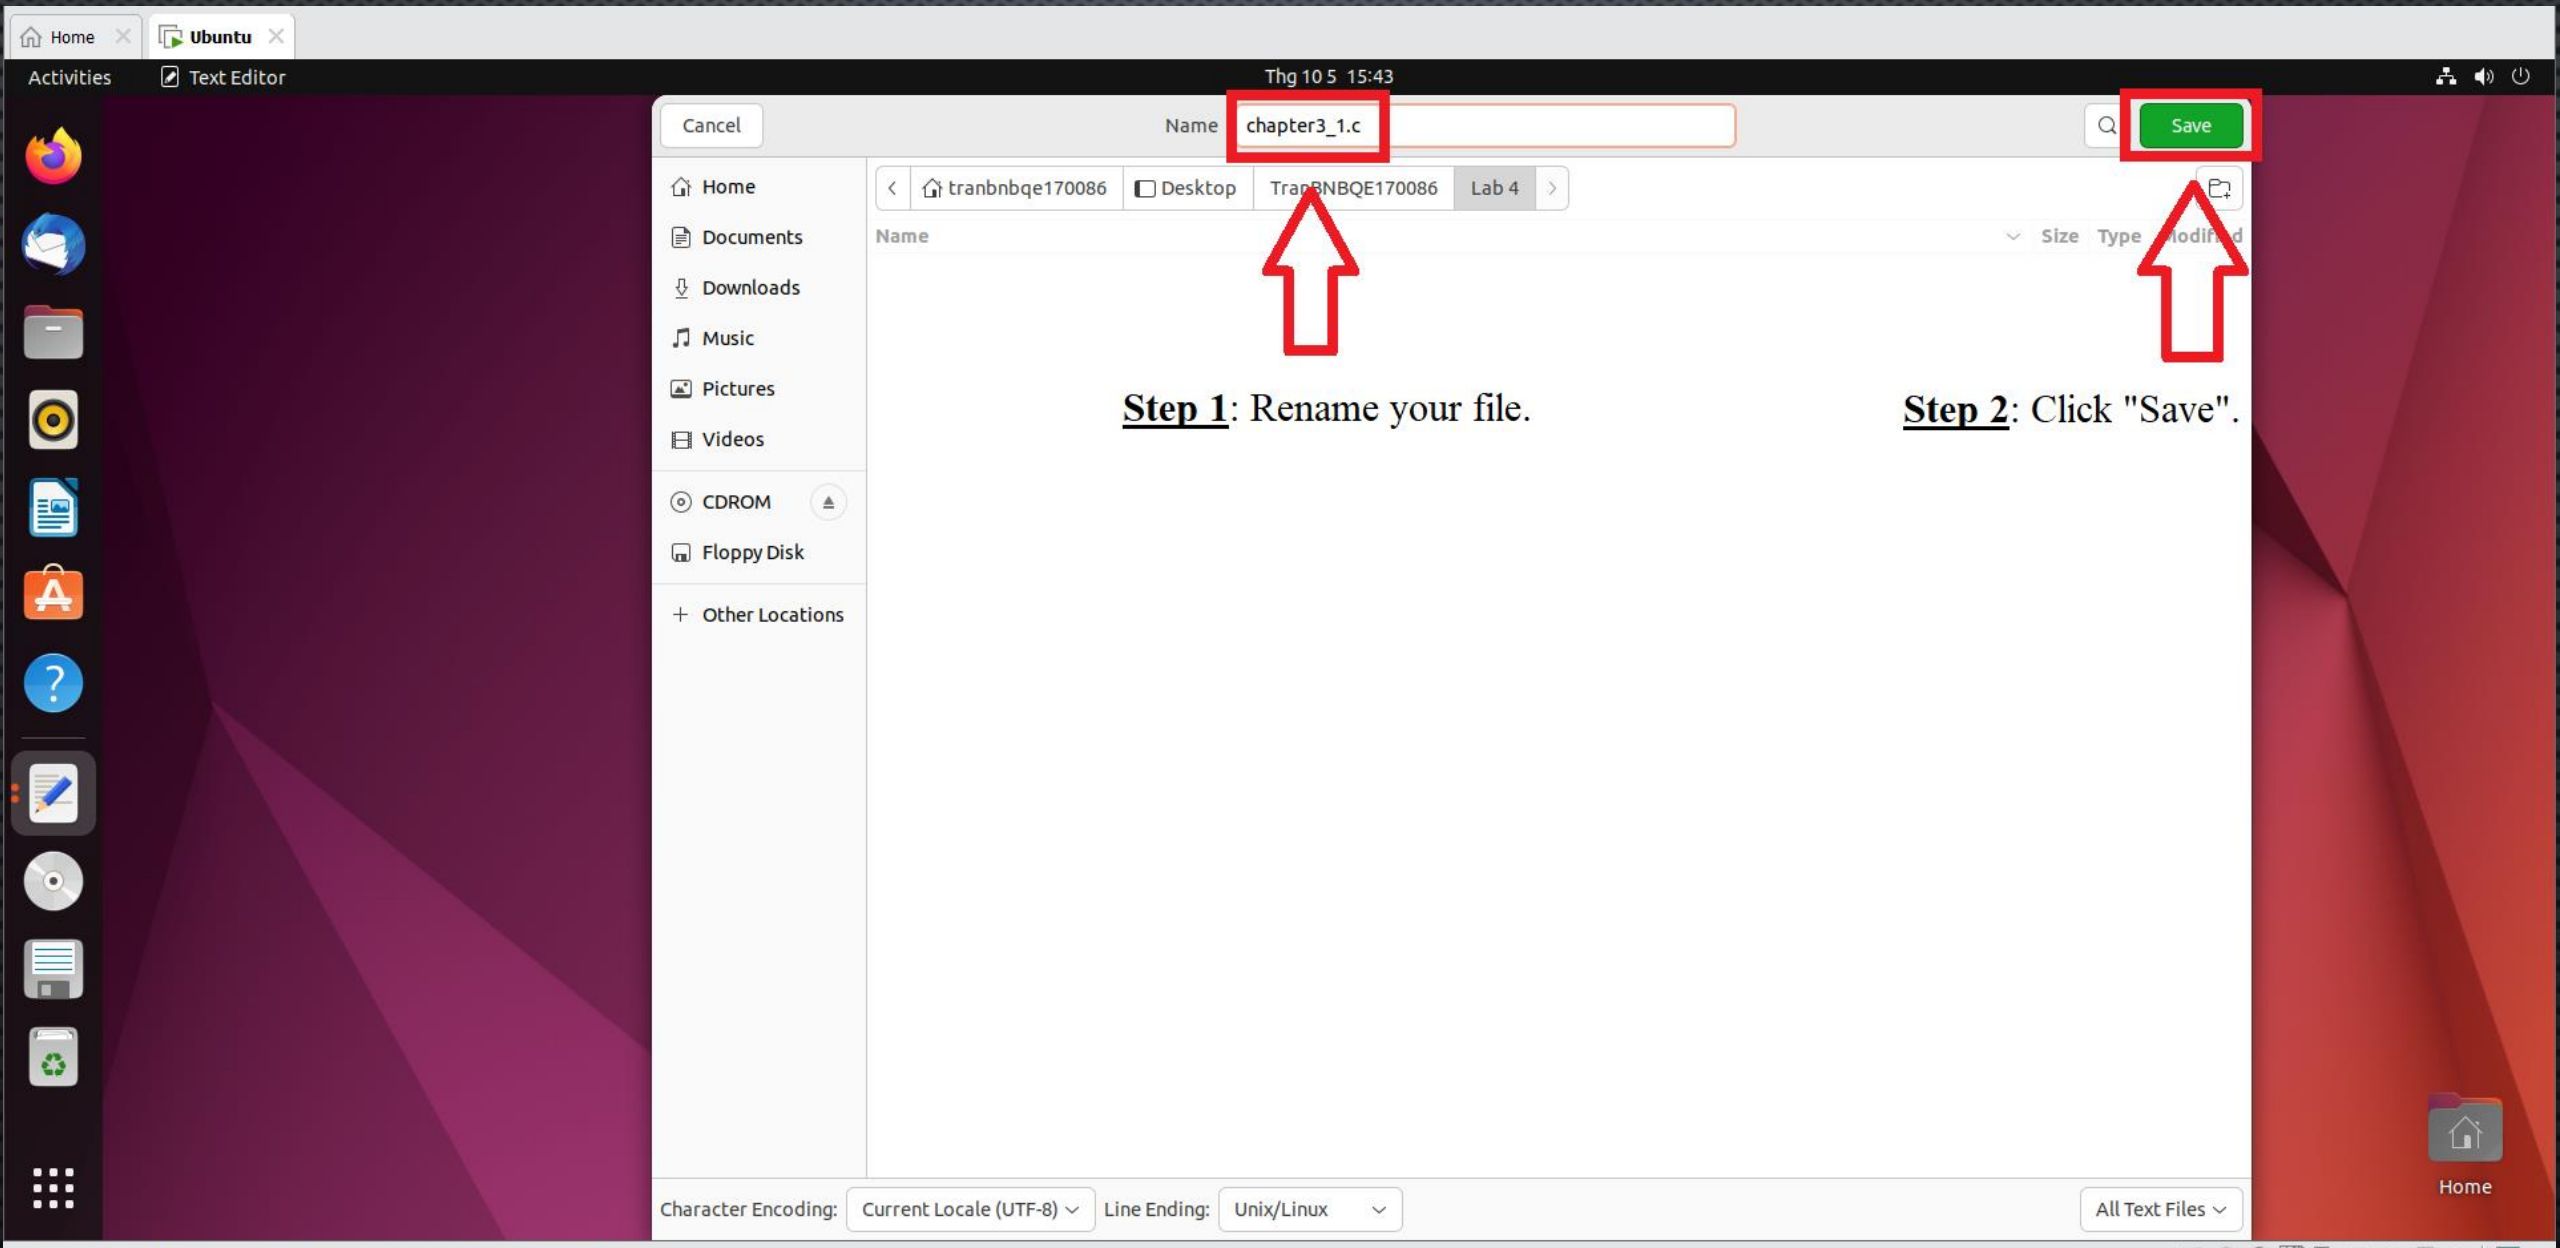


Rightclick mouse and choose "***Open in Terminal***".

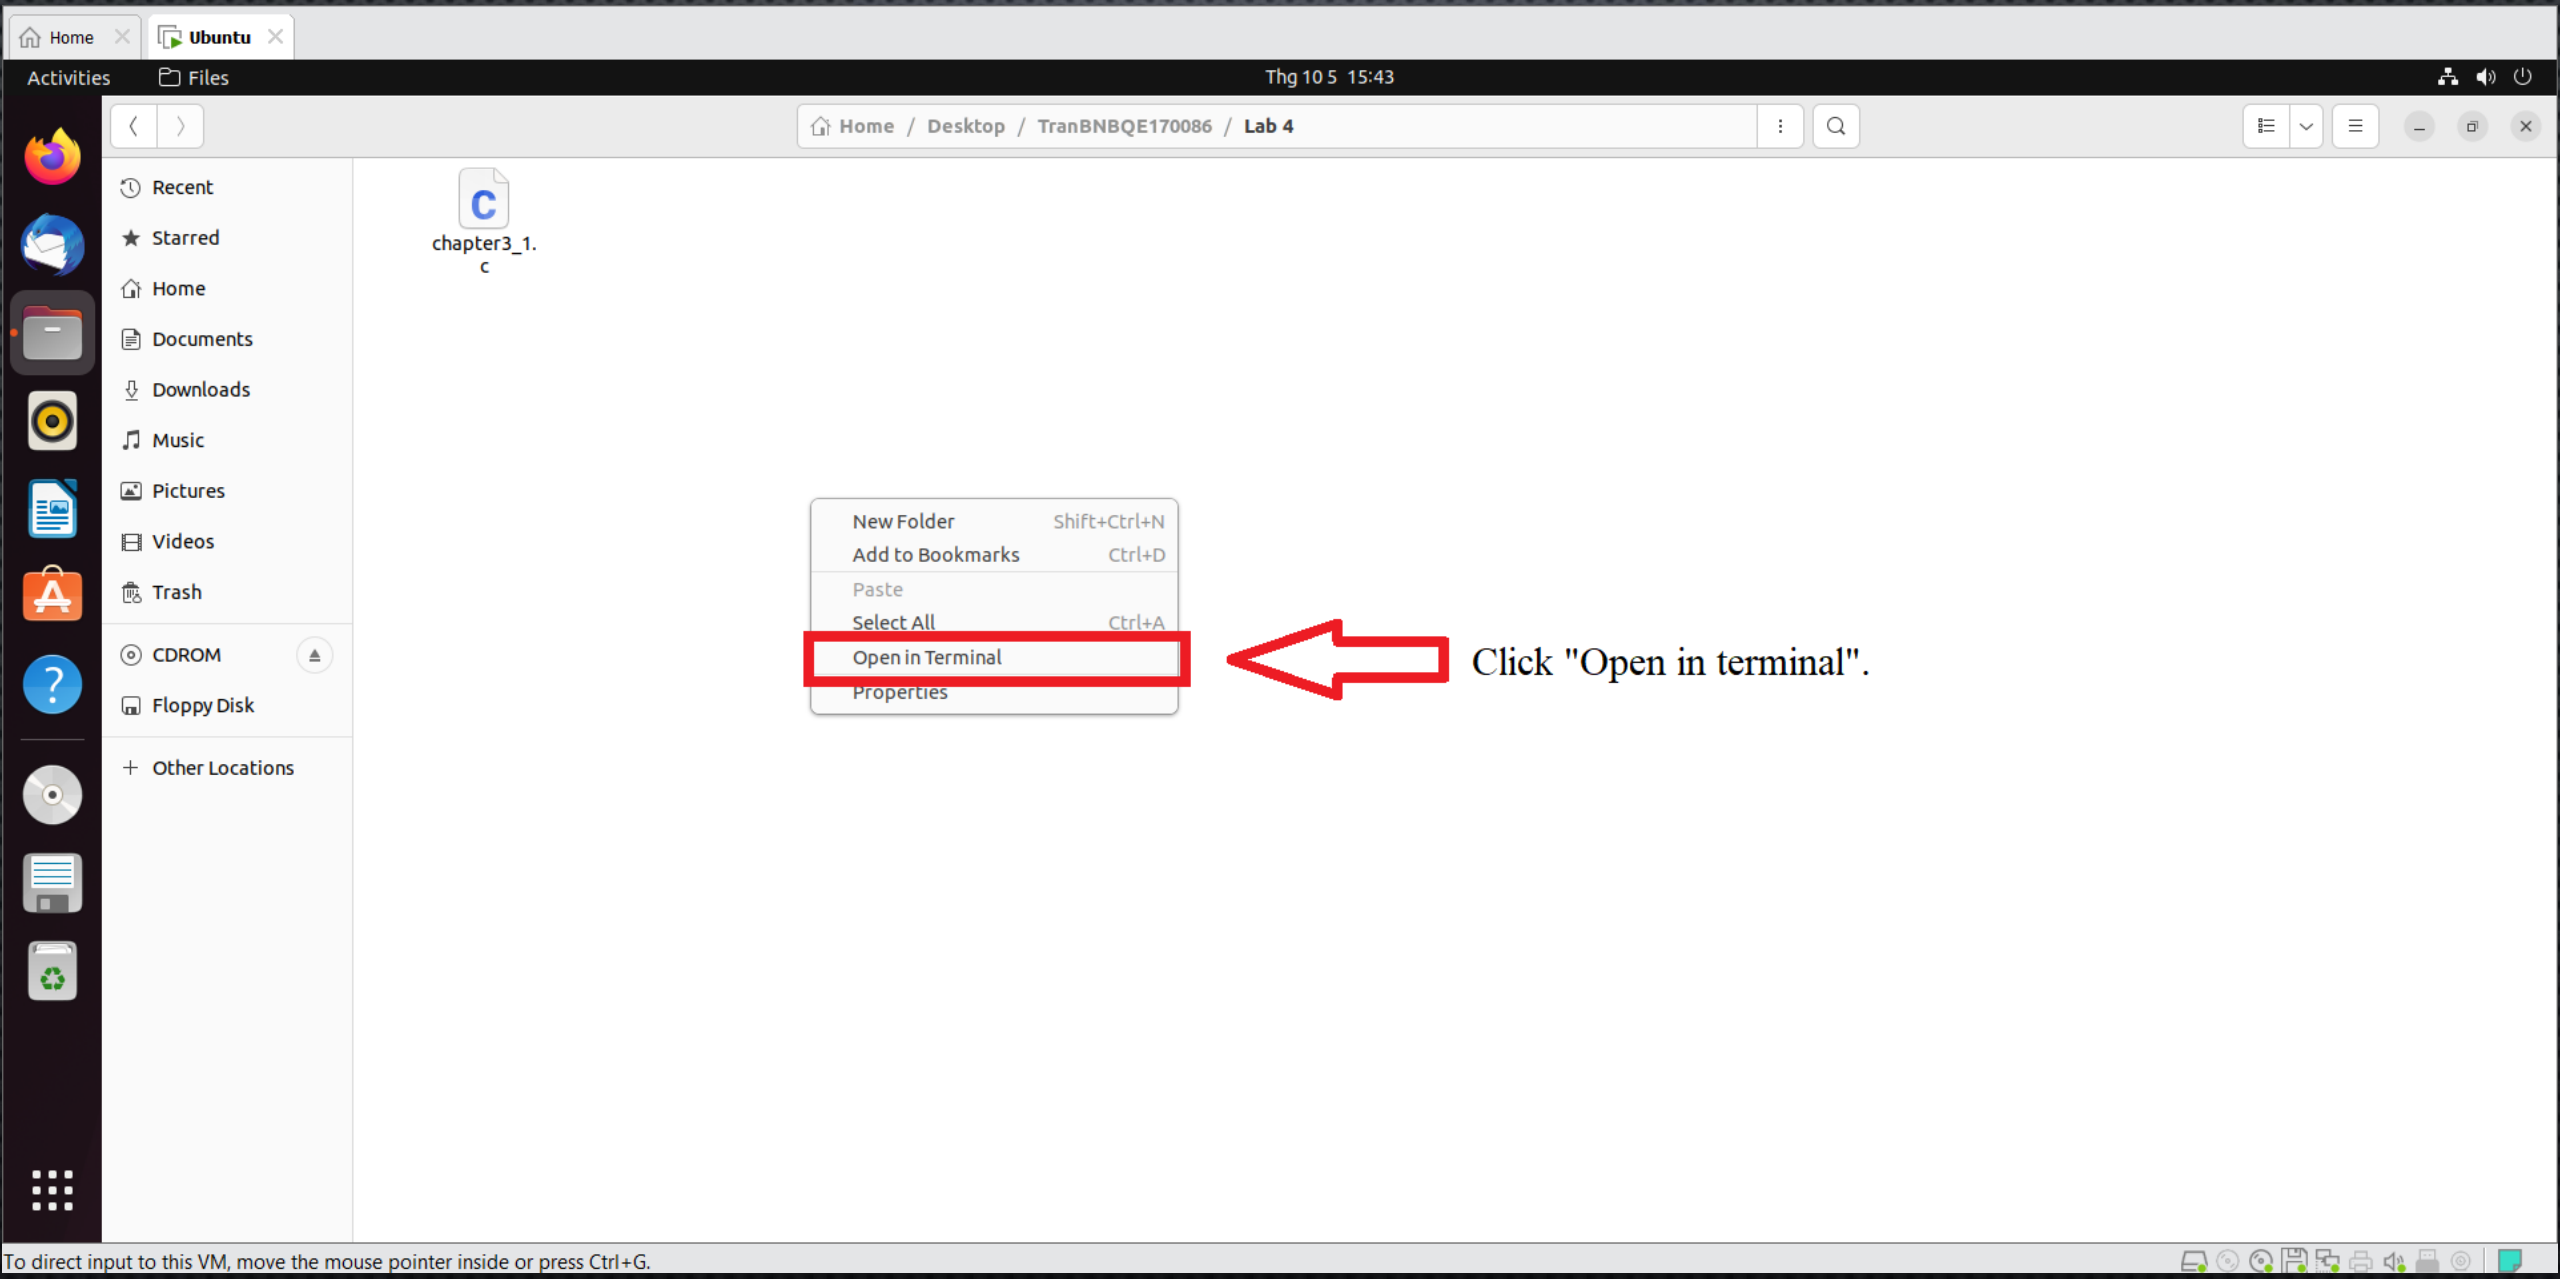


Execute the code.

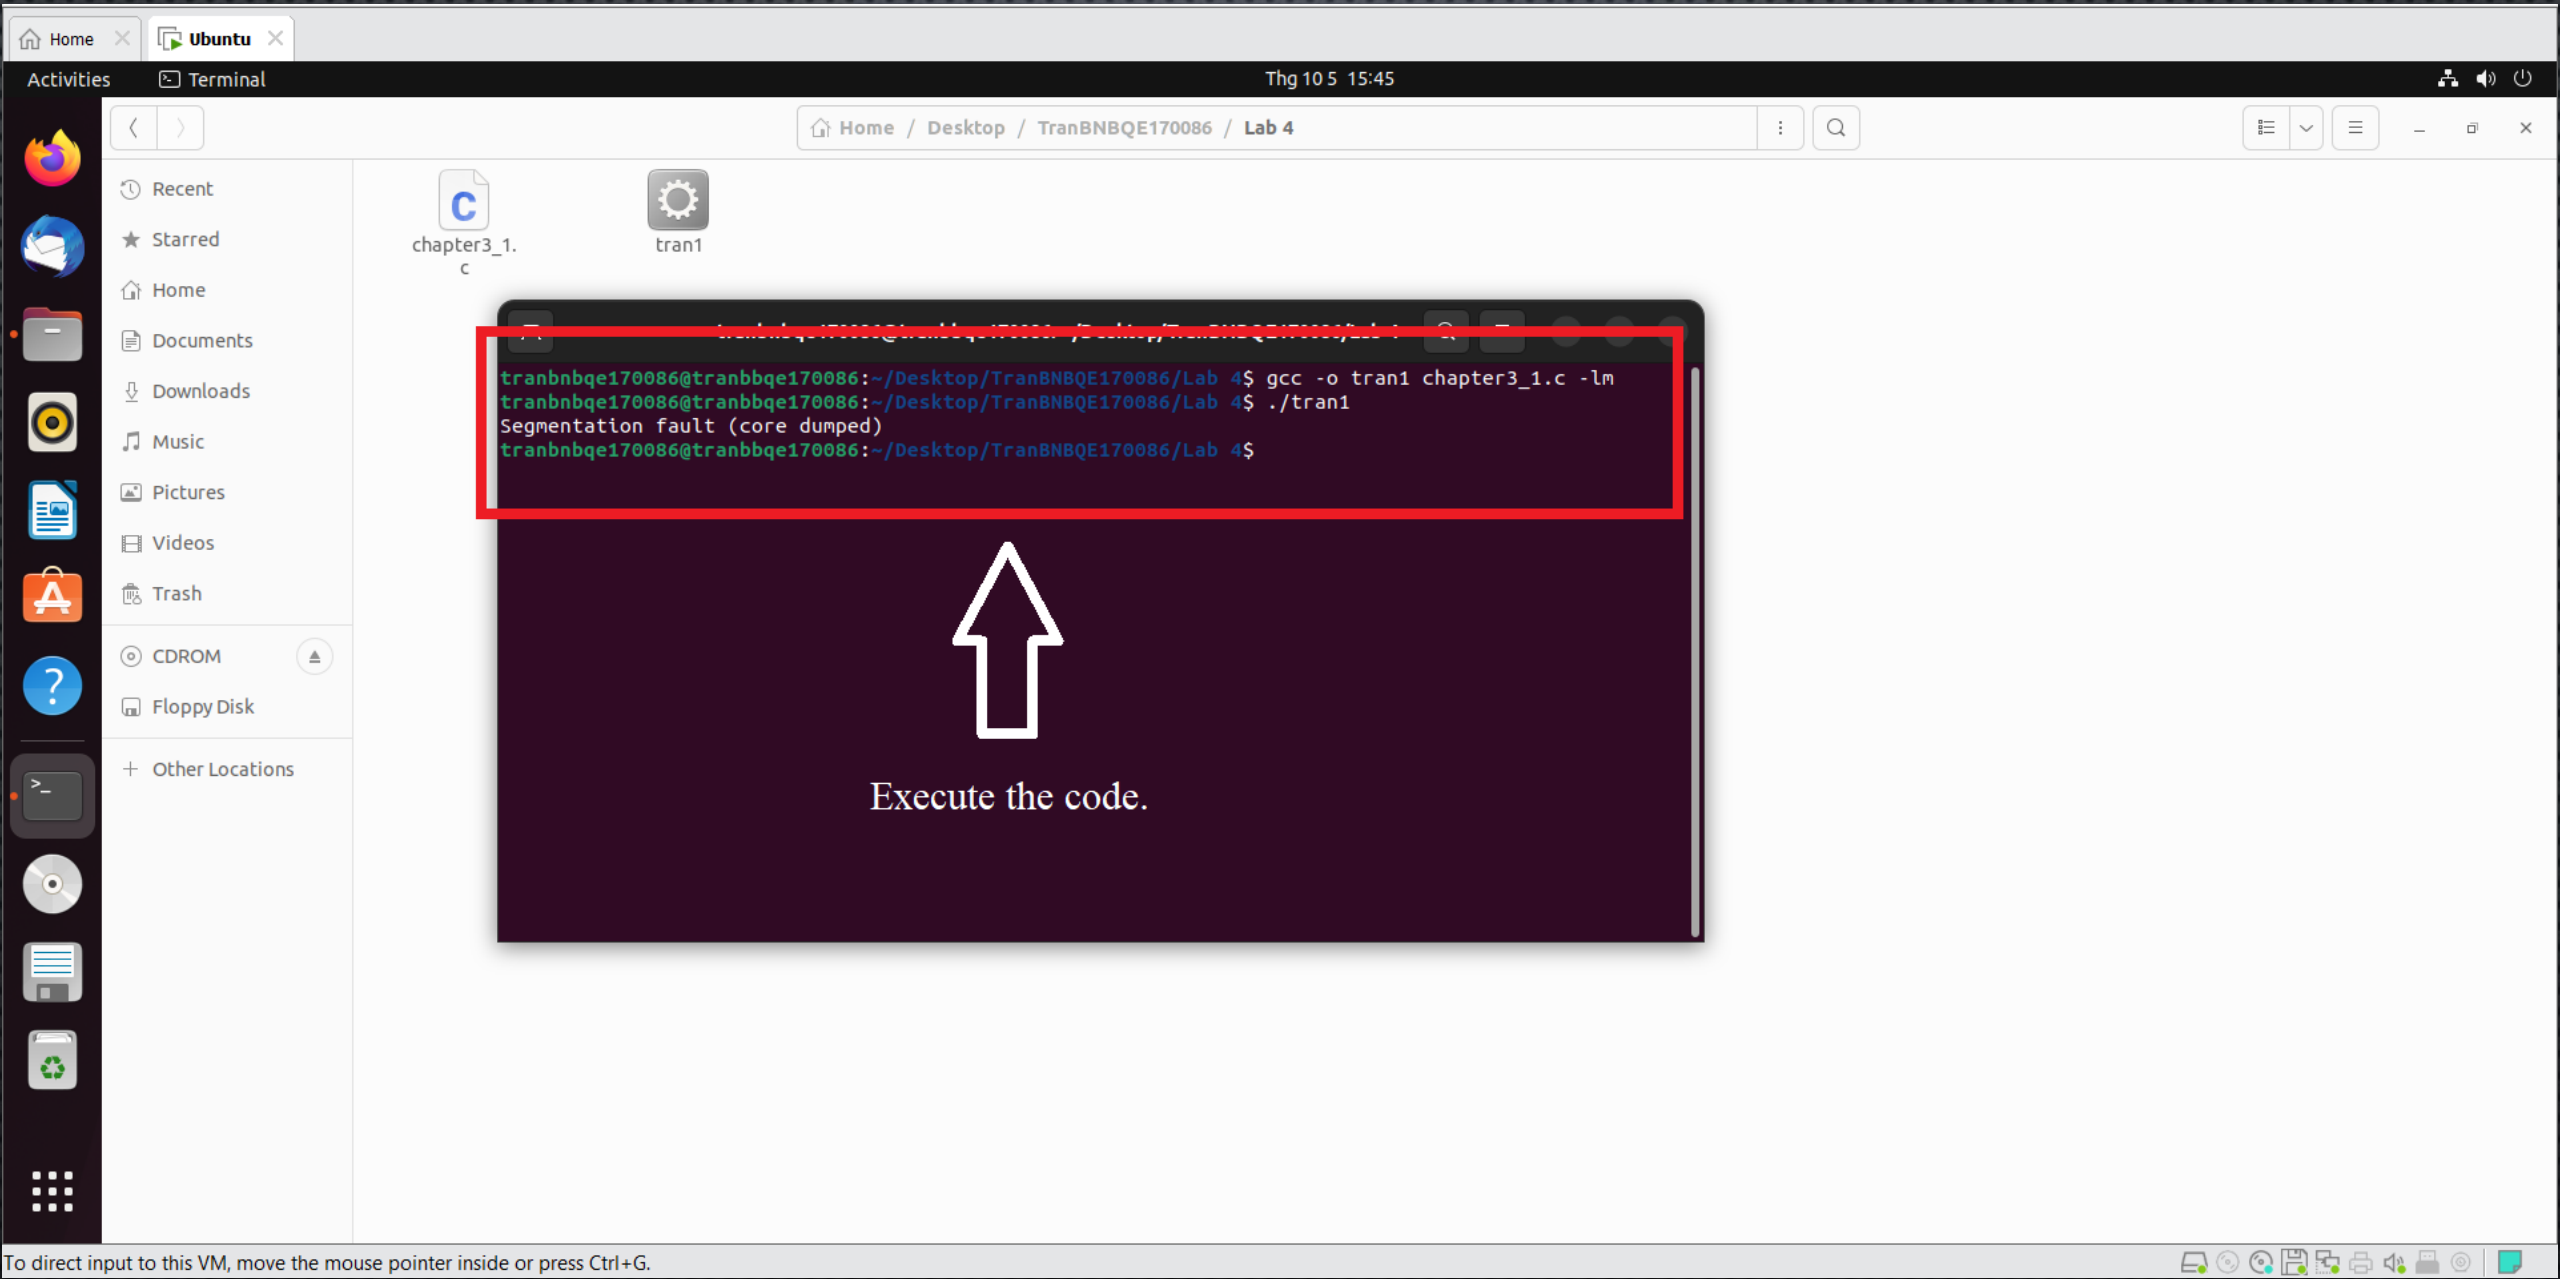


Code exercise 2 C programme.

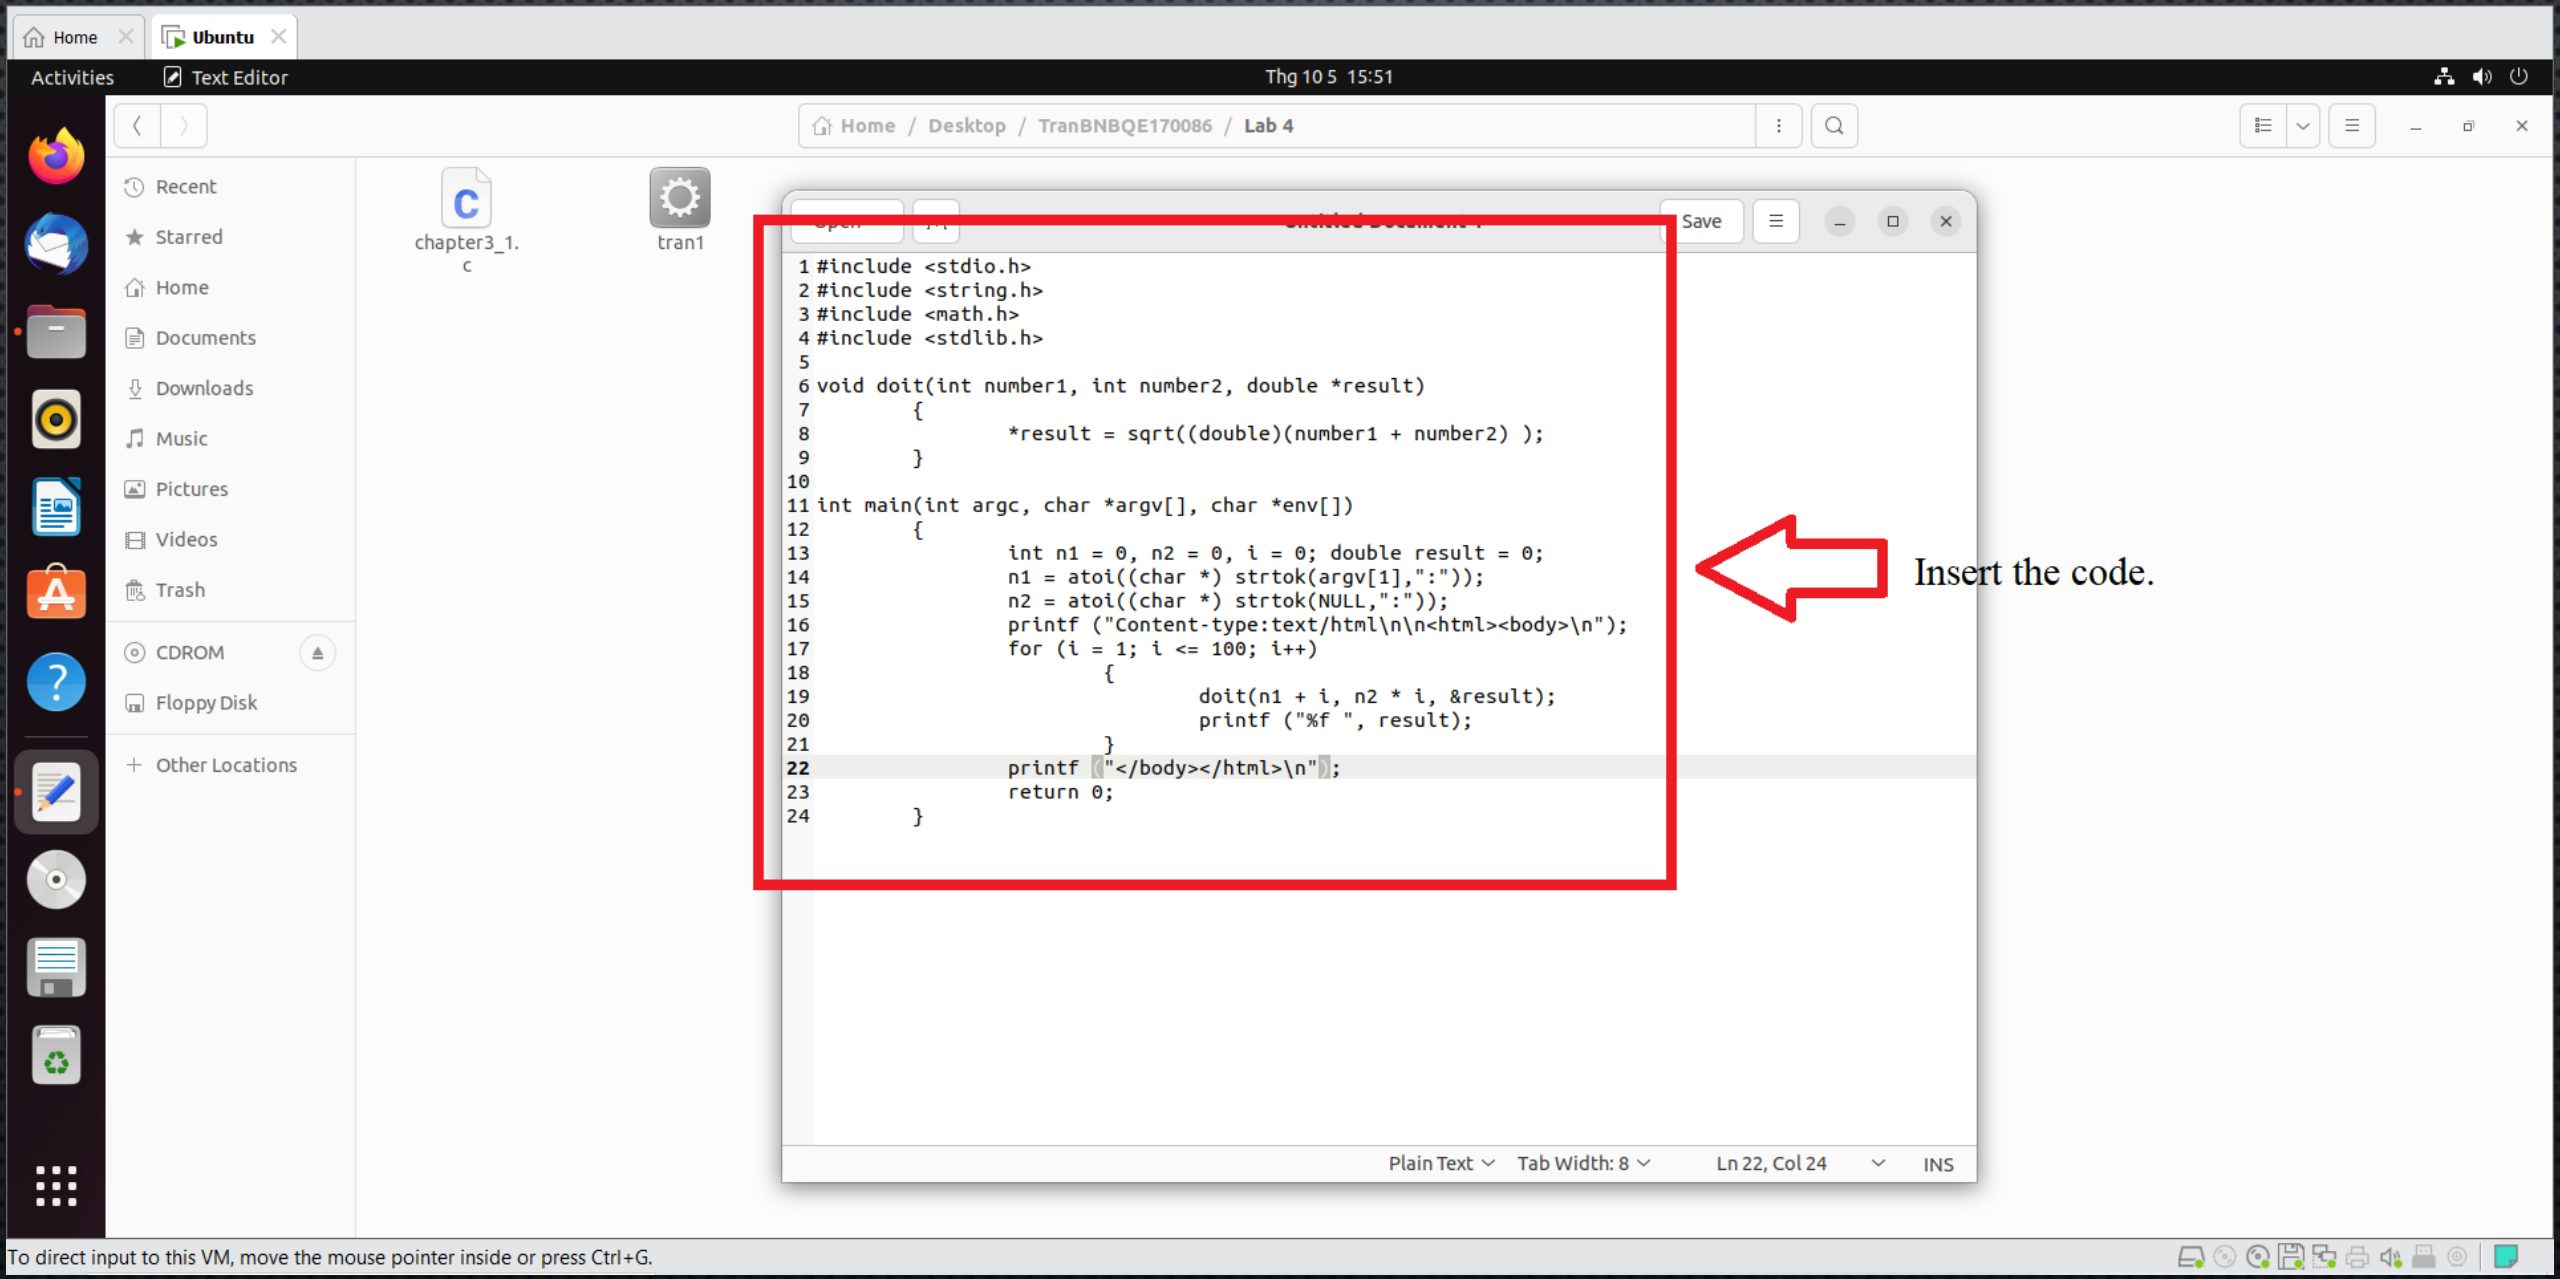


Rename your file and click "***Save***".

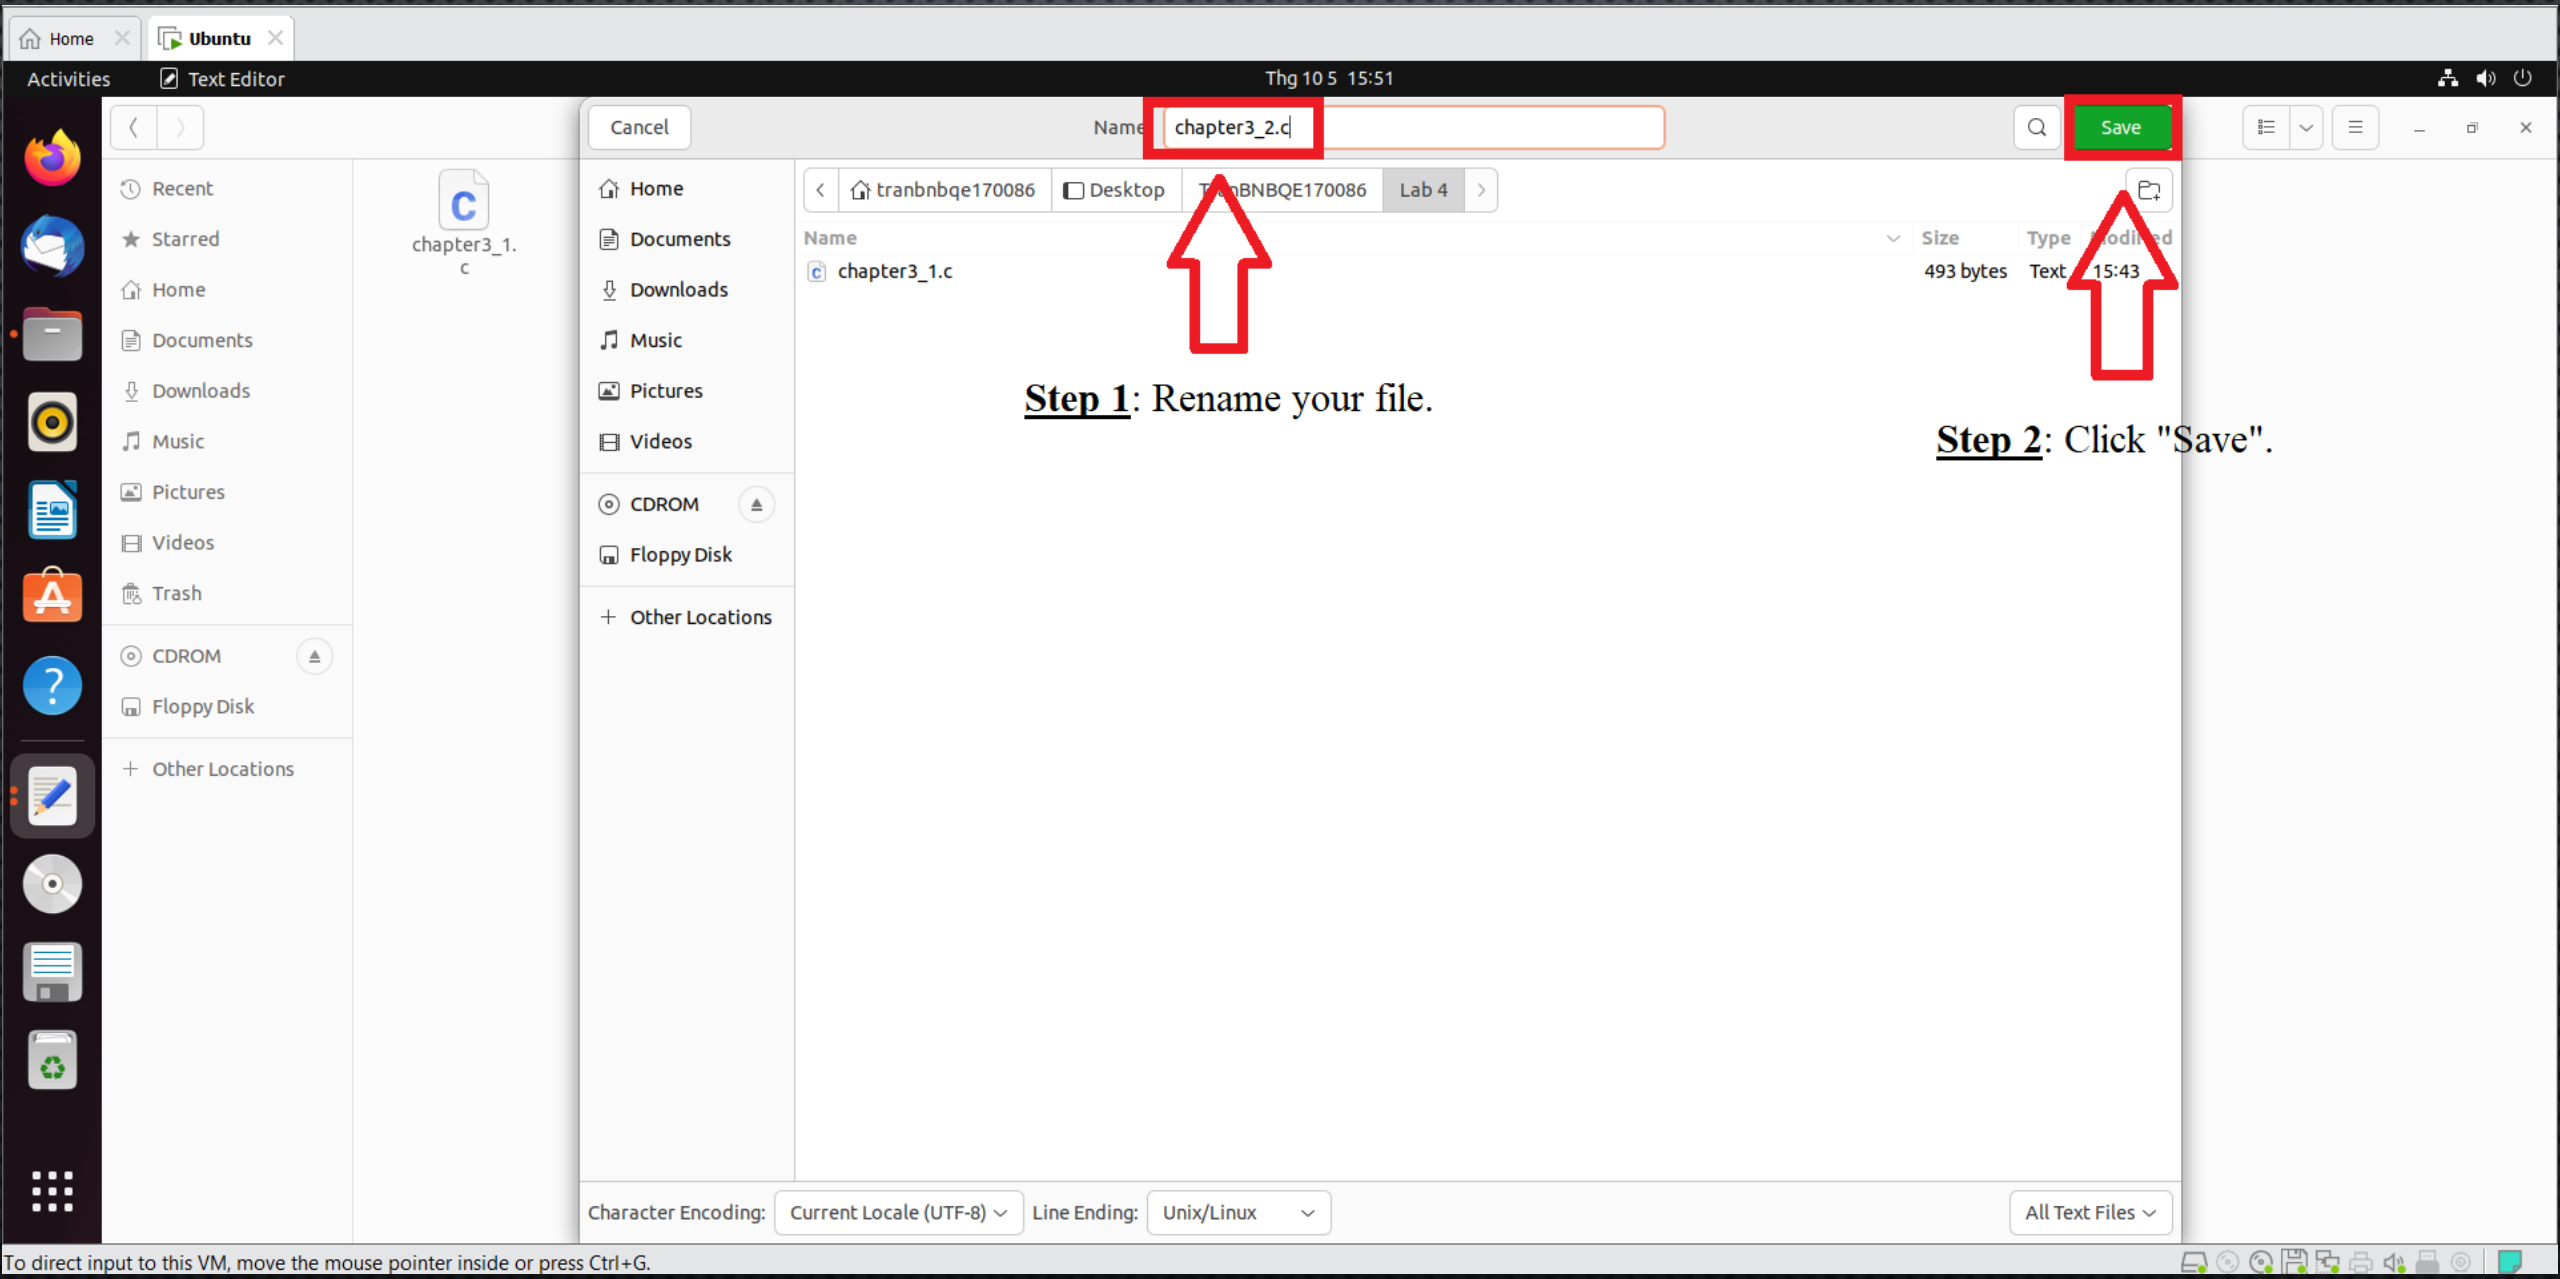

Rightclick mouse and choose "***Open in Terminal***".

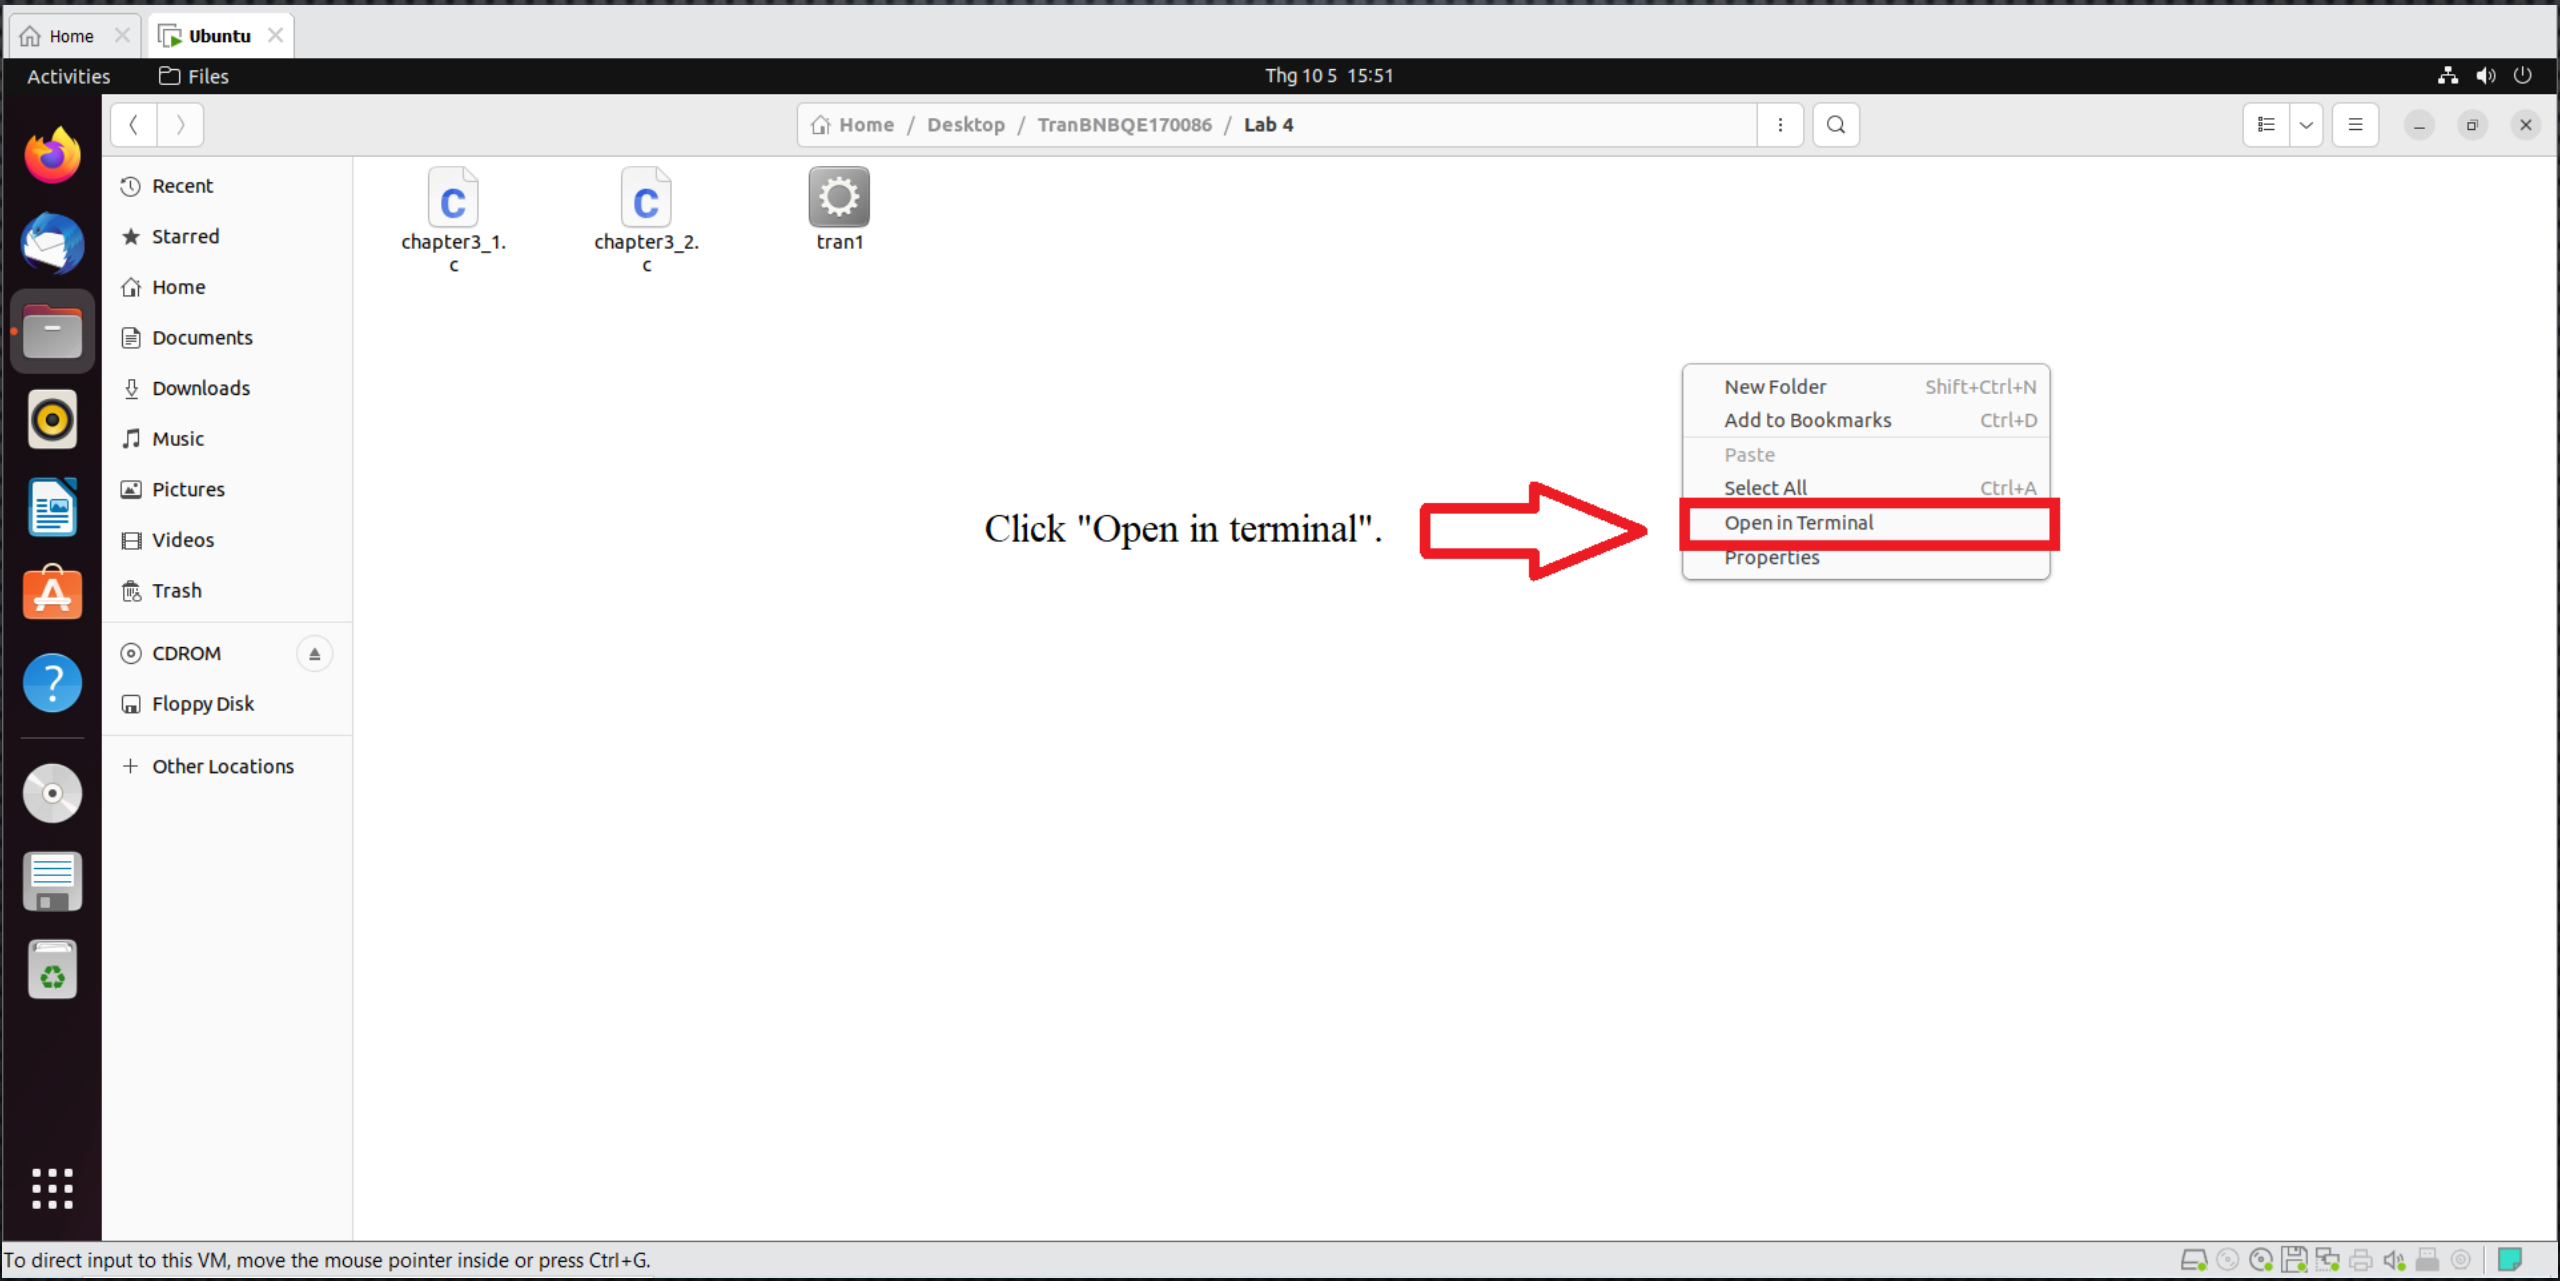

Execute the code.

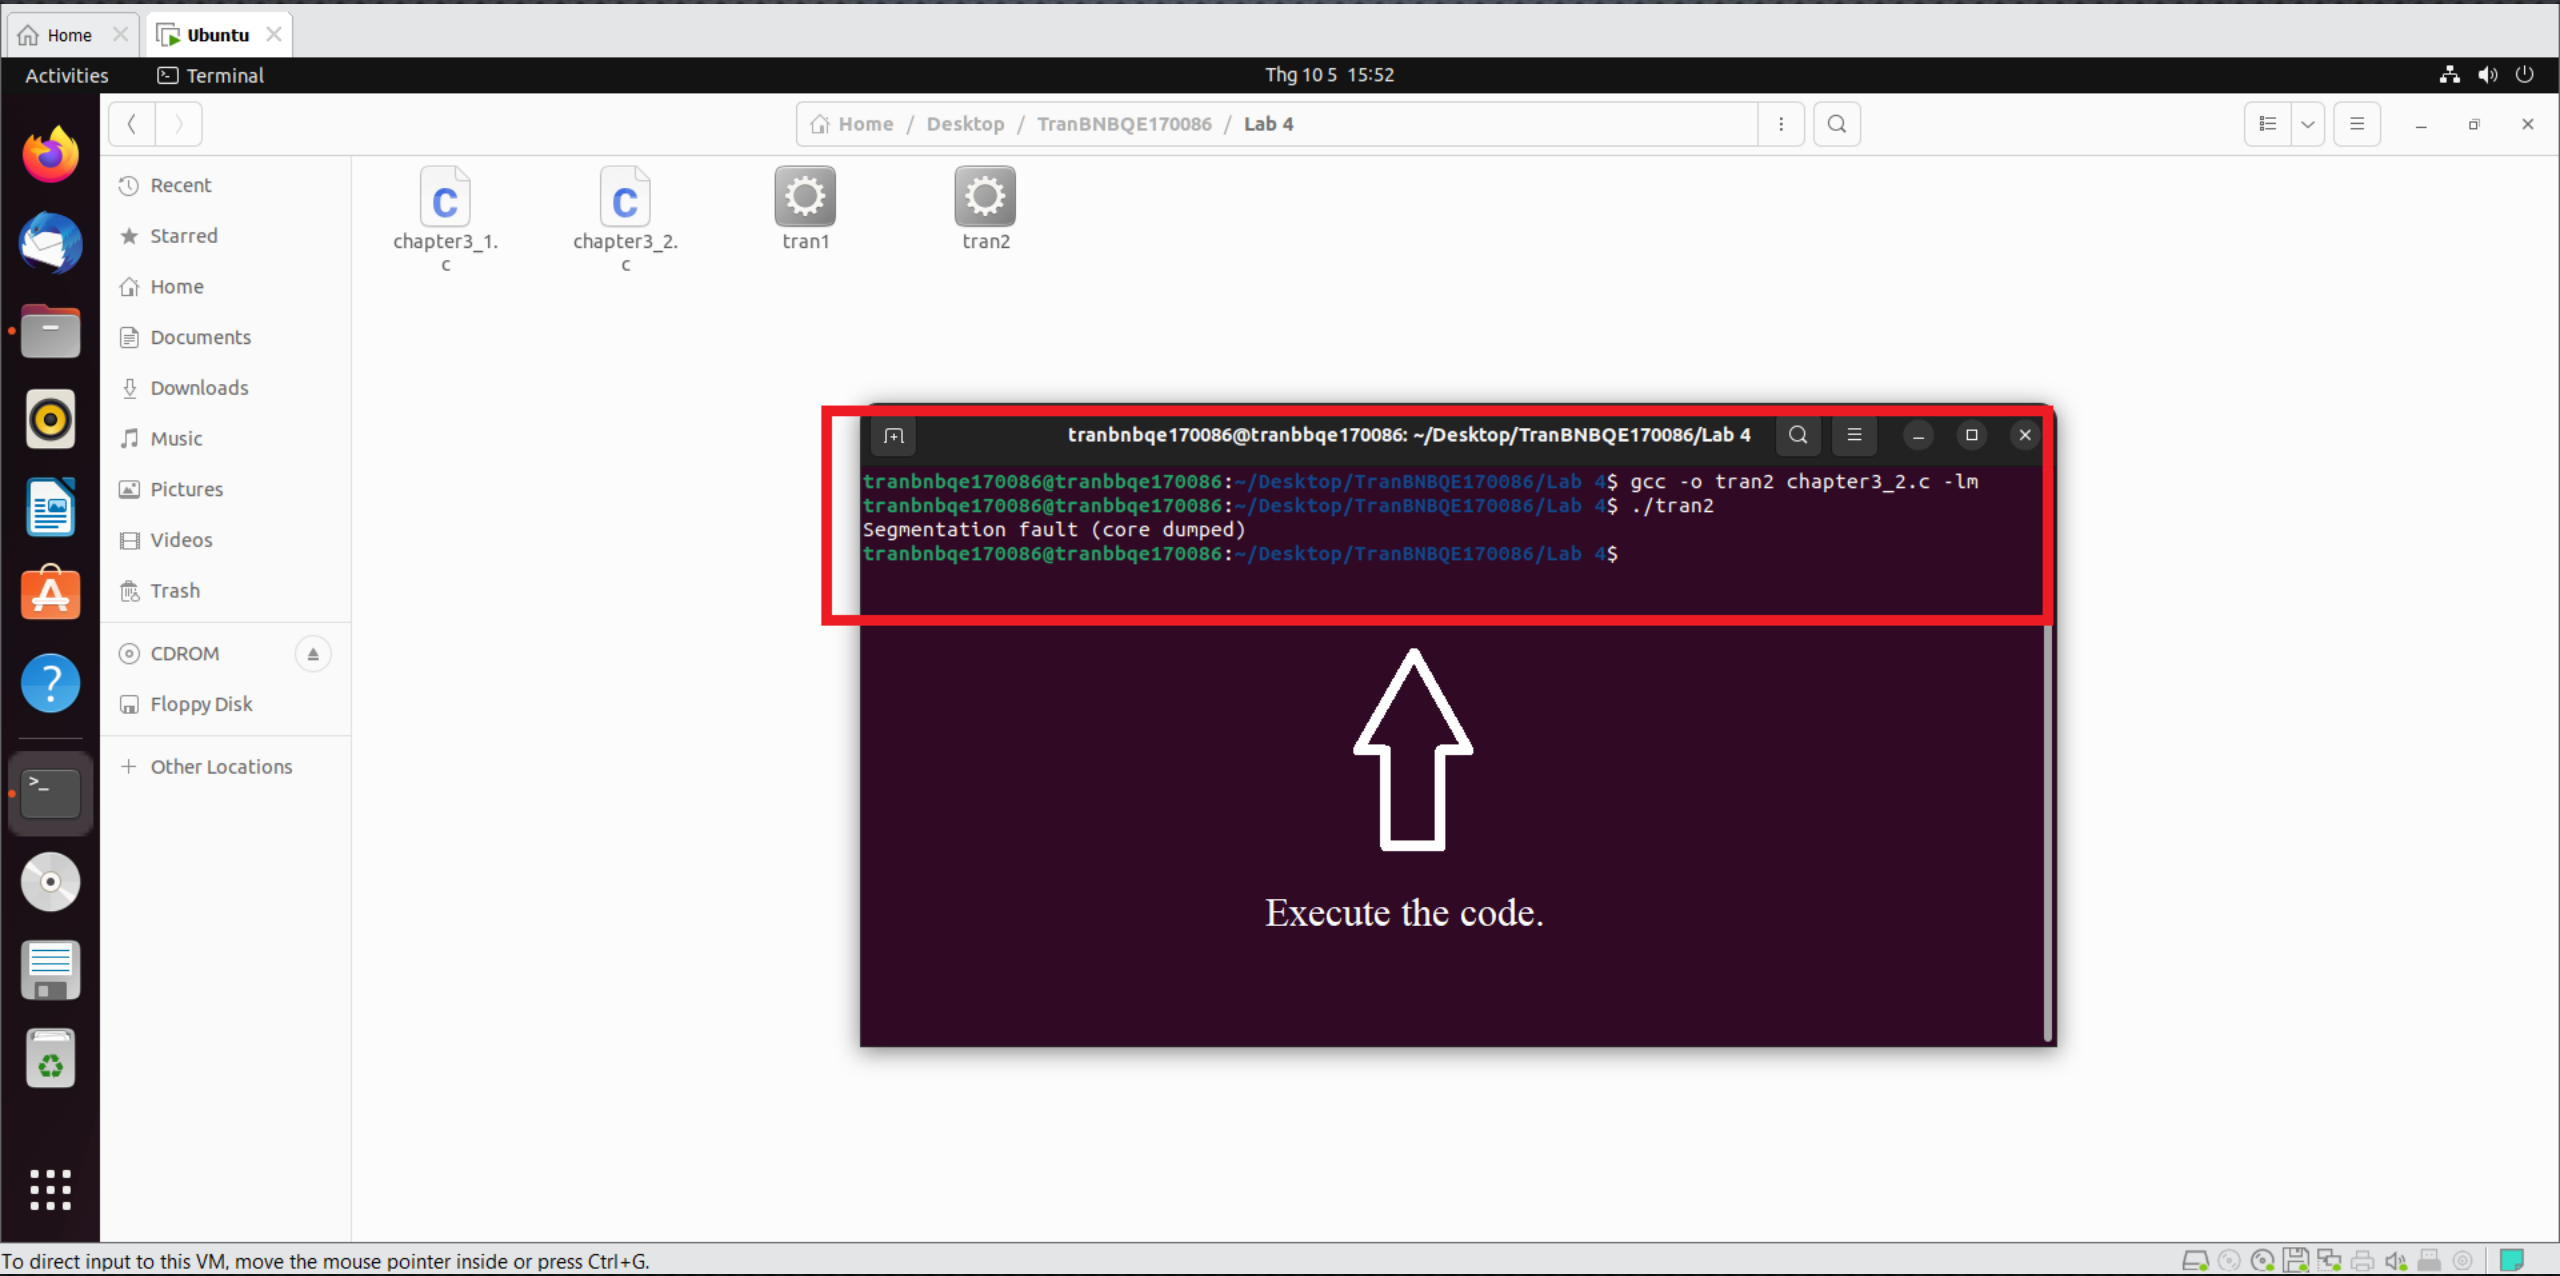

Code exercise 3 C programme.

Home | Ubuntu

Activities | Text Editor | Thg 10 5 16:10

Home / Desktop / TranBNBQE170086 / Lab 4

Open | *Untitled Document 1 | Save


```c
#include <stdio.h>
#include <string.h>

struct player
        {
                char name[255];
                char role[255];
                int ranking;
        };

void rank(struct player * p)
        {
                switch (p -> name[0])
                        {
                                case 'B':
                                        p -> ranking = 4;
                                        break;
                                case 'N':
                                        p -> ranking = 1;
                                        break;
                                case 'P':
                                        p -> ranking = 2;
                                        break;
                                case 'T':
                                        p -> ranking = 5;
                                        break;
                        }
        }

void show(struct player p)
        {
                printf ("Name: %s - Role: %s - Ranking: %d<br>\n", p.name, p.role, p.ranking);
        }


int main(int argc, char * argv[], char * env[])
        {
                struct player myteam[4] =
```




Insert the code.

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.


Rename your file and click "***Save***".

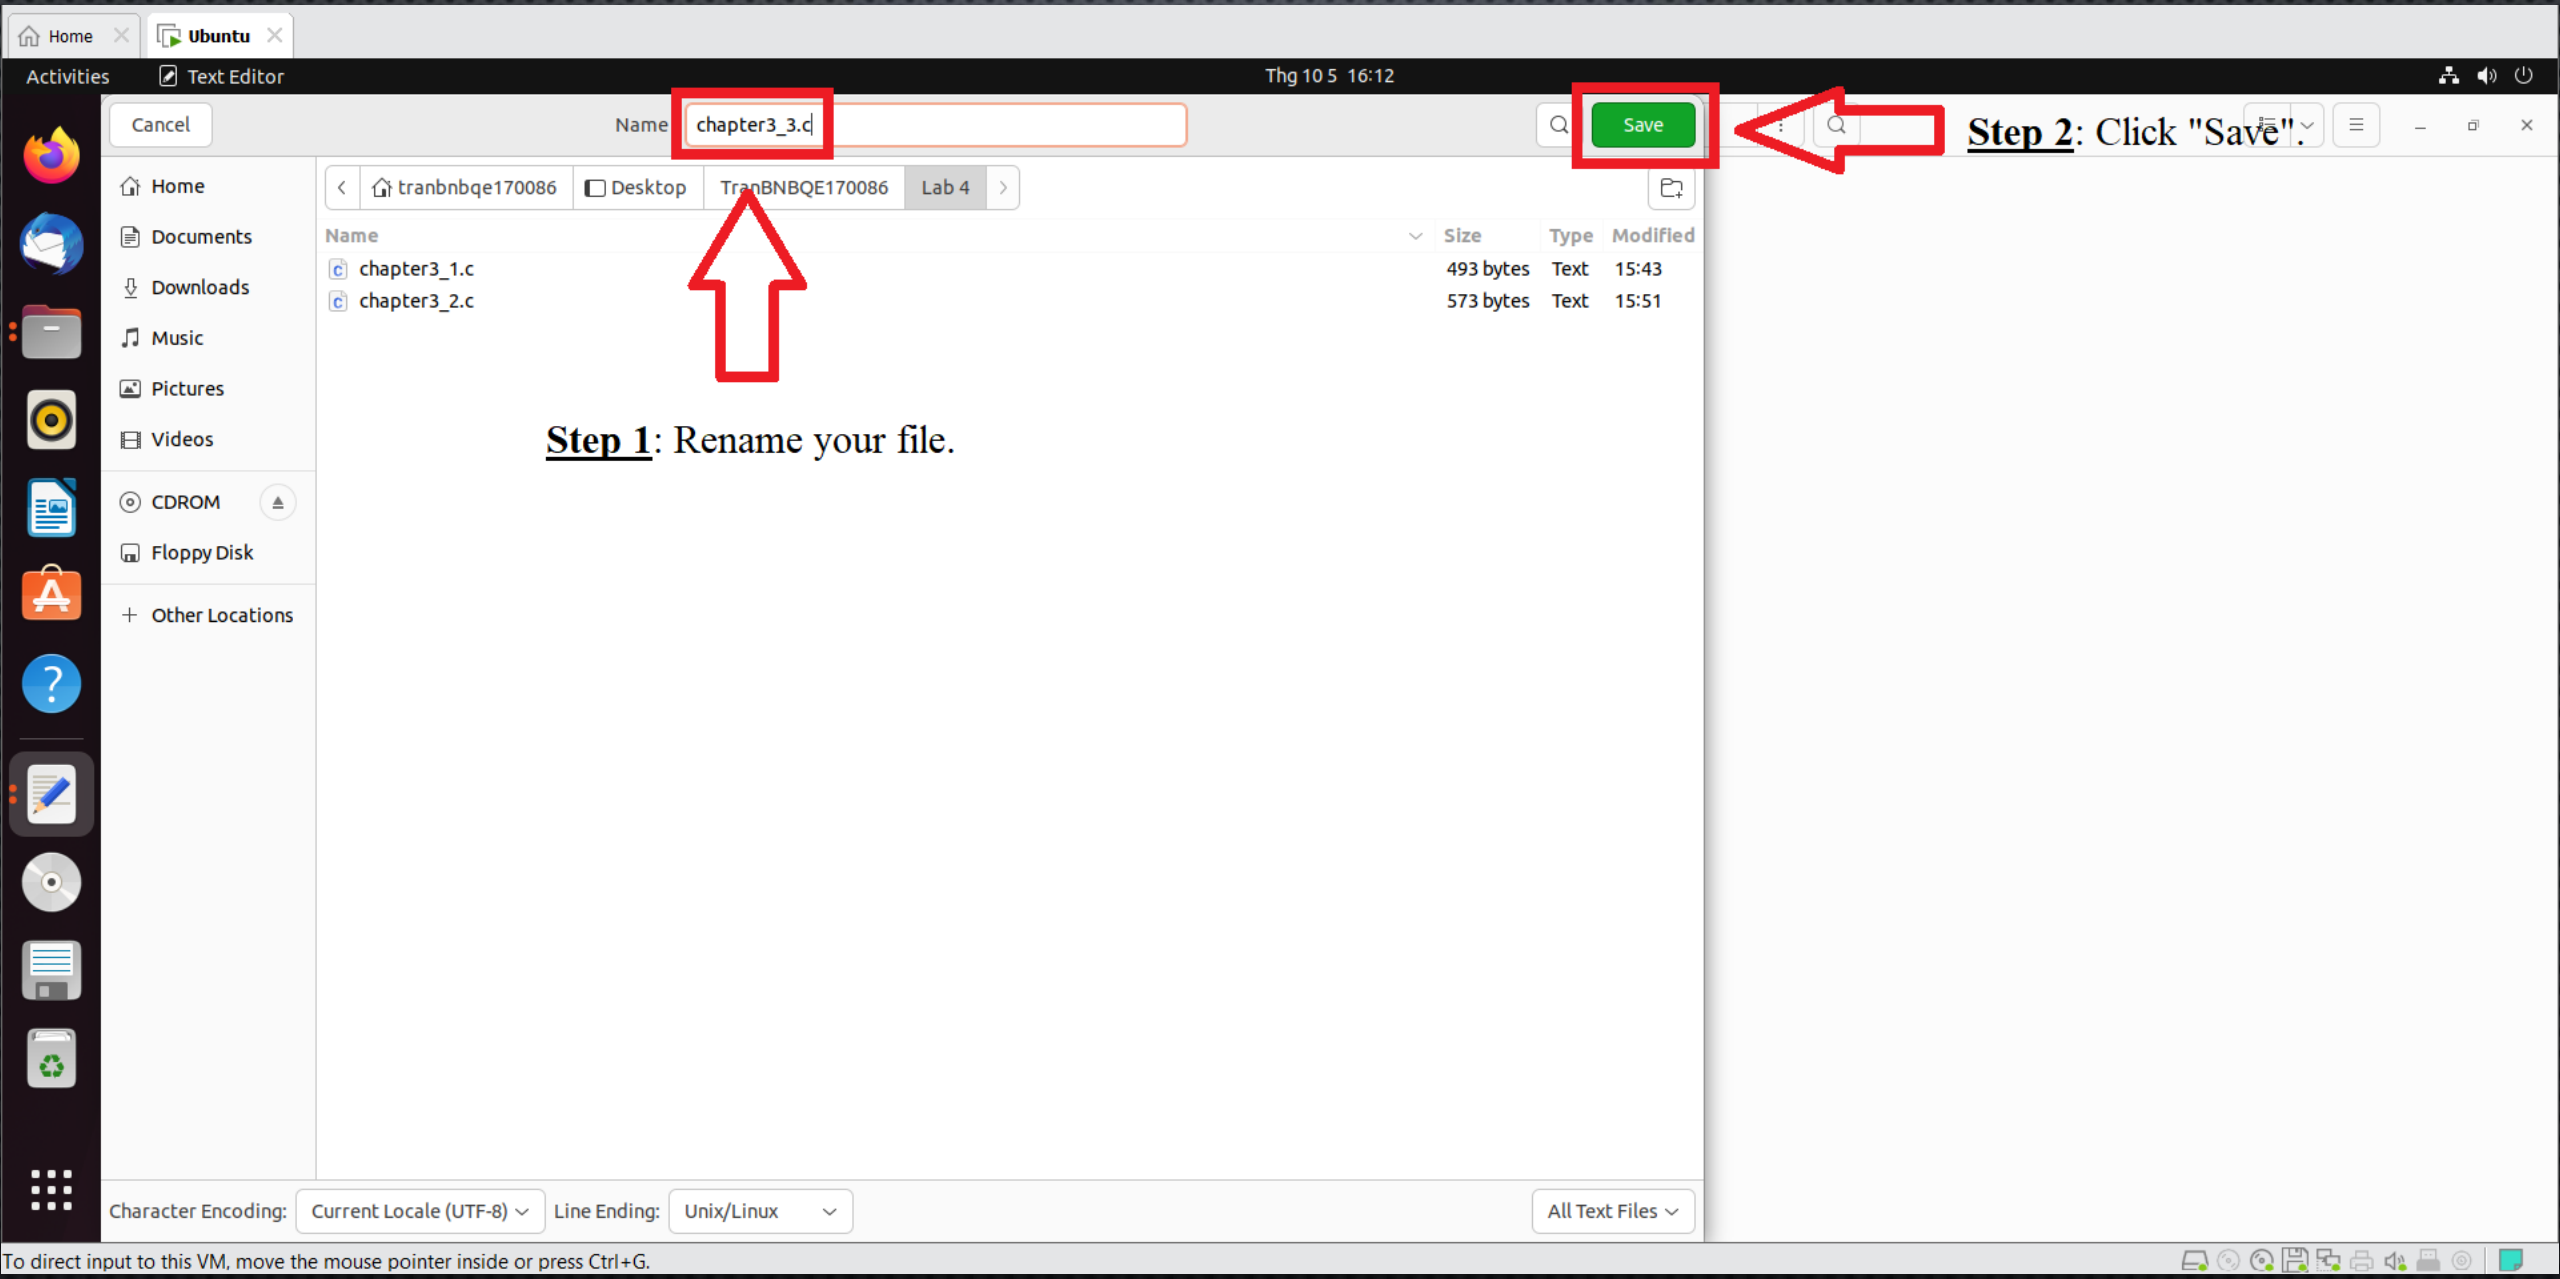


Rightclick mouse and choose "***Open in Terminal***".

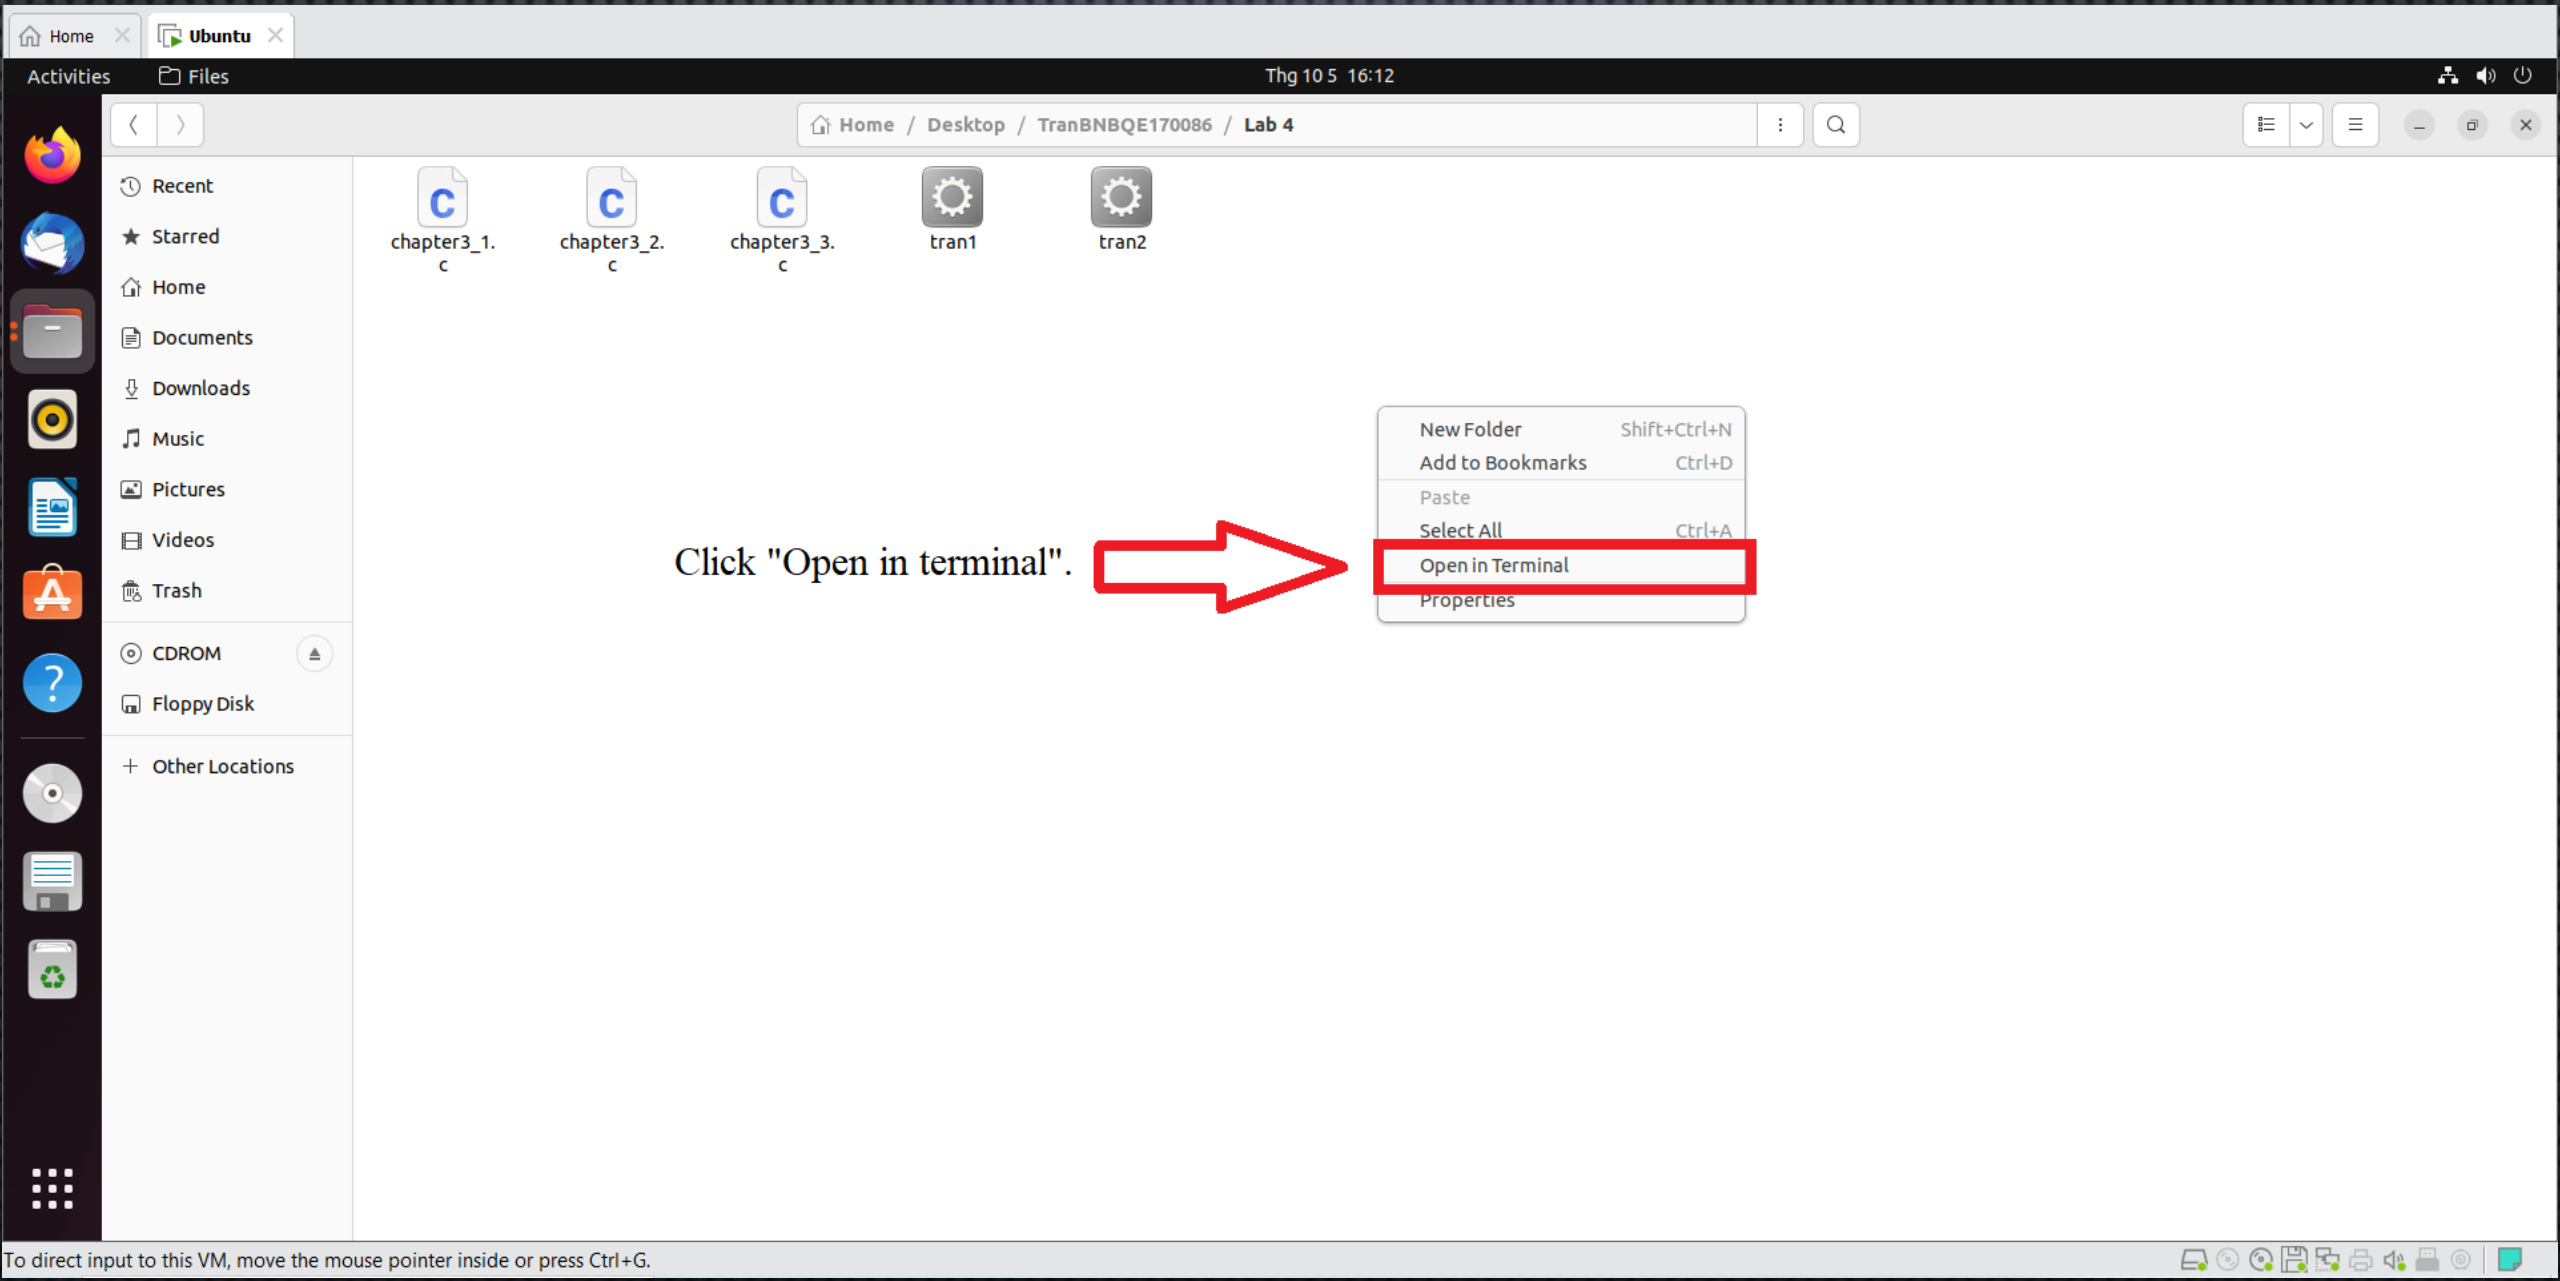


Execute the code.

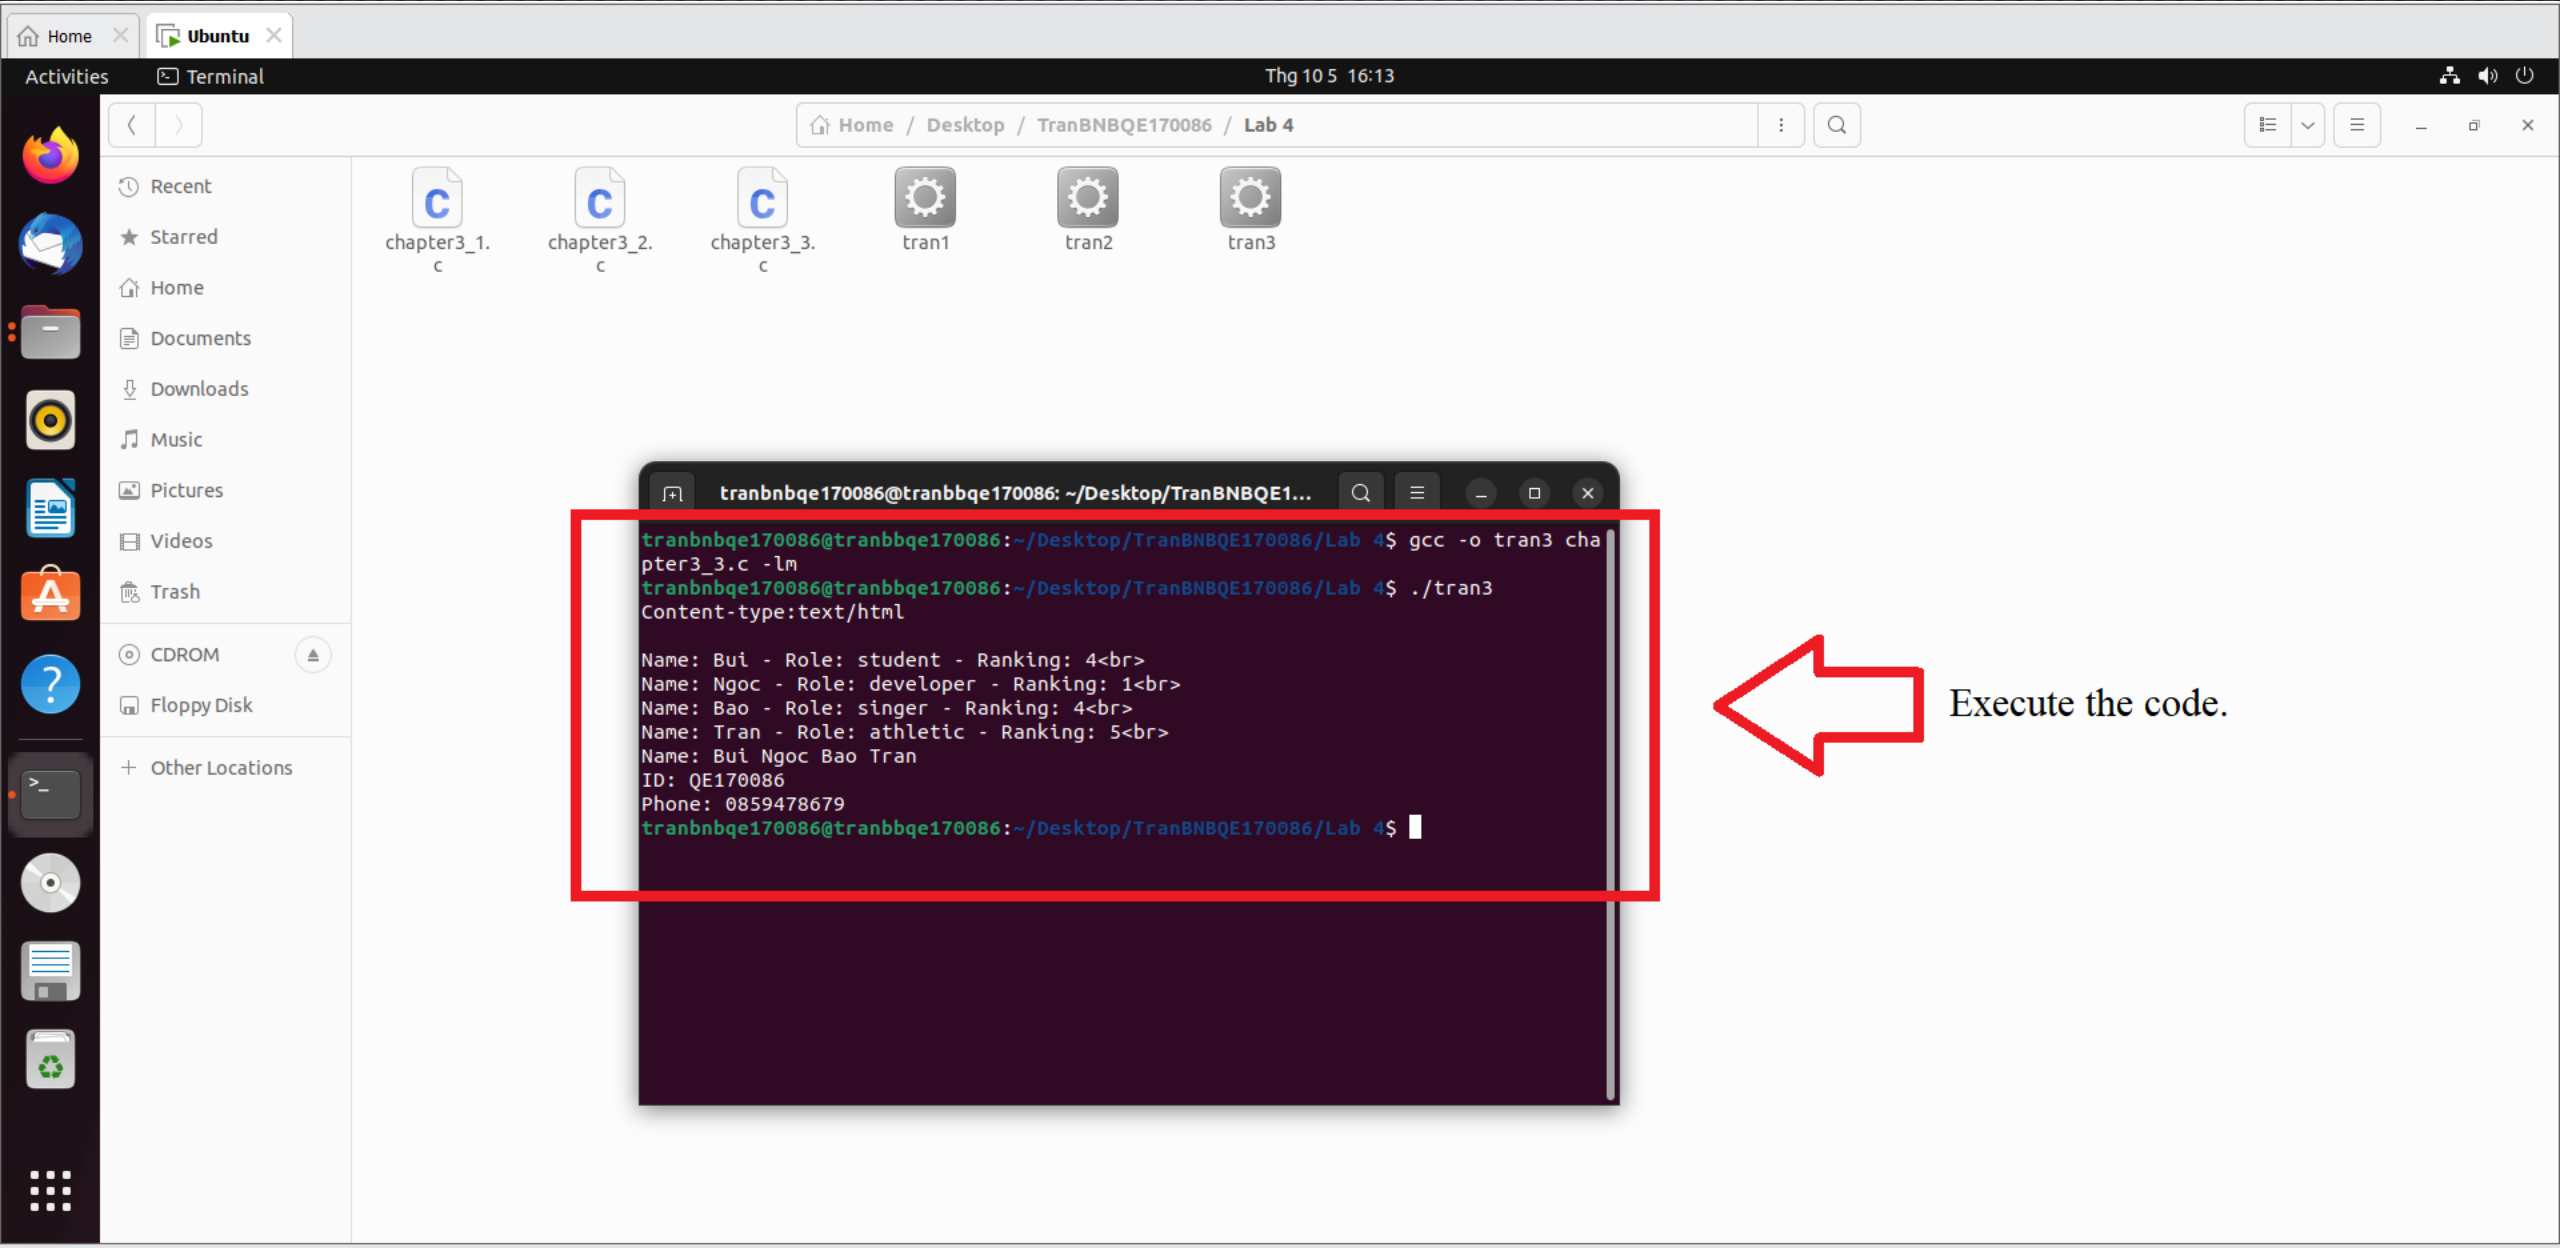


Click on the "***On/Off***" button.

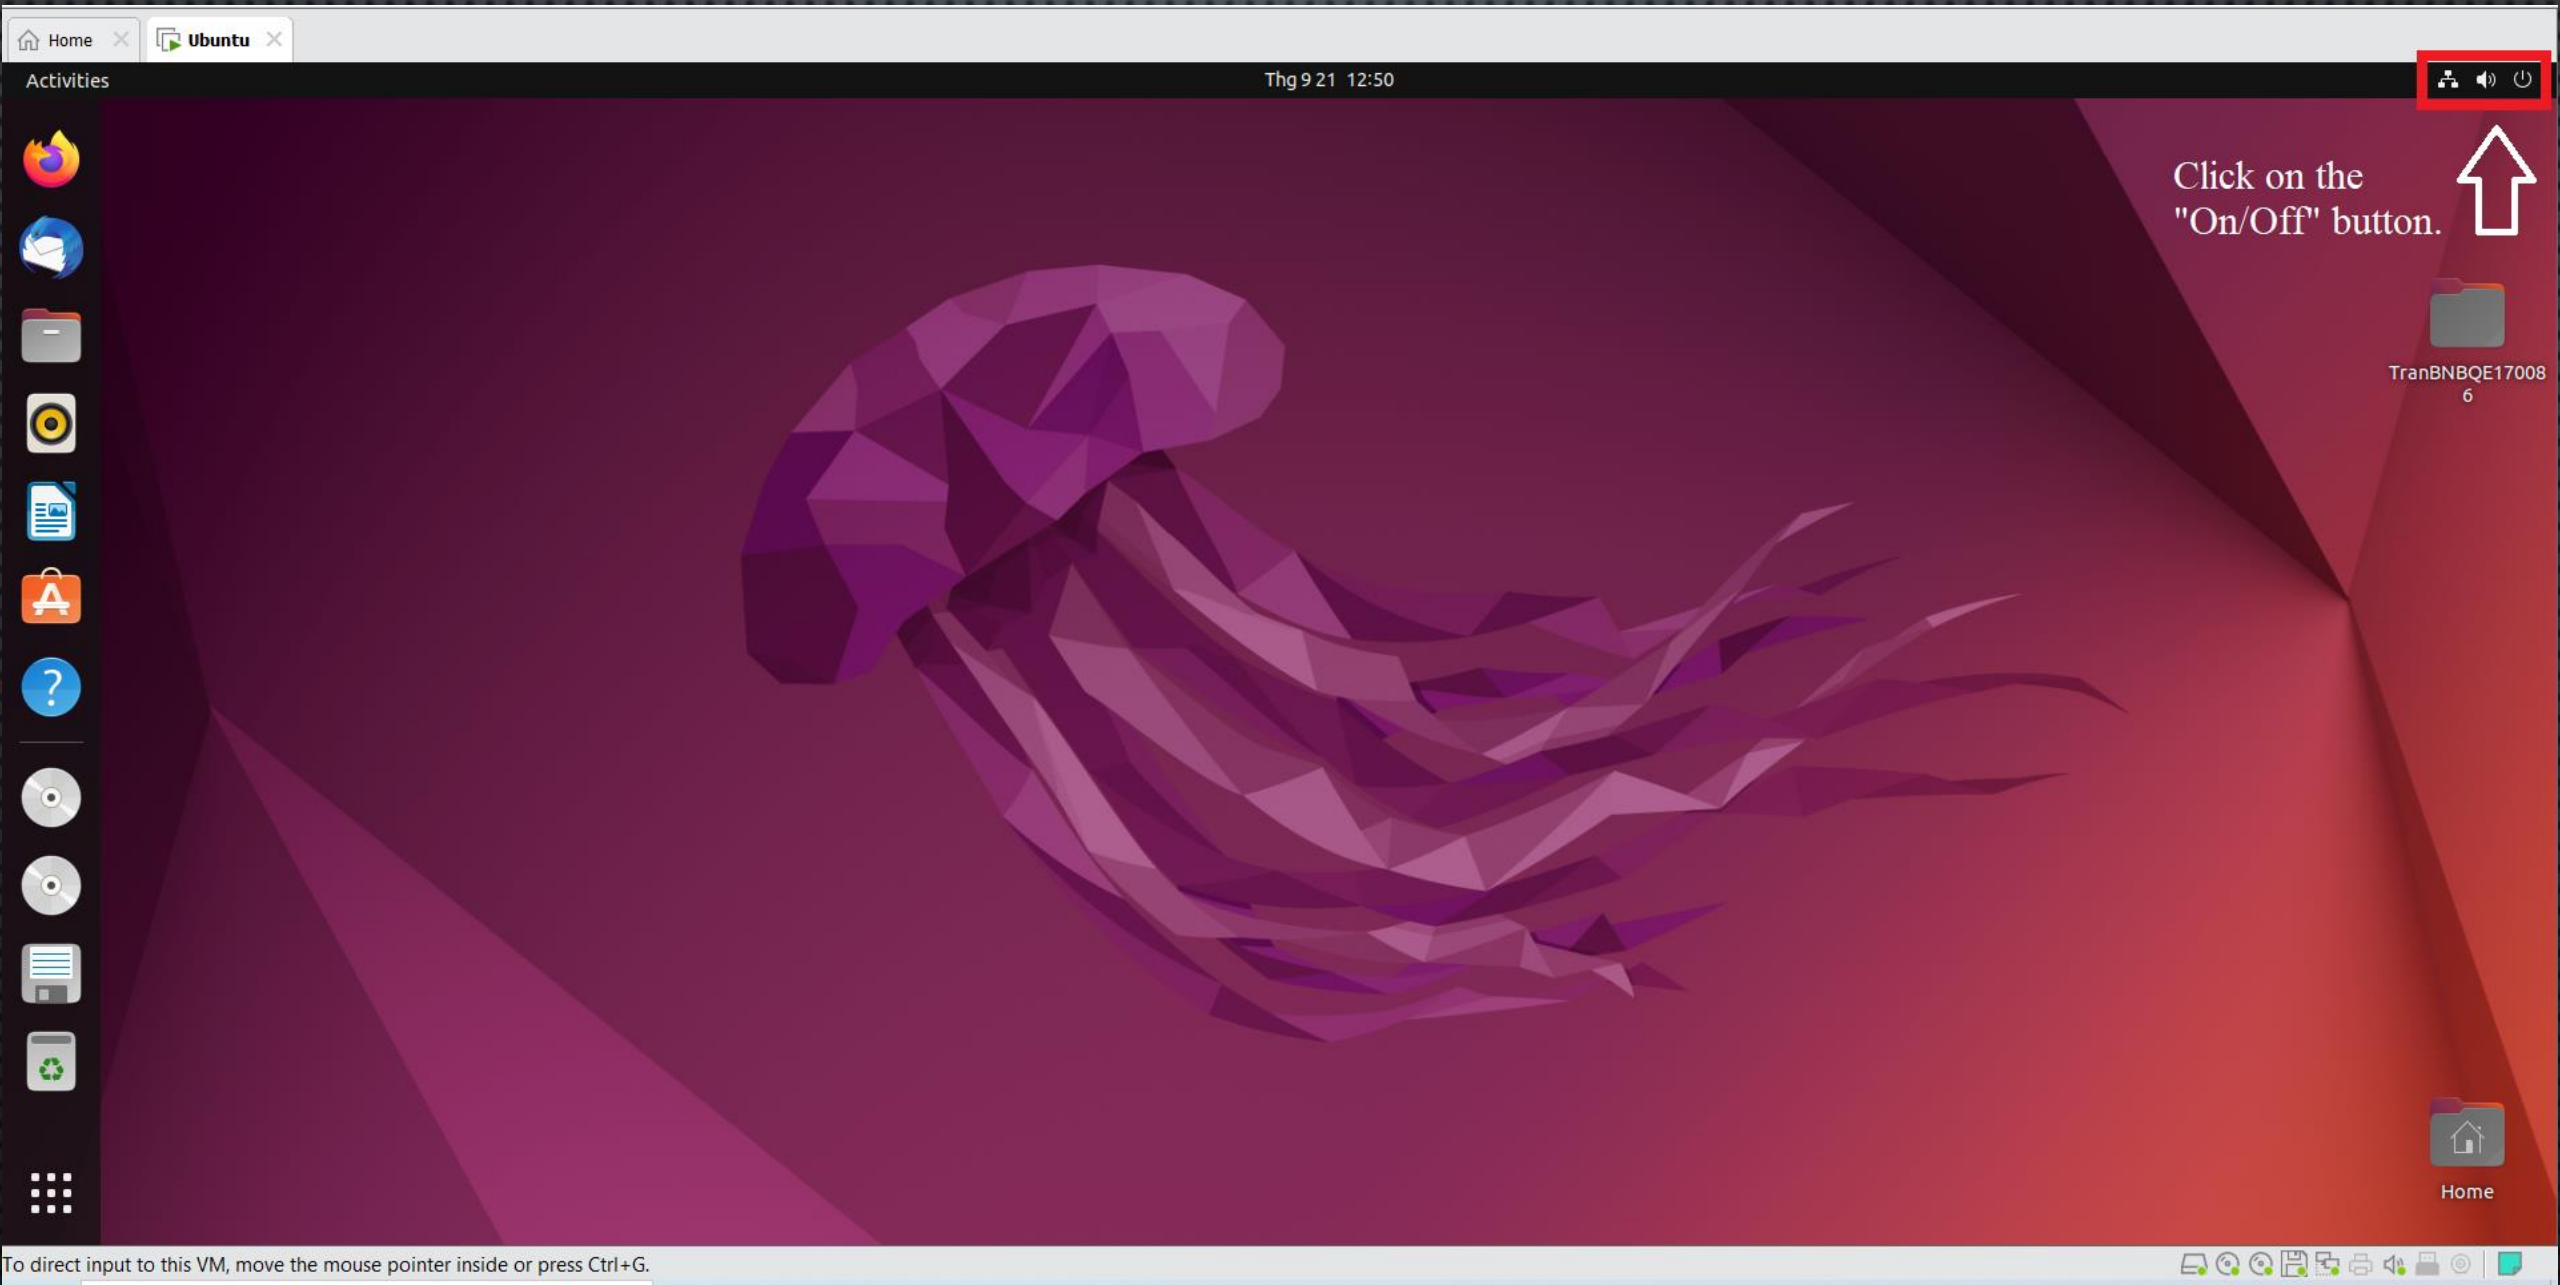

Click "***Power Off / Log out***".

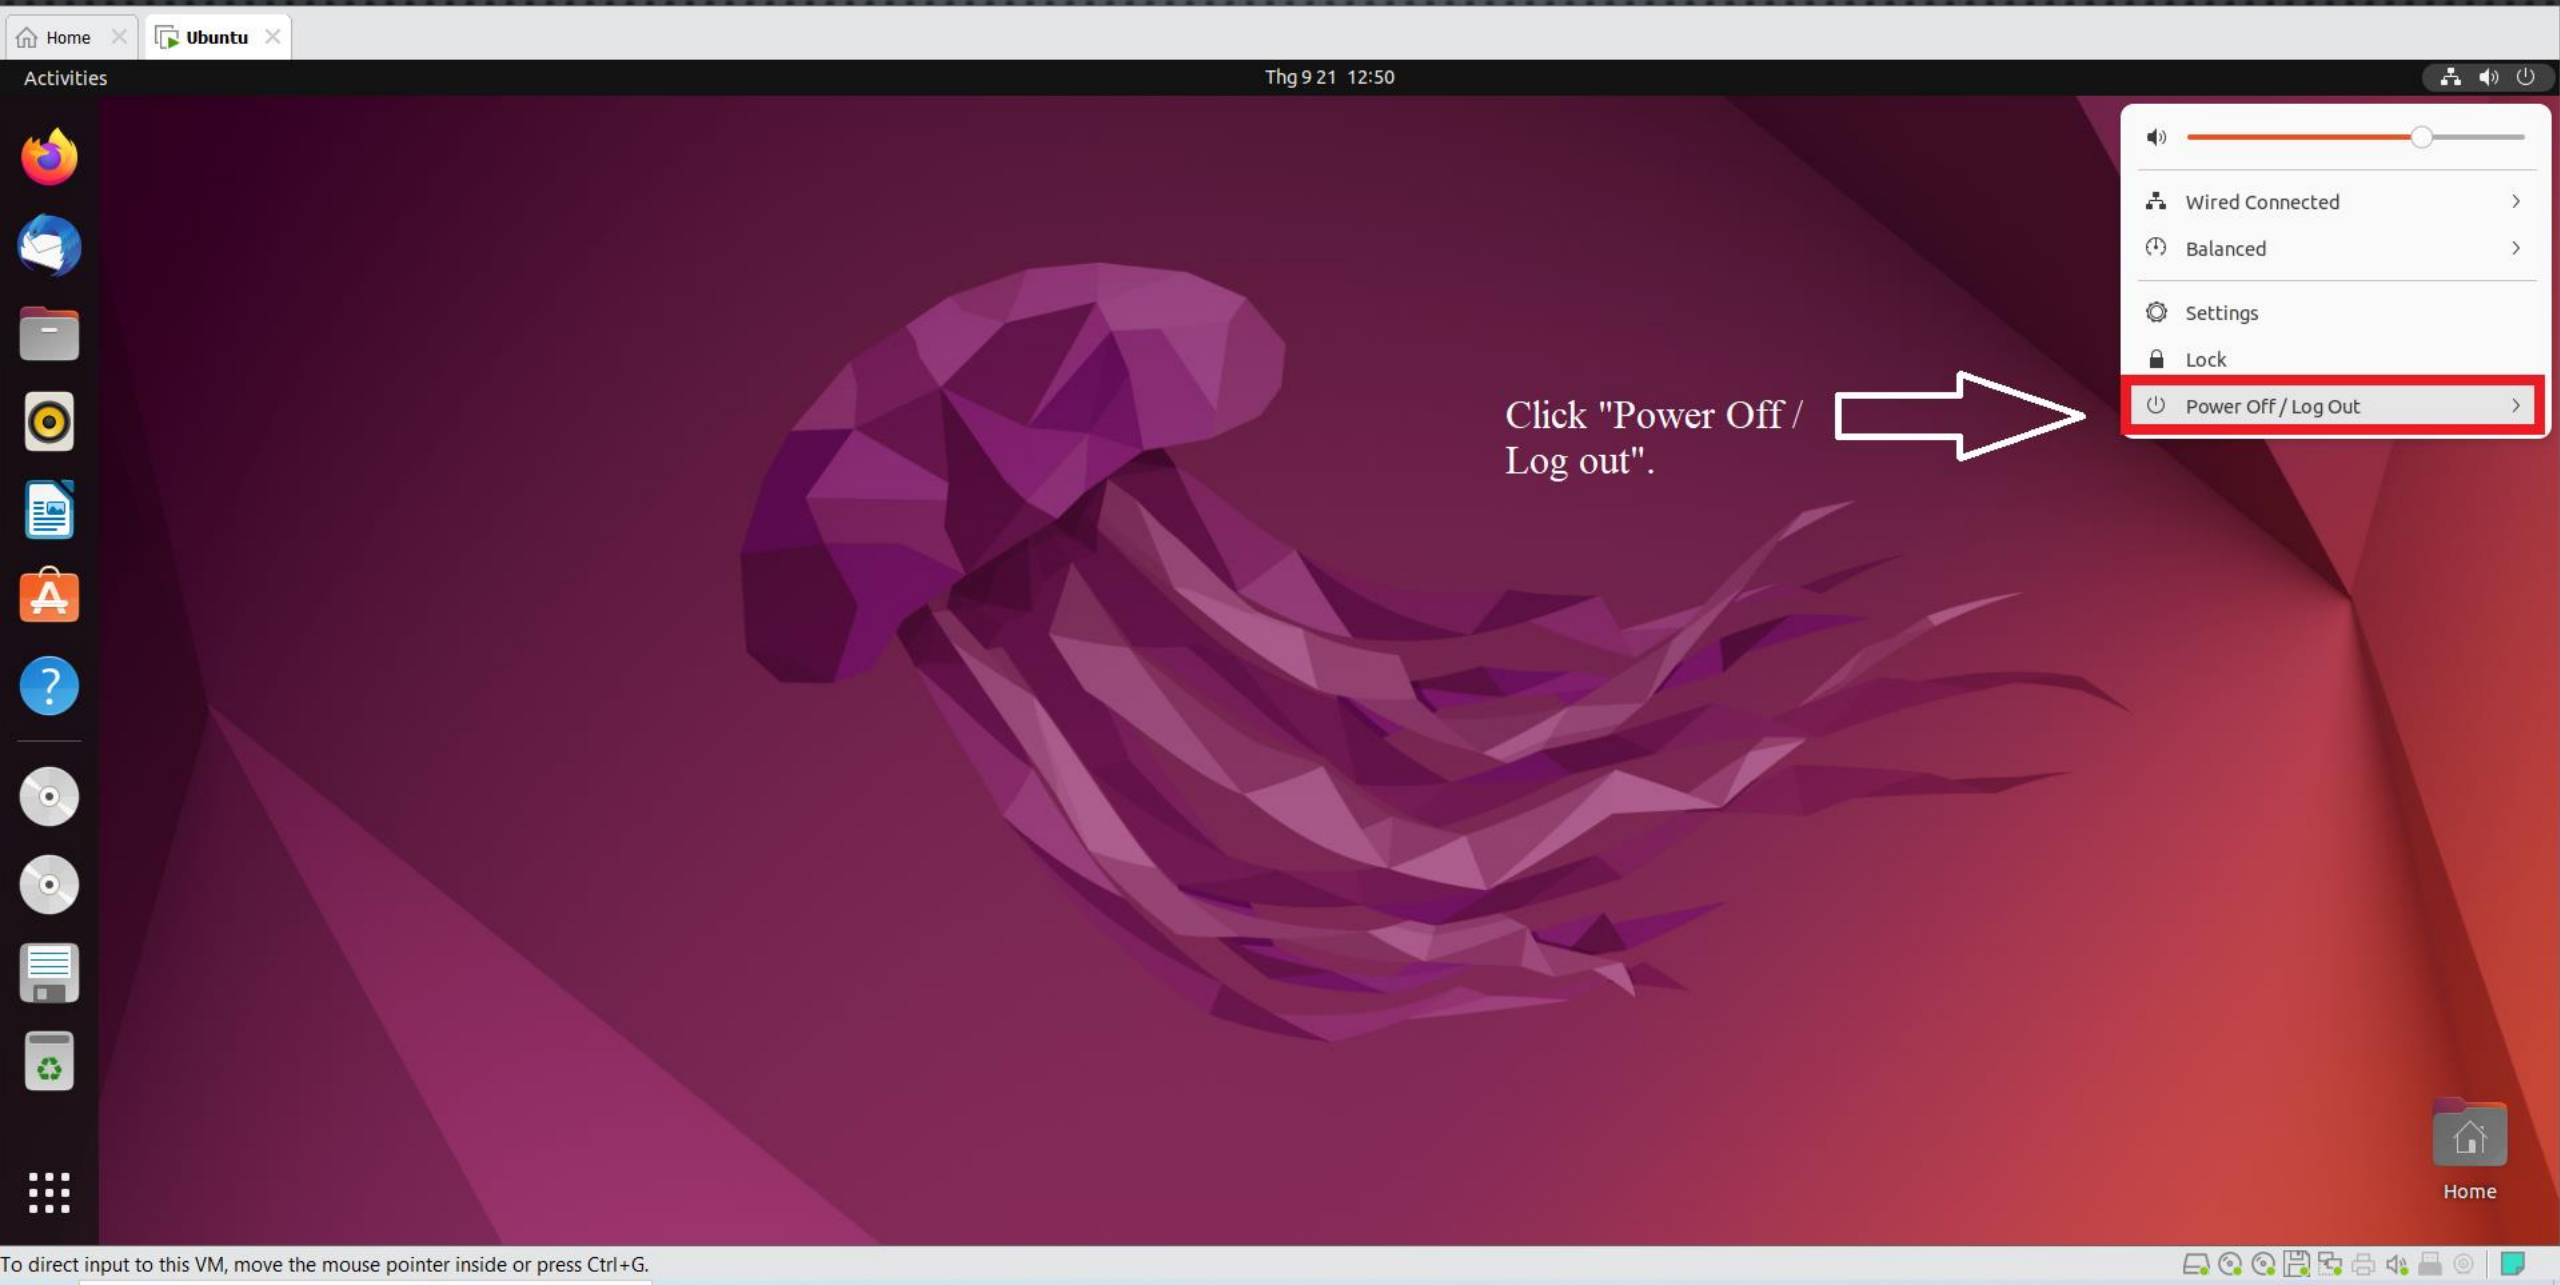

Click "***Power off***" and finish using virtual machine.

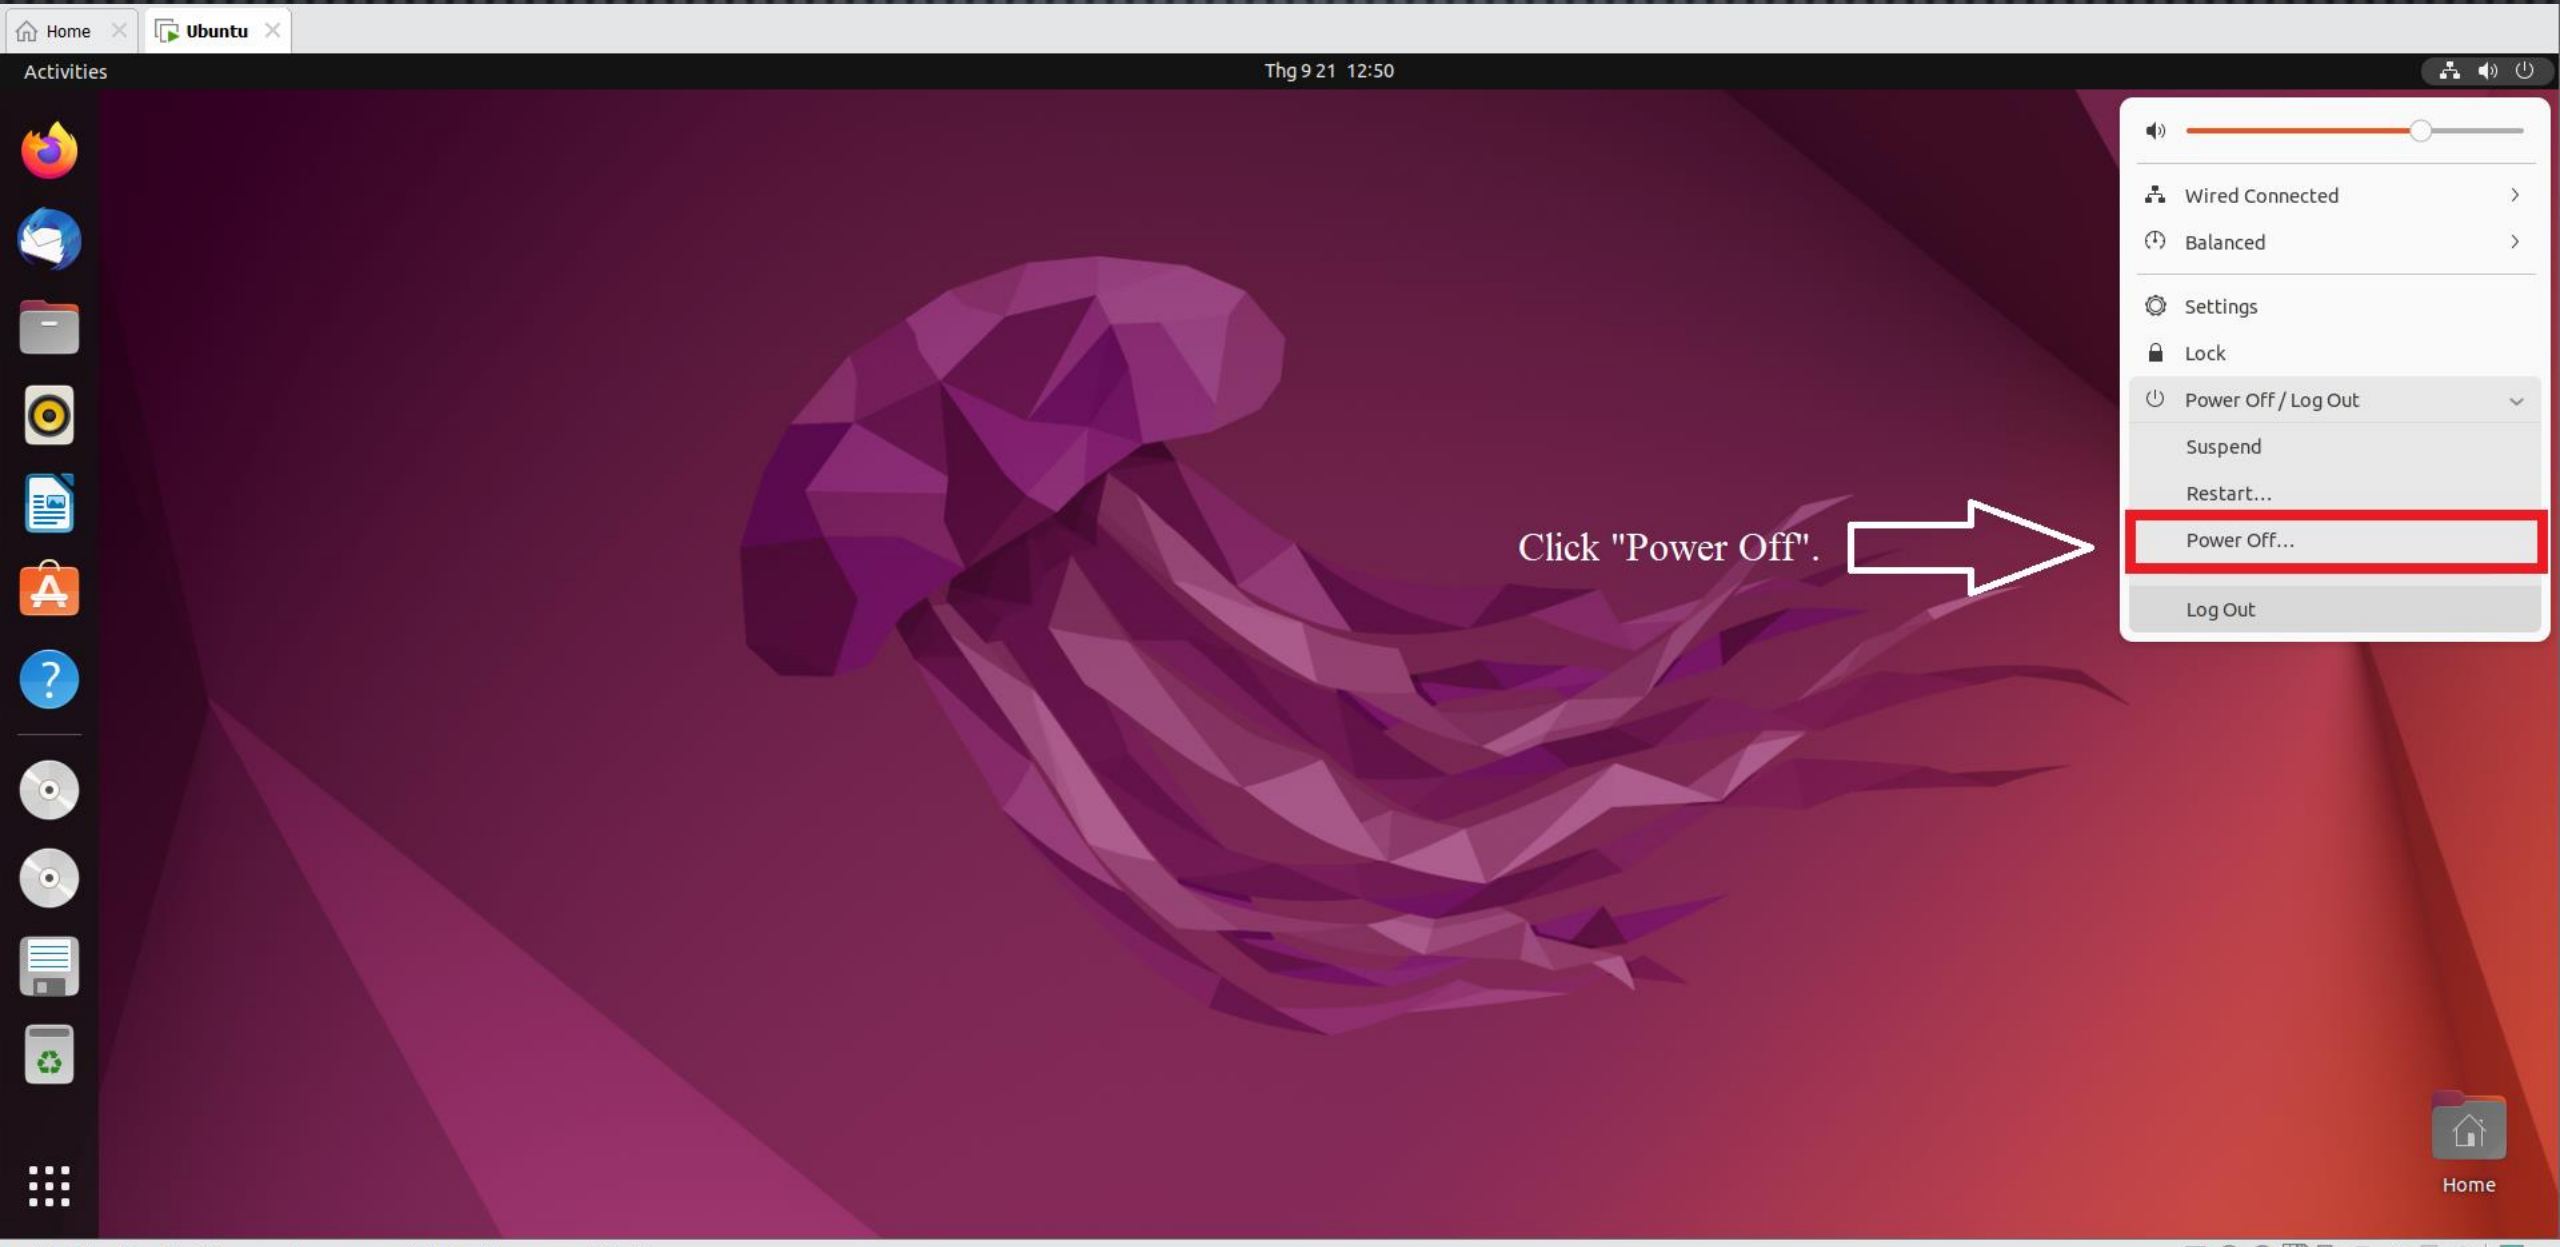

THE END

Bui Ngoc Bao Tran – QE170086