


Observed-interval experiment, Fig. 5B layout | 0% observation noise
Full-rollout loss / N_t (N_t = 30); interval objective unchanged


A. Actual interval training objective
Observed-interval ChemKAN: all three seeds

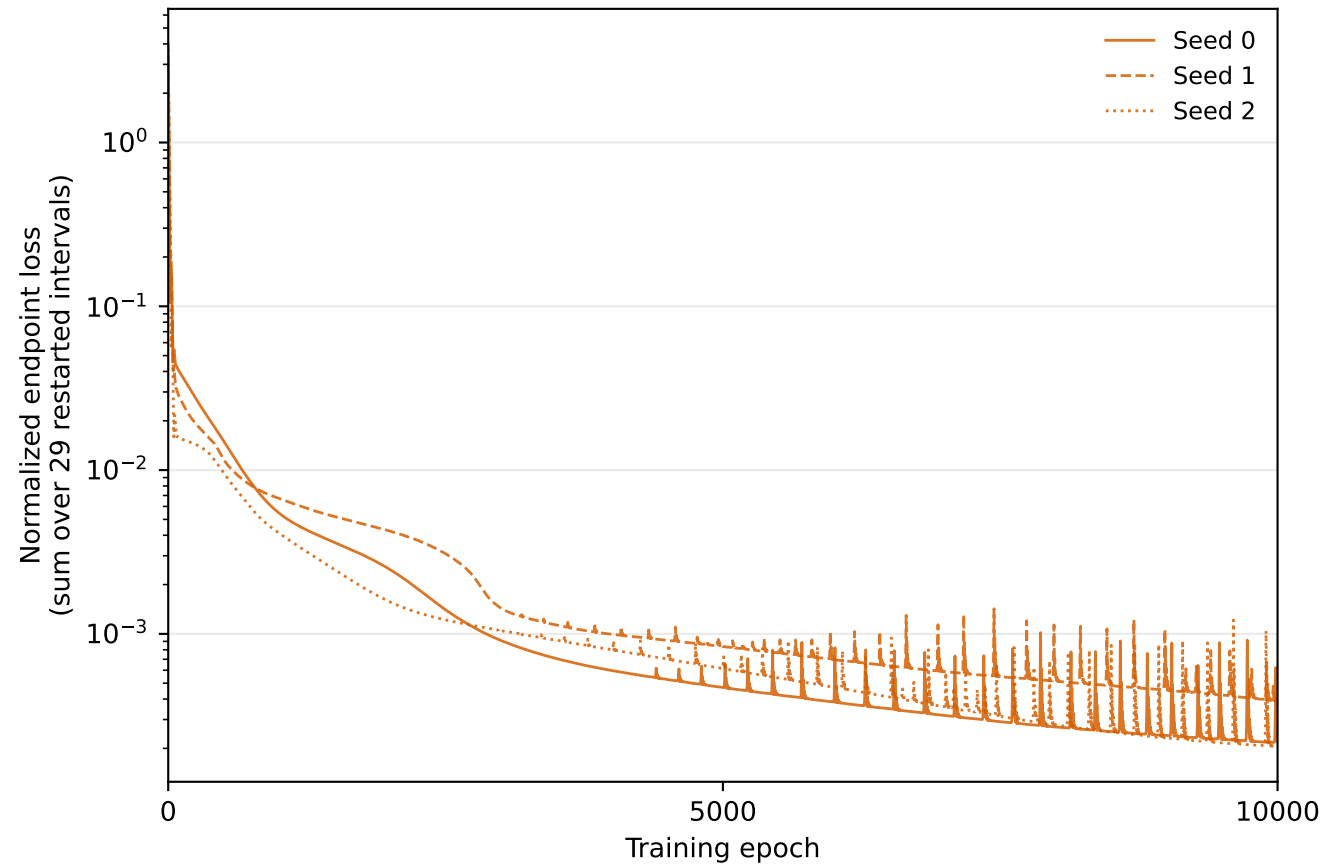

Final observed-interval training objective | 10,000 epochs

Interval-trained ChemKAN	Endpoint loss
Seed 0	0.000245433
Seed 1	0.000389095
Seed 2	0.000204941

B. Complete-trajectory evaluation
Training and clean held-out trajectories: seed 0

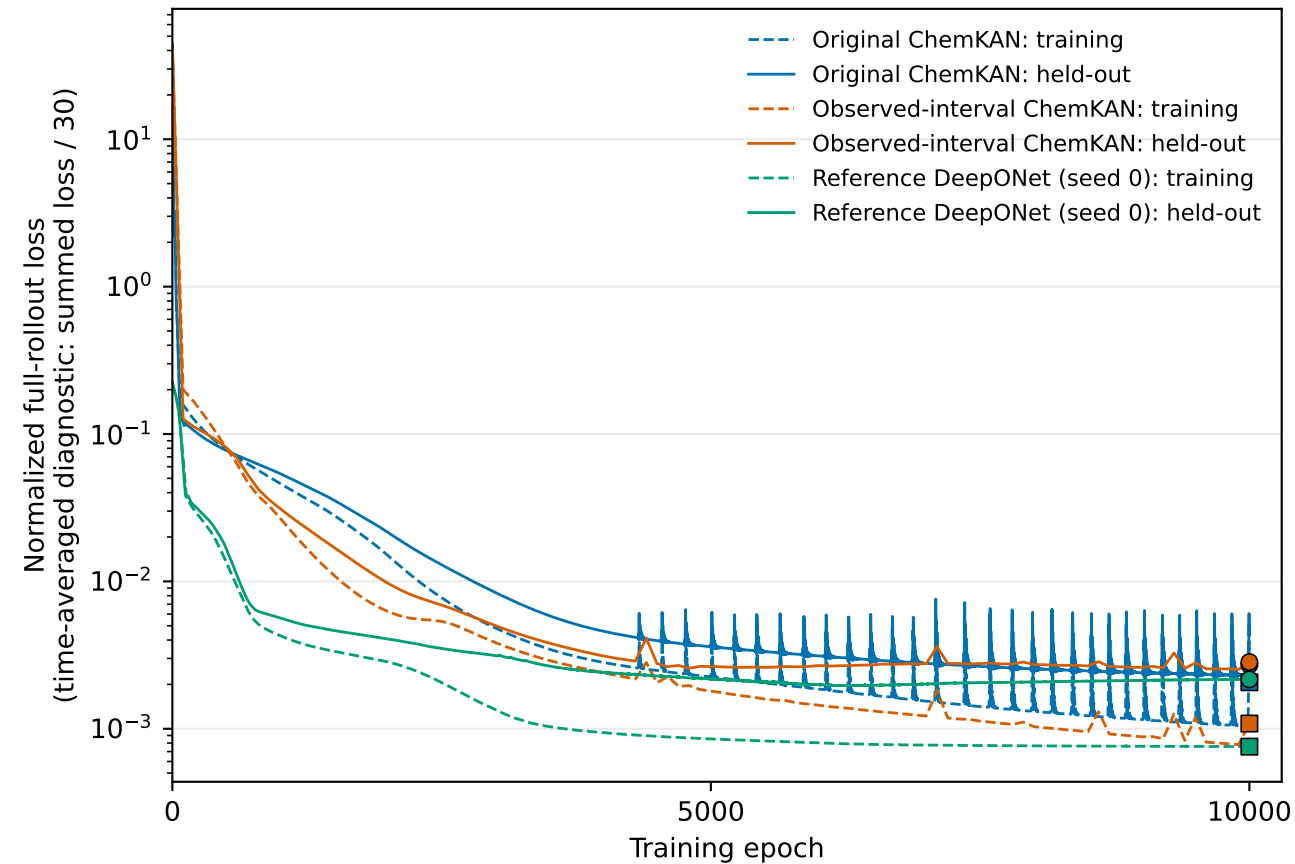

Final full-rollout losses / 30 | seed 0, 10,000 epochs

Model	Training	Held-out
Original ChemKAN	0.00206722	0.00271335
Observed-interval ChemKAN	0.00108517	0.00283389
Reference DeepONet (seed 0)	0.00075658	0.00216221

Right: dashed = training; solid = held-out. Final checkpoints at epoch 10,000: squares = training, circles = held-out.
Tables show rounded final values; CSVs retain full precision. Left and right use different prediction procedures.