

Getting Started with pgscatalogcolors

Contents

What ancestry acronyms are available?	1
What does my data frame need?	2
Basic scatter plot	2
Bar chart (fill aesthetic)	3
Using <code>scale_color_manual()</code> directly	4
Checking colors programmatically	5
What if my labels have typos or inconsistent formatting?	5
What if my data uses full ancestry names instead of acronyms?	6

```
library(pgscatalogcolors)
library(ggplot2)
```

What ancestry acronyms are available?

The package maps **19 ancestry categories** defined by the PGS Catalog ancestry documentation. Call `pgscatalog_ancestry_info()` to see the full lookup table:

```
pgscatalog_ancestry_info()
#>   acronym          ancestry pop_group  color
#> 1   ABO             Aboriginal Australian DIV #999999
#> 2   AAM African American or Afro-Caribbean AFR #F9DA49
#> 3   AFR             African unspecified AFR #F9DA49
#> 4   ASN             Asian unspecified ASN #B25928
#> 5   CAS             Central Asian ASN #B25928
#> 6   EAS             East Asian EAS #68AD57
#> 7   EUR             European EUR #377EB8
#> 8   MID             Greater Middle Eastern MID #5DCBCF
#> 9   HIS             Hispanic or Latin American HIS #D1352B
#> 10  AMR             Native American DIV #999999
#> 11  NON             Not Reported NON #BBBBBB
#> 12  OCE             Oceanian DIV #999999
#> 13  OTH             Other DIV #999999
#> 14  ADA             Other admixed ancestry DIV #999999
#> 15  SAS             South Asian SAS #984EA4
#> 16  SEA             South East Asian ASN #B25928
#> 17  SAF             Sub-Saharan African AFR #F9DA49
#> 18  MIE Multi-Ancestry including Europeans MIE #E887BD
#> 19  MEE Multi-Ancestry excluding Europeans MEE #EF8632
```

The columns are:

Column	Description
acronym	The exact string your data column must contain
ancestry	Full PGS Catalog ancestry label
pop_group	Broader population group abbreviation (1000G/HGDP-style)

Column	Description
color	Hex color assigned to that acronym

What does my data frame need?

Your data frame needs **one column whose values are ancestry acronyms** — the exact strings from the `acronym` column above (case-sensitive). The column can have any name; you point `ggplot2` to it with `aes(color = <your_column>)`.

```
# Minimal working example
df <- data.frame(
  sample_id = paste0("s", 1:6),
  pgs_score = c(0.42, -0.11, 0.87, 0.03, -0.55, 0.29),
  ancestry = c("EUR", "AFR", "EAS", "SAS", "HIS", "MID")
  #           ^-- must match acronyms exactly
)
df
#>   sample_id pgs_score ancestry
#> 1         s1      0.42      EUR
#> 2         s2     -0.11      AFR
#> 3         s3      0.87      EAS
#> 4         s4      0.03      SAS
#> 5         s5     -0.55      HIS
#> 6         s6      0.29      MID
```


The `ancestry` column values must be **character or factor** — numeric codes will not match. The column does **not** need to contain all 19 acronyms; only the ones present in your data are plotted.

Basic scatter plot

```
set.seed(1)
n <- 200
grp <- c("EUR", "AFR", "EAS", "SAS", "HIS", "MID")

df <- data.frame(
  PC1 = rnorm(n),
  PC2 = rnorm(n),
  ancestry = sample(grp, n, replace = TRUE,
                    prob = c(0.40, 0.15, 0.15, 0.12, 0.10, 0.08))
)


ggplot(df, aes(PC1, PC2, color = ancestry)) +
  geom_point(size = 2.5, alpha = 0.85) +
  scale_color_pgcatalog() +
  labs(title = "PCA by ancestry", color = "Ancestry") +
  theme_classic()
```

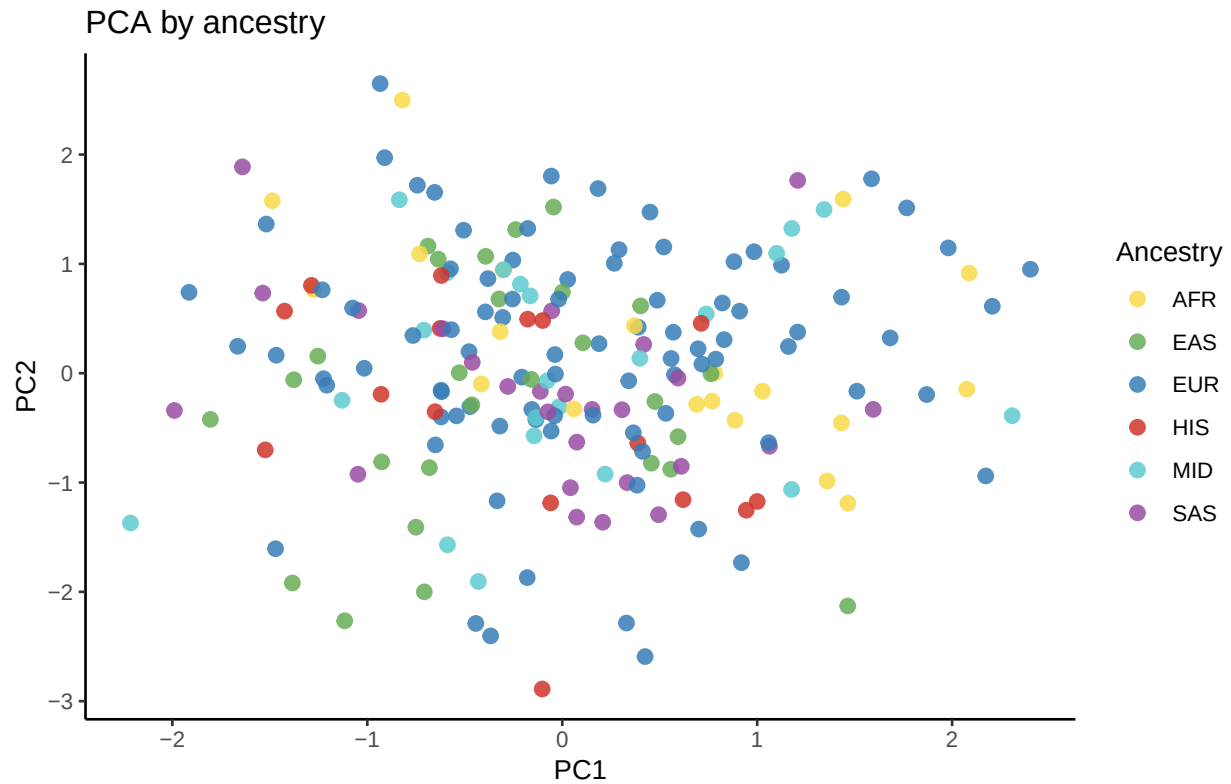

Bar chart (fill aesthetic)

```
counts <- data.frame(
  ancestry = c("EUR", "AFR", "EAS", "SAS", "HIS", "MID", "MIE", "MEE"),
  n         = c(512, 198, 175, 143, 97, 61, 44, 18)
)

ggplot(counts, aes(reorder(ancestry, -n), n, fill = ancestry)) +
  geom_col() +
  scale_fill_pgscatalog() +
  labs(x = "Ancestry", y = "Count", title = "Sample counts by ancestry") +
  theme_classic() +
  theme(legend.position = "none")
```

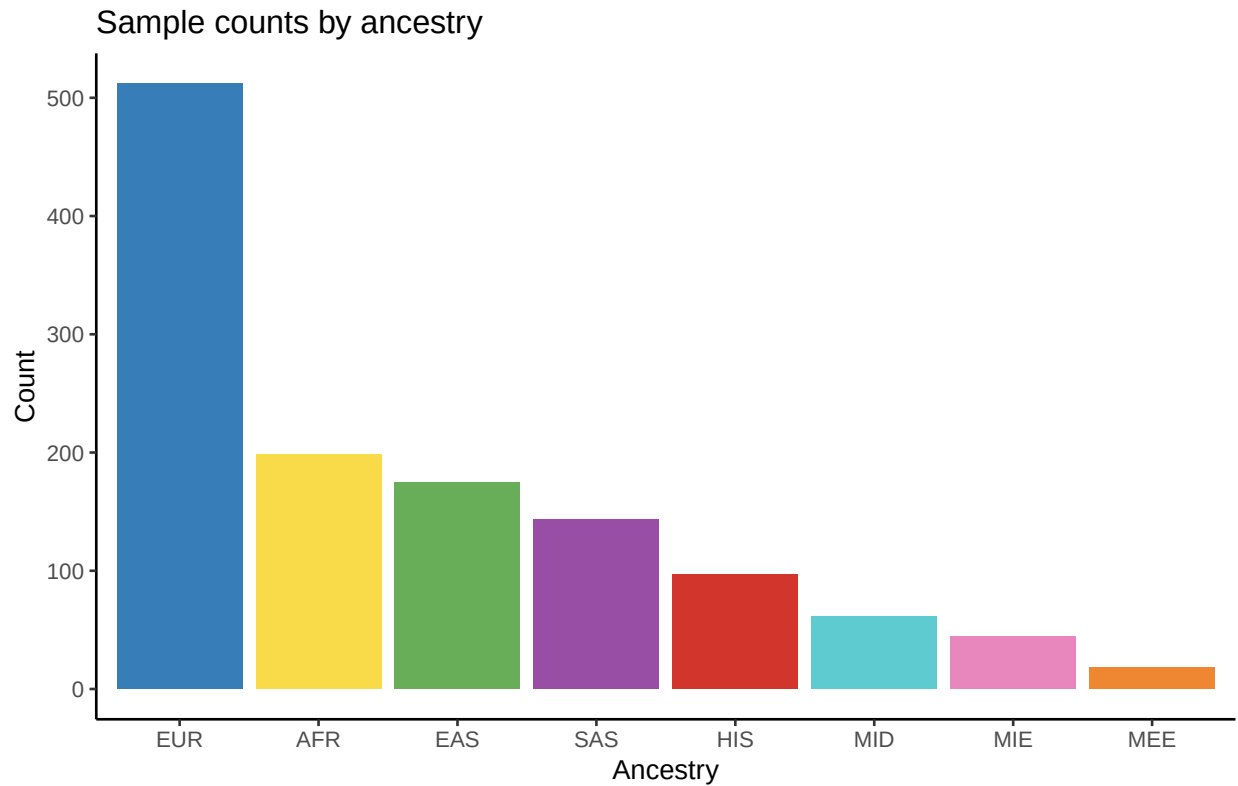


Using `scale_color_manual()` directly

If you need more control (e.g., custom legend labels), use `pgscatalog_scale_values()` to get only the colors for groups in your data:

```
my_groups <- c("EUR", "AFR", "EAS")

ggplot(df[df$ancestry %in% my_groups, ], aes(PC1, PC2, color = ancestry)) +
  geom_point(size = 2.5) +
  scale_color_manual(
    values = pgscatalog_scale_values(my_groups),
    labels = c(AFR = "African", EAS = "East Asian", EUR = "European")
  ) +
  theme_classic()
```

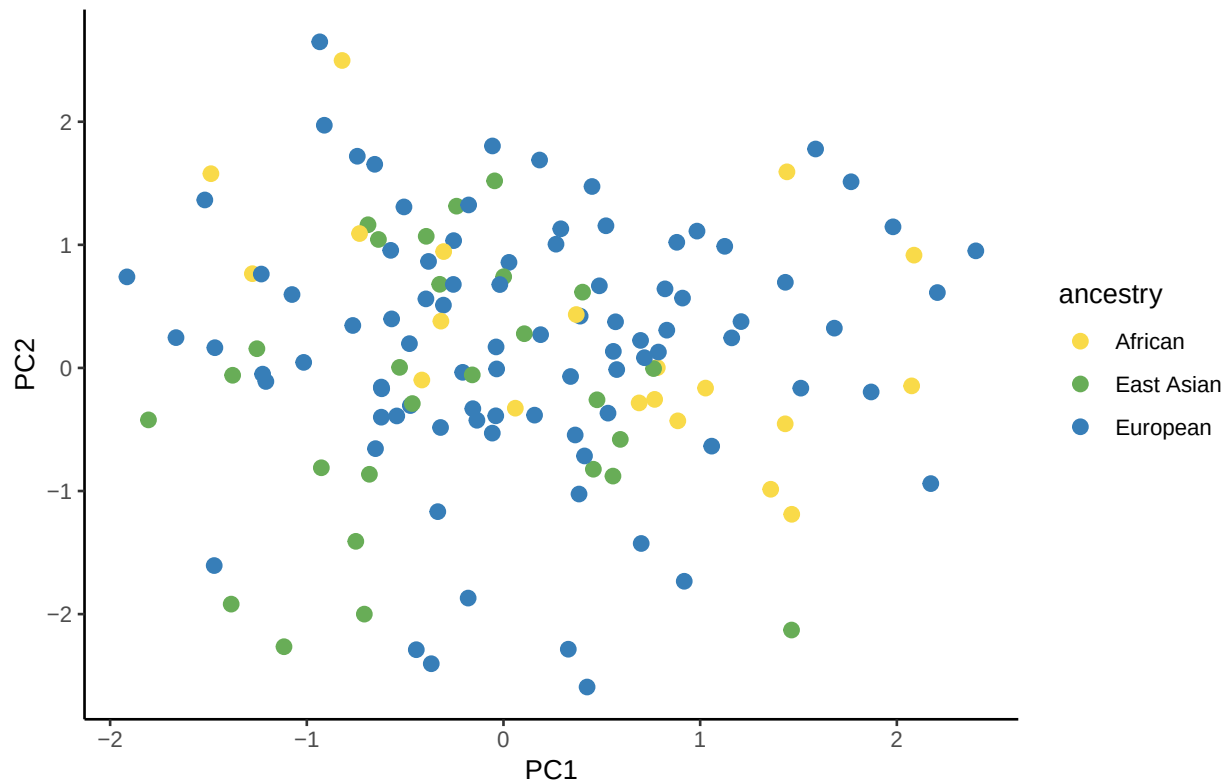

Checking colors programmatically

```
# Look up specific colors by acronym
pgscatalog_cols("EUR", "AFR", "EAS")
#>      EUR      AFR      EAS
#> "#377EB8" "#F9DA49" "#68AD57"

# Check whether your acronyms are all recognized before plotting
my_data_groups <- c("EUR", "AFR", "XYZ") # "XYZ" is not a valid acronym
pgscatalog_scale_values(my_data_groups) # warns about unknown acronyms
#> Warning in pgscatalog_scale_values(my_data_groups): Unknown acronyms (will use
#> grey): XYZ
#>      EUR      AFR      XYZ
#> "#377EB8" "#F9DA49" "#999999"
```

What if my labels have typos or inconsistent formatting?

Use `pgscatalog_match()` to fuzzy-match a column of messy ancestry labels to their PGS Catalog acronyms. Matching tries exact acronym, then exact full name, then edit-distance fuzzy matching — in that order.

```
messy <- c("EUR", "eur", "european", "East Asian", "east_asian", "EAST ASIAN")
pgscatalog_match(messy, quiet = TRUE)
#> [1] "EUR" "EUR" "EUR" "EAS" "EAS" "EAS"
```

Fuzzy matches (within `max_dist` edits, default 3) always produce a warning so you can verify them:

```
pgscatalog_match(c("Europeen", "sas", "Sub-Saharan African"))
#> Warning: Fuzzy matches accepted (verify these are correct):
```

```
#> "European" -> EUR
#> [1] "EUR" "SAS" "SAF"
```

Labels with no match within `max_dist` return NA with a warning:

```
pgscatalog_match(c("EUR", "martian", "unknown_ancestry"))
#> Warning: No match found (returned NA) for:
#> "martian"
#> "unknown_ancestry"
#> Call pgscatalog_ancestry_info() to see valid labels.
#> [1] "EUR" NA NA
```

The typical workflow is to call `pgscatalog_match()` once to add a clean acronym column, then pass that column to the `ggplot2` scales:

```
df_messy <- data.frame(
  sample_id = paste0("s", 1:6),
  pgs_score = c(0.42, -0.11, 0.87, 0.03, -0.55, 0.29),
  ancestry_raw = c("european", "African American or Afro-Caribbean",
    "east_asian", "South Asian", "HIS", "mid")
)

df_messy$ancestry <- pgscatalog_match(df_messy$ancestry_raw, quiet = TRUE)
df_messy[, c("ancestry_raw", "ancestry")]
#>
#> 1 european EUR
#> 2 African American or Afro-Caribbean AAM
#> 3 east_asian EAS
#> 4 South Asian SAS
#> 5 HIS HIS
#> 6 mid MID
```

What if my data uses full ancestry names instead of acronyms?

For exact full names, `pgscatalog_match()` handles this directly. For cases where you want to inspect or customise the mapping, you can also join against `pgscatalog_ancestry_info()` manually:

```
raw <- data.frame(
  sample_id = 1:3,
  ancestry_long = c("European", "African unspecified", "East Asian")
)

info <- pgscatalog_ancestry_info()
merged <- merge(raw, info[, c("ancestry", "acronym")],
  by.x = "ancestry_long", by.y = "ancestry")
merged
#>
#> 1 African unspecified 2 AFR
#> 2 East Asian 3 EAS
#> 3 European 1 EUR
```