https://localhost:7249/swagger/v1/swagger.json

Student

POST /api/Student

Parameters | Cancel | Reset

No parameters

Request body | application/json

```
{
  "name": "Богданов Ілля",
  "groupCode": "303-ТК"
}
```

Execute | Clear

Execute | Clear

Responses

Curl

```
curl -X 'POST' \
  'https://localhost:7249/api/Student' \
  -H 'accept: */*' \
  -H 'Content-Type: application/json' \
  -d '{
  "name": "Богданов Ілля",
  "groupCode": "303-ТК"
}'
```

Request URL

```
https://localhost:7249/api/Student
```

Server response

Code	Details
201 *Undocumented*	Response body

```
{
  "id": "e081f234-eee7-46d1-ac02-e018df0a4fdf",
  "name": "Богданов Ілля",
  "group": "303-ТК"
}
```

Download

Response headers

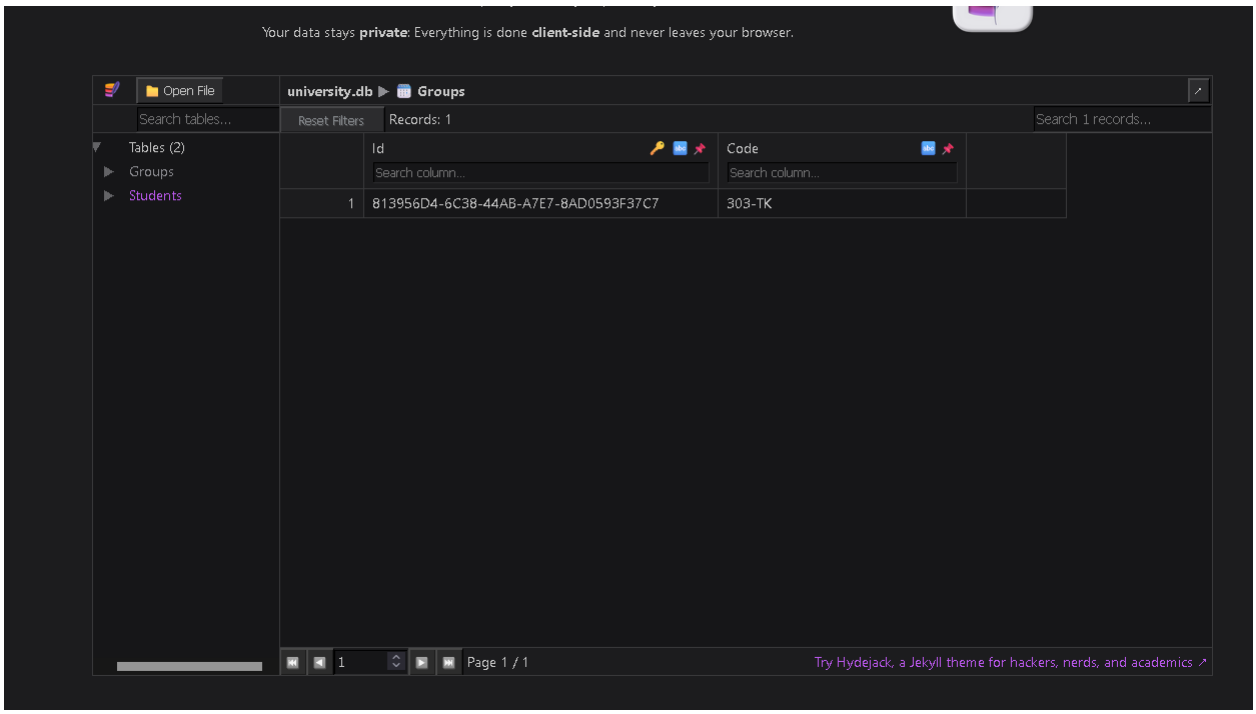
```
content-type: application/json; charset=utf-8
date: Wed,28 May 2025 10:20:37 GMT
location: https://localhost:7249/api/Student?id=e081f234-eee7-46d1-ac02-e018df0a4fdf
server: Kestrel
x-firefox-spdy: h2
```

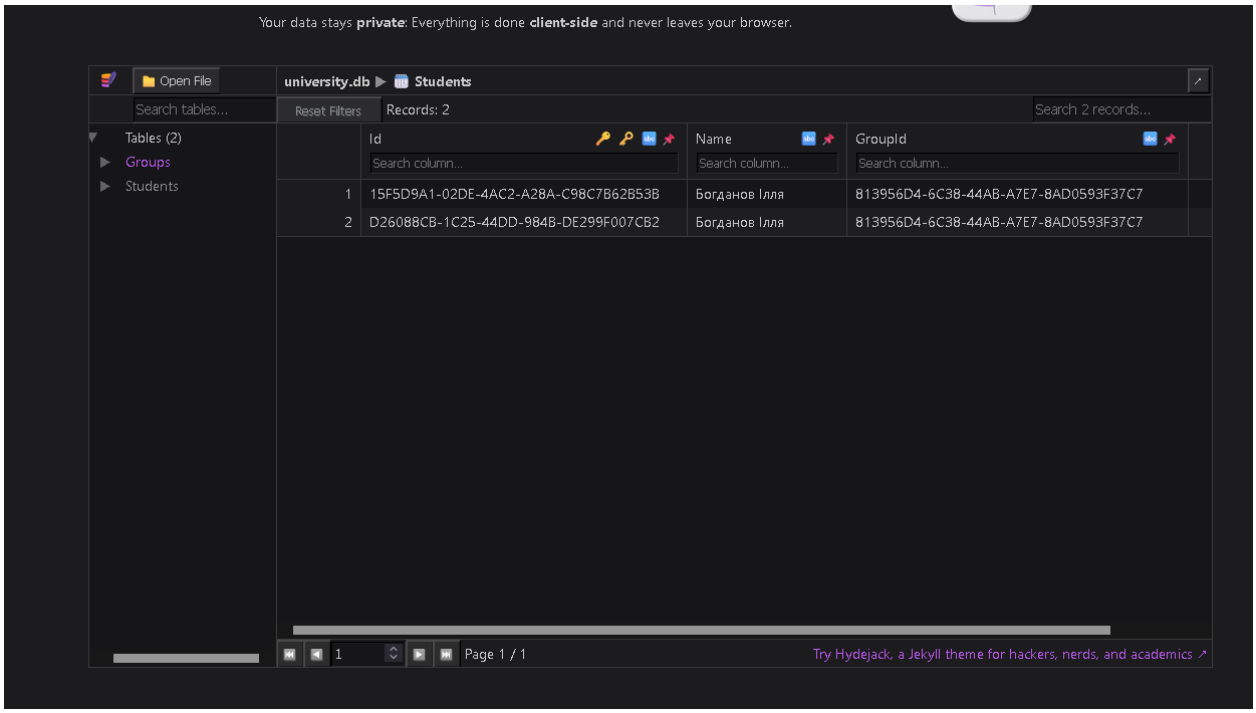
Responses

Code	Description	Links
200	OK	*No links*

C:\Users\Илюшка\Desktop\лабы\3 курс\.NET\NET_Bogdanow1\lab4\University.REST\bin\Debug\net9.0\University.REST.exe

```
info: Microsoft.EntityFrameworkCore.Database.Command[20101]
      Executed DbCommand (12ms) [Parameters=[], CommandType='Text', CommandTimeout='30']
      SELECT COUNT(*) FROM "sqlite_master" WHERE "type" = 'table' AND "rootpage" IS NOT NULL;
info: Microsoft.Hosting.Lifetime[14]
      Now listening on: https://localhost:7249
info: Microsoft.Hosting.Lifetime[14]
      Now listening on: http://localhost:5229
info: Microsoft.Hosting.Lifetime[0]
      Application started. Press Ctrl+C to shut down.
info: Microsoft.Hosting.Lifetime[0]
      Hosting environment: Development
info: Microsoft.Hosting.Lifetime[0]
      Content root path: C:\Users\Илюшка\Desktop\лабы\3 курс\.NET\NET_Bogdanow1\lab4\University.REST
info: Microsoft.EntityFrameworkCore.Database.Command[20101]
      Executed DbCommand (2ms) [Parameters=[], CommandType='Text', CommandTimeout='30']
      SELECT "g"."Id", "g"."Code"
      FROM "Groups" AS "g"
info: Microsoft.EntityFrameworkCore.Database.Command[20101]
      Executed DbCommand (9ms) [Parameters=[@p0='?' (DbType = Guid), @p1='?' (DbType = Guid), @p2='?' (Size = 13)], Comm
andType='Text', CommandTimeout='30']
      INSERT INTO "Students" ("Id", "GroupId", "Name")
      VALUES (@p0, @p1, @p2);
```


Your data stays private: Everything is done client-side and never leaves your browser.
Open File
university.db ▶ Groups
Search tables...
Reset Filters
Records: 1
Search 1 records...
Tables (2)
Groups
Students
Id
Code
Search column...
1
813956D4-6C38-44AB-A7E7-8AD0593F37C7
303-TK
1
Page 1 / 1
Try Hydejack, a Jekyll theme for hackers, nerds, and academics ↗


Your data stays private: Everything is done client-side and never leaves your browser.
Open File
university.db ▶ Students
Search tables...
Reset Filters
Records: 2
Search 2 records...
Tables (2)
Groups
Students
Id
Name
GroupId
Search column...
1
15F5D9A1-02DE-4AC2-A28A-C98C7B62B53B
Богданов Ілля
813956D4-6C38-44AB-A7E7-8AD0593F37C7
2
D26088CB-1C25-44DD-984B-DE299F007CB2
Богданов Ілля
813956D4-6C38-44AB-A7E7-8AD0593F37C7
1
Page 1 / 1
Try Hydejack, a Jekyll theme for hackers, nerds, and academics ↗