


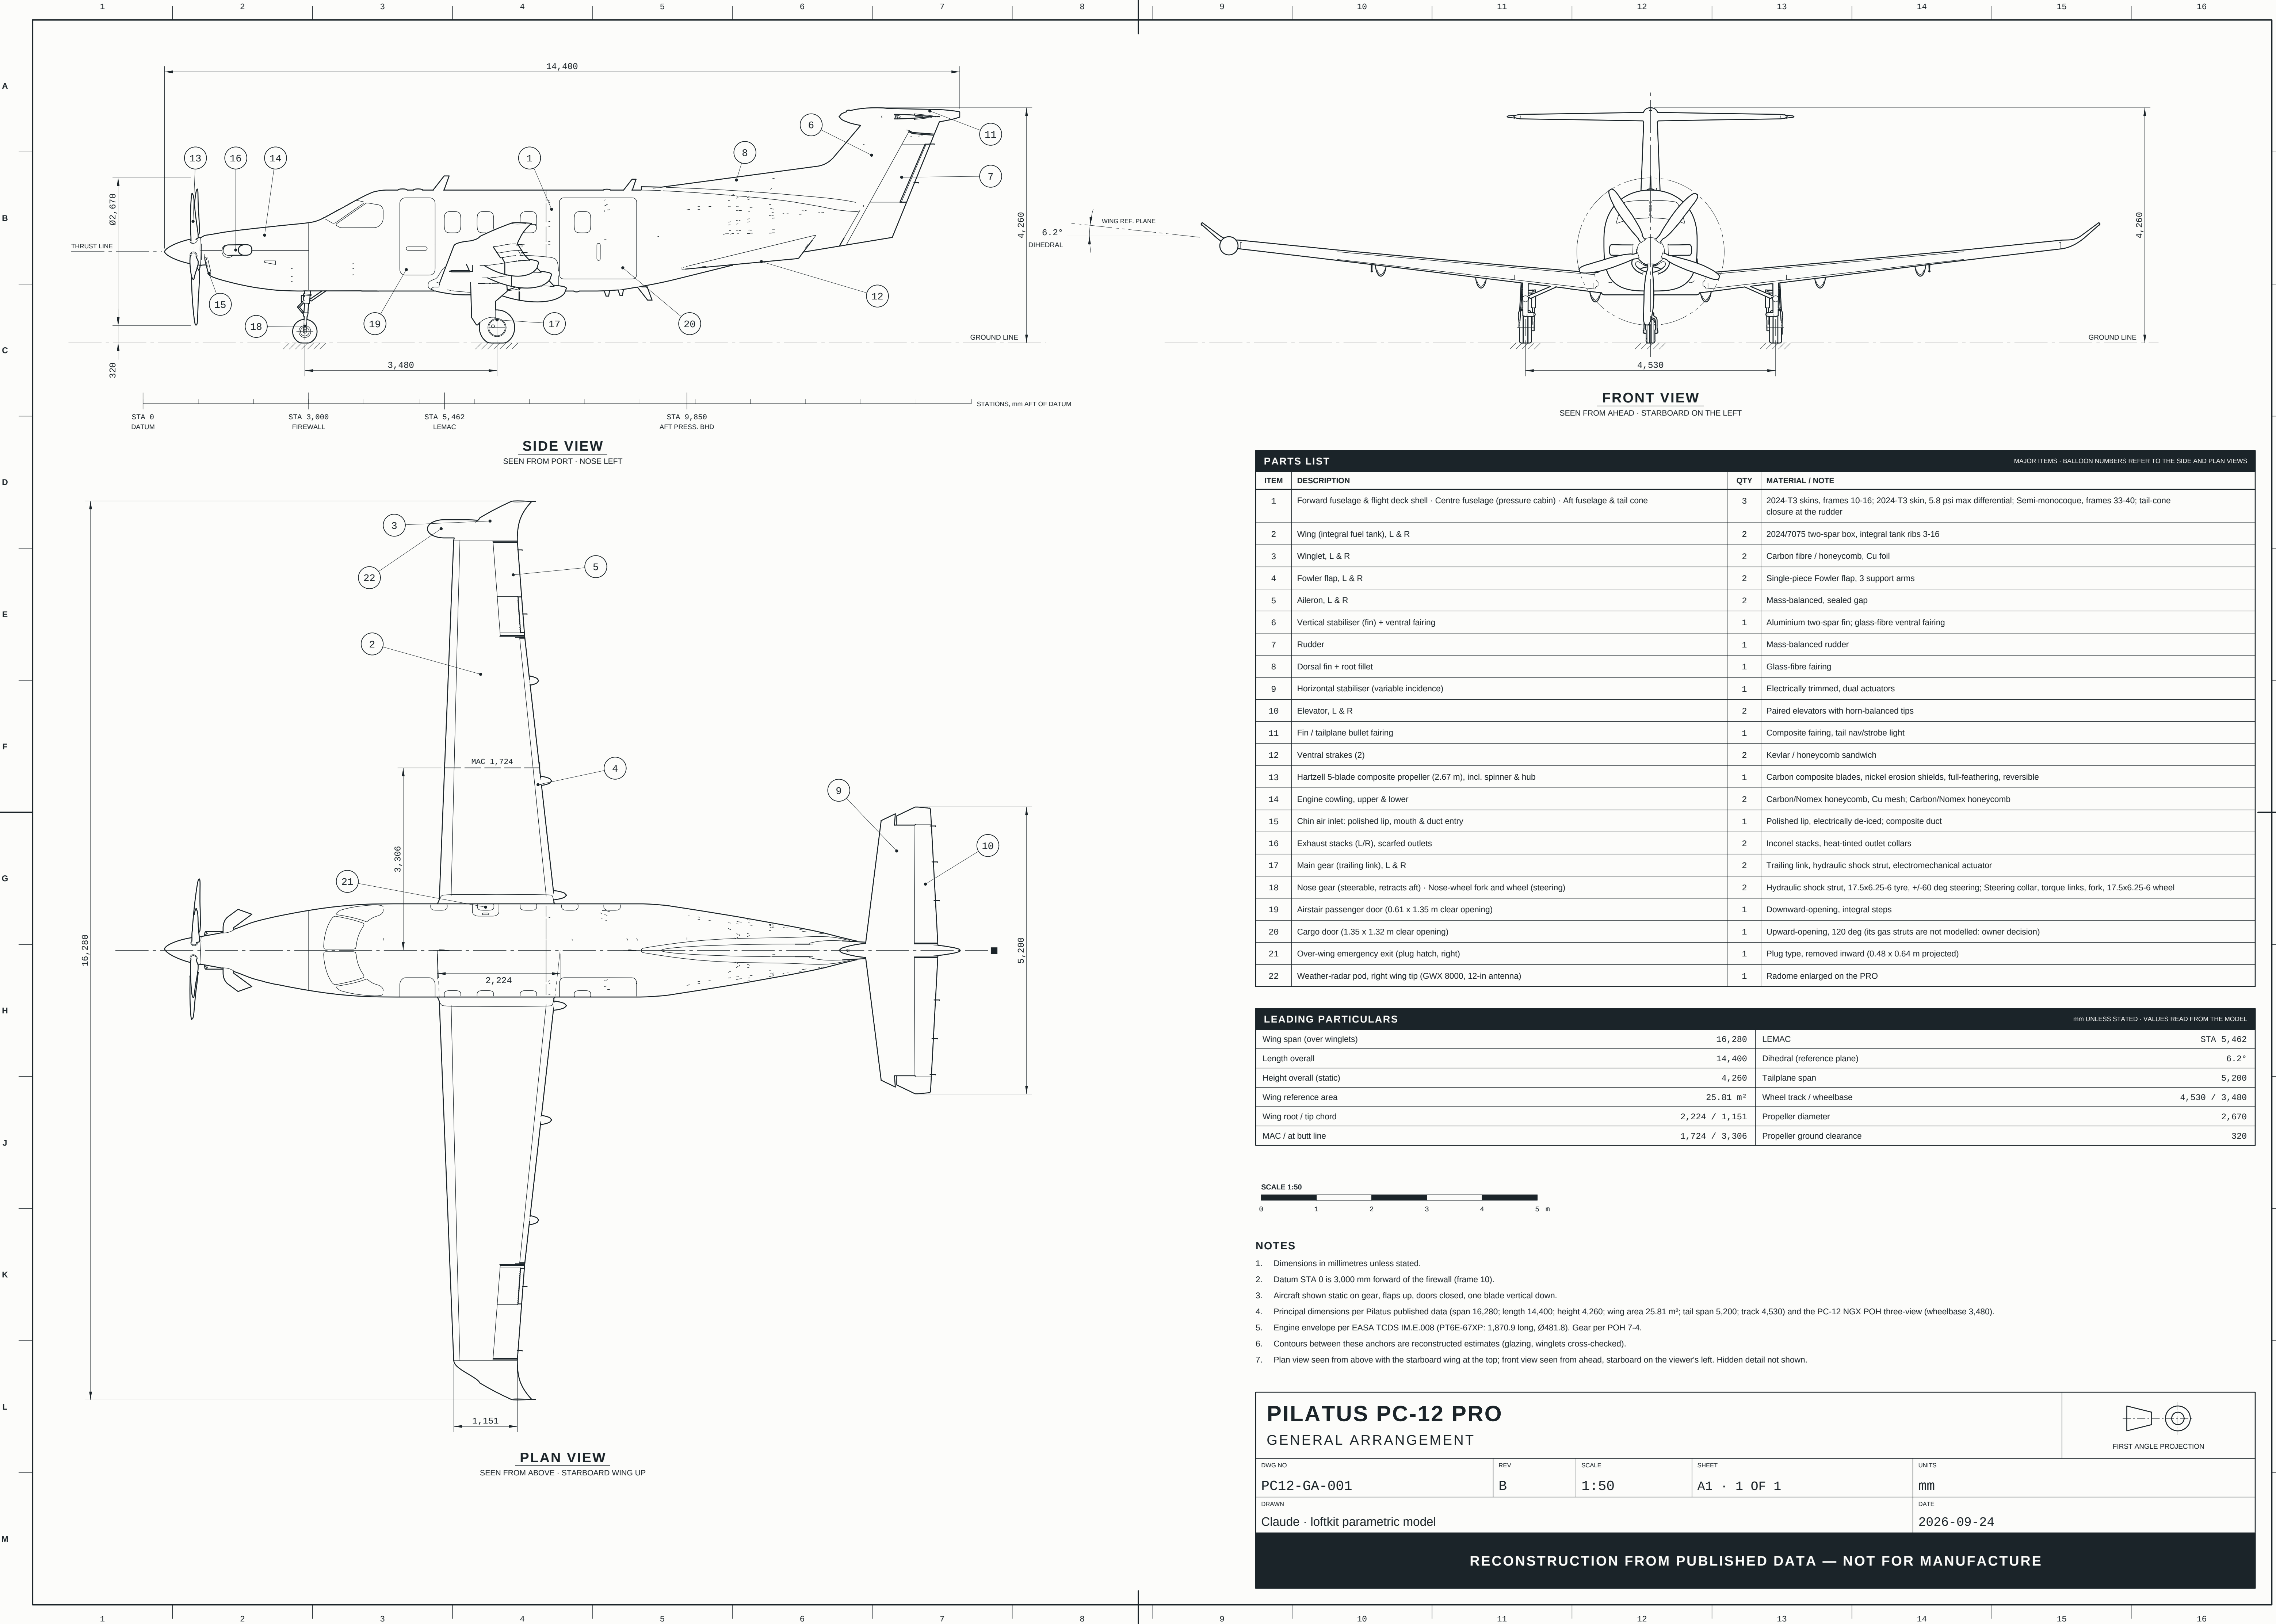

PARTS LIST

| MAJOR ITEMS - BALLOON NUMBERS REFER TO THE SIDE AND PLAN VIEWS |                                                                                                    |     |                                                                                                                                    |
|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----|------------------------------------------------------------------------------------------------------------------------------------|
| ITEM                                                           | DESCRIPTION                                                                                        | QTY | MATERIAL / NOTE                                                                                                                    |
| 1                                                              | Forward fuselage & flight deck shell - Centre fuselage (pressure cabin) - Aft fuselage & tail cone | 3   | 2024-T3 skins, frames 10-16; 2024-T3 skin, 5.8 psi max differential; Semi-monocoque, frames 33-40; tail-cone closure at the rudder |
| 2                                                              | Wing (integral fuel tank), L & R                                                                   | 2   | 2024/7075 two-spar box, integral tank ribs 3-16                                                                                    |
| 3                                                              | Winglet, L & R                                                                                     | 2   | Carbon fibre / honeycomb, Cu foil                                                                                                  |
| 4                                                              | Fowler flap, L & R                                                                                 | 2   | Single-piece Fowler flap, 3 support arms                                                                                           |
| 5                                                              | Aileron, L & R                                                                                     | 2   | Mass-balanced, sealed gap                                                                                                          |
| 6                                                              | Vertical stabiliser (fin) + ventral fairing                                                        | 1   | Aluminium two-spar fin; glass-fibre ventral fairing                                                                                |
| 7                                                              | Rudder                                                                                             | 1   | Mass-balanced rudder                                                                                                               |
| 8                                                              | Dorsal fin + root fillet                                                                           | 1   | Glass-fibre fairing                                                                                                                |
| 9                                                              | Horizontal stabiliser (variable incidence)                                                         | 1   | Electrically trimmed, dual actuators                                                                                               |
| 10                                                             | Elevator, L & R                                                                                    | 2   | Paired elevators with horn-balanced tips                                                                                           |
| 11                                                             | Fin / tailplane bullet fairing                                                                     | 1   | Composite fairing, tail nav/strobe light                                                                                           |
| 12                                                             | Ventral strakes (2)                                                                                | 2   | Kevlar / honeycomb sandwich                                                                                                        |
| 13                                                             | Hartzell 5-blade composite propeller (2.67 m), incl. spinner & hub                                 | 1   | Carbon composite blades, nickel erosion shields, full-feathering, reversible                                                       |
| 14                                                             | Engine cowlings, upper & lower                                                                     | 2   | Carbon/Nomex honeycomb, Cu mesh; Carbon/Nomex honeycomb                                                                            |
| 15                                                             | Chin air inlet; polished lip, mouth & duct entry                                                   | 1   | Polished lip, electrically de-iced; composite duct                                                                                 |
| 16                                                             | Exhaust stacks (L/R), scarfed outlets                                                              | 2   | Inconel stacks, heat-tinted outlet collars                                                                                         |
| 17                                                             | Main gear (trailing link), L & R                                                                   | 2   | Trailing link, hydraulic shock strut, electromechanical actuator                                                                   |
| 18                                                             | Nose gear (steerable, retracts aft) - Nose-wheel fork and wheel (steering)                         | 2   | Hydraulic shock strut, 17.5x6.25-6 tyre, +/-60 deg steering; Steering collar, torque links, fork, 17.5x6.25-6 wheel                |
| 19                                                             | Airstair passenger door (0.61 x 1.35 m clear opening)                                              | 1   | Downward-opening, integral steps                                                                                                   |
| 20                                                             | Cargo door (1.35 x 1.32 m clear opening)                                                           | 1   | Upward-opening, 120 deg (its gas struts are not modelled: owner decision)                                                          |
| 21                                                             | Over-wing emergency exit (plug hatch, right)                                                       | 1   | Plug type, removed inward (0.48 x 0.64 m projected)                                                                                |
| 22                                                             | Weather-radar pod, right wing tip (GWX 8000, 12-in antenna)                                        | 1   | Radome enlarged on the PRO                                                                                                         |

LEADING PARTICULARS

| mm UNLESS STATED - VALUES READ FROM THE MODEL |               |                            |               |
|-----------------------------------------------|---------------|----------------------------|---------------|
| Wing span (over winglets)                     | 16,280        | LEMAC                      | STA 5,462     |
| Length overall                                | 14,400        | Dihedral (reference plane) | 6.2°          |
| Height overall (static)                       | 4,260         | Tailplane span             | 5,200         |
| Wing reference area                           | 25.81 m²      | Wheel track / wheelbase    | 4,530 / 3,480 |
| Wing root / tip chord                         | 2,224 / 1,151 | Propeller diameter         | 2,670         |
| MAC / at butt line                            | 1,724 / 3,306 | Propeller ground clearance | 320           |



NOTES


- Dimensions in millimetres unless stated.
- Datum STA 0 is 3,000 mm forward of the firewall (frame 10).
- Aircraft shown static on gear, flaps up, doors closed, one blade vertical down.
- Principal dimensions per Pilatus published data (span 16,280; length 14,400; height 4,260; wing area 25.81 m²; tail span 5,200; track 4,530) and the PC-12 NGX POH three-view (wheelbase 3,480).
- Engine envelope per EASA TCDS IM.E.008 (PT6E-67XP: 1,870.9 long, Ø481.8). Gear per POH 7-4.
- Contours between these anchors are reconstructed estimates (glazing, winglets cross-checked).
- Plan view seen from above with the starboard wing at the top; front view seen from ahead, starboard on the viewer's left. Hidden detail not shown.

PILATUS PC-12 PRO

GENERAL ARRANGEMENT

|                                            |                    |               |                      |             |
|--------------------------------------------|--------------------|---------------|----------------------|-------------|
| DWG NO<br>PC12-GA-001                      | REV<br>B           | SCALE<br>1:50 | SHEET<br>A1 · 1 OF 1 | UNITS<br>mm |
| DRAWN<br>Claude · loftkit parametric model | DATE<br>2026-09-24 |               |                      |             |

RECONSTRUCTION FROM PUBLISHED DATA — NOT FOR MANUFACTURE



FIRST ANGLE PROJECTION