

Salesforce Certified MuleSoft Developer I

Time: 52 minutes of 120 minutes total
Status: Pass

	Percentage
Designing Application Networks	75%
Designing APIs	80%
Designing and Modifying Mule Events	100%
Designing Mule Applications	50%
Designing API Implementation Interface	75%
Designing Connectors	100%
Designing Records	83%
Designing Data	100%
Designing Events	80%
Designing Errors	100%
Designing and Troubleshooting Mule Apps	100%
Designing and Managing APIs and Integrations	50%

Congratulations! You have successfully completed the certification exam to become a Salesforce Certified MuleSoft Developer I. Welcome to the community of Certified Professionals!

Standard | True | ☒ Input

Your assessment responses are listed below. Asterisks(*) next to the item number indicate you have marked that item for review. Click on the item number to return to the desired item. When you are ready to submit your assessment, click the 'Submit Exam' button below to submit your responses and end the assessment.

Assessment Summary

Number of Items: 60
Answered:
Number of Items: 0
Unanswered:
Number of Items: 0
Marked for Review:

Answers

1. A	2. A	3. C	4. B
5. A	6. B	7. C	8. D
9. C	10. A	11. A	12. C
13. A	14. B	15. C	16. B
17. B	18. A	19. A	20. A
21. A	22. D	23. C	24. A
25. B	26. D	27. C	28. D
29. D	30. B	31. D	32. D
33. A	34. A	35. A	36. C
37. B	38. B	39. B	40. B
41. B	42. C	43. C	44. A
45. C	46. C	47. C	48. C
49. A	50. A	51. D	52. A
53. B	54. D	55. A	56. A
57. B	58. D	59. C	60. C

Submit Exam

version: 1.0

```
/order:
  post:
    body:
      application/xml:
        example: |
          <order oid="1001">
            <customerName>Annie Point</customerName>
            <itemName>Electric Standing Desk</itemName>
            <cost>300.00</cost>
          </order>
```

Other methods: GET POST PUT DELETE PATCH

Request URL: http://localhost:8081/api/order

Parameters: Headers Body Authorization Actions

Body content type: multipart/mixed

Raw input

415 Unsupported Media Type 4097.00 ms

DETAILS

```
{
  "message": "Unsupported media type"
}
```

- A. ☐ Set a request header with the name Content-Type to the value application/octet-stream
- B. ☐ Set a response header with the name Content-Type to the value application/octet-stream
- C. ☒ Set a request header with the name Content-Type to the value application/xml
- D. ☐ Set a response header with the name Content-Type to the value application/xml

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:08:14

60 of 60.

Refer to the exhibits. The web client sends a POST request to the ACME Orders API with an XML payload.

An error is returned.

What should be changed in the request so that a success response code is returned to the web client?

```
#%RAML 1.0
title: ACME Order API
version: 1.0

/order:
  post:
    body:
      application/xml:
        example: |
          <order oid="1001">
            <customerName>Annie Point
          </customerName>
```



The screenshot shows a REST client interface with the following details:

- URL: `http://localhost:8081/api/order`
- Method: `POST` (selected)
- Buttons: `GET`, `POST`, `PUT`, `DELETE`, `PATCH`, `SEND`
- Parameters: `Headers`, `Body` (selected), `Authorization`, `Actions`
- Body content type: `application/xml`



- A. ☐ The result of the domesticShipping flow
- B. ☐ The result of the internationalShipping flow
- C. ☒ A DataWeave syntax error
- D. ☐ A string with value "FR"

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam


Salesforce Certified MuleSoft Developer I

Time Remaining: 01:08:20

59 of 60.

Refer to the exhibits. In the Choice router, the When expression for the domesticShipping route is set to "[payload = 'FR']".

What is logged after the Choice router completes?

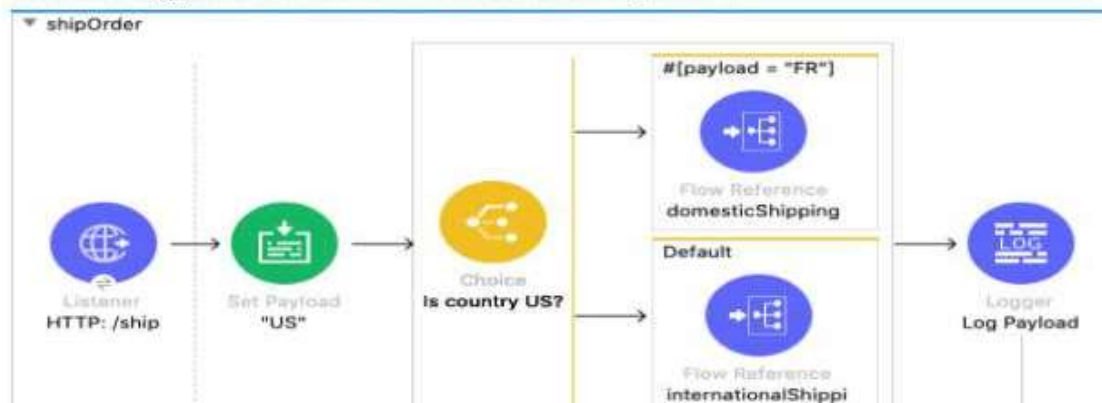

```

<http:request-config name="HTTP_Request_configuration" doc:name="HTTP Request configuration" basePath="/api/partners" >
  <http:request-connection host="localhost" port="8081" />
</http:request-config>
<flow name="webClient" >
  <scheduler doc:name="Scheduler" >
    <scheduling-strategy>
      <fixed-frequency frequency="10" timeUnit="SECONDS"/>
    </scheduling-strategy>
  </scheduler>
  <set-payload value="#[output.application/json --- {aid: 123, qty: 5, description: 'Jet Skies'}]" />
  <http:request doc:name="/fastShipping" config-ref="HTTP_Request_configuration" path="/fastShipping" method="PUT"/>
  <logger level="INFO" doc:name="logger" message="#[payload]" />
</flow>

<http:listener-config name="HTTP_Listener_config" doc:name="HTTP Listener config" basePath="/api/partners" >
  <http:listener-connection host="0.0.0.0" port="8081" />
</http:listener-config>
<flow name="mockServer" >
  <http:listener doc:name="Listener" config-ref="HTTP_Listener_config" path="/fastShipping" allowedMethods="POST"/>
  <logger level="INFO" doc:name="Request received" message="#['Request received']" />
</flow>
*****
Message      : HTTP PUT on resource 'http://localhost:8081/api/partners/fastShipping' failed: method not allowed (405).
Element      : webClient/webClient/1 @ order-shipping:orderShipping.xml:18 (/fastShipping)
Element DSL  : <http:request doc:name="/fastShipping" config-ref="HTTP_Request_configuration" path="/fastShipping" method="PUT"/></http:request>
Error type   : HTTP-METHOD_NOT_ALLOWED
FlowStack    : at webClient(webClient/webClient/1 @ order-shipping:orderShipping.xml:18 (/fastShipping))

(Set debug level logging or '-Dmule.verbose.exceptions=true' for everything)
*****

```

- A. ☐ Change the method attribute's value to ""
- B. ☐ Change the protocol attribute's value to "HTTPS"
- C. ☐ Change the path attribute's value to "/api/partners/fastShipping"
- D. ☒ Change the method attribute's value to "POST"

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:08:26


58 of 60.

Refer to the exhibits. The webClient flow sends requests to the mockServer flow's HTTP Listener.

An HTTP:METHOD_NOT_ALLOWED error is thrown each time the webClient flow executes.

What attribute value must be changed in the webClient flow's HTTP Request operation to prevent this error from being thrown?



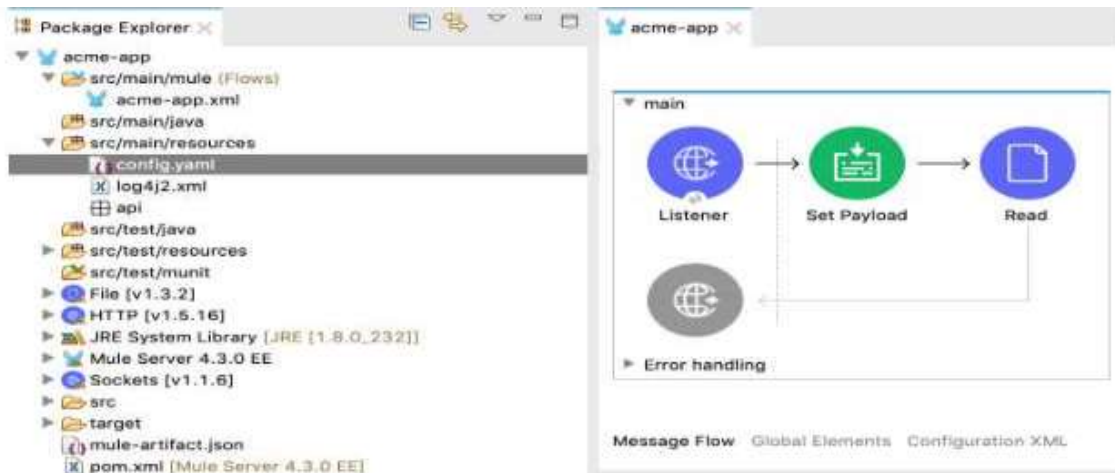

- A. ☐ A dependency element in the pom.xml file
- B. ☒ A configuration-properties element in the acme-app.xml file
- C. ☐ A file-config element in the acme-app.xml file
- D. ☐ A propertiesFile key/value pair in the mule-artifact.json file

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam


Salesforce Certified MuleSoft Developer I

Time Remaining: 01:08:33

57 of 60.

Refer to the exhibit. The Mule application's connectors are configured with property placeholders whose values are set in the config.yaml file.

What must be added to the Mule application to link the config.yaml file's values with the property placeholders?

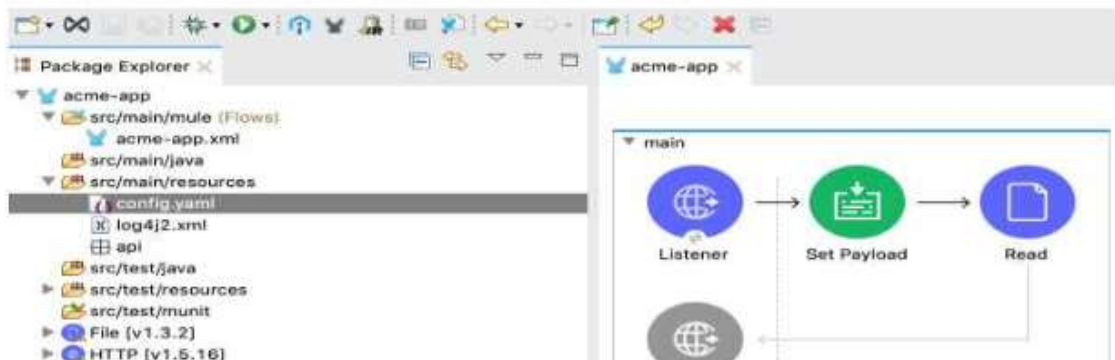



• Error handling

Set Payload

```

<flow name="processItems" >
  <http:listener doc:name="HTTP: POST /items" config-ref="HTTP Listener Config" path="/items"/>
    <set-payload value="#{[]}" doc:name="Extract items array" />
    <validation:is-not-empty-collection doc:name="Is not empty collection" message="Payload is an empty collection!"/>
    <db:insert doc:name="INSERT" config-ref="Database Config">
      <sql>#{[DATA]INSERT INTO accounts}</sql>
    </db:insert>
  </flow>
  <flow name="updateCustomerRecord" >
    <http:listener doc:name="HTTP: PATCH /email" config-ref="HTTP Listener Config" path="/email"/>
    <set-payload value="#{}" doc:name="Extract email" />
    <validation:is-email doc:name="Is email" email="#{payload}" message="Not an email!"/>
    <db:update doc:name="UPDATE" config-ref="Database Config">
      <sql>#{[DATA]UPDATE accounts}</sql>
    </db:update>
  </flow>
  <error-handler name="global-error-handler" >
    <on-error-continue enableNotifications="true" logExceptions="true" doc:name="On Error Continue" type="VALIDATION:EMPTY_COLLECTION">
      <set-payload value="#{[]}" doc:name="Set Payload" />
    </on-error-continue>
    <on-error-continue enableNotifications="true" logExceptions="true" doc:name="On Error Continue" type="VALIDATION:INVALID_EMAIL">
      <set-payload value="#{[]}" doc:name="Set Payload" />
    </on-error-continue>
    <on-error-propagate enableNotifications="true" logExceptions="true" doc:name="On Error Propagate" >
      <set-payload value="#{payload}" doc:name="Set Payload" />
    </on-error-propagate>
  </error-handler>

```

☒ A. In the my-app.xml file, as an attribute of a configuration element
☐ B. In the mule-artifact.json file, as the value of a key-value pair
☐ C. In the pom.xml file, as the value of a global element
☐ D. In the Validation folder, as the value of a global element in the error-handling.yaml file

☐ Mark this item for later review.

< Back
Next >
Review All
Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:08:39


56 of 60.

Refer to the exhibits. The my-app.xml file contains an Error Handler scope named "global-error-handler".

The Error Handler scope needs to be set to be the default error handler for every flow in the Mule application.

Where and how should the value "global-error-handler" be added in the Mule project so that the Error Handler scope is the default error handler of the Mule application?



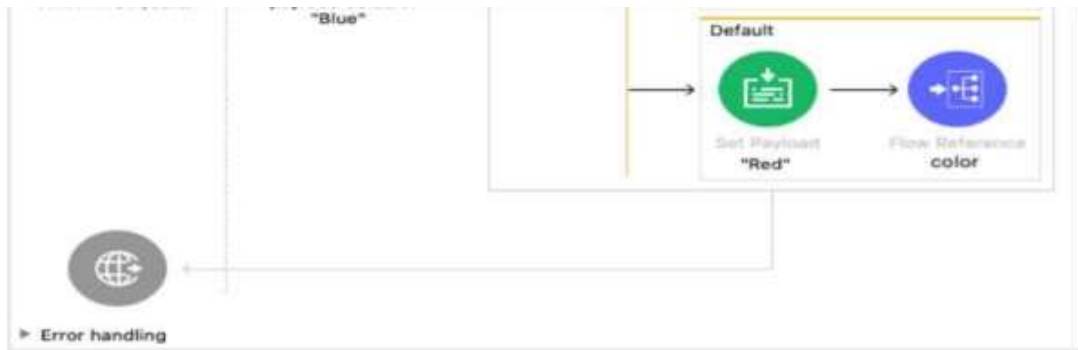

- A. ☒ An error message
- B. ☐ "Red"
- C. ☐ "Blk"
- D. ☐ "Green"

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:08:45

55 of 60.

Refer to the exhibit. The Default scope in the Choice router recursively calls the color flow.

A web client sends a PUT request to the HTTP Listener with payload "Blue".

What response is returned to the web client?





► Error handling

```
<http:listener-config name="HTTP_Listener_config" doc:name="HTTP Listener config" >
  <http:listener-connection host="localhost" port="8081" />
</http:listener-config>

<http:request-config name="HTTP_Request_configuration" doc:name="HTTP Request configuration" >
  <http:request-connection host="localhost" port="8081" />
</http:request-config>

<flow name="color" initialState="started">
  <http:listener doc:name="HTTP GET /color" config-ref="HTTP_Listener_config" path="/color" />
  <set-variable value="red" doc:name="color" variableName="color" />
  <set-payload value="red" doc:name="red" />
  <http:request method="POST" doc:name="POST http://localhost:8081/decideColor" config-ref="HTTP_Request_configuration"
    path="/decideColor" />
  <logger level="INFO" doc:name="log payload" message="#{payload}" />
</flow>

<flow name="decideColor">
  <http:listener doc:name="HTTP POST /decideColor" config-ref="HTTP_Listener_config" path="/decideColor"
    allowedMethods="POST"/>
  <set-payload value="#{if (vars.color == null) 'white' else 'blue'}"
    doc:name="if (color variable is null) 'white' else 'blue'"/>
</flow>
```

- A. ☐ An error message
- B. ☐ "red"
- C. ☐ "white"
- D. ☒ "blue"

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:08:51

54 of 60.

Refer to the exhibits. In the color flow, both the variable named color and the payload are set to "red".

An HTTP POST request is then sent to the decideColor flow's HTTP Listener.

What is the payload value at the Logger component after the HTTP Request completes?



Salesforce Certified MuleSoft Developer I

Time Remaining: 01:08:59

53 of 60.

Northern Trail Outfitter's Center for Enablement (C4E) has built foundational assets (API specifications and implementation templates, common frameworks, and best practices guides) and published them to Anypoint Exchange.

What is a metric related to these foundational assets that helps NTO measure the success of its C4E efforts?

- A. ☐ Correlation of each foundational asset with the counts of developers that downloaded each asset
- B. ☒ Correlation of key performance indicators (KPIs) of production applications with foundational assets
- C. ☐ Utilization counts of foundational assets in production applications
- D. ☐ Counts of how many lines of businesses (LoBs) consumed each foundational asset

☐ Mark this item for later review.



► Error handling

```
<flow name="main">
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_listener_config" path="/" allowedMethods="GET"/>
  <set-payload value="#[[1,2,3,4]]" doc:name="[1,2,3,4]" />
  <set-variable value="10" doc:name="quantity = 10" variableName="quantity" />
  <foreach doc:name="For Each">
    <set-payload value="#['order' ++ payload]" doc:name="'order' ++ payload" />
    <set-variable value="#[vars.quantity + 1]" doc:name="quantity + 1" variableName="quantity" />
  </foreach>
  <logger level="INFO" doc:name="Logger" message="#[[ payload, vars.quantity ]]" />
</flow>
```

- A. ☒ [[1,2,3,4], 14]
- B. ☐ [[order1, order2, order3, order4], 14]
- C. ☐ [order1order2order3order4, 14]
- D. ☐ [[1,2,3,4], 10]

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam


Salesforce Certified MuleSoft Developer I

Time Remaining: 01:09:05

52 of 60.

Refer to the exhibits.

What payload and quantity are logged at the end of the main flow?

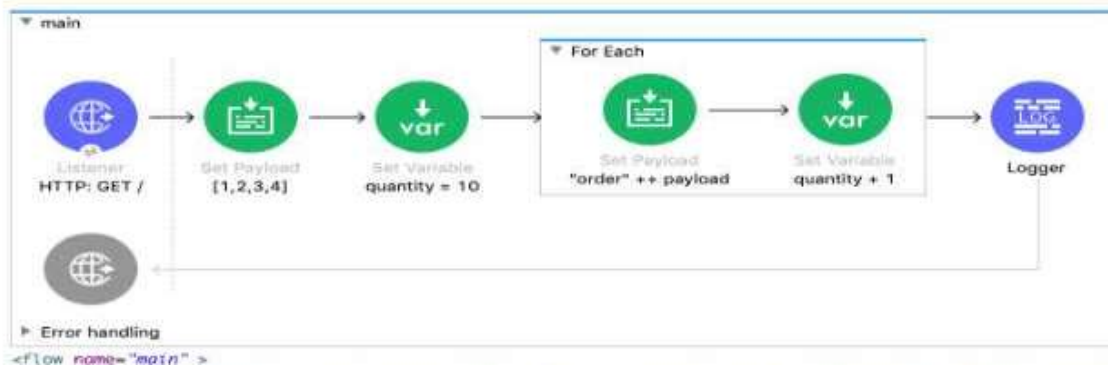

cindy.park@example.com" }

- A. ☐ `import libs.dw.WebStore`

`loginUser( "cindy.park@example.com" )`
- B. ☐ `import libs.dw`

`WebStore.loginUser( "cindy.park@example.com" )`
- C. ☐ `import * from libs::dw`

`WebStore::loginUser( "cindy.park@example.com" )`
- D. ☒ `import * from libs::dw:WebStore`

`loginUser( "cindy.park@example.com" )`

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:09:11

51 of 60.

A Mule project contains a DataWeave module file WebStore.dwl that defines a function named loginUser. The module file is located in the project's src/main/resources/libs/dw folder.

What is correct DataWeave code to import all of the WebStore.dwl file's functions and then call the loginUser function for the login "cindy.park@example.com"?

- A. ☐ `import libs.dw.WebStore`

`loginUser( "cindy.park@example.com" )`
- B. ☐ `import libs.dw`

`WebStore.loginUser( "cindy.park@example.com" )`

A. ☒ ID ZIPCODE
1 90001
2 90005
3 90009
4 90001

B. ☐ ID ZIPCODE
1 90001
2 90005
3 90009

C. ☐ ID ZIPCODE
1 90001
2 90005
3 90009
4 90001
5 90006

D. ☐ ID ZIPCODE
1 90001
2 90005
3 90009
5 90006

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:09:20

50 of 60.

Refer to the exhibits. A database Address table contains a ZIPCODE column and an increasing ID column. The Address table currently contains four (4) records. The On Table Row Database listener is configured with its watermark set to the Address table's ZIPCODE column and then the Mule application is run in Anypoint Studio for the first time, and the On Table Row Database listener polls the Address table.

A new row is added to the database with ID=5 and ZIPCODE=90006, and then the On Table Row Database listener polls the database again.

After the next execution of the On Table Row Database listener polling, what database rows have been processed by the Mule flow since the Mule application was started?

mainFlow

orders.raml

```
/orders:
  get:
  post:
  /order:
    get:
    patch:
/reports:
  get:
```

- A. ☒ 1
B. ☐ 2
C. ☐ 3
D. ☐ 5

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:09:28

49 of 60.

Refer to the exhibit. APIkit is used to generate flow components for the RAML specification.

How many apikit:router XML elements are generated to handle requests to every endpoint defined in the RAML specification?

```
orders.raml
```

```
/orders:  
  get:  
  post:  
  /order:  
    get:  
    patch:  
/reports:  
  get:
```

- A. ☐ ☐ Attach project sources
☐ Include project modules and dependencies
- B. ☐ ☒ Attach project sources
☐ Include project modules and dependencies
- C. ☒ ☐ Attach project sources
☒ Include project modules and dependencies
- D. ☐ ☒ Attach project sources
☒ Include project modules and dependencies

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining: 01:09:39

48 of 60.

A Mule application contains an ActiveMQ JMS dependency. The Mule application was developed in Anypoint Studio and runs successfully in Anypoint Studio.

The Mule application must now be exported from Anypoint Studio and shared with another developer.

What export options create the smallest JAR file that can be imported into the other developer's Anypoint Studio and run successfully?

- A. ☐ ☐ Attach project sources
☐ Include project modules and dependencies
- B. ☐ ☒ Attach project sources
☐ Include project modules and dependencies
- C. ☒ ☐ Attach project sources
☒ Include project modules and dependencies

Time Remaining: 01:09:48

47 of 60.

A shopping API contains a method to look up store details by department.

To get information for a particular store, web clients will submit requests with a query parameter named department and a URI parameter named storeId.

What is a valid RAML snippet that supports requests from web clients to get data for a specific storeId and department name?

- A. ☐

```
/department:  
  get:  
    uriParameters:  
      storeId:
```
- B. ☐

```
get:  
  queryParameters:  
    department:  
  uriParameters:  
    storeId:
```
- C. ☒

```
/({storeId}):  
  get:  
    queryParameters:  
      department:
```
- D. ☐

```
get:  
  uriParameters:
```

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:09:58**46 of 60.**

A Mule application configured with autodiscovery implements an API.

Where is governance enforced for policies defined for this Mule application?

- A. ☐ In the Mule application
- B. ☐ In a separate API proxy application
- C. ☒ In API Manager
- D. ☐ In Runtime Manager

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

```
enum:
  - "retail"
  - "commercial"
industry:
  required: true
  enum:
    - "finance"
    - "construction"
    - "government"
```

- A. ☐ /accounts/retail/finance
- B. ☐ /accounts?account_type=retail&industry=finance
- C. ☒ /accounts?account_type=retail&industry=finance
- D. ☐ /accounts/account_type=retail/industry=finance

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:10:04


45 of 60.

Refer to the exhibit. This RAML specification includes a resource and a method to retrieve accounts by account_type and industry.

What is the correct URI to get all retail finance accounts?

```
#%RAML 1.0
title: Accounts API

/accounts:
  get:
    queryParameters:
      account_type:
        required: true
        enum:
          - "retail"
          - "commercial"
      industry:
```
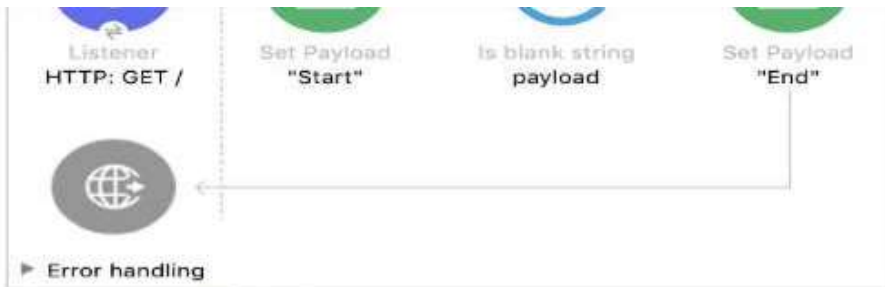
```
<flow name="validatePayload" >  
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />  
  <set-payload value="Start" doc:name="Start" />  
  <validation:is-blank-string doc:name="payload" value="#[payload]" />  
  <set-payload value="End" doc:name="End" />  
</flow>
```

- A. ☒ "String is not blank"
- B. ☐ "End"
- C. ☐ ""
- D. ☐ "Start"

☐ Mark this item for later review.

[< Back](#) [Next >](#) [Review All](#) [Submit Exam](#)

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:10:11

44 of 60.

Refer to the exhibits. The Mule application does NOT define any global error handler elements. A web client sends a GET request to the HTTP Listener.

What response message is returned to the web client?



Salesforce Certified MuleSoft Developer I

Time Remaining: 01:10:14

43 of 60. Following MuleSoft's recommended API-led connectivity approach, Northern Trail Outfitters (NTO) has created an application network. NTO now needs to create an API to transform, orchestrate, and aggregate data provided by other APIs in the application network. This API should be flexible enough to handle data from additional APIs in the future.

According to MuleSoft's recommended API-led connectivity approach, what is the best layer for this new API?

- A. ☐ Experience layer
- B. ☐ System layer
- C. ☒ Process layer
- D. ☐ Security layer

☐ Mark this item for later review.

[< Back](#)[Next >](#)[Review All](#)[Submit Exam](#)

```
<flow name="getTemp" >
  <http:listener doc:name="HTTP: GET /getTemp" config-ref="HTTP Listener Config" path="/getTemp"/>
    <output:retrieve-all doc:name="Retrieve all"/>
    <set-payload value="#[output application/json <== payload]" doc:name="output application/json <== payload" />
    <logger level="INFO" />
  </flow>
```

- A. ☐ {
 "temp": [70,65,100,60,85]
}
- B. ☐ {
 "temp": "100"
}
- C. ☒ {
 "temp": "85"
}
- D. ☐ {
 "temp": 70,
 "temp": 65,
 "temp": 100,
 "temp": 60,
 "temp": 85
}

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:10:22

42 of 60.

Refer to the exhibits. The updateTemp and getTemp flows share the same default object store.

A web client sends one GET request to the test flow's HTTP Listener, which causes the test flow to call the updateTemp flow. After the test flow returns a response, the web client then sends a different GET request to the getTemp flow's HTTP Listener. The test flow is not called a second time.

What response is returned from the request to the getTemp flow's HTTP Listener?



Error handling

```
<flow name="logPayload" >
  <scheduler doc:name="Scheduler" >
    <scheduling-strategy >
      <fixed-frequency />
    </scheduling-strategy>
  </scheduler>
  <set-payload value="#[one: {child1: 'Name1',child2: 'Name2'}]" doc:name="Set Payload" />
  <logger level="INFO" doc:name="Logger" message="Result: #[ 'INFO' ++ payload]" />
</flow>
```

Notes

Help

Generic

Message: Result:

Level:

Category:

A. ☐ ERROR: You evaluated an inline expression '#' without ++
...

B. ☒ ERROR ... "You called the function '++' with these arguments:
1: String ("INFO")
2: Object ({one: {child1: "Name1" as String {class: "java.lang.String"},child2: "Name2" ...})
...

C. ☐ Result: INFO { \"one\": { \"child1\": \"Name1\", \"child2\": \"Name2\" } }

D. ☐ Result: INFOpayload

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining: 01:10:29**41 of 60.**

Refer to the exhibits. The Set Payload transformer sets the payload to an object. The Logger component's message attribute is configured with the string 'Result: #["INFO" ++ payload]'.

What is logged when the flow executes?



The screenshot displays the MuleSoft Studio interface. On the left, a flow diagram titled 'logPayload' shows a sequence of three components: a Scheduler, a Set Payload transformer, and a Logger. Below the diagram, the flow's XML definition is visible. The Scheduler component is configured with a fixed-frequency strategy. The Set Payload transformer is configured with a value that creates a list containing 'Name1' and 'Name2'. The Logger component is configured with a message attribute that concatenates 'INFO' and the payload.

```
<flow name="logPayload">
  <scheduler doc:name="Scheduler">
    <scheduling-strategy>
      <fixed-frequency />
    </scheduling-strategy>
  </scheduler>
  <set-payload value="#[one: {child1: 'Name1', child2: 'Name2'}]" doc:name="Set Payload" />
  <logger level="INFO" doc:name="Logger" message="Result: #['INFO' ++ payload]" />
</flow>
```

On the right, the 'Logger' component's configuration panel is shown. The 'Message' attribute is configured with the expression `#['INFO' ++ payload]`. The 'Level' is set to 'INFO (Default)'. The 'Category' is left empty. The 'Problems' tab indicates that there are no errors.

► Error handling

```
<flow name="logFirst" >
  <scheduler doc:name="Scheduler" >
    <scheduling-strategy >
      <fixed-frequency frequency="30" timeUnit="SECONDS"/>
    </scheduling-strategy>
  </scheduler>
  <set-variable value='${first: "Max", last: "Mule"}'
    doc:name='customer = {first: "Max", last: "Mule"}' variableName="customer"/>
  <logger level="INFO" doc:name="first" message='
' />
</flow>
```

- A. ☐ customer.first
- B. ☒ vars."customer","first"
- C. ☐ "customer.first"
- D. ☐ vars."customer.first"

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I


Time Remaining: 01:10:34

40 of 60.

Refer to the exhibits. The Set Variable transformer is set with value

```
#[ { first: "Max", last: "Mule" } ]
```

What is a valid DataWeave expression to set as the message attribute of the Logger to access the value "Max" from the Mule event?

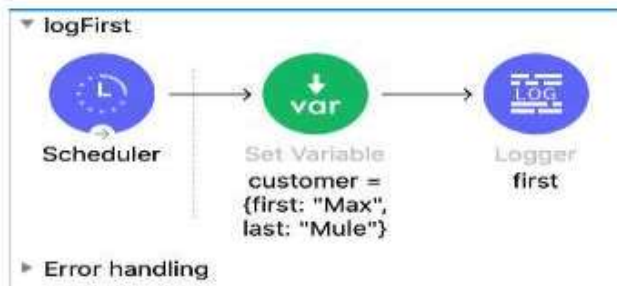

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:10:39

39 of 60.

A REST Connect module is generated for a RAML specification, and then the REST Connect module is imported into a Mule application.

For each method of the RAML specification, what does the REST Connect module provide?

- A. ☐ An event source
- B. ☒ A flow
- C. ☐ A scope
- D. ☐ An operation

☐ Mark this item for later review.

[< Back](#)[Next >](#)[Review All](#)[Submit Exam](#)

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:10:59

38 of 60. What is the output type of the DataWeave flatten function?

- A. ☐ Java
- B. ☒ Array
- C. ☐ Object
- D. ☐ Map

☐ Mark this item for later review.

[< Back](#)[Next >](#)[Review All](#)[Submit Exam](#)

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:11:01

37 of 60. By default, what happens to a file after it is read using an FTP connector Read operation?

- A. ☐ The file is deleted from the folder
- B. ☒ The file stays in the same folder unchanged
- C. ☐ The file is renamed in the same folder
- D. ☐ The file is moved to a different folder

☐ Mark this item for later review.

[< Back](#)[Next >](#)[Review All](#)[Submit Exam](#)



- A. ☐ The payload and all attributes
- B. ☐ The payload
- C. ☒ The payload and all variables
- D. ☐ The entire Mule event

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam


Salesforce Certified MuleSoft Developer I

Time Remaining: 01:11:09

36 of 60.

Refer to the exhibits. The main flow contains a Flow Reference component configured to call the child flow.

What part(s) of a Mule event passed to the Flow Reference component are available in the child flow?

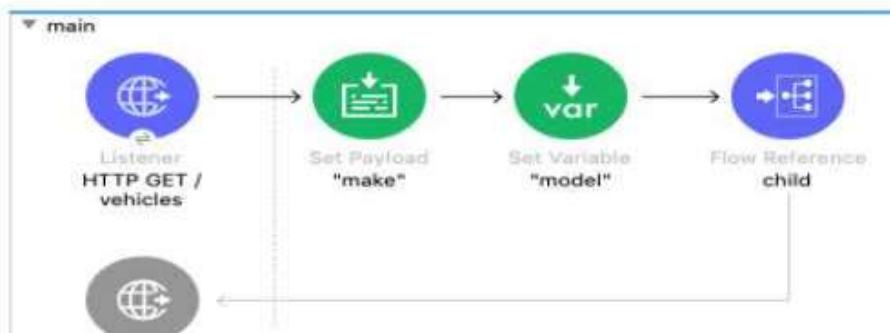

```
author: string
publisher?: string
year: integer
ISBN:
  type: string
  required: true
```

```
publisher: John Wiley & Sons
year: 2007
ISBN: "0471767840"
```

A. ☒ #%RAML 1.0
title: Books

```
Book: bookDataType.raml

/books:
  post:
    body:
      application/json:
        type: Book
        examples:
          input: bookExample.raml
    responses:
      201:
        body:
          application/json:
            example:
              message: Book added
```

B. ☐ #%RAML 1.0
title: Books

```
types:
  Book: ABC/DataTypes/bookDataType.raml

/books:
  post:
    body:
      application/json:
        type: Book
        examples:
          input: ABC/Examples/bookExample.raml
```

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:11:21**35 of 60.**

Refer to the exhibits. BetterBooks has defined this Book data type and Book example to be used in APIs.

What is valid RAML for an API that uses this Book data type and Book example?

```
##RAML 1.0 DataType
# bookDataType.raml
```

```
type: object
properties:
  ID?: integer
  title: string
  author: string
  publisher?: string
  year: integer
```

```
##RAML 1.0 NamedExample
# bookExample.raml
```

```
bookExample:
  ID: 101
  title: Shakespeare
  author: Encyclopaedia Britannica
  publisher: John Wiley & Sons
  year: 2007
  ISBN: "0471767840"
```


An API implementation is created for this RAML API specification.

What is valid JSON input for a request from a web client to an implementation of this RAML API specification?

```
#%RAML 1.0 DataType

type: object
properties:
  ID?: integer
  title: string
  author: string
  publisher?: string
  year: integer
  ISBN:
    type: string
    required: true
```

- A. ☒ {
 "ISBN": "0471767840",
 "year": 2007,
 "title": "Shakespeare",
 "author": "Encyclopedia Britannica"
}
- B. ☐ {
 "ISBN": "0471767840"
 {
 type: "Biography"
 }
}

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:11:35

34 of 60.

Refer to the exhibit. This RAML fragment defines a Book data type that is used in a RAML API specification.

An API implementation is created for this RAML API specification.

What is valid JSON input for a request from a web client to an implementation of this RAML API specification?

```
#%RAML 1.0 DataType
```

```
type: object
properties:
  ID?: integer
  title: string
  author: string
```

host: http.host

Port: \${http.port}

- A. ☒ http:
 basePath: "api"
 port: "8081"
 host: "localhost"
- B. ☐ http.port = 8081
 http.host = "localhost"
- C. ☐ http:
 port = "8081"
 host = "localhost"
- D. ☐ {
 http:
 basePath: "api"
 port: "8081"
 host: "localhost"
 }

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:11:41

33 of 60.

Refer to the exhibit. A Mule application configures a property placeholder file named config.yaml to set some property placeholders for an HTTP connector.

What is a valid properties placeholder file to set these values?

HTTP Listener config

Configuration element for a HttpListener.

General	Notes	Help
Name: HTTP_Listener_config		
General	TLS	Advanced

```
<batch:job jobname="Batch_Job" >
  <batch:process-records >
    <batch:step name="Batch_Step1" >
      <set-payload value="#{upper(payload)}" doc:name="upper(payload)" />
    </batch:step>
  </batch:process-records>
  <batch:on-complete >
    <logger level="INFO" doc:name="payload" message="#{payload}" />
  </batch:on-complete>
</batch:job>
</flow>
```

- A. ☐ Total Records processed: 3
Successful records: 3
Failed Records: 0
payload: ["A", "B", "C"]
- B. ☐ ["A", "B", "C"]
- C. ☐ Total Records processed: 1
Successful records: 1
Failed Records: 0
payload: ["A", "B", "C"]
- D. ☒ Total Records processed: 3
Successful records: 3
Failed Records: 0

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam


Salesforce Certified MuleSoft Developer I

Time Remaining: 01:11:48

32 of 60.

Refer to the exhibits. The Batch Job scope processes the array of strings.

After the Batch Job scope completes processing the input payload, what information is logged by the Logger component?

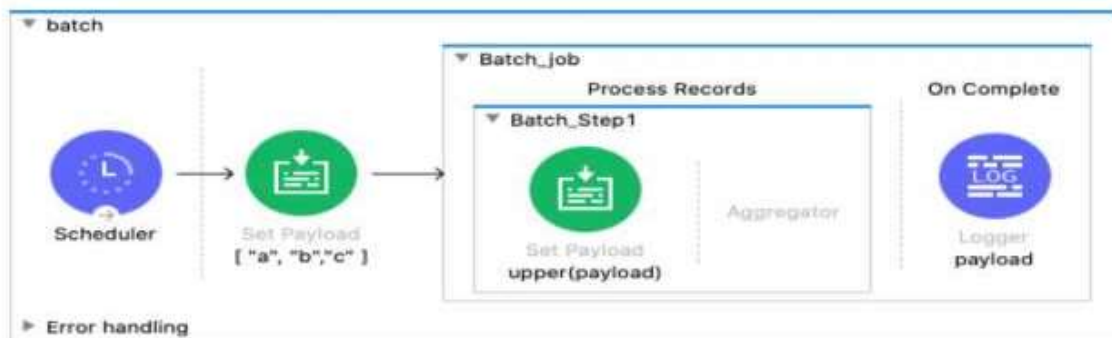

► Error handling

- A. ☐ addItem(
 { price: "100", item: "router", itemType: "cable" }
)
- B. ☐ lookup(
 "addItem",
 { payload: { price: "100", item: "router", itemType: "cable" } }
)
- C. ☐ addItem(
 { payload: { price: "100", item: "router", itemType: "cable" } }
)
- D. ☒ lookup(
 "addItem",
 { price: "100", item: "router", itemType: "cable" }
)

☐ Mark this item for later review.

< Back

Next >

Review All


Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:11:57

31 of 60. Refer to the exhibits. The Set Payload transformer in the addItem child flow uses DataWeave to create an order object.

What is the correct DataWeave code for the Set Payload transformer in the createOrder flow to use the addItem child flow to add a router cable with the price of 100 to the order?

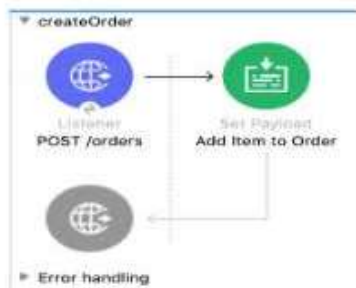

⚙️ addItem /



```
1 //flow 2.0
2 output application/json
3 ---
4 order: {
5   item: {
6     itemName: payload.item,
7     itemType: payload.itemType,
8     price: payload.price
9   }
10 }
```


Salesforce Certified MuleSoft Developer I

Time Remaining: 01:12:07

30 of 60. Refer to the exhibit. What is the correct syntax to add a customer ID as a URI parameter in an HTTP Listener's path attribute?

Basic Settings

Connector configuration: HTTP_Listener_config   

General

Path:

- A. ☐ \${customerID}
- B. ☒ (customerID)
- C. ☐ {customerID}
- D. ☐ #[customerID]

☐ Mark this item for later review.

[< Back](#)[Next >](#)[Review All](#)[Submit Exam](#)

Time Remaining: 01:12:12

29 of 60.

Northern Trail Outfitters (NTO) has an API to manage departments, with each department identified by a unique deptId. The API was built with RAML according to MuleSoft best practices.

What is valid RAML to specify a method to update the details for a specific department?

- A. ☐ /departments:
 patch:
 /deptId:
- B. ☐ /departments:
 /deptId:
 patch:
- C. ☐ /departments:
 patch:
 queryParameters:
 deptId:
- D. ☒ /departments:
 /{deptId}:
 patch:

☐ Mark this item for later review.

► Error handling

```
<flow name="logPayload" >
  <scheduler doc:name="Scheduler" >
    <scheduling-strategy >
      <fixed-frequency />
    </scheduling-strategy>
  </scheduler>
  <set-payload doc:name="Set to JSON" value='#[{
    "accounts": {
      "account": {
        "accountName": "ABC Widgets",
        "type": "New Customer",
        "stage": "Qualification"
      }
    }
  }]' />
  <logger level="INFO" doc:name="typeOf(payload)" message='#[typeOf(payload)]' />
</flow>
```

- A. ☐ "JSON"
- B. ☐ "String"
- C. ☐ "Array"
- D. ☒ "Object"

☐ Mark this item for later review.

< Back

Next >


Review All

Submit Exam

Time Remaining: 01:12:23**28 of 60.**

Refer to the exhibits. A payload is set in the Set Payload transformer.

What is logged by the Logger?

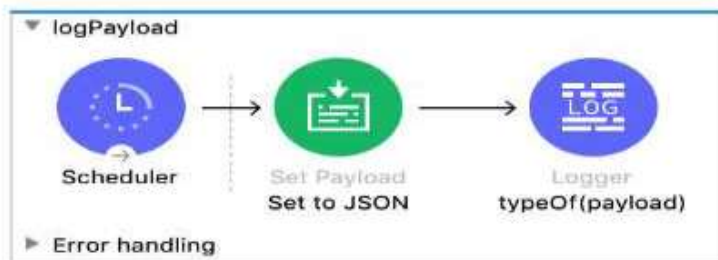

```
<flow name="logPayload" >
  <scheduler doc:name="Scheduler" >
    <scheduling-strategy >
      <fixed-frequency />
    </scheduling-strategy>
  </scheduler>
  <set-payload doc:name="Set to JSON" />
  <logger doc:name="Logger" level="INFO" />
</flow>
```



► Error handling

```
<flow name="scatterGather" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP Listener config" path="/" />
  <set-variable value="#{now()}" doc:name="startTime to now()" variableName="startTime" />
  <scatter-gather doc:name="Scatter-Gather" >
    <route >
      <flow-ref doc:name="sleep 1 sec" name="flow1" />
    </route>
    <route >
      <flow-ref doc:name="sleep 5 sec" name="flow2" />
    </route>
  </scatter-gather>
  <set-payload value="#[output application/json --- now() - vars.startTime]" doc:name="now() - startTime" />
</flow>
```

- A. ☐ 0
B. ☐ 1
C. ☒ 5
D. ☐ 6

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam


Salesforce Certified MuleSoft Developer I

Time Remaining: 01:12:30

27 of 60.

Refer to the exhibits. In the execution of the Scatter-Gather, the "sleep 1 sec" Flow Reference takes about 1 second to complete, and the "sleep 5 secs" Flow Reference takes about 5 seconds to complete.

About how many seconds does it take from the time the Scatter-Gather is called until the Set Payload transformer is called?

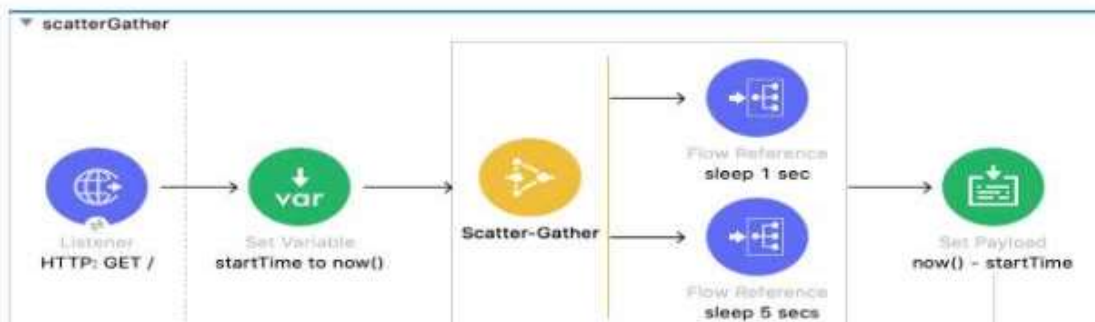



- A. ☐ Mule message payload
- B. ☐ Mule message attributes
- C. ☐ Mule message
- D. ☒ Mule event

☐ Mark this item for later review.

[< Back](#)

[Next >](#)

[Review All](#)

[Submit Exam](#)

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:12:36

26 of 60.

Refer to the exhibit. A Mule event is composed of a hierarchy of objects.

Where in the hierarchy are variables stored?



► Error handling

```
<http:listener-config name="HTTP_Listener_config" doc:name="HTTP Listener config" >
  <http:listener-connection host="0.0.0.0" port="8881" />
</http:listener-config>

<flow name="main" >
  <http:listener doc:name="HTTP: GET /order" config-ref="HTTP_Listener_config" path="/order"/>
  <set-payload value='Order01' doc:name="Order01" />
  <set-variable value="#[attributes.queryParams.qty]" doc:name="quantity to qty param"
    variableName="quantity"/>
  <http:request method="POST" doc:name="POST http://localhost:8881/child"
    url="http://localhost:8881/child"></http:request>
  <logger level="INFO" doc:name="Logger" message="#[output application/json ---
    { flow: "parent", qtyAttribute: attributes.queryParams.qty, quantityVar: vars.quantity, payload: payload }]" />
</flow>

<flow name="child" >
  <http:listener doc:name="HTTP: POST /child" config-ref="HTTP_Listener_config" path="/child"/>
  <logger level="INFO" doc:name="Logger"
    message="#[output application/json ---
    { flow: "child", qtyAttribute: attributes.queryParams.qty, quantityVar: vars.quantity, payload: payload }]" />
  <set-payload value="child flow finished" doc:name="child flow finished" />
</flow>
```

- A. ☐ The entire Mule event
- B. ☒ The payload and all variables
- C. ☐ All variables
- D. ☐ The payload and all attributes

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:12:42

25 of 60.

Refer to the exhibits. The main flow contains an HTTP Request operation configured to call the child flow's HTTP Listener.

A web client sends a GET request to the HTTP Listener with the qty query parameter set to 30.

After the HTTP Request operation completes, what parts of the Mule event at the main flow's Logger component are the same as the Mule event that was input to the HTTP Request operation?



- A. ☒ {
 items: payload.items,
 shippingInfo: vars.shippingAddress
}
- B. ☐ {
 items: attributes.shippingAddress.items
 shippingInfo: payload
}
- C. ☐ {
 items: vars.shippingAddress.items
 shippingInfo: payload
}
- D. ☐ {
 items: payload.items,
 shippingInfo: shippingAddress
}

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam



Salesforce Certified MuleSoft Developer I

Time Remaining: 01:12:50

24 of 60.

Refer to the exhibits. Northern Trail Outfitters is developing a Mule application to process web client POST requests with payloads containing order information, including the user name and purchased items. The Shipping connector returns a shipping address for the input payload's user name. The Shipping connector's Shipping Address operation is configured with a target named shippingAddress.

The Set Payload transformer needs to set an item key equal to the items value from the original received payload and a shippingInfo key equal to the the Shipping Address operation's response.

What is a straightforward way to properly configure the Set Payload transformer with the required data?

```
<http:listener doc:name="HTTP: GET /" config-ref="HTTP_listener_config" path="/" >
  </http:listener>
  <set-payload value="'START'" doc:name="'START'" />
  <http:request method="GET" doc:name="HTTP: GET /data" url="http://mule.learn.mulesoft.com/data"/>
  <set-payload value="'END'" doc:name="'END'" />
  <error-handler >
    <on-error-continue enableNotifications="true" logException="true" doc:name="On Error Continue">
      <set-payload value="ERROR1" doc:name="ERROR1" />
    </on-error-continue>
  </error-handler>
</flow>
```

A. ☐ Response body: "START"

Default response status code: 500

B. ☐ Response body: "END"

Default response status code: 100

C. ☒ Response body: "ERROR1"

Default response status code: 200

D. ☐ Response body: "ERROR1"

Default error response status code: 400

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I


Time Remaining: 01:12:57

23 of 60.

Refer to the exhibits. The Mule application does NOT define any global error handlers.

A web client sends a GET request to the HTTP Listener and the HTTP Request throws an error.

What payload and status code are returned to the web client?

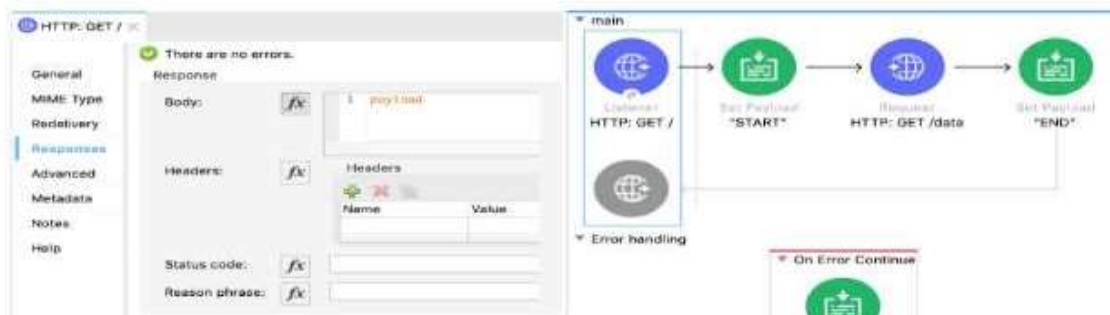

```
<flow name="writeRecords" >
  <http:listener doc:name="HTTP: POST /sales" config-ref="HTTP_Listener_config"
    path="/sales" allowedMethods="POST"/>
  <ee:transform doc:name="Add vendor name" >
    <ee:message >
      <ee:set-payload ><![CDATA[%dw 2.0
        output application/json
        ---
        {vendor: "Acme"} ++ payload.sale]]>
      </ee:set-payload>
    </ee:message>
  </ee:transform>
  <file:write doc:name="File: sales.csv" path="file-store/sales.csv">
  </file:write>
</flow>
```

- A. ☐ The enriched payload in CSV format
- B. ☐ An error message
- C. ☐ The enriched payload in XML format
- D. ☒ The enriched payload in JSON format

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:13:02

22 of 60.

Refer to the exhibits. A web client sends sale data in a POST request to the Mule application. The Transform Message component then enriches the payload by prepending a vendor name to the sale data.

What is written to the sales.csv file when the flow executes?

Input payload:

```
<?xml version="1.0" encoding="UTF-8"?>
<sale>
  <transaction_id>55-4848-44KK-45YQ</transaction_id>
  <customer_id>anniepoint@acme.com</customer_id>
  <customer>Annie Point</customer>
  <item>Car Seat</item>
  <qty>1</qty>
  <price>59</price>
</sale>
```





```
<flow name="main">
  <http:listener doc:name="HTTP: POST /jms" config-ref="HTTP_Listener_config" path="/jms" />
  <jms:publish doc:name="JMS: one" config-ref="JMS_Config" destination="one" >
    <jms:message outboundContentType="text/plain" />
  </jms:publish>
  <http:request method="POST" doc:name="HTTP: POST /data" url="http://localhost:8081/data"/>
  <jms:publish-consume doc:name="JMS: two" config-ref="JMS_Config" destination="two">
    <jms:message outboundContentType="text/plain" />
  </jms:publish-consume>
  <set-payload value='#[payload ++ "Three"]' doc:name='payload as String ++ "Three"' />

```

- A. ☒ Hello-HTTP-JMS2-Three
- B. ☐ Hello-HTTP-Three
- C. ☐ Hello-JMS1-HTTP-JMS2-Three
- D. ☐ HTTP-JMS2-Three

☐ Mark this item for later review.

[< Back](#) [Next >](#) [Review All](#) [Submit Exam](#)

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:13:10

21 of 60.

Refer to the exhibits. A web client sends a POST request to the HTTP Listener with the payload "Hello-".

What response is returned to the web client?




Scheduler


Set Variable
counter = 1


Flow Reference
ChildFlow


Logger
Log counter

► Error handling

▼ ChildFlow

Source


Set Variable
counter ++ 10

► Error handling

A. ☒ 1

B. ☐ 11

C. ☐ 110

D. ☐ null

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam


Salesforce Certified MuleSoft Developer I

Time Remaining: 01:13:16

20 of 60.

Refer to the exhibits. The Mule application is stopped at the breakpoint in Anypoint Studio. A watch expression is set to the counter variable.

What value is displayed for this watch expression?

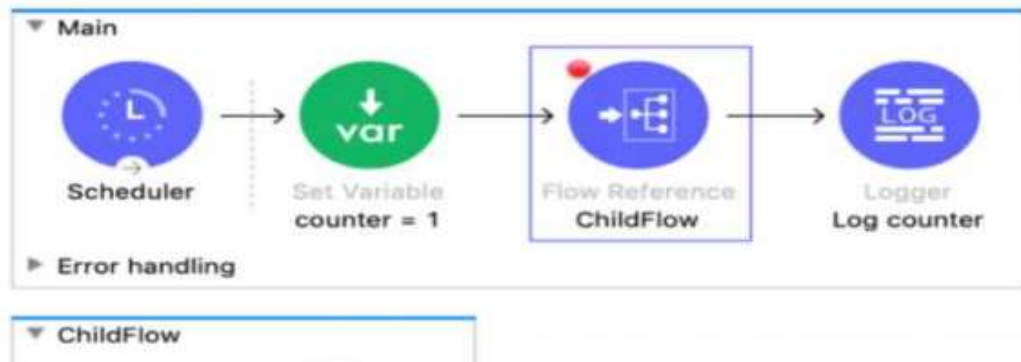

```
</batch:step>
<batch:step name="greaterThan200" acceptExpression="#{ payload.amount <= 200 }" acceptPolicy="ALL">
  <set-payload value="#{(step2amount: payload.amount)}" doc:name="(step2amount: payload.amount)" />
  <logger level="INFO" doc:name="payload" message="{payload}" />
</batch:step>
</batch:process>
</batch:job>
```

- A. ☒ { "amount": 500 }
 { "amount": 101 }
 { "step2amount": 1000 }
 { "step2amount": 500 }
- B. ☐ { "amount": 500 }
 { "amount": 101 }
 { "step2amount": 1000 }
 { "step2amount": 400 }
- C. ☐ { "amount": 500 }
 { "amount": 601 }
 { "step2amount": 1000 }
 { "step2amount": 500 }
 { "step2amount": 601 }
- D. ☐ { "amount": 500 }
 { "amount": 101 }
 { "step2amount": 1000 }

☐ Mark this item for later review.

[< Back](#)[Next >](#)[Review All](#)[Submit Exam](#)

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:13:23

19 of 60.

Refer to the exhibits. The Batch Job scope contains two Batch Step scopes with different accept expressions.

The input payload is passed to the Batch Job scope.

After the entire payload is processed by the Batch Job scope, what messages have been logged by the Logger components?

Input payload:

```
[  
  {"size": "large", "amount": 1000, "price": 400.00},  
  {"size": "medium", "amount": 400, "price": 600.00},  
  {"size": "small", "amount": 1, "price": 800.00}  
]
```


Salesforce Certified MuleSoft Developer I


Time Remaining: 01:13:31

18 of 60.

Refer to the exhibits. In the requestFlow an HTTP Request operation is configured to send an HTTP request with an XML payload. The request is sent to the HTTP Listener in the transformFlow. That flow transforms the incoming payload into JSON format and returns the response to the HTTP request.

The response of the request is stored in a target variable named `theResult`.

What is the payload at the Logger component after the HTTP Request?

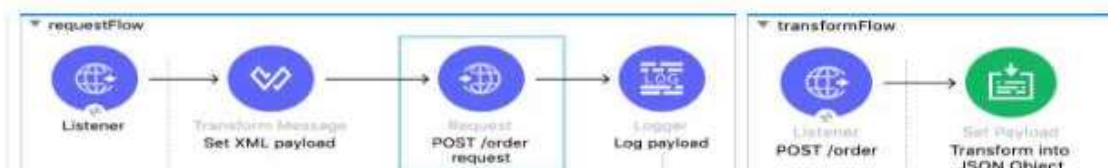

- A. ☐ *status
- B. ☒ */status
- C. ☐ *[order,customer]/status
- D. ☐ ?[order,customer]/status

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:13:38

17 of 60.

Refer to the exhibits. The Mule application implements a REST API that accepts GET requests from web clients on the URLs:

http://acme.com/order/status and http://acme.com/customer/status.

What path value can be set in the HTTP: GET event source to accept web client requests from both of these URLs?



The screenshot displays the MuleSoft Studio interface. On the left, a flow diagram shows a main flow starting with an 'HTTP: GET' event source, followed by a 'Set Payload' processor, and an 'Error handling' section. The 'HTTP: GET' event source is selected, opening the 'Global Element Properties' panel. This panel has tabs for 'General', 'Notes', and 'Help'. The 'General' tab is active, showing the 'Name' as 'HTTP.Listener_global_config' and the 'Connection' as 'HTTP (Default)'. To the right, the 'HTTP: GET' configuration panel is open, showing a red error message: 'Attribute 'path' is required'. Below this message, the 'Display Name' is 'HTTP: GET', and the 'Connector configuration' is 'HTTP.Listener_config'. The 'Path' field is empty and highlighted in red, indicating it is required.

```
</item>
</sale>
```

```
14
15
16
17
..
```


- A. ☐ payload.sale.item map ({value,index} -> {
 index: index,
 sale: value.@saleId,
 itemName: value.desc,
 itemPrice: (value.price) * (value.quantity),
 item: value.@itemId
})
- B. ☒ payload.sale.*item map ({value,index} -> {
 index: index,
 sale: value.@saleId,
 itemName: value.desc,
 itemPrice: (value.price) * (value.quantity),
 item: value.@itemId
})
- C. ☐ payload.sale.item map ({value,index} -> {
 index: index,
 sale: value.saleId,
 itemName: value.desc,
 itemPrice: (value.price) * (value.quantity),
 item: value.itemId
})
- D. ☐ payload.sale.*item map ({value,index} -> {
 index: index,
 sale: value.saleId,
 itemName: value.desc,
 itemPrice: (value.price) * (value.quantity),
 item: value.itemId
})

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:13:47**16 of 60.**

Refer to the exhibit.

What DataWeave expression transforms the example XML input to the CSV output?

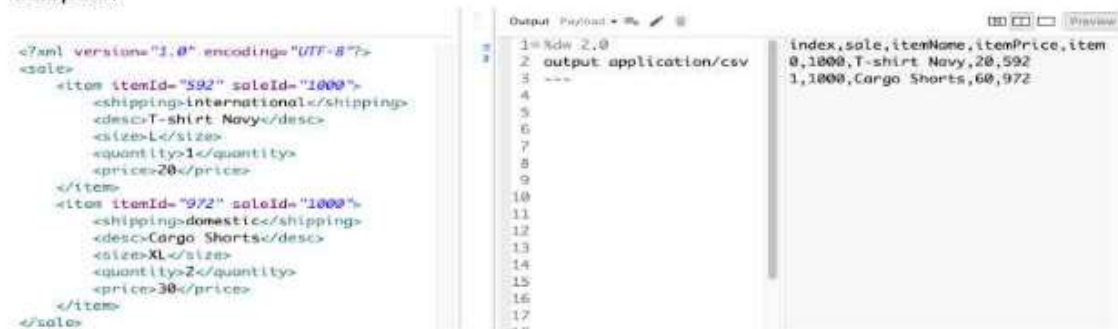

The screenshot displays the MuleSoft Studio interface. On the left, the XML input is shown in a code editor. It is a root element <sale> containing two <item> elements. The first item has attributes itemId="592" and saleId="1000", and contains shipping, desc, size, quantity, and price elements. The second item has attributes itemId="972" and saleId="1000", and contains shipping, desc, size, quantity, and price elements. On the right, the Output window shows the result of a DataWeave expression. The output is a CSV file named 'output.csv' with two rows. The first row is '0,1000,T-shirt Navy,20,592' and the second row is '1,1000,Cargo Shorts,60,972'. The Output window also shows the DataWeave expression used to generate the output: 'index,sale,itemName,itemPrice,item'.

A. ☐ payload.sale.item map ((value,index) -> {

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:13:51

15 of 60. Any Airlines is beginning to follow MuleSoft's recommended API-led connectivity approach to use modern APIs to support the development and lifecycles of their integration solutions and to close the IT delivery gap.

What distinguishes between how modern APIs are organized in a MuleSoft-recommended API-led connectivity approach vs. other common enterprise integration solutions?

- A. ☐ The API implementations are monitored with common tools, centralized monitoring, and security systems
- B. ☐ The API interfaces are specified as macroservices, with one API representing all the business logic of an existing and proven end-to-end integration solution
- C. ☒ The API interfaces are specified at a granularity intended for developers to consume specific aspects of integration processes
- D. ☐ The API implementations are built with standards using common lifecycle and centralized configuration management tools

☐ Mark this item for later review.

[< Back](#)[Next >](#)[Review All](#)[Submit Exam](#)

```

<ee:message>
  <ee:set-payload><![CDATA[%dw 2.0
    output application/json
    ---
    payload]]></ee:set-payload>
</ee:message>
</ee:transform>
</flow>
<flow name="setPayload100"><set-payload value="#["100"]" doc:name="100" /></flow>
<flow name="setPayload200"><set-payload value="#["200"]" doc:name="200" /></flow>

```

A. ☐ ["100", "200"]

B. ☒ {
 "0": {
 "attributes": ...,
 "payload": "100"
 },
 "1": {
 "attributes": ...,
 "payload": "200"
 }
 }

C. ☐ {
 "0": "100",
 "1": "200"
 }

D. ☐ [
 {
 "attributes": ...,
 "payload": "100"
 }
]


Salesforce Certified MuleSoft Developer I

Time Remaining: 01:13:59

14 of 60.

Refer to the exhibits. Each route in the Scatter-Gather sets the payload to the number shown in the label.

What response is returned to a web client request to the HTTP Listener?

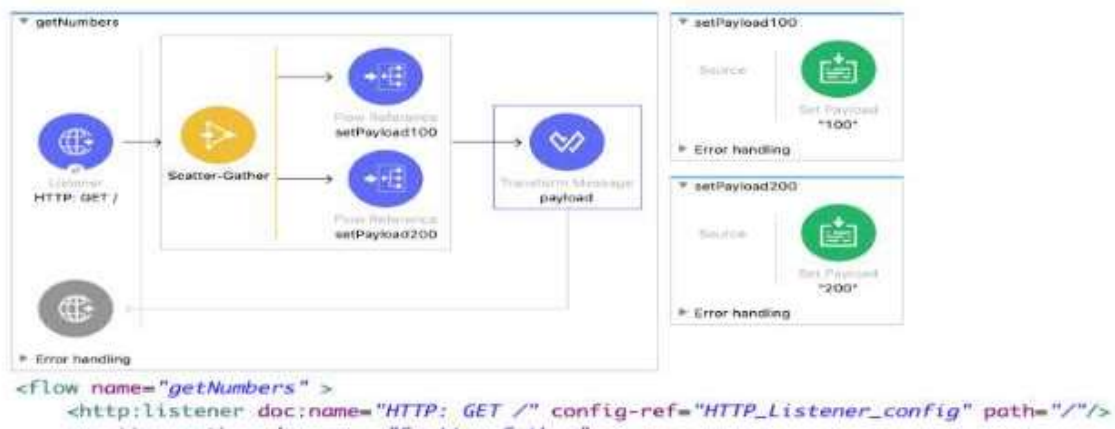

Category:

```
<http:listener-config name="HTTP_Listener_config" doc:name="HTTP Listener config" >
  <http:listener-connection host="0.0.0.0" port="8081" />
</http:listener-config>
<db:config name="Database_Config" doc:name="Database Config" >
  <db:mysql-connection host="iltdb.learn.mulesoft.com" port="3306"
    user="mule" password="mule" database="training" />
</db:config>
<flow name="selectFromOrders" >
  <http:listener doc:name="Listener" config-ref="HTTP_Listener_config" path="/test" />
  <db:select doc:name="Select" config-ref="Database_Config">
    <db:sql >SELECT * FROM accounts limit 5</db:sql>
  </db:select>
  <logger level="INFO" doc:name="Logger" message="#[typeof(payload)]" />
  <set-payload value="#[output application/json --- "Response"]" doc:name="Set Payload" />
</flow>
```

- A. ☒ "Array"
- B. ☐ "CaseInsensitiveHashMap"
- C. ☐ "Object"
- D. ☐ "LinkedHashMap"

☐ Mark this item for later review.

< Back

Next >

Review All


Submit Exam

Time Remaining: 01:14:05

13 of 60.

Refer to the exhibits. The Database Select operation returns five rows from a database.

What is logged by the Logger component?

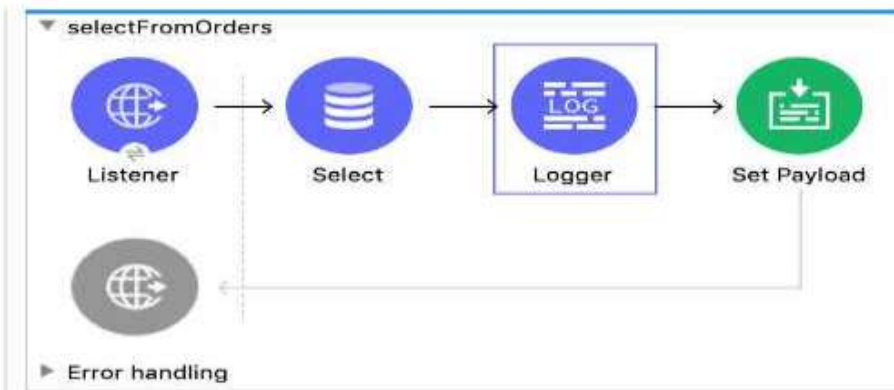

```
<flow name="acceptOrder">
  <http:listener doc:name="HTTP: POST /order" config-ref="HTTP_Listener_config"
    path="/order" allowedMethods="POST">
    <http:error-response >
      <http:body ><![CDATA[#[output text/plain --- payload]]]></http:body>
    </http:error-response>
  </http:listener>
  <file:write doc:name="Write" config-ref="File_Config" path="newOrder.json">
    <error-mapping sourceType="FILE:CONNECTIVITY" targetType="ORDER:NOT_CREATED" />
    <file:content ><![CDATA[#[output application/json --- payload]]]></file:content>
  </file:write>
  <set-payload value='#["File written"]' doc:name="File written" />
</flow>
```

- A. ☐ "OTHER ERROR"
- B. ☐ "FILE:CONNECTIVITY"
- C. ☒ "ORDER:NOT_CREATED"
- D. ☐ "File written"

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:14:12

12 of 60.

Refer to the exhibits. The Mule application does NOT define any global error handlers.

A web client sends a POST request to the Mule application with this input payload. The File Write operation throws a FILE:CONNECTIVITY error.

What response message is returned to the web client?

Input payload:

```
{ "oid": "1000", "itemid": "AC200", "qty": "4" }
```

Flows:

▼ acceptOrder

File Write Payload

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:14:18

11 of 60.

A web client sends a request to `http://localhost:8081?dept=sales`.

What is the correct DataWeave expression to access the value of dept?

- A. ☒ `attributes.queryParams.dept`
- B. ☐ `attributes.dept`
- C. ☐ `vars.dept`
- D. ☐ `message.queryParams.dept`

☐ Mark this item for later review.

[< Back](#)[Next >](#)[Review All](#)[Submit Exam](#)

Time Remaining: 01:14:24

10 of 60.

A Mule application's HTTP Listener is configured with the HTTP protocol. The HTTP Listener's port attribute is configured with a property placeholder named `http.port`. The Mule application sets the `http.port` property placeholder's value to 9090.

The Mule application is deployed to CloudHub without setting any properties in the Runtime Manager Properties tab, and a log message reports the status of the HTTP Listener after the Mule application deployment completes.

After the Mule application is deployed, what information is reported in the replica logs related to the port on which the Mule application's HTTP Listener listens?

- A. ☒ The HTTP Listener is listening on port 8081
- B. ☐ The HTTP Listener is listening on port 9090
- C. ☐ The HTTP Listener is listening on port 80
- D. ☐ The HTTP Listener failed to bind to the port and is not listening for connections

☐ Mark this item for later review.

- ▶ Error handling

[illegible]

- A. ☐ Configure the correct database name
- B. ☐ Configure the correct host URL
- C. ☒ Configure the correct JDBC driver
- D. ☐ Configure the correct table name

☐ Mark this item for later review.

[← Back](#)

Next >

[Review All](#)

Submit Exam

Salesforce Certified MuleSoft Developer I


Time Remaining: 01:14:36

9 of 60.

Refer to the exhibits. A Mule application polls a database table.

This error is logged when the Mule application is run.

What should be changed in the Database connector configuration to resolve this error?

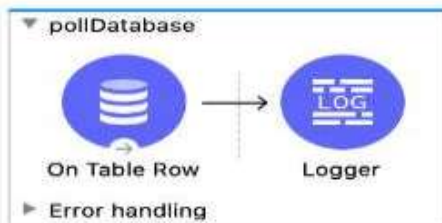

```
        engineerId: engId
      }
    }
  )
}
```

C. ☐ {
 trains: conductorIds map { (engId, index) ->
 train: {
 engineerId: engId
 }
 }
}

D. ☒ trains:
 { {
 conductorIds map { (engId, index) ->
 train: {
 engineerId: engId
 }
 }
 }
}

☐ Mark this item for later review.

[< Back](#)[Next >](#)[Review All](#)[Submit Exam](#)

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:14:42**8 of 60.**

Refer to the exhibit.

What DataWeave expression transforms the conductorIds array to the XML output?

<pre>1 %dw 2.0 2 output application/xml 3 var conductorIds = [592, 921] 4 --- 5 6 7 8 9 10</pre>	<pre><?xml version='1.0' encoding='UTF-8'?> <trains> <train> <engineerId>592</engineerId> </train> <train> <engineerId>921</engineerId> </train> </trains></pre>
--	--

A. ☐ trains:
conductorIds map ((engId, index) ->
train: {

Set Payload
"Parent error"

```
<http:listener-config name="HTTP_Listener_config" doc:name="HTTP Listener config" >
  <http:listener-connection host="0.0.0.0" port="8081" />
</http:listener-config>

<flow name="main" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />
  <flow-ref doc:name="private" name="private"/>
  <set-payload value="Parent completed" doc:name="Parent completed" />
  <error-handler>
    <on-error-propagate enableNotifications="true" logException="true" doc:name="On Error Propagate" >
      <set-payload value="Parent error" doc:name="Parent error" />
    </on-error-propagate>
  </error-handler>
</flow>

<flow name="private" >
  <validation:is-number numberType="INTEGER" doc:name="payload" value="#[payload]"
    message="Validation Error" />
  <error-handler>
    <on-error-propagate enableNotifications="true" logException="true" doc:name="On Error Propagate" >
      <set-payload value="Child error" doc:name="Child error" />
    </on-error-propagate>
  </error-handler>
</flow>
```

- A. ☐ "Child error"
- B. ☐ "Parent completed"
- C. ☒ "Validation Error"
- D. ☐ "Parent error"

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I


Time Remaining: 01:14:52

7 of 60.

Refer to the exhibits. The Mule application does NOT define any global error handlers.

The Validation component in the private flow throws an error.

What response message is returned to a web client request to the main flow's HTTP Listener?

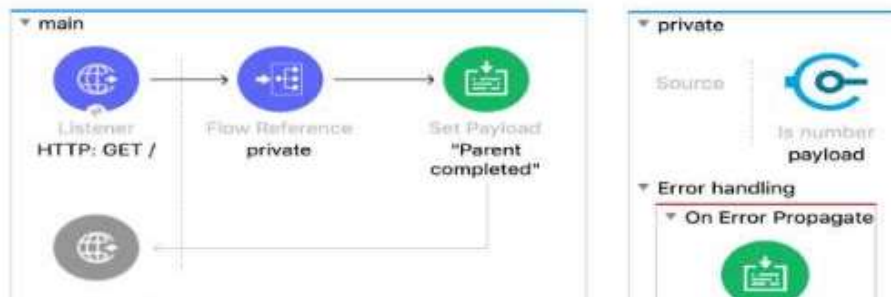

```
WHERE city = attributes.queryParams.city AND  
state = attributes.queryParams.state
```

Input Parameters:

```
1 {  
2   city: attributes.queryParams.city,  
3   state: attributes.queryParams.state  
4 }
```

- A. ☐ WHERE city = #[city] AND state = #[state]
- B. ☒ WHERE city = :city AND state = :state
- C. ☐ WHERE city := \${city} AND state := \${state}
- D. ☐ WHERE city = attributes.city AND state = attributes.state

☐ Mark this item for later review.

[< Back](#)[Next >](#)[Review All](#)[Submit Exam](#)

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:14:59**6 of 60.** Refer to the exhibit.

How should the WHERE clause be changed to set the city and state values from the configured input parameters?

Query

SQL Query Text:

```
SELECT * FROM accounts  
WHERE city = attributes.queryParams.city AND  
state = attributes.queryParams.state
```

Input Parameters:

```
1 {  
2   city: attributes.queryParams.city,  
3   state: attributes.queryParams.state
```



Set Payload
"Error - main
flow"

```
<flow name="main">
  <http:listener doc:name="HTTP: POST /" config-ref="HTTP_Listener_config" path="/" />
  <try doc:name="Try" >
    <validation:is-null doc:name="payload" value="#[payload]" message="Validation Error"/>
    <error-handler >
      <on-error-continue enableNotifications="true" logException="true" doc:name="On Error Continue" >
        <set-payload value="Error - Try scope" doc:name="Error - Try scope" />
      </on-error-continue>
    </error-handler>
  </try>
  <set-payload value="Success - main flow" doc:name="Success - main flow" />
  <error-handler >
    <on-error-propagate enableNotifications="true" logException="true" doc:name="On Error Propagate" >
      <set-payload value="Error - main flow" doc:name="Error - main flow" />
    </on-error-propagate>
  </error-handler>
</flow>
```

- A. ☒ "Success - main flow"
- B. ☐ "Error - Try scope"
- C. ☐ Validation Error
- D. ☐ "Error -main flow"

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:15:10

5 of 60.

Refer to the exhibits. The Mule application does NOT define any global error handlers.

The Validation component in the Try scope throws an error.

What response message is returned to a client request to the main flow's HTTP Listener?



Salesforce Certified MuleSoft Developer I

Time Remaining: 01:15:15

4 of 60.

A function named toUpper needs to be defined that accepts a string named userName and returns the string in uppercase.

What is the correct DataWeave code to define the toUpper function?

- A. ☐ `var toUpper(userName) = upper(userName)`
- B. ☒ `fun toUpper(userName) = upper(userName)`
- C. ☐ `var toUpper(userName) -> upper(userName)`
- D. ☐ `fun toUpper(userName) -> upper(userName)`

☐ Mark this item for later review.


```

<set-payload value="#[[ 'a', 'b', 'c', 'd', 'e' ]]" doc:name="[ 'a', 'b', 'c', 'd', 'e' ]" />
<batch:job jobName="processRecordsBatchJob" >
  <batch:process-records >
    <batch:step name="Batch_Step_With_Filter"
      acceptExpression="#[not (payload contains "b") ]">
      <ee:transform doc:name="upper(payload)"><ee:message >
        <ee:set-payload ><![CDATA[%dw 2.0
          output application/json
          ---
          upper(payload)]]></ee:set-payload>
        </ee:message></ee:transform>
      <batch:aggregator doc:name="Batch_Aggregate_by_3" size="3">
        <logger level="INFO" doc:name="payload"
          message="#[output application/json --- payload]"/>
        </batch:aggregator>
      </batch:step>
    </batch:process-records>
  </batch:job>
</flow>

```

- A. ☐ ["E"]
- B. ☐ ["D", "E"]
- C. ☒ [["A", "C", "D"], ["E"]]
- D. ☐ ["A", "C", "D", "E"]

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam


Salesforce Certified MuleSoft Developer I

Time Remaining: 01:15:24

3 of 60.

Refer to the exhibits. The input array of strings is processed by the batch job that processes, filters, and aggregates the values.

What is the last message logged by the Logger component after the batch job completes processing?

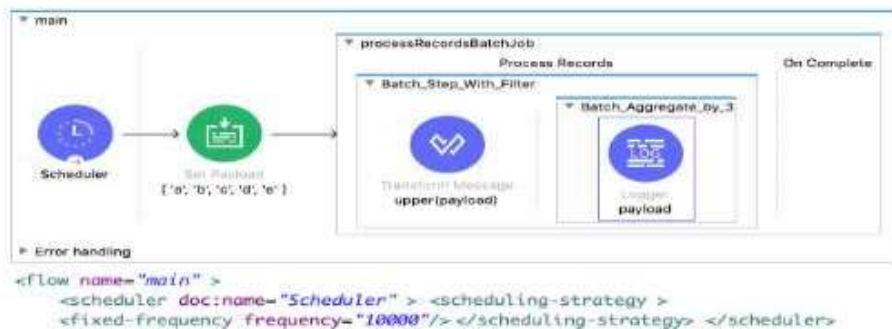

Salesforce Certified MuleSoft Developer I

Time Remaining: 01:15:33

2 of 60.

An API was designed in API Designer, published to Anypoint Exchange, then imported into API Manager.

A Mule application implements this API and is deployed to CloudHub. API Manager manages this deployed API implementation.

What is the easiest and most idiomatic (used for its intended purpose) way to enforce a Client ID Enforcement policy on this Mule application?

- A. ☒ In API Manager, apply a Client ID Enforcement policy for the API instance
- B. ☐ In Anypoint Design Center, code a custom policy for Client ID Enforcement and then publish the custom policy to the API portal in Anypoint Exchange
- C. ☐ In API Designer, add Client ID Enforcement policy requirements to the API specification
- D. ☐ In Anypoint Studio, code a custom policy for Client ID Enforcement and then add the custom policy to Runtime Manager for the Mule application deployment

```

<flow name="httpListener1" >
  <http:listener doc:name="HTTP: 2222 /"
    config-ref="HTTP_listener_config_2222" path="/" />
  <http:request method="GET" doc:name="GET HTTP://localhost:3333"
    url="http://localhost:3333"/>
</flow>
<flow name="httpListener3333" >
  <http:listener doc:name="HTTP: 3333 /"
    config-ref="HTTP_listener_config_3333" path="/" />
  <set-payload value="#['HTTP: 33333']" doc:name="HTTP: 3333" />
</flow>

```



A. ☒ The Mule application starts successfully

Web client requests can be received at the URI / on port 2222 or port 3333

B. ☐ The Mule application starts successfully

Web client requests can only be received at the URI / on port 2222, not on port 3333

C. ☐ The Mule application fails to start

There is a port bind conflict because the HTTP Request also uses port 3333

D. ☐ The Mule application fails to start

There is a URL path conflict because both HTTP Listeners are configured with the same path /

☐ Mark this item for later review.

Next >

Review All

Submit Exam

Time Remaining: 01:16:05

1 of 60.

Refer to the exhibits. The Mule application configures and uses two HTTP Listener global configuration elements.


The Mule application is run in Anypoint Studio.

If the Mule application starts correctly, what URI and port number(s) can receive web client requests; if the Mule application fails to start, what is the cause of the failure?



26 Refer to the exhibits. The Set Payload transformer sets the payload to an object. The Logger component's message attribute is configured with the string 'Result #["INFO" ++ payload]'.

What is logged when the flow executes?

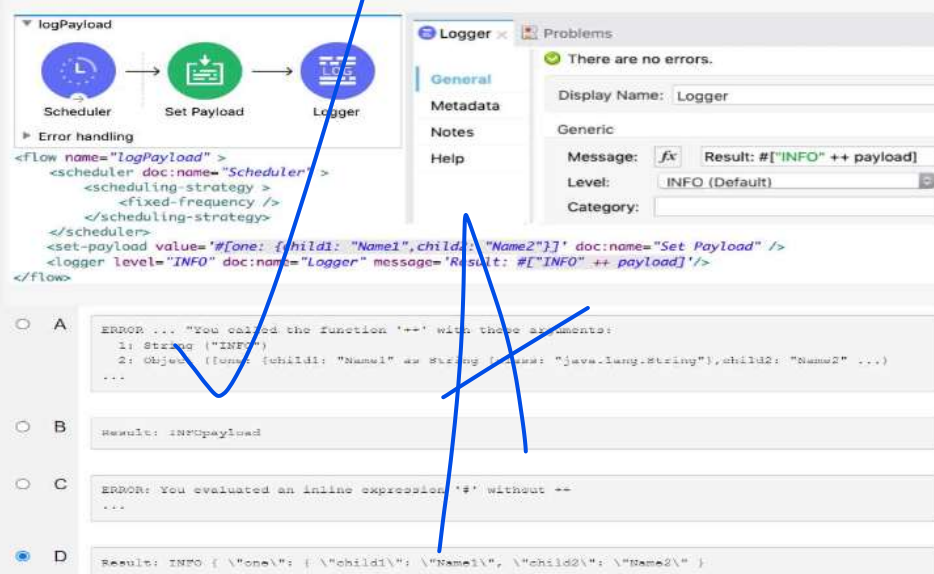

An API was designed in API Designer, published to Anypoint Exchange, then imported into API Manager.

A Mule application implements this API and is deployed to CloudHub. API Manager manages this deployed API implementation.

What is the easiest and most idiomatic (used for its intended purpose) way to enforce a Client ID Enforcement policy on this Mule application?

- D. In API Manager, apply a Client ID Enforcement policy for the API instance

[illegible]

☐ A. Configure the correct host (IP).

☒ B. Configure the correct database name.

☐ C. Configure the correct table name.

☐ D. Configure the correct JDBC driver.

Comment: