


Time Remaining: 00:13:26

1 of 60.

Refer to the exhibits. A payload is set in the Set Payload transformer.

What is logged by the Logger?

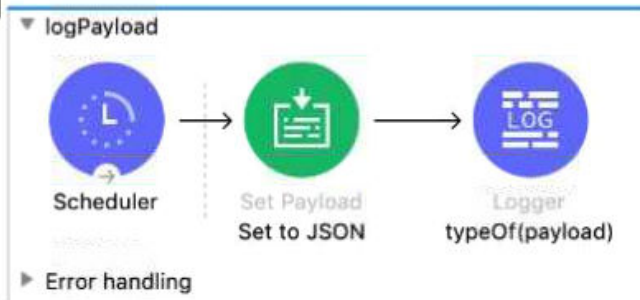

```
<flow name="logPayload" >
  <scheduler doc:name="Scheduler" >
    <scheduling-strategy >
      <fixed-frequency />
    </scheduling-strategy>
  </scheduler>
  <set-payload doc:name="Set to JSON" value='#[{
    "accounts": {
```

```
<scheduler doc:name="Scheduler">
  <scheduling-strategy>
    <fixed-frequency />
  </scheduling-strategy>
</scheduler>
<set-payload doc:name="Set to JSON" value="#[{
  "accounts": {
    "account": {
      "accountName": "ABC Widgets",
      "type": "New Customer",
      "stage": "Qualification"
    }
  }
}]" />
<logger level="INFO" doc:name="typeOf(payload)" message="#[typeof(payload)]"/>
</flow>
```

- A. ☐ "String"
- B. ☐ "JSON"
- C. ☒ "Array"
- D. ☐ "Object"

☐ Mark this item for later review.

Next >

Review All

Submit Exam

Time Remaining: 00:13:16**2 of 60.**

Refer to the exhibits. The Set Payload transformer sets the payload to an object. The Logger component's message attribute is configured with the string 'Result: #["INFO" ++ payload]'.

What is logged when the flow executes?

The image displays the MuleSoft Studio interface. On the left, a flow diagram for 'logPayload' shows a sequence of three components: a Scheduler, a Set Payload transformer, and a Logger. Below the diagram, the XML configuration for the flow is visible:

```
<flow name="logPayload" >
  <scheduler doc:name="Scheduler" >
    <scheduling-strategy>
      <fixed-frequency />
    </scheduling-strategy>
  </scheduler>
  <set-payload />
  <logger />
</flow>
```

On the right, the 'Logger' component configuration is shown. The 'Display Name' is 'Logger'. Under the 'Generic' tab, the 'Message' is configured with the expression 'Result: #["INFO" ++ payload]', the 'Level' is set to 'INFO (Default)', and the 'Category' is empty. A status message at the top of the configuration pane states 'There are no errors.'

Note:
Any
notes
added
here
will not
be saved

Enter

```
<!-- payload = payload {one: {child1: "Name1", child2: "Name2"}, doc: name = doc payload } -->  
<logger level="INFO" doc:name="Logger" message="Result: #[ "INFO" ++ payload]"/>  
</flow>
```

- A. ☐ Result: INFOpayload
- B. ☐ ERROR: You evaluated an inline expression '#' without ++
...
- C. ☒ ERROR ... "You called the function '++' with these arguments:
1: String ("INFO")
2: Object ({one: {child1: "Name1" as String {class: "java.lang.String"}, child2: "Name2" ...})
...
- D. ☐ Result: INFO { \ "one\ ": { \ "child1\ ": \ "Name1\ ", \ "child2\ ": \ "Name2\ " } }

☐ Mark this item for later review.

< Back

Next >

Review All


Submit Exam

3 of 60.

Refer to the exhibit. The Default scope in the Choice router recursively calls the color flow.


A web client sends a PUT request to the HTTP Listener with payload "Blue".

What response is returned to the web client?

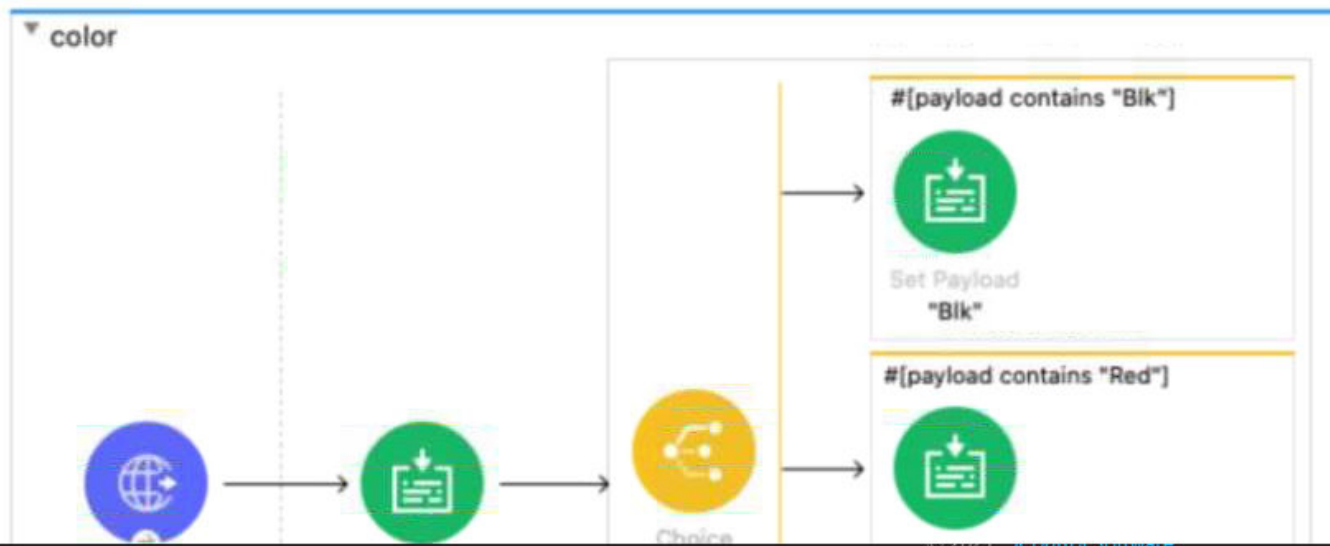

be saved

Enter

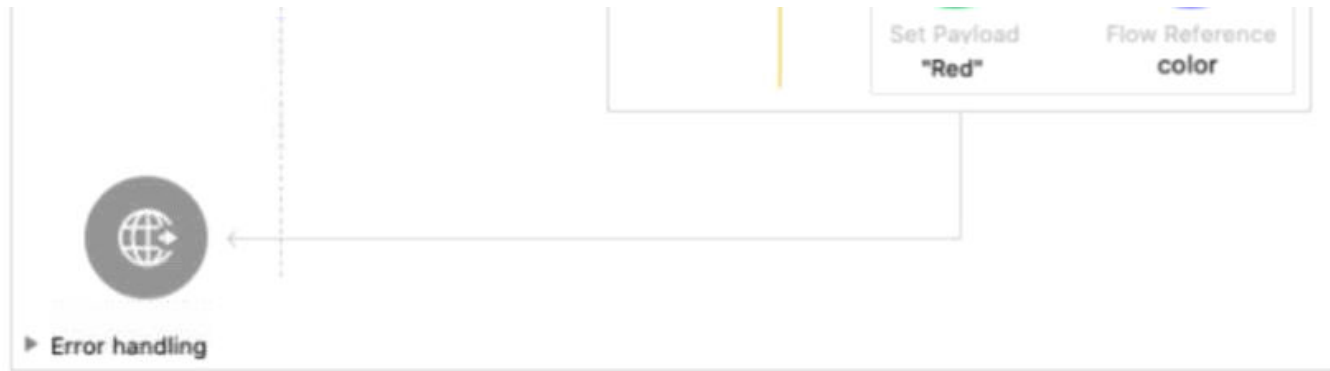

- A. ☐ "Blk"
- B. ☐ "Red"
- C. ☒ An error message
- D. ☐ "Green"

☐ Mark this item for later review.

< Back

Next >


Review All

Submit Exam

4 of 60.

Refer to the exhibits. A web client sends a POST request to the HTTP Listener with the payload "Hello-".

What response is returned to the web client?

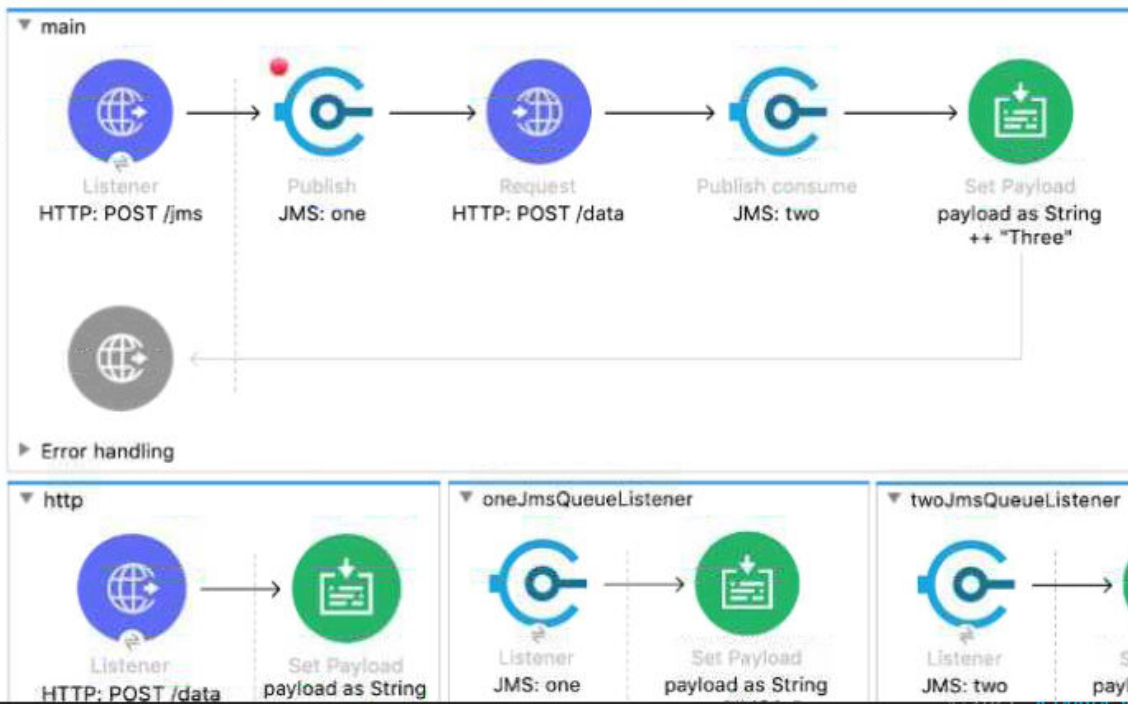

▶ Error handling

▶ Error handling

▶ Error handling

```
<flow name="main">
  <http:listener doc:name="HTTP: POST /jms" config-ref="HTTP_Listener_config" path="/jms" />
  <jms:publish doc:name="JMS: one" config-ref="JMS_Config" destination="one" >
    <jms:message outboundContentType="text/plain" />
  </jms:publish>
  <http:request method="POST" doc:name="HTTP: POST /data" url="http://localhost:8081/data"/>
  <jms:publish-consume doc:name="JMS: two" config-ref="JMS_Config" destination="two">
    <jms:message outboundContentType="text/plain" />
  </jms:publish-consume>
  <set-payload value='#[payload ++ "Three"]' doc:name='payload as String ++ "Three"' />
</flow>
```

- A. ☐ HTTP-JMS2-Three
- B. ☒ Hello-HTTP-JMS2-Three
- C. ☐ Hello-JMS1-HTTP-JMS2-Three
- D. ☐ Hello-HTTP-Three

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I


Time Remaining: 00:12:27

5 of 60.

Refer to the exhibits. A database Address table contains a ZIPCODE column and an increasing ID column. The Address table currently contains four (4) records. The On Table Row Database listener is configured with its watermark set to the Address table's ZIPCODE column and then the Mule application is run in Anypoint Studio for the first time, and the On Table Row Database listener polls the Address table.

A new row is added to the database with ID=5 and ZIPCODE=90006, and then the On Table Row Database listener polls the database again.

After the next execution of the On Table Row Database listener polling, what database rows have been processed by the Mule flow since the Mule application was started?

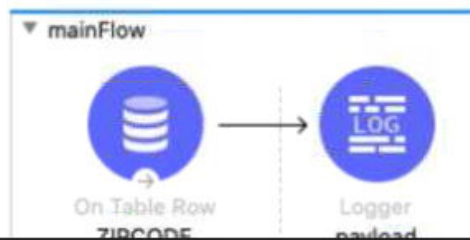

Note:
Any
notes
added
here
will not
be saved

Enter

1	90001
2	90005
3	90009
4	90001

A. ☐ ID ZIPCODE

1 90001
2 90005
3 90009
4 90001

B. ☐ ID ZIPCODE

1 90001
2 90005
3 90009

C. ☐ ID ZIPCODE

1 90001
2 90005
3 90009
5 90006

D. ☒ ID ZIPCODE

1 90001
2 90005
3 90009
4 90001
5 90006

Time Remaining: 00:11:59

6 of 60.

Refer to the exhibits. The main flow contains an HTTP Request operation configured to call the child flow's HTTP Listener.

A web client sends a GET request to the HTTP Listener with the qty query parameter set to 30.

After the HTTP Request operation completes, what parts of the Mule event at the main flow's Logger component are the same as the Mule event that was input to the HTTP Request operation?



will not
be saved

Enter

```
<http:listener-config name="HTTP_Listener_config" doc:name="HTTP Listener config" >
  <http:listener-connection host="0.0.0.0" port="8081" />
</http:listener-config>

<flow name="main" >
  <http:listener doc:name="HTTP: GET /order" config-ref="HTTP_Listener_config" path="/order"/>
  <set-payload value='Order01' doc:name='\"Order01\"' />
  <set-variable value="#{attributes.queryParams.qty}" doc:name="quantity to qty param"
  variableName="quantity"/>
  <http:request method="POST" doc:name="POST http://localhost:8081/child"
  url="http://localhost:8081/child"></http:request>
  <logger level="INFO" doc:name="Logger" message="#{output application/json ---
  { flow: \"parent\", qtyAttribute: attributes.queryParams.qty, quantityVar: vars.quantity, payload: payload } }' />
</flow>

<flow name="child" >
  <http:listener doc:name="HTTP: POST /child" config-ref="HTTP_Listener_config" path="/child"/>
  <logger level="INFO" doc:name="Logger"
  message="#{output application/json ---
  { flow: \"child\", qtyAttribute: attributes.queryParams.qty, quantityVar: vars.quantity, payload: payload } }' />
  <set-payload value='\"child flow finished\"' doc:name='\"child flow finished\"' />
</flow>
```

- A. ☐ All variables
- B. ☐ The payload and all attributes
- C. ☐ The entire Mule event
- D. ☒ The payload and all variables

☐ Mark this item for later review.

```
<customerName>AMIE FOUN  
</customerName>  
<itemName>Electric Standing Desk  
</itemName>  
<cost>300.00</cost>  
</order>
```

Body content type

multipart/mixed

Editor view

Raw input

415 Unsupported Media Type

4097.00 ms

DETAILS ▾

<>

|||

{
 "message": "Unsupported media type"
}

- A. ☐ Set a response header with the name Content-Type to the value application/xml
- B. ☐ Set a response header with the name Content-Type to the value application/octet-stream
- C. ☐ Set a request header with the name Content-Type to the value application/octet-stream
- D. ☒ Set a request header with the name Content-Type to the value application/xml

☐ Mark this item for later review.

[< Back](#)[Next >](#)[Review All](#)[Submit Exam](#)

Time Remaining: 00:11:36**8 of 60.**

A Mule project contains a DataWeave module file WebStore.dwl that defines a function named loginUser. The module file is located in the project's src/main/resources/libs/dw folder.

What is correct DataWeave code to import all of the WebStore.dwl file's functions and then call the loginUser function for the login "cindy.park@example.com"?

- A. ☒ `import * from libs::dw::WebStore`

`loginUser( "cindy.park@example.com" )`
- B. ☐ `import libs.dw`

`WebStore.loginUser( "cindy.park@example.com" )`
- C. ☐ `import libs.dw.WebStore`

`loginUser( "cindy.park@example.com" )`

Note:
Any
notes
added
here
will not
be saved

Enter


Time Remaining: 00:11:29

9 of 60.

Refer to the exhibits. The Mule application does NOT define any global error handlers.

The Validation component in the private flow throws an error.

What response message is returned to a web client request to the main flow's HTTP Listener?

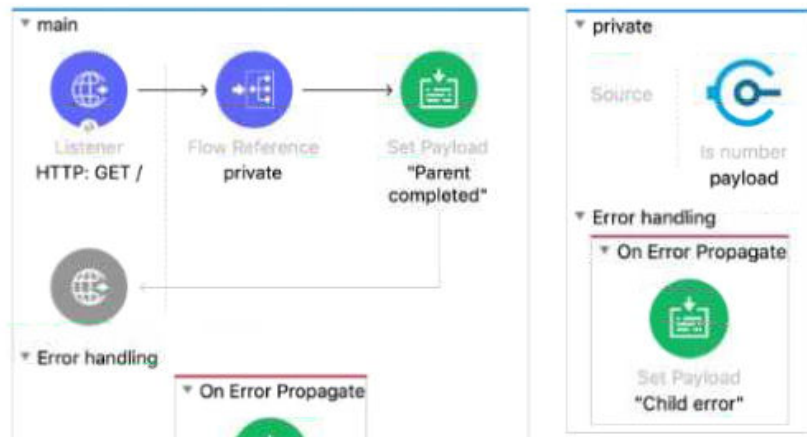

Note:
Any
notes
added
here
will not
be saved

Enter

Set Payload
"Parent error"

```
<http:listener-config name="HTTP_Listener_config" doc:name="HTTP Listener config" >
  <http:listener-connection host="0.0.0.0" port="8081" />
</http:listener-config>

<flow name="main" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />
  <flow-ref doc:name="private" name="private"/>
  <set-payload value="Parent completed" doc:name="'Parent completed'" />
  <error-handler>
    <on-error-propagate enableNotifications="true" logException="true" doc:name="On Error Propagate" >
      <set-payload value="Parent error" doc:name="'Parent error'" />
    </on-error-propagate>
  </error-handler>
</flow>

<flow name="private" >
  <validation:is-number numberType="INTEGER" doc:name="payload" value="#[payload]"
  message="Validation Error" />
  <error-handler >
    <on-error-propagate enableNotifications="true" logException="true" doc:name="On Error Propagate" >
      <set-payload value="Child error" doc:name="'Child error'" />
    </on-error-propagate>
  </error-handler>
</flow>
```

- A. ☐ "Child error"
- B. ☒ "Validation Error"
- C. ☐ "Parent error"
- D. ☐ "Parent completed"

Salesforce Certified MuleSoft Developer I

Time Remaining: 00:11:17

10 of 60.

Northern Trail Outfitter's Center for Enablement (C4E) has built foundational assets (API specifications and implementation templates, common frameworks, and best practices guides) and published them to Anypoint Exchange.

What is a metric related to these foundational assets that helps NTO measure the success of its C4E efforts?

- A. ☐ Correlation of each foundational asset with the counts of developers that downloaded each asset
- B. ☒ Correlation of key performance indicators (KPIs) of production applications with foundational assets
- C. ☐ Utilization counts of foundational assets in production applications
- D. ☐ Counts of how many lines of businesses (LoBs) consumed each foundational asset

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Note:
Any
notes
added
here
will not
be saved

Enter



Time Remaining: 00:11:12

11 of 60.

Refer to the exhibits. The webClient flow sends requests to the mockServer flow's HTTP Listener.

An HTTP:METHODO_NOT_ALLOWED error is thrown each time the webClient flow executes.

What attribute value must be changed in the webClient flow's HTTP Request operation to prevent this error from being thrown?

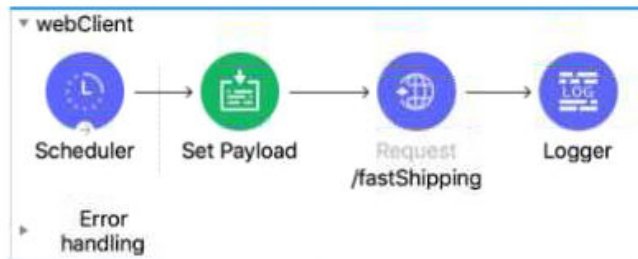

Note:
Any
notes
added
here
will not
be saved

Enter

```

        <fixed-frequency frequency="10" timeunit="SECOND" />
    </scheduling-strategy>
</scheduler>
<set-payload value="#[output application/json --- {oid: 123, qty: 5, description: "Jet Skies"}]" />
<http:request doc:name="/fastShipping" config-ref="HTTP_Request_configuration" path="fastShipping" method="PUT"/>
<logger level="INFO" doc:name="Logger" message="#[payload]"/>
</flow>

<http:listener-config name="HTTP_Listener_config" doc:name="HTTP Listener config" basePath="api/partners" >
    <http:listener-connection host="0.0.0.0" port="8081" />
</http:listener-config>
<flow name="mockServer" >
    <http:listener doc:name="Listener" config-ref="HTTP_Listener_config" path="/fastShipping" allowedMethods="POST"/>
    <logger level="INFO" doc:name="Request received" message="#["Request received"]"/>
</flow>

```

.....

```

Message          : HTTP PUT on resource 'http://localhost:8081/api/partners/fastShipping' failed: method not allowed (405).
Element          : webClient/processors/1 @ order-shipping:orderShipping.xml:18 (/fastShipping)
Element DSL      : <http:request doc:name="/fastShipping" config-ref="HTTP_Request_configuration" path="fastShipping" method="PUT"></http:request>
Error type       : HTTP:METHOd_NOT_ALLOWED
FlowStack        : at webClient(webClient/processors/1 @ order-shipping:orderShipping.xml:18 (/fastShipping))

```

(set debug level logging or '-Dmule.verbose.exceptions=true' for everything)

- A. ☐ Change the method attribute's value to ""
- B. ☐ Change the path attribute's value to "/api/partners/fastShipping"
- C. ☐ Change the protocol attribute's value to "HTTPS"
- D. ☒ Change the method attribute's value to "POST"

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

A. ☐ get:
uriParameters:
 {storeId};
queryParameters:
 department:

B. ☐ get:
queryParameters:
 department:
uriParameters:
 storeId:

C. ☒ /{storeId}:
get:
 queryParameters:
 department:

D. ☐ /department:
get:
 uriParameter:
 storeId:

☐ Mark this item for later review.

< Back

Next >

Review All


Submit Exam

Time Remaining: 00:10:56

13 of 60.

Refer to the exhibits. In the Choice router, the When expression for the domesticShipping route is set to "`#[payload = 'FR']`".

What is logged after the Choice router completes?

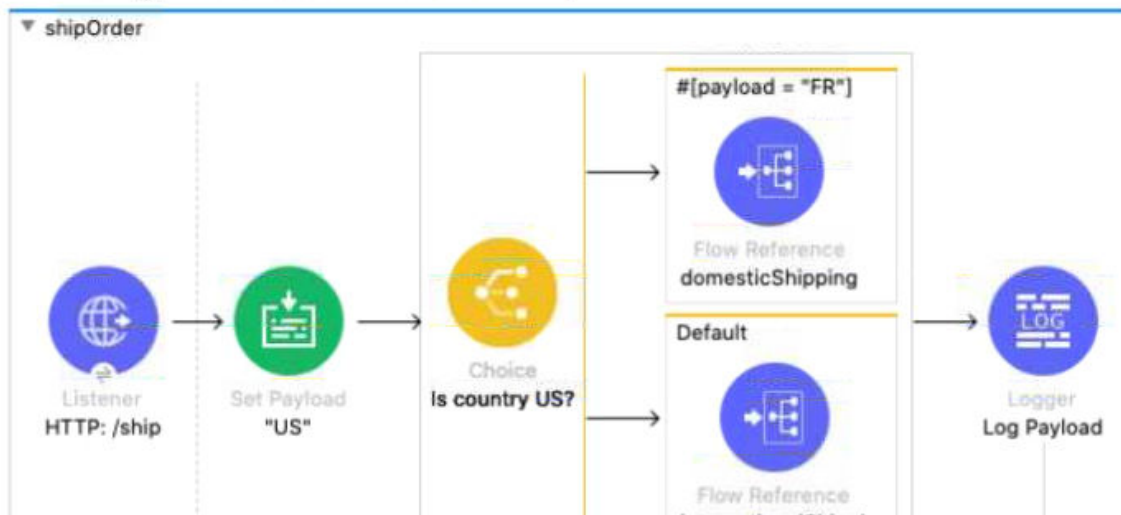

Note:
Any
notes
added
here
will not
be saved

Enter

► Error handling

▼ internationalShipping

Source



Logger



Set Payload

► Error handling

- A. ☐ The result of the internationalShipping flow
- B. ☐ A string with value "FR"
- C. ☐ The result of the domesticShipping flow
- D. ☒ A DataWeave syntax error

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining: 00:10:45**14 of 60.**

Refer to the exhibit.

What DataWeave expression transforms the conductorIds array to the XML output?

```
1 %dw 2.0
2 output application/xml
3 var conductorIds = [592, 921]
4 ---
5
6
7
8
9
10
```

```
<?xml version='1.0' encoding='UTF-8'?>
<trains>
  <train>
    <engineerId>592</engineerId>
  </train>
  <train>
    <engineerId>921</engineerId>
  </train>
</trains>
```

A. ☐ { (

```
  trains: conductorIds map ( (engId, index) ->
    train: {
      engineerId: engId
```

Note:
Any
notes
added
here
will not
be saved

Enter


```
) }
```

B. ☒ trains:

```
{ (  
  conductorIds map ( (engId, index) ->  
    train: {  
      engineerId: engId  
    }  
  )  
} }
```

C. ☐ trains:

```
conductorIds map ( (engId, index) ->  
  train: {  
    engineerId: engId  
  }  
)
```

D. ☐ {



```
trains: conductorIds map ( (engId, index) ->  
  train: {  
    engineerId: engId  
  }  
)  
}
```

☐ Mark this item for later review.

15 of 60.

Refer to the exhibits. The Mule application is stopped at the breakpoint in Anypoint Studio. A watch expression is set to the counter variable.

What value is displayed for this watch expression?

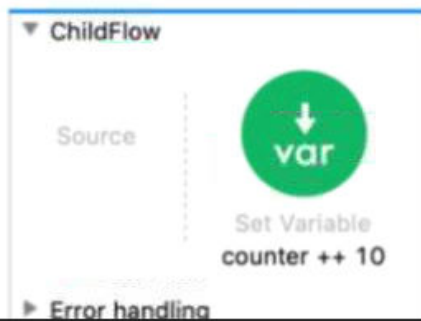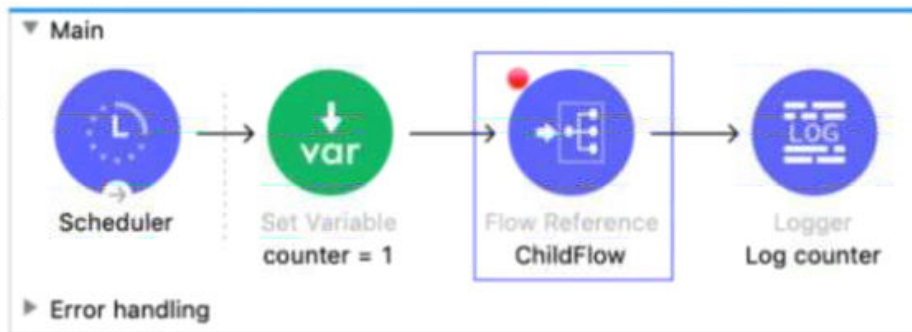

ChildFlow

Source

Set Variable
counter ++ 10

Error handling

- A. ☒ 1
- B. ☐ 11
- C. ☐ 110
- D. ☐ null

☐ Mark this item for later review.

< Back

Next >

Review All


Submit Exam

Time Remaining: 00:10:13

16 of 60.

Refer to the exhibits. The Mule application does NOT define any global error handler elements. A web client sends a GET request to the HTTP Listener.

What response message is returned to the web client?

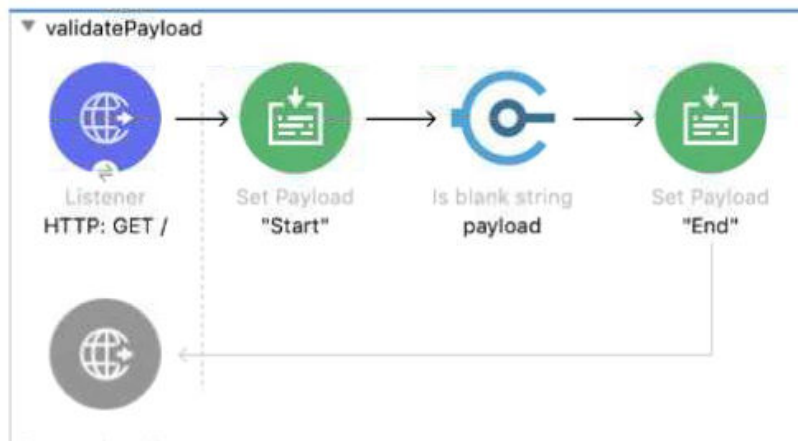

Note:
Any
notes
added
here
will not
be saved

Enter

► Error handling

```
<flow name="validatePayload" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP Listener_config" path="/" />
  <set-payload value="Start" doc:name="Start" />
  <validation:is-blank-string doc:name="payload" value="#[payload]" />
  <set-payload value="End" doc:name="End" />
</flow>
```

- A. ☐ "End"
- B. ☒ "String is not blank"
- C. ☐ ""
- D. ☐ "Start"

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

17 of 60.

Refer to the exhibit. This RAML fragment defines a Book data type that is used in a RAML API specification.

An API implementation is created for this RAML API specification.

What is valid JSON input for a request from a web client to an implementation of this RAML API specification?

```
#%RAML 1.0 DataType

type: object
properties:
  ID?: integer
  title: string
  author: string
  publisher?: string
  year: integer
  ISBN:
    type: string
    required: true
```

be saved

Enter

```
title: "Encyclopedia",  
"author": "Encyclopedia Britannica"  
}
```

B. ☒ {
 "ID?": 101,
 "title": "Shakespeare",
 "author": "Encyclopedia Britannica",
 "publisher?": "Dunwich House Publishing",
 "year": 2007,
 "ISBN": "0471767840"
}

C. ☐ {
 "ID": 101
 "publisher": "Dunwich House Publishing"
}

D. ☐ {
 "ISBN": "0471767840"
 {
 type: "Biography"
 }
}

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 00:09:47

18 of 60.

A Mule application's HTTP Listener is configured with the HTTP protocol. The HTTP Listener's port attribute is configured with a property placeholder named `http.port`. The Mule application sets the `http.port` property placeholder's value to 9090.

The Mule application is deployed to CloudHub without setting any properties in the Runtime Manager Properties tab, and a log message reports the status of the HTTP Listener after the Mule application deployment completes.

After the Mule application is deployed, what information is reported in the replica logs related to the port on which the Mule application's HTTP Listener listens?

- A. ☐ The HTTP Listener failed to bind to the port and is not listening for connections
- B. ☐ The HTTP Listener is listening on port 80
- C. ☐ The HTTP Listener is listening on port 9090
- D. ☒ The HTTP Listener is listening on port 8081

☐ Mark this item for later review.

Note:
Any
notes
added
here
will not
be saved

Enter

19 of 60.

Refer to the exhibits. The Mule application does NOT define any global error handlers.


A web client sends a POST request to the Mule application with this input payload. The File Write operation throws a FILE:CONNECTIVITY error.

What response message is returned to the web client?

Input payload:

```
{ "oid": "1000", "itemid": "AC200", "qty": "4" }
```

Flows:

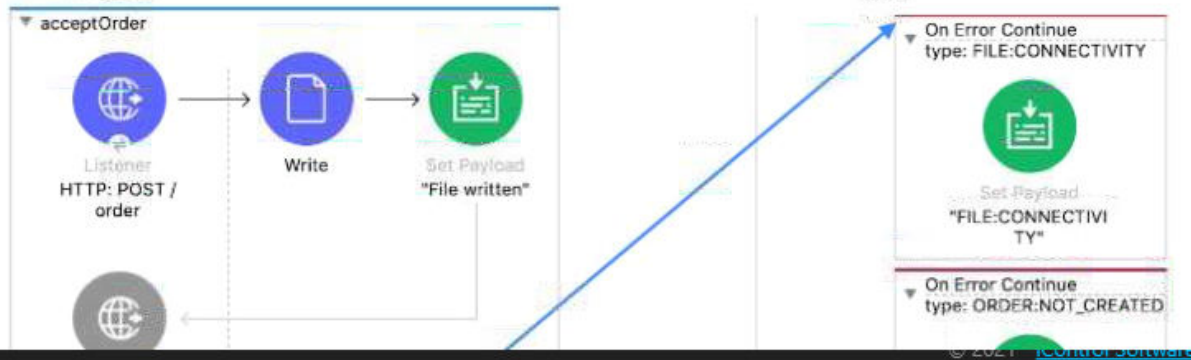

```
</http:listener>
<file:write doc:name="Write" config-ref="File_Config" path="newOrder.json">
  <error-mapping sourceType="FILE:CONNECTIVITY" targetType="ORDER:NOT_CREATED" />
  <file:content >![CDATA[#[output appliation/json --- payload]]]></file:content>
</file:write>
<set-payload value='#["File written"]' doc:name='"File written"' />
```

- A. ☐ "File written"
- B. ☐ "FILE:CONNECTIVITY"
- C. ☐ "OTHER ERROR"
- D. ☒ "ORDER:NOT_CREATED"

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

```

<os:store doc:name="Store payload in temp key in object store" key="temp" path="/temp" value="#payload" />
</flow>
<flow name="getTemp" >
  <http:listener doc:name="HTTP: GET /getTemp" config-ref="HTTP_Listener_config" path="/getTemp"/>
  <os:retrieve-all doc:name="Retrieve all"/>
  <set-payload value="#[output application/json --- payload]" doc:name="output application/json --- payload" />
  <logger level="INFO" />
</flow>

```

A. ☐ {
 "temp": [70,65,100,60,85]
 }

B. ☐ {
 "temp": "100"
 }

C. ☐ {
 "temp": 70,
 "temp": 65,
 "temp": 100,
 "temp": 60,
 "temp": 85
 }

D. ☒ {
 "temp": "85"
 }


☐ Mark this item for later review.

Time Remaining: 00:09:15

21 of 60.

Refer to the exhibits.

What payload and quantity are logged at the end of the main flow?

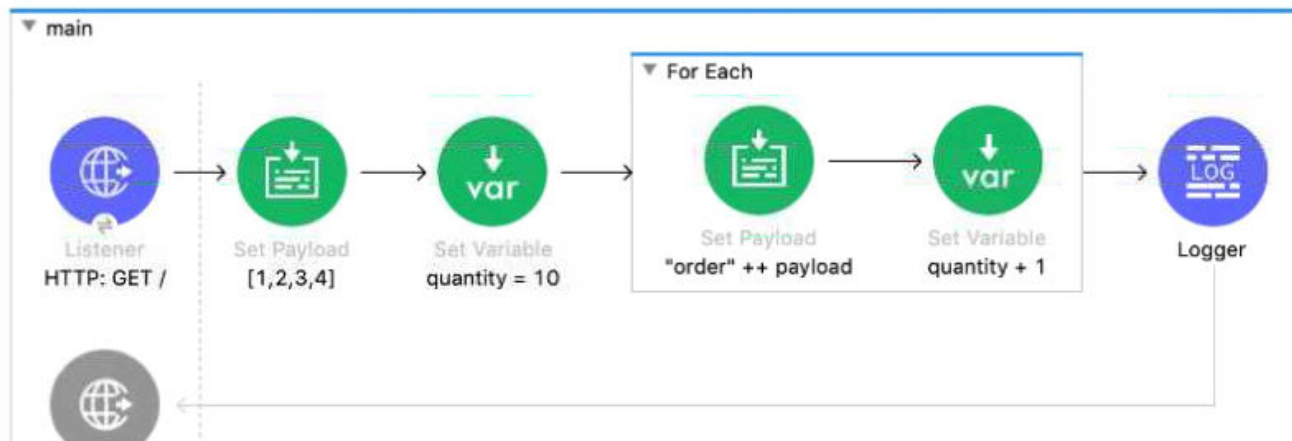

Note:
Any
notes
added
here
will not
be saved

Enter

► Error handling

```
<flow name="main" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" allowedMethods="GET"/>
  <set-payload value="#[[1,2,3,4]]" doc:name="[1,2,3,4]" />
  <set-variable value='10' doc:name="quantity = 10" variableName="quantity" />
  <foreach doc:name="For Each" >
    <set-payload value='#["order" ++ payload]' doc:name='"order" ++ payload' />
    <set-variable value="#[vars.quantity + 1]" doc:name="quantity + 1" variableName="quantity" />
  </foreach>
  <logger level="INFO" doc:name="Logger" message='#[[ payload, vars.quantity ]]' />
</flow>
```

- A. ☐ [[order1, order2, order3, order4], 14]
- B. ☐ [[1,2,3,4], 10]
- C. ☐ [order1order2order3order4, 14]
- D. ☒ [[1,2,3,4], 14]

☐ Mark this item for later review.

< Back

Next >

Review All


Submit Exam

Time Remaining: 00:09:01

22 of 60.

Refer to the exhibits. The Batch Job scope processes the array of strings.

After the Batch Job scope completes processing the input payload, what information is logged by the Logger component?

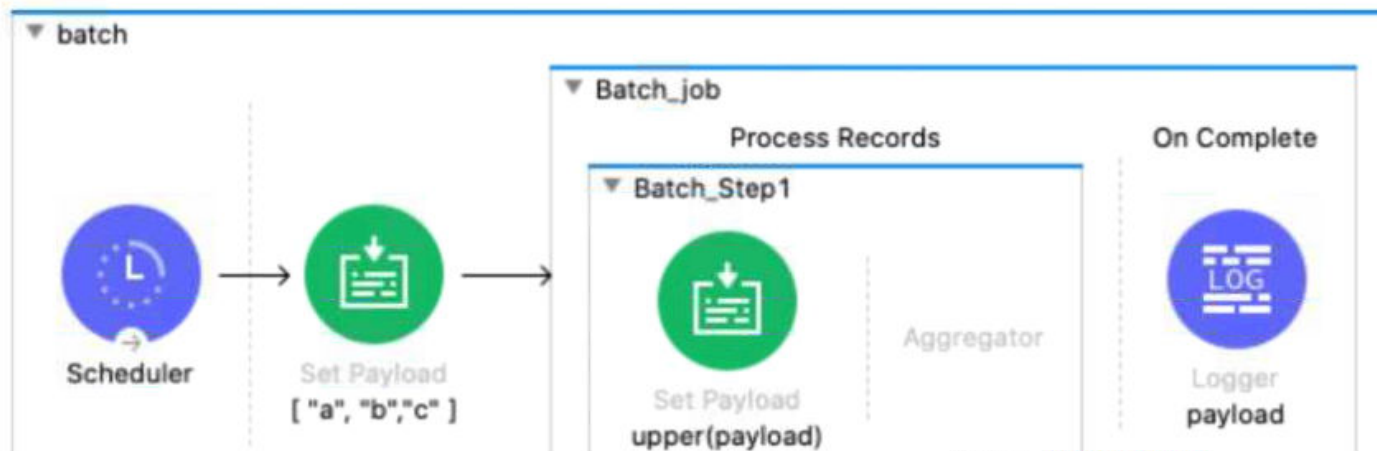

Note:
Any
notes
added
here
will not
be saved

Enter


```
</batch:job>
</flow>
```

- A. ☐ Total Records processed: 3
Successful records: 3
Failed Records: 0
payload: ["A", "B", "C"]
- B. ☐ ["A", "B", "C"]
- C. ☐ Total Records processed: 1
Successful records: 1
Failed Records: 0
payload: ["A", "B", "C"]
- D. ☒ Total Records processed: 3
Successful records: 3
Failed Records: 0

☐ Mark this item for later review.

< Back

Next >

Review All


Submit Exam

Time Remaining: 00:08:51

23 of 60.

Refer to the exhibits. Each route in the Scatter-Gather sets the payload to the number shown in the label.

What response is returned to a web client request to the HTTP Listener?

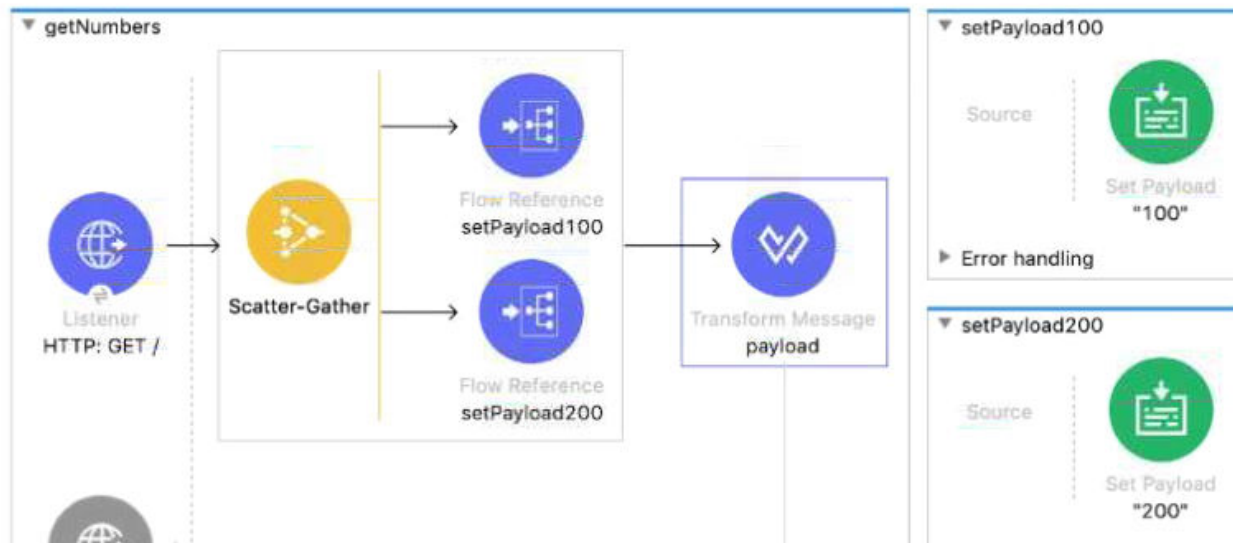

Note:
Any
notes
added
here
will not
be saved

Enter

```
<flow name="setPayload200" ><set-payload value='#["200"]' doc:name="'200"' /></flow>
```

A. ☒ {
 "0": {
 "attributes": ...,
 "payload": "100"
 },
 "1": {
 "attributes": ...,
 "payload": "200"
 }
}

B. ☐ ["100", "200"]

C. ☐ {
 "0": "100",
 "1": "200"
}

D. ☐ [
 {
 "attributes": ...,
 "payload": "100"
 },
 {
 "attributes": ...,
 "payload": "200"
 }
]

Salesforce Certified MuleSoft Developer I


Time Remaining: 00:08:20

24 of 60.

Refer to the exhibits. The Mule application configures and uses two HTTP Listener global configuration elements.

The Mule application is run in Anypoint Studio.

If the Mule application starts correctly, what URI and port number(s) can receive web client requests; if the Mule application fails to start, what is the cause of the failure?

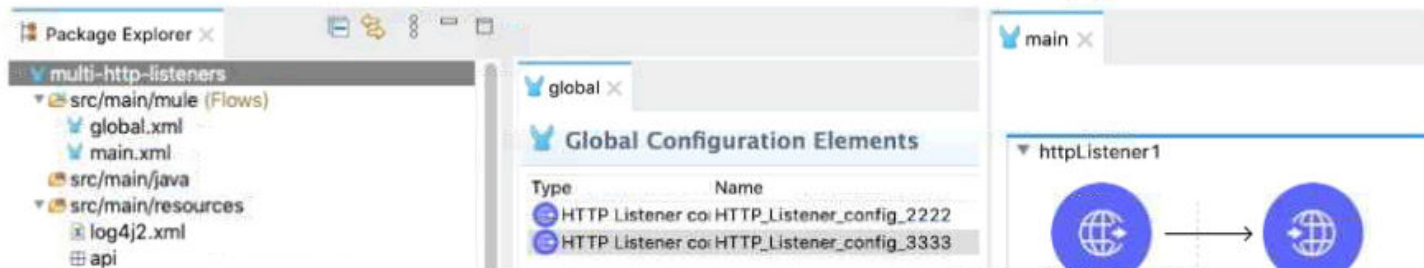

Note:
Any
notes
added
here
will not
be saved

Enter

A. ☒ The Mule application starts successfully

Web client requests can be received at the URI / on port 2222 or port 3333

B. ☐ The Mule application fails to start

There is a URL path conflict because both HTTP Listeners are configured with the same path /

C. ☐ The Mule application fails to start

There is a port bind conflict because the HTTP Request also uses port 3333

D. ☐ The Mule application starts successfully

Web client requests can only be received at the URI / on port 2222, not on port 3333

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam


Time Remaining: 00:08:07

25 of 60.

Refer to the exhibits. The Mule application does NOT define any global error handlers.

The Validation component in the Try scope throws an error.

What response message is returned to a client request to the main flow's HTTP Listener?

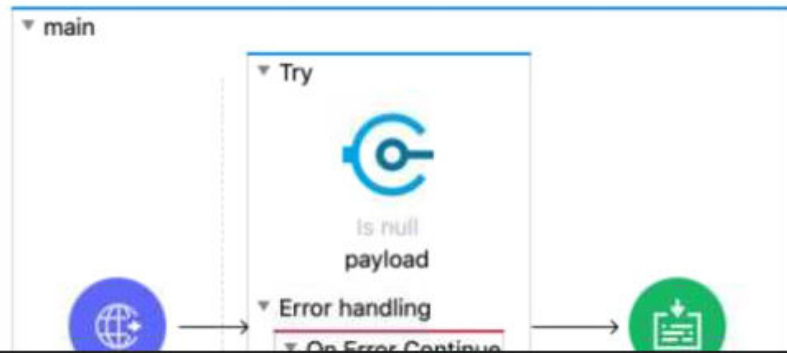

Note:
Any
notes
added
here
will not
be saved

Enter

```
<flow name="main">
  <http:listener doc:name="HTTP: POST /" config-ref="HTTP_Listener_config" path="/" />
  <try doc:name="Try" >
    <validation:is-null doc:name="payload" value="#[payload]" message="Validation Error"/>
    <error-handler >
      <on-error-continue enableNotifications="true" logException="true" doc:name="On Error Continue" >
        <set-payload value="Error - Try scope" doc:name="Error - Try scope" />
      </on-error-continue>
    </error-handler>
  </try>
  <set-payload value="Success - main flow" doc:name="Success - main flow" />
  <error-handler >
    <on-error-propagate enableNotifications="true" logException="true" doc:name="On Error Propagate" >
      <set-payload value="Error - main flow" doc:name="Error - main flow" />
    </on-error-propagate>
  </error-handler>
</flow>
```

- A. ☐ Validation Error
- B. ☐ "Success - main flow"
- C. ☐ "Error - Try scope"
- D. ☒ "Error -main flow"

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam


Time Remaining: 00:07:53

26 of 60.

Refer to the exhibits. A Mule application polls a database table.

This error is logged when the Mule application is run.

What should be changed in the Database connector configuration to resolve this error?

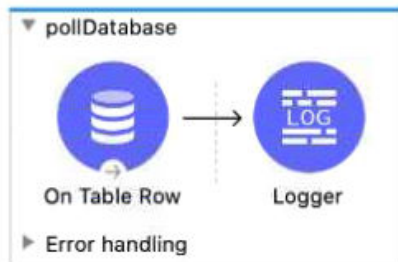

```
ERROR 2020-06-18 09:27:34,895 [_pollingSource_pollDatabase/executor.01] [processor: ; event: ] org.mule.extension.db.internal.source.RowListener: Could not obtain connection while trying to poll table 'training'. Could not obtain connection from data source  
org.mule.runtime.api.connectivity.ConnectionException: Could not obtain connection from data source
```

© 2021 iControl Software

Note:
Any
notes
added
here
will not
be saved

Enter


```
Class 'com.mysql.jdbc.Driver' has no package mapping for region '/domain/default',  
Class 'com.mysql.jdbc.Driver' not found in classloader for artifact 'container'.]]]  
Caused by: java.sql.SQLException: Error trying to load driver: com.mysql.jdbc.Driver : Cannot load class 'com.mysql.jdbc.Driver': [  
com.mysql.jdbc.Driver,  
Cannot load class 'com.mysql.jdbc.Driver': [  
Class 'com.mysql.jdbc.Driver' has no package mapping for region 'domain/default/app/pollDatabase',  
Cannot load class 'com.mysql.jdbc.Driver': [  
Class 'com.mysql.jdbc.Driver' has no package mapping for region '/domain/default',  
Class 'com.mysql.jdbc.Driver' not found in classloader for artifact 'container'.]]]  
at org.mule.extension.db.internal.domain.connection.JdbcConnectionFactory.createConnection(JdbcConnectionFactory.java:57) ~[mule-db-connector-1.8.0-mule-plugin.jar:?  
at org.mule.extension.db.internal.domain.connection.DbConnectionProvider.connect(DbConnectionProvider.java:139) ~[mule-db-connector-1.8.0-mule-plugin.jar:?  
at org.mule.extension.db.internal.domain.connection.DbConnectionProvider.connect(DbConnectionProvider.java:71) ~[mule-db-connector-1.8.0-mule-plugin.jar:?  
at org.mule.runtime.module.extension.internal.runtime.config.ClassLoaderConnectionProviderWrapper.connect(ClassLoaderConnectionProviderWrapper.java:60) ~[?:?  
at org.mule.runtime.core.internal.connection.ConnectionUtils.connect(ConnectionUtils.java:49) ~[?:?  
at org.mule.runtime.core.internal.connection.AbstractConnectionProviderWrapper.connect(AbstractConnectionProviderWrapper.java:64) ~[?:?  
at org.mule.runtime.core.internal.connection.ErrorTypeHandlerConnectionProviderWrapper.connect(ErrorTypeHandlerConnectionProviderWrapper.java:64) ~[?:?  
at org.mule.runtime.core.internal.connection.ConnectionUtils.connect(ConnectionUtils.java:49) ~[?:?  
at org.mule.runtime.core.internal.connection.AbstractConnectionProviderWrapper.connect(AbstractConnectionProviderWrapper.java:64) ~[?:?  
at org.mule.runtime.core.internal.connection.DefaultConnectionProviderWrapper.connect(DefaultConnectionProviderWrapper.java:52) ~[?:?  
at org.mule.runtime.core.internal.connection.NullConnectionManagementStrategy.getConnectionHandler(NullConnectionManagementStrategy.java:40) ~[?:?  
at org.mule.runtime.core.internal.connection.DefaultConnectionManager.getConnection(DefaultConnectionManager.java:241) ~[?:?  
at org.mule.runtime.core.internal.connection.DelegateConnectionManagerAdapter$EagerConnectionManagerAdapter.getConnection(DelegateConnectionManagerAdapter.java:160)  
~[?:?  
at org.mule.runtime.core.internal.connection.DelegateConnectionManagerAdapter.getConnection(DelegateConnectionManagerAdapter.java:82) ~[?:?
```

- A. ☐ Configure the correct host URL
- B. ☐ Configure the correct table name
- C. ☐ Configure the correct database name
- D. ☒ Configure the correct JDBC driver

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified MuleSoft Developer I

Time Remaining: 00:07:40

27 of 60. Following MuleSoft's recommended API-led connectivity approach, Northern Trail Outfitters (NTO) has created an application network. NTO now needs to create an API to transform, orchestrate, and aggregate data provided by other APIs in the application network. This API should be flexible enough to handle data from additional APIs in the future.

According to MuleSoft's recommended API-led connectivity approach, what is the best layer for this new API?

- A. ☐ System layer
- B. ☐ Experience layer
- C. ☐ Security layer
- D. ☒ Process layer

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Note:
Any
notes
added
here
will not
be saved

Enter

Time Remaining: 00:07:36

28 of 60.

Refer to the exhibit. This RAML specification includes a resource and a method to retrieve accounts by account_type and industry.

What is the correct URI to get all retail finance accounts?

```
#%RAML 1.0
title: Accounts API

/accounts:
  get:
    queryParameters:
      account_type:
        required: true
        enum:
          - "retail"
          - "commercial"
      industry:
        required: true
```

Note:
Any
notes
added
here
will not
be saved

Enter

```
required: true
enum:
  - "finance"
  - "construction"
  - "government"
```

- A. ☒ /accounts?account_type=retail&industry=finance
- B. ☐ /accounts/account_type=retail/industry=finance
- C. ☐ /accounts/retail/finance
- D. ☐ /accounts?account_type:retail&industry:finance

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

A. ☐ {
 http:
 basePath: "api"
 port: "8081"
 host: "localhost"
}

B. ☐ http.port = 8081
 http.host = "localhost"

C. ☐ http:
 port = "8081"
 host = "localhost"

D. ☒ http:
 basePath: "api"
 port: "8081"
 host: "localhost"

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam