
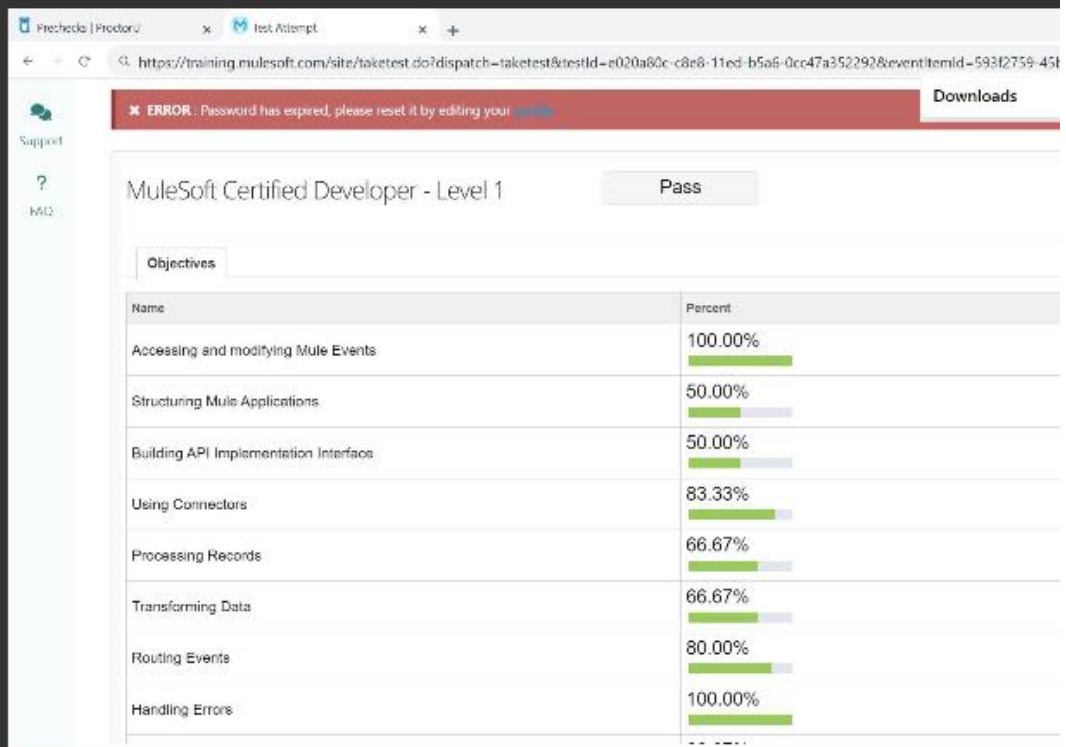


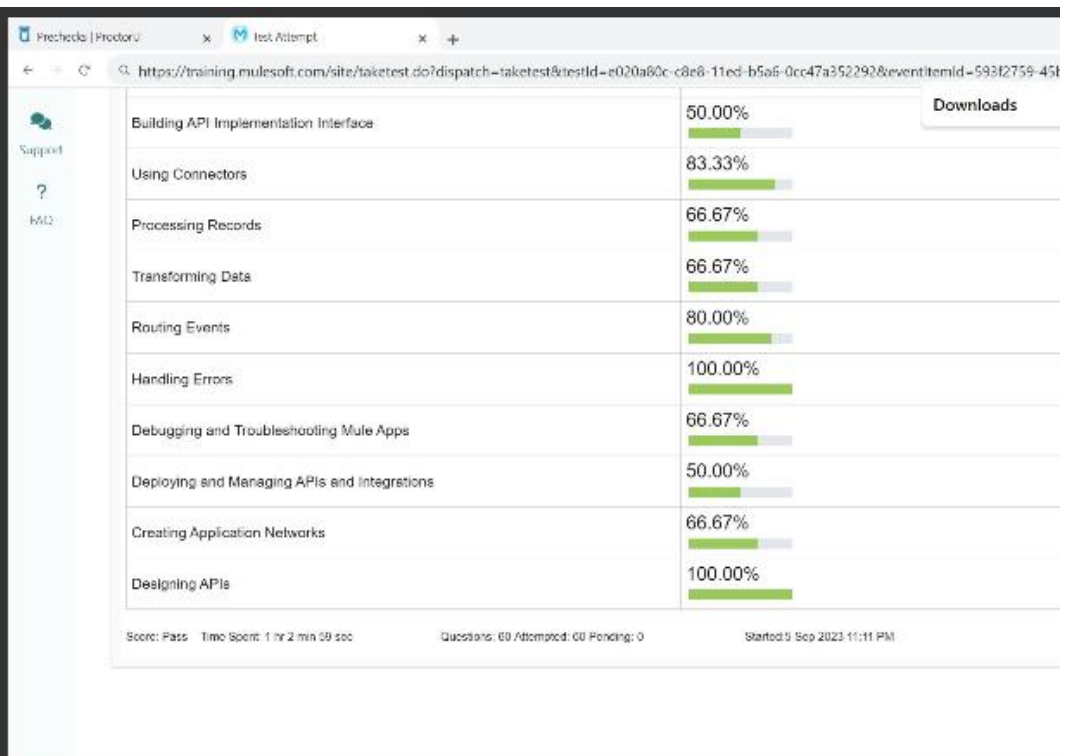

Objectives

Name	Percent
Accessing and modifying Mule Events	100.00%
Structuring Mule Applications	50.00%
Building API Implementation Interface	50.00%
Using Connectors	83.33%
Processing Records	66.67%
Transforming Data	66.67%
Routing Events	80.00%
Handling Errors	100.00%
Debugging and Troubleshooting Mule Apps	66.67%
Deploying and Managing APIs and Integrations	50.00%

Down

```
</flow>  
<flow name="decideColor">  
  <http:listener doc:name="HTTP POST /decideColor" config-ref="HTTP_Listener_config" path="/decideColor"  
    allowedMethods="POST"/>  
    <set-payload value="#[if (vars.color== null) 'white' else 'blue']"  
      doc:name="if (color variable is null) 'white' else 'blue'"/>  
</flow>
```

- ☐ A An error message
- ☐ B "white"
- ☒ C "blue"
- ☐ D "red"

[Clear Answer](#)

Comment:

[< Previous](#)

IN PROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

MuleSoft Certified Developer - Level 1

Remaining: 57.14 Minutes

◀ Previous

60 Refer to the exhibits. In the color flow, both the variable named color and the payload are set to "red".

An HTTP POST request is then sent to the decideColor flow's HTTP Listener.

What is the payload value at the Logger component after the HTTP Request completes?



- Successful records: 1
Failed Records: 0
payload: ["A", "B", "C"]
- ☐ B Total Records processed: 3
Successful records: 3
Failed Records: 0
payload: ["A", "B", "C"]
- ☐ C ["A", "B", "C"]
- ☒ D Total Records processed: 3
Successful records: 3
Failed Records: 0

[Clear Answer](#)

Comment:

☐ Mark for review

◀ Previous

Next ▶

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM


MuleSoft Certified Developer - Level 1

Remaining: 57:21 Minutes

< Previous Next >

59 Refer to the exhibits. The Batch Job scope processes the array of strings.

After the Batch Job scope completes processing the input payload, what information is logged by the Logger component?

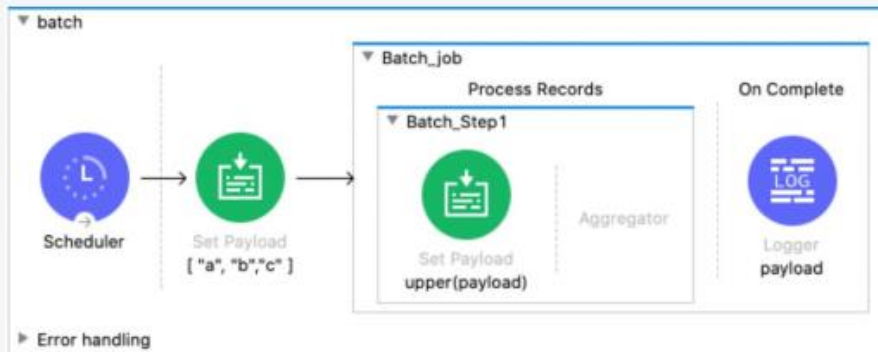

```

<flow name="batch" >
  <scheduler doc:name="Scheduler" >
    <scheduling-strategy >
      <fixed-frequency frequency="10000" />
    </scheduling-strategy>
  </scheduler>
  <set-payload value='#[["a", "b", "c"]]' doc:name='["a", "b", "c"]' />
</flow>

```

< Previous Next >

Down

58 Refer to the exhibit. What is the correct syntax to add a customer ID as a URI parameter in an HTTP Listener's path attribute?

Basic Settings

Connector configuration: HTTP_Listener_config

General

Path: /accounts/

☐ A #{customerID}

☐ B \${customerID}

☐ C {customerID}

☒ D {customerID}

[Clear Answer](#)

Comment:

rt

Source


Set Variable
counter ++ 10

► Error handling

◯ A 1

◯ B 11

☒ C 110

◯ D null

Clear Answer

Comment:

☐ Mark for review

◀ Previous

Next ▶

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

rt

✖ ERROR : Password has expired, please reset it by editing your profile

MuleSoft Certified Developer - Level 1

Remaining: 57:39 Minutes

◀ Previous

Next ▶

57 Refer to the exhibits. The Mule application is stopped at the breakpoint in Anypoint Studio. A watch expression is set to the counter variable.

What value is displayed for this watch expression?

▼ Main


Scheduler

→


Set Variable
counter = 1

→


Flow Reference
ChildFlow

→


Logger
Log counter

► Error handling

▼ ChildFlow

Source


Set Variable
counter ++ 10

► Error handling

rt

Dow

Lost Connection to Server

Sorry, we've lost connection with the server. We are trying to reconnect.

00:13

rt

Dow

Successful records: 1
Failed Records: 0
payload: ["A", "B", "C"]

- ☐ B Total Records processed: 3
Successful records: 3
Failed Records: 0
payload: ["A", "B", "C"]
- ☐ C ["A", "B", "C"]
- ☒ D Total Records processed: 3
Successful records: 3
Failed Records: 0

[Clear Answer](#)

Comment:

☐ Mark for review

[< Previous](#)

[Next >](#)

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM


MuleSoft Certified Developer - Level 1

Remaining: 68.07 Minutes

< Previous Next >

59 Refer to the exhibits. The Batch Job scope processes the array of strings.

After the Batch Job scope completes processing the input payload, what information is logged by the Logger component?

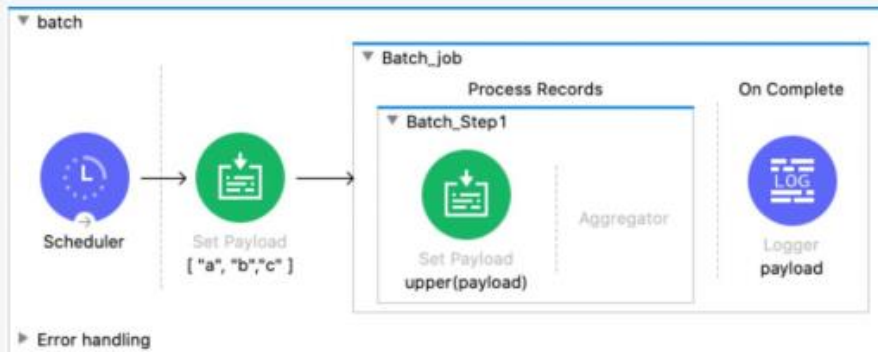

```

<flow name="batch" >
  <scheduler doc:name="Scheduler" >
    <scheduling-strategy >
      <fixed-frequency frequency="10000" />
    </scheduling-strategy>
  </scheduler>
  <set-payload value='#[["a", "b", "c"]]' doc:name='["a", "b", "c"]' />
  <batch-job>
    <batch-step-1>
      <set-payload value='upper(payload)' />
    </batch-step-1>
    <aggregator>
      <payload />
    </aggregator>
    <logger message='payload' />
  </batch-job>
</flow>
  
```

MuleSoft Certified Developer - Level 1

Remaining: 68.19 Minutes

< Previous Next >

58 Refer to the exhibit. What is the correct syntax to add a customer ID as a URI parameter in an HTTP Listener's path attribute?

Basic Settings

Connector configuration: HTTP_Listener_config

General

Path: /accounts/

- ☐ A `#[customerID]`
- ☐ B `$(customerID)`
- ☐ C `{customerID}`
- ☒ D `(customerID)`

rt

Source


Set Variable
counter ++ 10

► Error handling

◻ A 1

◻ B 11

☒ C 110

◻ D null

Clear Answer

Comment:

☐ Mark for review

◀ Previous

Next ▶

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

rt

✖ ERROR : Password has expired, please reset it by editing your profile

MuleSoft Certified Developer - Level 1

Remaining: 60:40 Minutes

◀ Previous

Next ▶

57 Refer to the exhibits. The Mule application is stopped at the breakpoint in Anypoint Studio. A watch expression is set to the counter variable.

What value is displayed for this watch expression?

▼ Main


Scheduler

→


Set Variable
counter = 1

→


Flow Reference
ChildFlow

→


Logger
Log counter

► Error handling

▼ ChildFlow

Source


Set Variable
counter ++ 10

► Error handling

</>

Download

```
<flow name="child" >
  <http:listener doc:name="HTTP: POST /child" config-ref="HTTP_Listener_config" path="/child"/>
  <logger level="INFO" doc:name="Logger"
    message="#{output application/json ---
      { flow: "child", qtyAttribute: attributes.queryParams.qty, quantityVar: vars.quantity, payload: payload
    }
  }" />
  <set-payload value="child flow finished" doc:name="child flow finished" />
</flow>
```

☐ A

The payload and all attributes

☒ B

The entire Mule event

☐ C

The payload and all variables

☐ D

All variables

[Clear Answer](#)

Comment:

Mark as Favorite

< Previous

Next >

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

</>

Download

✖ ERROR : Password has expired, please reset it by editing your profile

MuleSoft Certified Developer - Level 1

Remaining: 60:40 Minutes

< Previous

Next >

56 Refer to the exhibits. The main flow contains an HTTP Request operation configured to call the child flow's HTTP Listener.

A web client sends a GET request to the HTTP Listener with the qty query parameter set to 30.

After the HTTP Request operation completes, what parts of the Mule event at the main flow's Logger component are the same as the Mule event that was input to the HTTP Request operation?

main

Listener
HTTP: GET /
order

Set Payload
"Order01"

Set Variable
quantity to qty
param

Request
POST http://
localhost:8081
/child

Logger

Error handling

child

Listener

Logger

Set Payload

et

```
{
  "ISBN": "0471767840",
  "year": 2007,
  "title": "Shakespeare",
  "author": "Encyclopedia Britannica"
}
```

```
{
  "ID": 101
  "publisher": "Dunwich House Publishing",
  "ISBN": "0471767040"
}
```

Comment:

[← Previous](#)

Next ➤

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

et

Remaining: 68:55 Minutes

[← Previous](#)

Next >

An API implementation is created for this RAML API specification.

What is valid JSON input for a request from a web client to an implementation of this RAML API specification?

```
type: object
properties:
  ID?: integer
  title: string
  author: string
  publisher?: string
  year: integer
  ISBN:
    type: string
    required: true
```

```
{
  "ID?": 101,
  "title": "Shakespeare",
  "author": "William Shakespeare",
  "year": 1616,
  "genre": "Tragedy",
  "language": "English",
  "country": "England",
  "publisher": "The Folio Society",
  "isbn": "978-0-14-000000-0",
  "description": "A collection of Shakespeare's plays, including Hamlet, Macbeth, and Romeo and Juliet."
}
```

Result: INFOpayload
Download

☐ B ERROR: You evaluated an inline expression '#' without ++

☒ C ERROR ... "You called the function '++' with these arguments:
1: String ("INFO")
2: Object ({one: {child1: "Name1" as String (class: "java.lang.String"),child2: "Name2" ...})
...

☐ D Result: INFO { \ "one\ ": { \ "child1\ ": \ "Name1\ ", \ "child2\ ": \ "Name2\ " }

[Clear Answer](#)

Comment:

☐ Mark for review

[< Previous](#)
[Next >](#)

INPROGRESS
Questions: 60 Attempted: 60 Pending: 0
Started: 5 Sep 2023 11:11 PM

✖ ERROR : Password has expired, please reset it by editing your profile
Download

MuleSoft Certified Developer - Level 1

Remaining: 69.02 Minutes

[< Previous](#)
[Next >](#)

54 Refer to the exhibits. The Set Payload transformer sets the payload to an object. The Logger component's message attribute is configured with the string 'Result: #["INFO" ++ payload]'. What is logged when the flow executes?

logPayload



► Error handling

```
<flow name="logPayload" >
  <scheduler doc:name="Scheduler" >
    <scheduling-strategy>
      <fixed-frequency />
    </scheduling-strategy>
  </scheduler>
  <set-payload value='#[one: {child1: "Name1",child2: "Name2"}]' doc:name="Set Payload" />
  <logger level="INFO" doc:name="Logger" message='Result: #[ "INFO" ++ payload]' />
</flow>
```

Logger Problems

General

Display Name:

Generic

Message: fx

Level:

Category:

There are no errors.

☐ A Result: INFOpayload

<pre> type: object properties: ID?: integer title: string author: string publisher?: string year: integer ISBN: type: string required: true </pre>	<pre> bookExample: ID: 101 title: Shakespeare author: Encyclopaedia Britannica publisher: John Wiley & Sons year: 2007 ISBN: "0471767840" </pre>
--	--

A

```

##RAML 1.0
title: Books

types:
  Book: !include bookDataType.raml

/books:
  post:
    body:
      application/json:
        type: Book
        examples:
          input: !include bookExample.raml
    responses:
      201:
        body:
          application/json:
            example:
              message: Book added

```

✖ ERROR: Password has expired, please reset it by editing your profile

MuleSoft Certified Developer - Level 1

Remaining: 69:20 Minutes

< Previous Next >

53 Refer to the exhibits. BetterBooks has defined this Book data type and Book example to be used in APIs.

What is valid RAML for an API that uses this Book data type and Book example?

<pre> ##RAML 1.0 DataType # bookDataType.raml type: object properties: ID?: integer title: string author: string publisher?: string year: integer ISBN: type: string required: true </pre>	<pre> ##RAML 1.0 NamedExample # bookExample.raml bookExample: ID: 101 title: Shakespeare author: Encyclopaedia Britannica publisher: John Wiley & Sons year: 2007 ISBN: "0471767840" </pre>
---	--

A

```

##RAML 1.0
title: Books

```

```

        </batch:process-records>
      </batch:job>
    </flow>

```

Down

- ☐ A ["A", "C", "D", "E"]
- ☐ B ["D", "E"]
- ☐ C ["E"]
- ☒ D [["A", "C", "D"], ["E"]]

[Clear Answer](#)

Comment:

[< Previous](#)

[Next >](#)

IN PROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

✖ ERROR: Password has expired, please reset it by editing your [profile](#)

Down

MuleSoft Certified Developer - Level 1


Remaining: 69.35 Minutes

[< Previous](#)

[Next >](#)

52 Refer to the exhibits. The input array of strings is processed by the batch job that processes, filters, and aggregates the values.

What is the last message logged by the Logger component after the batch job completes processing?

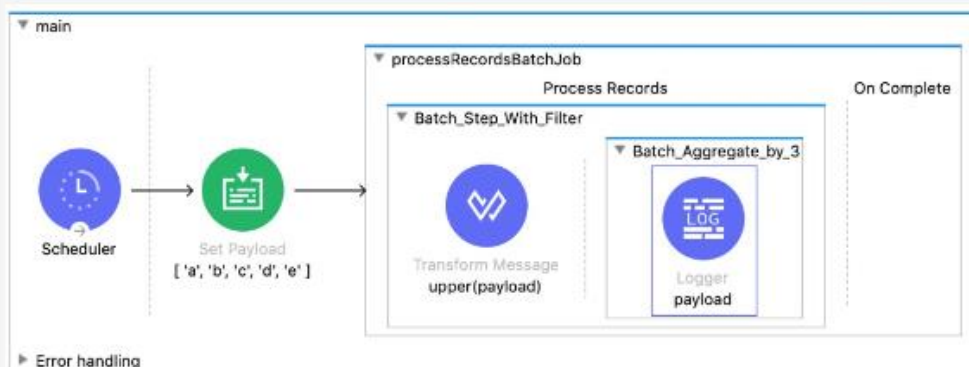

```

<flow name="main" >

```

```
<http:listener doc:name="HTTP: 3333" />
  <config-ref="HTTP_Listener_config_3333" path="/" />
<set-payload value='#["HTTP: 33333"]' doc:name="HTTP: 3333" />
</flow>
```

Dow

► Error handling

☒ A The Mule application starts successfully
Web client requests can be received at the URI / on port 2222 or port 3333

☐ B The Mule application starts successfully
Web client requests can only be received at the URI / on port 2222, not on port 3333

☐ C The Mule application fails to start
There is a port bind conflict because the HTTP Request also uses port 3333

☐ D The Mule application fails to start
There is a URL path conflict because both HTTP Listeners are configured with the same path /

[Clear Answer](#)

Comment:

☐ Mark f

◀ Previous

Next ▶

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0
Started 5 Sep 2023 11:11 PM

✖ ERROR : Password has expired, please reset it by editing your profile

Dow

MuleSoft Certified Developer - Level 1

◀ Previous

Next ▶

Remaining: 69.43 Minutes

51 Refer to the exhibits. The Mule application configures and uses two HTTP Listener global configuration elements.

The Mule application is run in Anypoint Studio.

If the Mule application starts correctly, what URI and port number(s) can receive web client requests; if the Mule application fails to start, the cause of the failure?

Package Explorer

- multi-http-listeners
 - src/main/mule (Flows)
 - global.xml
 - main.xml
 - src/main/java
 - log4j2.xml
 - api

global

```
<http:listener-config name="HTTP_Listener_config_2222"
  doc:name="HTTP Listener config" >
  <http:listener-connection host="0.0.0.0" port="2222" />
</http:listener-config>

<http:listener-config name="HTTP_Listener_config_3333"
  doc:name="HTTP Listener config" >
```

Global Configuration Elements

Type	Name
HTTP Listener co	HTTP_Listener_config_2222
HTTP Listener co	HTTP_Listener_config_3333

main

```
httpListener1
  Listener HTTP: 2222 /
  Request GET HTTP://localhost:3333
```

MuleSoft Certified Developer - Level 1

Remaining: 69.52 Minutes

◀ Previous Next ▶

50 A Mule application's HTTP Listener is configured with the HTTP protocol. The HTTP Listener's port attribute is configured with a property placeholder named `http.port`. The Mule application sets the `http.port` property placeholder's value to 9090.

The Mule application is deployed to CloudHub without setting any properties in the Runtime Manager Properties tab, and a log message reports the status of the HTTP Listener after the Mule application deployment completes.

After the Mule application is deployed, what information is reported in the replica logs related to the port on which the Mule application's HTTP Listener listens?

- ☐ A The HTTP Listener is listening on port 80
- ☐ B The HTTP Listener is listening on port 9090
- ☒ C The HTTP Listener is listening on port 8081
- ☐ D The HTTP Listener failed to bind to the port and is not listening for connections

[Clear Answer](#)

Comment:

```
<http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path=
<set-payload value="Start" doc:name="Start" />
<validation:is-blank-string doc:name="payload" value="#[payload]"/>
<set-payload value="End" doc:name="End" />
</flow>
```

Down

- ☐ A "End"
- ☐ B ""
- ☒ C "String is not blank"
- ☐ D "Start"

[Clear Answer](#)

Comment:

◀ Previous Next ▶

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM


MuleSoft Certified Developer - Level 1

Remaining: 70:07 Minutes

< Previous Next >

49 Refer to the exhibits. The Mule application does NOT define any global error handler elements. A web client sends a GET request to the

What response message is returned to the web client?

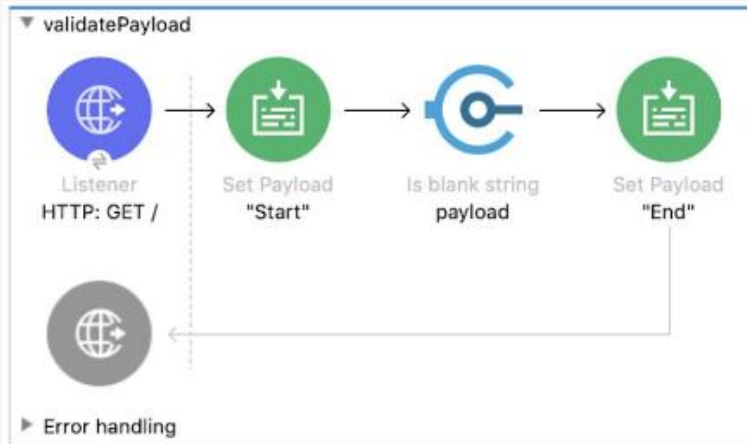

```

<flow name="validatePayload">
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_listener_config" path="/" />
  <set payload value="Start" />
  <isBlankString />
  <set payload value="End" />
  <error-handler />
</flow>
  
```

✖ ERROR: Password has expired, please reset it by editing your profile.

MuleSoft Certified Developer - Level 1

Remaining: 70:14 Minutes

< Previous Next >

48 Refer to the exhibit.

What DataWeave expression transforms the conductorIds array to the XML output?

<pre> 1 %dw 2.0 2 output application/xml 3 var conductorIds = [592, 921] 4 --- 5 6 7 8 9 10 </pre>	<pre> <?xml version='1.0' encoding='UTF-8'?> <trains> <train> <engineerId>592</engineerId> </train> <train> <engineerId>921</engineerId> </train> </trains> </pre>
--	--

☒ A

```

trains:
{ (
  conductorIds map ( (engId, index) ->
    train: {
      engineerId: engId
    }
  )
)
  
```



```

---
payload]]></ee:set-payload>
</ee:message>
</ee:transform>
</flow>
<flow name="setPayload100"><set-payload value="#["100"]" doc:name="100" /></flow>
<flow name="setPayload200"><set-payload value="#["200"]" doc:name="200" /></flow>

```

☒ A

```

{
  "0": {
    "attributes": ...,
    "payload": "100"
  },
  "1": {
    "attributes": ...,
    "payload": "200"
  }
}

```

☐ B

```

["100", "200"]

```

☐ C

```

{
  "0": "100",
  "1": "200"
}

```

☐ D

```

{
}

```

✖ ERROR : Password has expired, please reset it by editing your profile


MuleSoft Certified Developer - Level 1

Remaining: 70.33 Minutes

[< Previous](#) [Next >](#)

46 Refer to the exhibits. Each route in the Scatter-Gather sets the payload to the number shown in the label.

What response is returned to a web client request to the HTTP Listener?

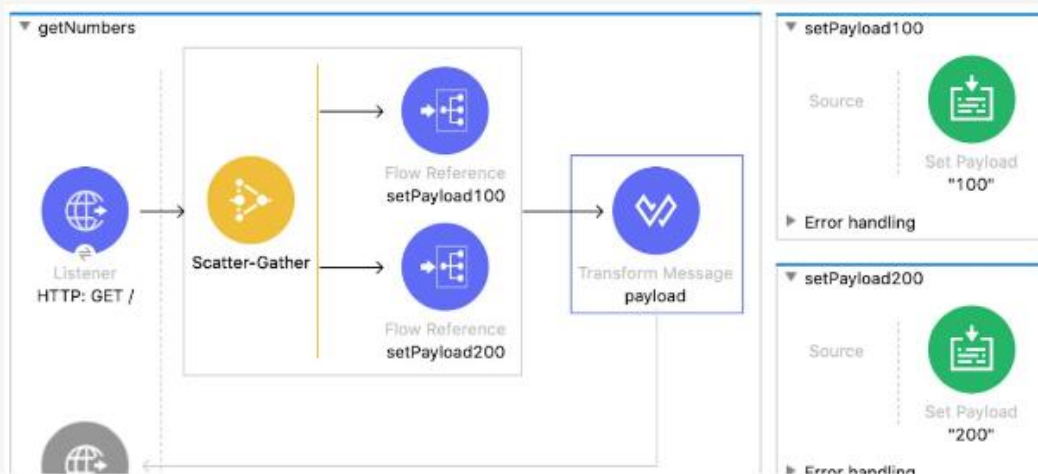

```

<set-variable value="#[vars.quantity + 1]" doc:name="quantity + 1" variableName="quantity"
</foreach>
<logger level="INFO" doc:name="Logger" message="#[ payload, vars.quantity ]"/>
</flow>

```

Down

- ☐ A [[1,2,3,4], 10]
- ☐ B [[order1, order2, order3, order4], 14]
- ☒ C [[1,2,3,4], 14]
- ☐ D [order1order2order3order4, 14]

Clear Answer

Comment:

☐ Mark for review

< Previous

Next >

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

✖ ERROR : Password has expired, please reset it by editing your profile

Down

MuleSoft Certified Developer - Level 1


Remaining: 70.49 Minutes

< Previous

Next >

45 Refer to the exhibits.

What payload and quantity are logged at the end of the main flow?

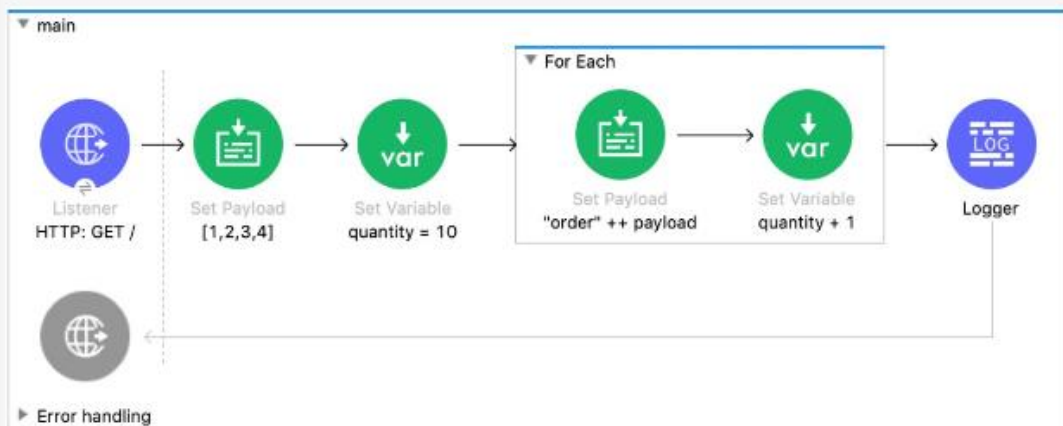

[< Previous](#) [Next >](#)

44 A function named toUpper needs to be defined that accepts a string named userName and returns the string in uppercase.

What is the correct DataWeave code to define the toUpper function?

- ☐ A `fun toUpper(userName) -> upper(userName)`
- ☐ B `var toUpper(userName) = upper(userName)`
- ☐ C `var toUpper(userName) -> upper(userName)`
- ☒ D `fun toUpper(userName) = upper(userName)`

[Clear Answer](#)

Comment:

☐ Mark for review[< Previous](#) [Next >](#)

- ☐ A Response body: "START"
Default response status code: 500
- ☒ B Response body: "ERROR1"
Default response status code: 200
- ☐ C Response body: "END"
Default response status code: 100
- ☐ D Response body: "ERROR1"
Default error response status code: 400

[Clear Answer](#)

Comment:

[< Previous](#) [Next >](#)

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

MuleSoft Certified Developer - Level 1


Remaining: 71.00 Minutes

< Previous Next >

43 Refer to the exhibits. The Mule application does NOT define any global error handlers.

A web client sends a GET request to the HTTP Listener and the HTTP Request throws an error.

What payload and status code are returned to the web client?

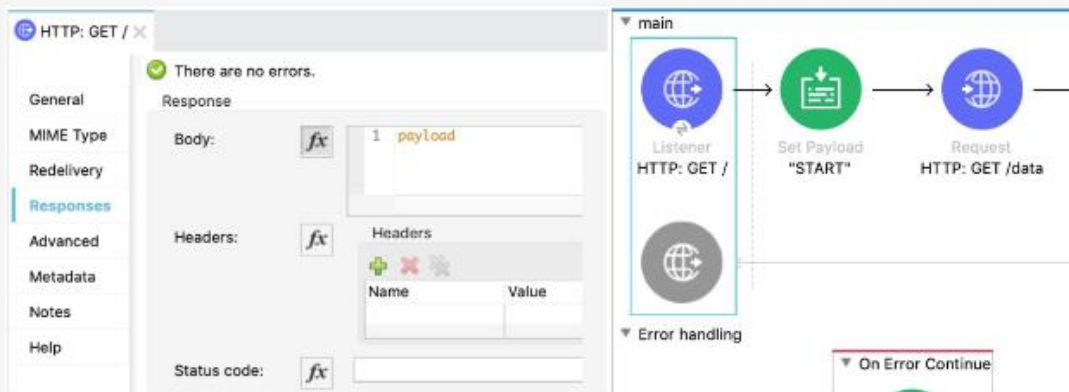

MuleSoft Certified Developer - Level 1

Remaining: 71.16 Minutes

< Previous Next >

42 A Mule application contains an ActiveMQ JMS dependency. The Mule application was developed in Anypoint Studio and runs successfully in Anypoint Studio.

The Mule application must now be exported from Anypoint Studio and shared with another developer.

What export options create the smallest JAR file that can be imported into the other developer's Anypoint Studio and run successfully?

- ☐ A
 - ☐ Attach project sources
 - ☒ Include project modules and dependencies
- ☒ B
 - ☒ Attach project sources
 - ☐ Include project modules and dependencies
- ☐ C
 - ☒ Attach project sources
 - ☒ Include project modules and dependencies

- ☐ A Set a request header with the name Content-Type to the value application/octet-stream
- ☐ B Set a response header with the name Content-Type to the value application/octet-stream
- ☒ C Set a request header with the name Content-Type to the value application/xml
- ☐ D Set a response header with the name Content-Type to the value application/xml

Comment:

[illegible]

[← Previous](#)

Next ➤

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

✖ ERROR : Password has expired, please reset it by editing your [profile](#)

Remaining: 71:25 Minutes

[← Previous](#)

Next >

An error is returned.

What should be changed in the request so that a success response code is returned to the web client?

The screenshot shows the Swagger UI interface for a REST API. The URL bar at the top displays `http://localhost:8081/api/`. Below the URL bar, the selected HTTP method is `POST`, with other methods like `GET`, `PUT`, `DELETE`, and `PATCH` also visible. The request URL is `http://localhost:8081/api/order`. The body content type is set to `multipart/mixed`. The response status is `415 Unsupported Media Type`, and the response time is `4097.00 ms`. The response details are visible at the bottom of the interface.

et

▶ Sockets [v1.1.6]
 ▶ src
 ▶ target
 mule-artifact.json
 pom.xml [Mule Server 4.3.0 EE]

error handling

Message Flow Global Elements Configuration XML

☒ A A configuration-properties element in the acme-app.xml file
☐ B A dependency element in the pom.xml file
☐ C A file-config element in the acme-app.xml file
☐ D A propertiesFile key/value pair in the mule-artifact.json file

Clear Answer

Comment:

☐ Mark for review

< Previous
Next >

INPROGRESS
Questions: 60 Attempted: 60 Pending: 0
Started: 5 Sep 2023 11:11 PM

et

< Previous Next >

Dow

40 Refer to the exhibit. The Mule application's connectors are configured with property placeholders whose values are set in the config.yaml file.

What must be added to the Mule application to link the config.yaml file's values with the property placeholders?

< Previous

Next >

Down

39 A REST Connect module is generated for a RAML specification, and then the REST Connect module is imported into a Mule application.

For each method of the RAML specification, what does the REST Connect module provide?

- ☒ A A flow
- ☐ B A scope
- ☐ C An operation
- ☐ D An event source

[Clear Answer](#)

Comment:

☐ Mark for review

< Previous

Next >

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

```
get:
  patch:
/reports:
  get:
```

Down

- ☐ A 3
- ☐ B 2
- ☐ C 5
- ☒ D 1

[Clear Answer](#)

Comment:

☐ Mark for review

< Previous

Next >

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

MuleSoft Certified Developer - Level 1

Remaining: 71.47 Minutes

[< Previous](#) [Next >](#)

38 Refer to the exhibit. APIkit is used to generate flow components for the RAML specification.

How many apikit:router XML elements are generated to handle requests to every endpoint defined in the RAML specification?

```
orders.raml

/orders:
  get:
  post:
  /order:
    get:
    patch:
/reports:
  get:
```

- ☐ A 3
- ☐ B 2
- ☐ C 5



► Error handling

- ☐ A "Blk"
- ☐ B "Green"
- ☐ C "Red"
- ☒ D An error message

[Clear Answer](#)

Comment:

☐ Mark for review

[< Previous](#) [Next >](#)

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

MuleSoft Certified Developer - Level 1


Remaining: 71.50 Minutes

[< Previous](#) [Next >](#)

37 Refer to the exhibit. The Default scope in the Choice router recursively calls the color flow.

A web client sends a PUT request to the HTTP Listener with payload "Blue".

What response is returned to the web client?

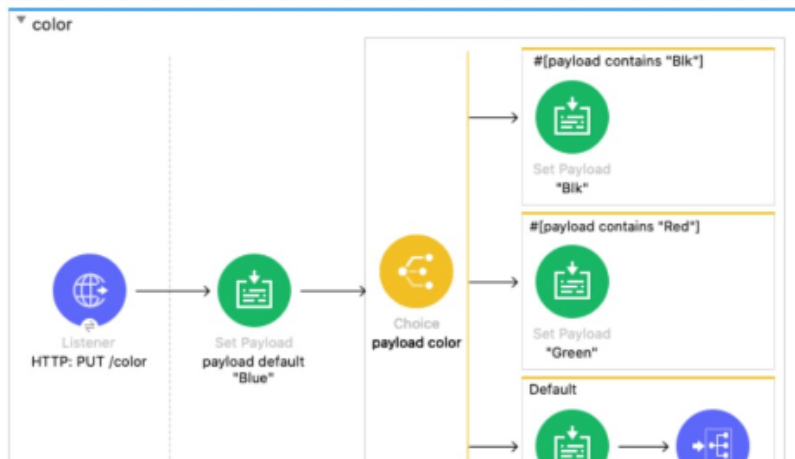

- ☐ C ID ZIPCODE
 - 1 90001
 - 2 90005
 - 3 90009
 - 4 90001
- ☒ D ID ZIPCODE
 - 1 90001
 - 2 90005
 - 3 90009

[Clear Answer](#)

Comment:

☐ Mark for review

[< Previous](#) [Next >](#)

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

MuleSoft Certified Developer - Level 1


Remaining: 72.06 Minutes

< Previous Next >

36 Refer to the exhibits. A database Address table contains a ZIPCODE column and an increasing ID column. The Address table currently contains four (4) records. The On Table Row Database listener is configured with its watermark set to the Address table's ZIPCODE column and then the Mule application is run in Anypoint Studio for the first time, and the On Table Row Database listener polls the Address table.

A new row is added to the database with ID=5 and ZIPCODE=90006, and then the On Table Row Database listener polls the database again.

After the next execution of the On Table Row Database listener polling, what database rows have been processed by the Mule flow since the Mule application was started?



ID	ZIPCODE
----	---------

- ☐ B
- ```
addItem(
 { price: "100", item: "router", itemType: "cable" }
)
```
- ☐ C
- ```
addItem(
  { payload: { price: "100", item: "router", itemType: "cable" } }
)
```
- ☒ D
- ```
lookup(
 "addItem",
 { payload: { price: "100", item: "router", itemType: "cable" } }
)
```

[Clear Answer](#)

Comment:

< Previous Next >

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

## MuleSoft Certified Developer - Level 1

Remaining: 72.16 Minutes

< Previous Next >

35 Refer to the exhibits. The Set Payload transformer in the addItem child flow uses DataWeave to create an order object.

What is the correct DataWeave code for the Set Payload transformer in the createOrder flow to use the addItem child flow to add a route of 100 to the order?



```

1 %dw 2.0
2 output application/json
3 ---
4 order: {
5 item: {
6 itemName: payload.itemName
7 itemType: payload.itemType
8 price: payload.price
9 }
10 }

```

## MuleSoft Certified Developer - Level 1

< Previous Next >

34 A Mule project contains a DataWeave module file WebStore.dwl that defines a function named loginUser. The module file is located in the project's src/main/resources/libs/dw folder.

What is correct DataWeave code to import all of the WebStore.dwl file's functions and then call the loginUser function for the login "cindy.park@example.com"?

- ☒ A
- ```
import * from libs::dw::WebStore
---
loginUser( "cindy.park@example.com" )
```
- ☐ B
- ```
import * from libs::dw

WebStore::loginUser("cindy.park@example.com")
```
- ☐ C
- ```
import libs.dw
---
WebStore.loginUser( "cindy.park@example.com" )
```
- ☐ D
- ```
import libs.dw.WebStore

loginUser("cindy.park@example.com")
```

Clear Answer

Comment:

[< Previous](#) [Next >](#)

33 By default, what happens to a file after it is read using an FTP connector Read operation?

- ☐ A The file is renamed in the same folder
- ☐ B The file is deleted from the folder
- ☐ C The file is moved to a different folder
- ☒ D The file stays in the same folder unchanged

[Clear Answer](#)

Comment:

☐ Mark for review[< Previous](#) [Next >](#)

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

- ☒ B Change the method attribute's value to "POST"
- ☐ C Change the path attribute's value to "/api/partners/fastShipping"
- ☐ D Change the protocol attribute's value to "HTTPS"

[Clear Answer](#)

Comment:

[< Previous](#) [Next >](#)

INPROGRESS


Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

32 Refer to the exhibits. The webClient flow sends requests to the mockServer flow's HTTP Listener.

An HTTP:METHOD\_NOT\_ALLOWED error is thrown each time the webClient flow executes.

What attribute value must be changed in the webClient flow's HTTP Request operation to prevent this error from being thrown?

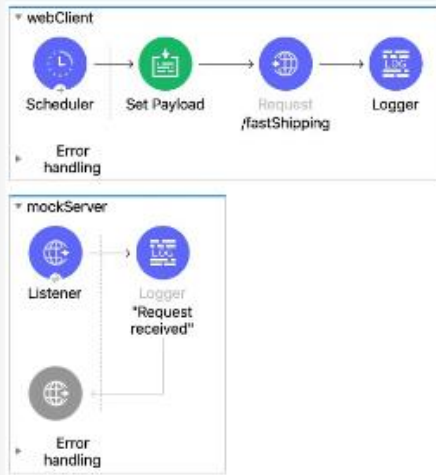

```
<http:request-config name="HTTP_Request_configuration" doc:name="HTTP Request configuration" basePath="/c
 <http:request-connection host="localhost" port="8081" />
</http:request-config>
<flow name="webClient">
 <scheduler doc:name="Scheduler">
```

- ☐ A
- ```
{
  items: vars.shippingAddress.items
  shippingInfo: payload
}
```
- ☐ B
- ```
{
 items: vars.shippingAddress.items
 shippingInfo: payload
}
```
- ☐ C
- ```
{
  items: attributes.shippingAddress.items
  shippingInfo: payload
}
```
- ☒ D
- ```
{
 items: payload.items,
 shippingInfo: vars.shippingAddress
}
```

[Clear Answer](#)

Comment:

[Previous](#)

[Next](#)

IN PROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

## MuleSoft Certified Developer - Level 1

Remaining: 72.54 Minutes

< Previous Next >

**31** Refer to the exhibits. Northern Trail Outfitters is developing a Mule application to process web client POST requests with payloads containing the user name and purchased items. The Shipping connector returns a shipping address for the input payload's user name. The Shipping Address operation is configured with a target named shippingAddress.

The Set Payload transformer needs to set an item key equal to the items value from the original received payload and a shippingInfo key to the Shipping Address operation's response.

What is a straightforward way to properly configure the Set Payload transformer with the required data?

**Input payload:**

```
{
 "user": "vivek.singh@acme.com",
 "items": [
 { "item": "bike", "price": 120.45, "qty": 1 }
]
}
```

▼ main



Down

- ☐ A The entire Mule event
- ☐ B The payload and all attributes
- ☒ C The payload and all variables
- ☐ D The payload

[Clear Answer](#)

Comment:

☐ Mark for review

< Previous Next >

IN PROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

## MuleSoft Certified Developer - Level 1

Remaining: 73.04 Minutes

< Previous Next >

30 Refer to the exhibits. The main flow contains a Flow Reference component configured to call the child flow.

What part(s) of a Mule event passed to the Flow Reference component are available in the child flow?



☒ C

```
{ "amount": 500 }
{ "amount": 101 }
{ "step2amount": 1000 }
{ "step2amount": 500 }
```

☐ D

```
{ "amount": 500 }
{ "amount": 601 }
{ "step2amount": 1000 }
{ "step2amount": 500 }
{ "step2amount": 601 }
```

[Clear Answer](#)

Comment:

< Previous Next >

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM



## MuleSoft Certified Developer - Level 1

Remaining: 73:16 Minutes

< Previous Next >

29 Refer to the exhibits. The Batch Job scope contains two Batch Step scopes with different accept expressions.

The input payload is passed to the Batch Job scope.

After the entire payload is processed by the Batch Job scope, what messages have been logged by the Logger components?

Input payload:

```
[
 { "size": "large", "amount": 1000, "price": 400.00 },
 { "size": "medium", "amount": 400, "price": 600.00 },
 { "size": "small", "amount": 1, "price": 800.00 }
]
```

Batch\_job

Process Records

lessThan500



greaterThan200



Input Parameters:

```
1 {
2 city: attributes.queryParams.city,
3 state: attributes.queryParams.state
4 }
```

- ☐ A WHERE city = #{city} AND state = #{state}
- ☒ B WHERE city = :city AND state = :state
- ☐ C WHERE city :- \${city} AND state :- \${state}
- ☐ D WHERE city = attributes.city AND state = attributes.state

Clear Answer

Comment:

☐ Mark for review

< Previous Next >

## MuleSoft Certified Developer - Level 1

Remaining: 73.27 Minutes

[< Previous](#) [Next >](#)

- 28 Refer to the exhibit. How should the WHERE clause be changed to set the city and state values from the configured input parameters?

### Query

#### SQL Query Text:

```
SELECT * FROM accounts
WHERE city = attributes.queryParams.city AND
state = attributes.queryParams.state
```

#### Input Parameters:

```
1 {
2 city: attributes.queryParams.city,
3 state: attributes.queryParams.state
4 }
```

- ☐ A WHERE city = #{city} AND state = #{state}

- 27 Any Airlines is beginning to follow MuleSoft's recommended API-led connectivity approach to use modern APIs to support the development and lifecycles of their integration solutions and to close the IT delivery gap.

What distinguishes between how modern APIs are organized in a MuleSoft-recommended API-led connectivity approach vs. other common enterprise integration solutions?

- ☐ A The API implementations are monitored with common tools, centralized monitoring, and security systems
- ☐ B The API interfaces are specified as macroservices, with one API representing all the business logic of an existing and proven end-to-end integration solution
- ☒ C The API implementations are built with standards using common lifecycle and centralized configuration management tools
- ☐ D The API interfaces are specified at a granularity intended for developers to consume specific aspects of integration processes

[Clear Answer](#)

Comment:

☐ Mark for review

[< Previous](#) [Next >](#)

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

Dow

- [Clear Answer](#)

\_\_\_\_\_

Next ➤

Started: 5 Sep 2023 11:11 PM

Next ➤

```

graph LR
 Listener[Listener HTTP: POST /] --> Try
 subgraph Try
 IsNull[Is null payload]
 subgraph ErrorHandling [Error handling]
 OnErrorContinue[On Error Continue]
 SetPayloadError[Set Payload "Error - Trv"]
 end
 end
 Try --> SetPayloadSuccess[Set Payload "Success - main flow"]
 OnErrorContinue --> SetPayloadError

```

et

Download

☒ C

```
http:
 basePath: "api"
 port: "8081"
 host: "localhost"
```

☐ D

```
{
 http:
 basePath: "api"
 port: "8081"
 host: "localhost"
}
```

```
host = "localhost"
```

[Clear Answer](#)

Comment:

☐ Mark for review

[< Previous](#)
[Next >](#)

INPROGRESS
 Questions: 60 Attempted: 60 Pending: 0
Started: 5 Sep 2023 11:11 PM

et

✖ ERROR : Password has expired, please reset it by editing your profile
Download

## MuleSoft Certified Developer - Level 1

Remaining: 73.57 Minutes

[< Previous](#)
[Next >](#)

**25** Refer to the exhibit. A Mule application configures a property placeholder file named config.yaml to set some property placeholders for an HTTP connector.

What is a valid properties placeholder file to set these values?

**HTTP Listener config**  
Configuration element for a HttpListener.

| General                                                                                                                                                                                        | Notes | Help     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------|
| <p>Name: <input type="text" value="HTTP_Listener_config"/></p>                                                                                                                                 |       |          |
| General                                                                                                                                                                                        | TLS   | Advanced |
| <p>Connection</p> <p>Protocol: <input type="text" value="HTTP (Default)"/></p> <p>Host: <input type="text" value="\${http.host}"/></p> <p>Port: <input type="text" value="\${http.port}"/></p> |       |          |

Caused by: [org.mule.runtime.extension.api.exception.ModuleException: java.sql.SQLException: Error trying to load driver: com.mysql.jdbc.Driver](#): [

```

com.mysql.jdbc.Driver,
Cannot load class 'com.mysql.jdbc.Driver': [
Class 'com.mysql.jdbc.Driver' has no package mapping for region 'domain/default/app/pollDatabase',
Cannot load class 'com.mysql.jdbc.Driver': [
Class 'com.mysql.jdbc.Driver' has no package mapping for region '/domain/default',
Class 'com.mysql.jdbc.Driver' not found in classloader for artifact 'container']]
Caused by: java.sql.SQLException: Error trying to load driver: com.mysql.jdbc.Driver : Cannot load class 'com.
com.mysql.jdbc.Driver,
Cannot load class 'com.mysql.jdbc.Driver': [
Class 'com.mysql.jdbc.Driver' has no package mapping for region 'domain/default/app/pollDatabase',
Cannot load class 'com.mysql.jdbc.Driver': [
Class 'com.mysql.jdbc.Driver' has no package mapping for region '/domain/default',
Class 'com.mysql.jdbc.Driver' not found in classloader for artifact 'container']]
at org.mule.extension.db.internal.domain.connection.JdbcConnectionFactory.createConnection(JdbcConnect
at org.mule.extension.db.internal.domain.connection.DbConnectionProvider.connect(DbConnectionProvider,
at org.mule.runtime.module.extension.internal.runtime.config.ClassLoaderConnectionProviderWrapper.conn
at org.mule.runtime.core.internal.connection.ConnectionUtils.connect(ConnectionUtils.java:49) ~[?:?]
at org.mule.runtime.core.internal.connection.AbstractConnectionProviderWrapper.connect(AbstractConnect
at org.mule.runtime.core.internal.connection.ErrorTypeHandlerConnectionProviderWrapper.connect(ErrorTy
at org.mule.runtime.core.internal.connection.ConnectionUtils.connect(ConnectionUtils.java:49) ~[?:?]
at org.mule.runtime.core.internal.connection.AbstractConnectionProviderWrapper.connect(AbstractConnect
at org.mule.runtime.core.internal.connection.DefaultConnectionProviderWrapper.connect(DefaultConnectio
at org.mule.runtime.core.internal.connection.NullConnectionManagementStrategy.getConnectionHandler(Nul
at org.mule.runtime.core.internal.connection.DefaultConnectionManager.getConnection(DefaultConnectionM
at org.mule.runtime.core.internal.connection.DelegateConnectionManagerAdapter$EagerConnectionManagerAd
~[?:?]
at org.mule.runtime.core.internal.connection.DelegateConnectionManagerAdapter.getConnection(DelegateCo

```

- ☒ A Configure the correct JDBC driver
- ☐ B Configure the correct database name
- ☐ C Configure the correct table name
- ☐ D Configure the correct host URL

✖ ERROR : Password has expired, please reset it by editing your profile

## MuleSoft Certified Developer - Level 1


Remaining: 74.12 Minutes

[< Previous](#) [Next >](#)

**24** Refer to the exhibits. A Mule application polls a database table.

This error is logged when the Mule application is run.

What should be changed in the Database connector configuration to resolve this error?



ERROR 2020-06-18 09:27:34,895 [\_pollingSource\_pollDatabase/executor.01] [processor: ; event: ] org.mule.extens while trying to poll table 'training'. Could not obtain connection from data source

```

org.mule.runtime.api.connection.ConnectionException: Could not obtain connection from data source
Caused by: org.mule.extension.db.api.exception.connection.ConnectionCreationException: Could not obtain connec
Caused by: org.mule.runtime.extension.api.exception.ModuleException: java.sql.SQLException: Error trying to lo
'com.mysql.jdbc.Driver': [
com.mysql.jdbc.Driver,
Cannot load class 'com.mysql.jdbc.Driver': [
Class 'com.mysql.jdbc.Driver' has no package mapping for region 'domain/default/app/pollDatabase',
Cannot load class 'com.mysql.jdbc.Driver': [

```

et

```

 </scheduling-strategy>
 </scheduler>
 <set-variable value='#{first: "Max", last: "Mule"}'
 doc:name='customer = {first: "Max", last: "Mule"}' variableName="customer"/>
 <logger level="INFO" doc:name="first" message='<!-- -->' />
</flow>

```

Dow

- ☐ A vars."customer.first"
- ☐ B "customer.first"
- ☐ C customer.first
- ☒ D vars."customer"."first"

[Clear Answer](#)

Comment:

☐ Mark for review

[< Previous](#)
[Next >](#)

IN PROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

et

✖ **ERROR** : Password has expired, please reset it by editing your profile

Dow


## MuleSoft Certified Developer - Level 1

Remaining: 74.25 Minutes

[< Previous](#)
[Next >](#)

**23** Refer to the exhibits. The Set Variable transformer is set with value `#{ first: "Max", last: "Mule" }`.

What is a valid DataWeave expression to set as the message attribute of the Logger to access the value "Max" from the Mule event?

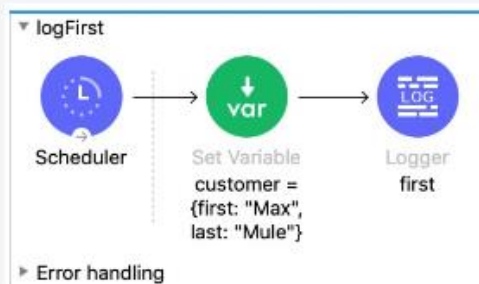

```

<flow name="logFirst" >
 <scheduler doc:name="Scheduler" >
 <scheduling-strategy >
 <fixed-frequency frequency="30" timeUnit="SECONDS"/>
 </scheduling-strategy>
 </scheduler>
 <set-variable value='#{first: "Max", last: "Mule"}'

```

rt

Down

☐ A

Mule message payload

☐ B

Mule message

☒ C

Mule event

☐ D

Mule message attributes

Clear Answer

Comment:

Mark for review

< Previous

Next >

IN PROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

rt

✖ ERROR : Password has expired, please reset it by editing your [profile](#)

Down

MuleSoft Certified Developer - Level 1

Remaining: 75.18 Minutes

< Previous

Next >

22

Refer to the exhibit. A Mule event is composed of a hierarchy of objects.

Where in the hierarchy are variables stored?

Mule event

Mule message

Attributes

Payload

☐ A

Mule message payload



```

</foreach>
</flow>
<flow name="updateTemp" >
 <http:listener doc:name="HTTP POST /updateTemp" config-ref="HTTP_Listener_conf"
 <os:store doc:name="Store payload in temp key in Object Store" key="temp" fail
</flow>
<flow name="getTemp" >
 <http:listener doc:name="HTTP: GET /getTemp" config-ref="HTTP_Listener_config"
 <os:retrieve-all doc:name="Retrieve all"/>
 <set-payload value="#[output application/json --- payload]" doc:name="output a
 <logger level="INFO" />
</flow>

```

- ☐ A
- ```
{
  "temp": "100"
}
```
- ☒ B
- ```
{
 "temp": "85"
}
```
- ☐ C
- ```
{
  "temp": [70, 65, 100, 60, 85]
}
```
- ☐ D
- ```
{
 "temp": 70,
}
```

✖ ERROR: Password has expired, please reset it by editing your profile

## MuleSoft Certified Developer - Level 1


Remaining: 75.37 Minutes

[< Previous](#) [Next >](#)

21 Refer to the exhibits. The updateTemp and getTemp flows share the same default object store.

A web client sends one GET request to the test flow's HTTP Listener, which causes the test flow to call the updateTemp flow. After the test flow sends a different GET request to the getTemp flow's HTTP Listener. The test flow is not called a second time.

What response is returned from the request to the getTemp flow's HTTP Listener?

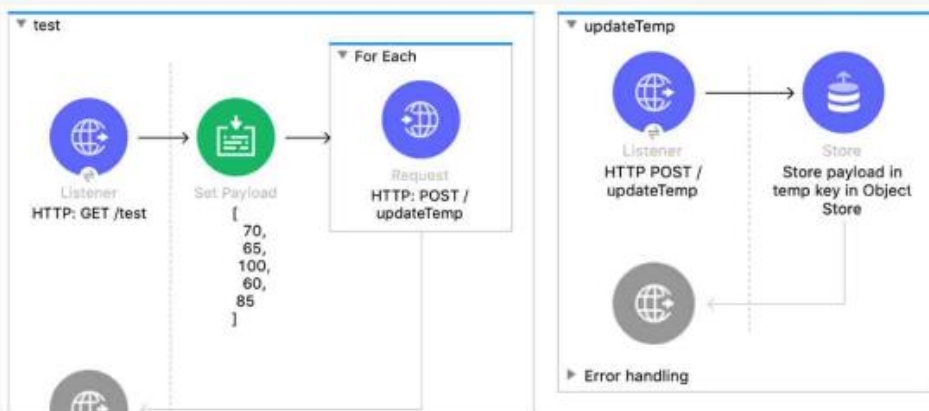



Metadata

Notes

Target Variable:

theResult

Target Value:

`#[ payload ]`

☐ A The returned JSON response

☒ B The original XML payload

☐ C null

☐ D A non-empty Java object

Clear Answer

Comment:

< Previous

Next >

IN-PROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

< Previous

Next >

20 Refer to the exhibits. In the requestFlow an HTTP Request operation is configured to send an HTTP request with an XML payload. The request is sent to the HTTP Listener in the transformFlow. That flow transforms the incoming payload into JSON format and returns the response to the request.

The response of the request is stored in a target variable named theResult.

What is the payload at the Logger component after the HTTP Request?

requestFlow

Listener

Transform Message  
Set XML payload

Request  
POST /order  
request

Logger  
Log payload

Error handling

transformFlow

Listener  
POST /order

Set Payload  
Transform JSON Object

Error handling

Message Flow

Global Elements

Configuration XML

< Previous

Next >

Down

19 Northern Trail Outfitter's Center for Enablement (C4E) has built foundational assets (API specifications and implementation templates, common frameworks, and best practices guides) and published them to Anypoint Exchange.

What is a metric related to these foundational assets that helps NTO measure the success of its C4E efforts?

- ☐ A Utilization counts of foundational assets in production applications
- ☒ B Correlation of key performance indicators (KPIs) of production applications with foundational assets
- ☐ C Correlation of each foundational asset with the counts of developers that downloaded each asset
- ☐ D Counts of how many lines of businesses (LoBs) consumed each foundational asset

[Clear Answer](#)

Comment:

☐ Mark for review

< Previous

Next >

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

Listener interceptors: None

Down

☐ A `*[order,customer]/status`

☒ B `*status`

☐ C `*/status`

☐ D `?[order,customer]/status`

[Clear Answer](#)

Comment:

☐ Mark for review

< Previous

Next >

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

## MuleSoft Certified Developer - Level 1

Remaining: 76.03 Minutes

< Previous Next >

18 Refer to the exhibits. The Mule application implements a REST API that accepts GET requests from web clients on the URLs: `http://acme.com/order/status` and `http://acme.com/customer/status`.

What path value can be set in the HTTP: GET event source to accept web client requests from both of these URLs?



Global Element Properties

### HTTP Listener config

Configuration element for a HttpListener.

General Notes Help

Name: HTTP\_Listener\_global\_config

Connection

General TLS Advanced

Connection

Protocol: HTTP (Default)

Host: acme.com

Port: 8081

General

HTTP: GET

Attribute 'path' is required

Display Name: HTTP: GET

Basic Settings

Connector configuration: HTTP\_Listener

General

Path:

```

<on-error-propagate enable-exceptions="true" log-exception="true" doc:name="On Error"
 <set-payload value="Child error" doc:name="Child error" />
</on-error-propagate>
</error-handler>
</flow>

```

- ☒ A "Validation Error"
- ☐ B "Child error"
- ☐ C "Parent completed"
- ☐ D "Parent error"

[Clear Answer](#)

Comment:

0/1

< Previous Next >

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

## MuleSoft Certified Developer - Level 1


Remaining: 76.11 Minutes

< Previous Next >

17 Refer to the exhibits. The Mule application does NOT define any global error handlers.

The Validation component in the private flow throws an error.

What response message is returned to a web client request to the main flow's HTTP Listener?

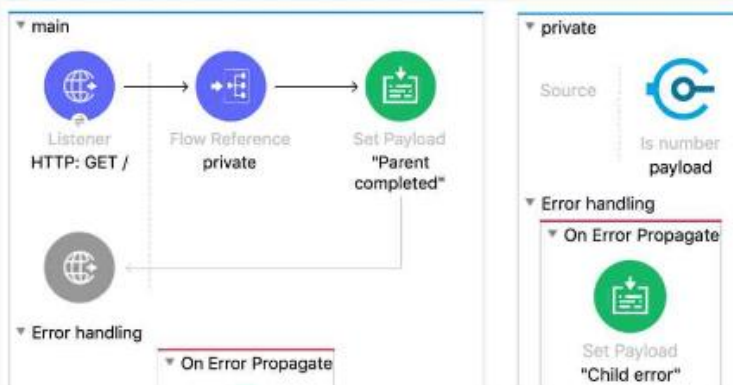

```

<?xml version="1.0" encoding="UTF-8" ?>
<error-handler>
 <on-error-continue enableNotifications="true" logException="true" doc:name="On Error Continue" type="WARNING">
 <set-payload value="#['Payload is not a valid email']" doc:name="Set Payload" />
 </on-error-continue>
 <on-error-propagate enableNotifications="true" logException="true" doc:name="On Error Propagate" >
 <set-payload value="#[payload]" doc:name="Set Payload" />
 </on-error-propagate>
</error-handler>

```

Down

- ☒ A In the my-app.xml file, as an attribute of a configuration element
- ☐ B In the Validation folder, as the value of a global element in the error-handling.yaml file
- ☐ C In the mule-artifact.json file, as the value of a key-value pair
- ☐ D In the pom.xml file, as the value of a global element

[Clear Answer](#)

Comment:

## MuleSoft Certified Developer - Level 1


Remaining: 76.27 Minutes

< Previous Next >

16 Refer to the exhibits. The my-app.xml file contains an Error Handler scope named "global-error-handler".

The Error Handler scope needs to be set to be the default error handler for every flow in the Mule application.

Where and how should the value "global-error-handler" be added in the Mule project so that the Error Handler scope is the default error

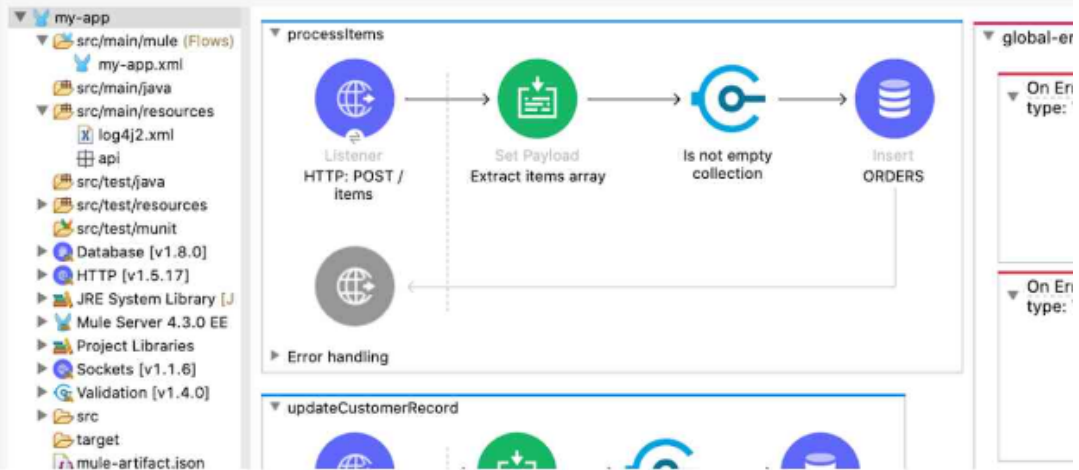

- ☐ A 0
- ☐ B 1
- ☐ C 6
- ☒ D 5

Clear Answer

Comment:

< Previous Next >

IN PROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM


## MuleSoft Certified Developer - Level 1

Remaining: 76:35 Minutes

< Previous Next >

- 15 Refer to the exhibits. In the execution of the Scatter-Gather, the "sleep 1 sec" Flow Reference takes about 1 second to complete, and the "sleep 5 secs" Flow Reference takes about 5 seconds to complete.

About how many seconds does it take from the time the Scatter-Gather is called until the Set Payload transformer is called?

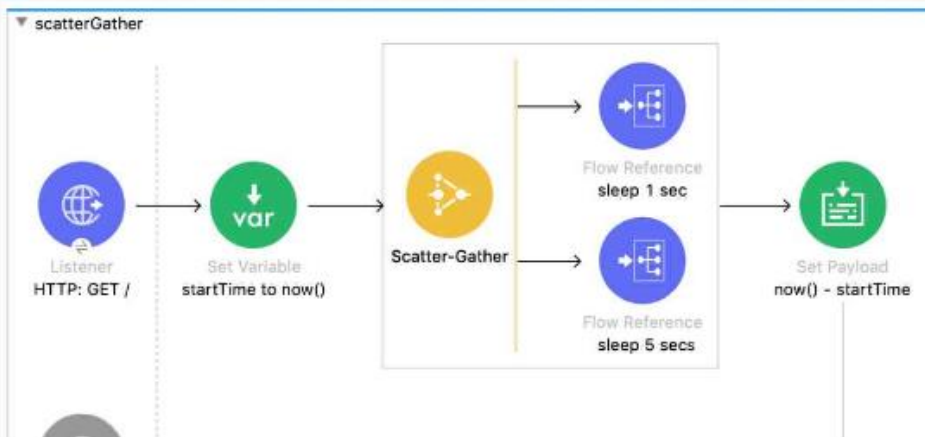

## MuleSoft Certified Developer - Level 1

Remaining: 76:45 Minutes

< Previous Next >

- 14 Northern Trail Outfitters (NTO) has an API to manage departments, with each department identified by a unique deptId. The API was built with RAML according to MuleSoft best practices.

What is valid RAML to specify a method to update the details for a specific department?

- ☐ A
- ```

/departments:
  patch:
    /deptId:
  
```
- ☒ B
- ```

/departments:
 /(deptId):
 patch:

```
- ☐ C
- ```

/departments:
  /deptId:
    patch:
  
```
- ☐ D
- ```

/departments:
 patch:

```

<db:select doc:name="Select" config-ref="Database\_Config">  
    <db:sql>SELECT \* FROM accounts limit 5</db:sql>  
</db:select>  
<logger level="INFO" doc:name="Logger" message="#[typeof(payload)]" />  
<set-payload value="#[output application/json --- "Response"]" doc:name="Set Payload" />  
</flow>

☐ A

"Array"

☒ B

"Object"

☐ C

"LinkedHashMap"

☐ D

"CaseInsensitiveHashMap"

Clear Answer

Comment:

☐ Mark for review

< Previous

Next >

IN PROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

✖ ERROR: Password has expired, please reset it by editing your profile

Dow

MuleSoft Certified Developer - Level 1

Remaining: 76.54 Minutes

< Previous

Next >

13

Refer to the exhibits. The Database Select operation returns five rows from a database.

What is logged by the Logger component?

selectFromOrders

  
Listener

  
Select

  
Logger

  
Set Payload

  
Error handling

Message Flow

Global Elements

Configuration XML

Logger

Problems

Console

There are no errors.



rt

Download

☐ A "FILE:CONNECTIVITY"

☐ B "OTHER ERROR"

☐ C "File written"

☒ D "ORDER:NOT\_CREATED"

Clear Answer

Comment:

< Previous

Next >

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

rt

✖ ERROR : Password has expired, please reset it by editing your [profile](#)

Download

MuleSoft Certified Developer - Level 1

Remaining: 77.03 Minutes

< Previous

Next >

**12** Refer to the exhibits. The Mule application does NOT define any global error handlers.

A web client sends a POST request to the Mule application with this input payload. The File Write operation throws a FILE:CONNECTIVITY error.

What response message is returned to the web client?

**Input payload:**

```
{ "did": "1000", "itemid": "AC200", "qty": "4" }
```

▼ acceptOrder

  
Listener  
HTTP: POST / order

  
Write

  
Set Payload  
"File written"



▼ On Error Continue  
type: FILE:CONNECTIVITY

  
Set Payload  
"FILE:CONNECTIVITY"

▼ On Error Continue  
type: ORDER:NOT\_CREATED



Down

- "finance"
- "construction"
- "government"

- ☐ A `/accounts?account_type:retail&industry:finance`
- ☐ B `/accounts/retail/finance`
- ☒ C `/accounts?account_type=retail&industry=finance`
- ☐ D `/accounts/account_type=retail/industry=finance`

[Clear Answer](#)

Comment:

[illegible]☐ Mark for review

[← Previous](#)

Next ➤

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

Dow

✖ ERROR : Password has expired, please reset it by editing your [profile](#)

Remaining: 77.13 Minutes

MuleSoft Certified Developer - Level 1

[← Previous](#)

Next ➤

11 Refer to the exhibit. This RAML specification includes a resource and a method to retrieve accounts by account type and industry.

What is the correct URI to get all retail finance accounts?

```

#%RAML 1.0
title: Accounts API

/accounts:
 get:
 queryParameters:
 account_type:
 required: true
 enum:
 - "retail"
 - "commercial"
 industry:
 required: true
 enum:
 - "finance"
 - "construction"
 - "government"

```

Down

- "finance"
- "construction"
- "government"

- ☐ A `/accounts?account_type:retail&industry:finance`
- ☐ B `/accounts/retail/finance`
- ☒ C `/accounts?account_type=retail&industry=finance`
- ☐ D `/accounts/account_type=retail/industry=finance`

[Clear Answer](#)

Comment:

[illegible]☐ Mark for review

[← Previous](#)

Next ➤

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

Dow

✖ ERROR : Password has expired, please reset it by editing your [profile](#)

Remaining: 77.27 Minutes

MuleSoft Certified Developer - Level 1

[← Previous](#)

Next ➤

11 Refer to the exhibit. This RAML specification includes a resource and a method to retrieve accounts by account type and industry.

What is the correct URI to get all retail finance accounts?

```

#%RAML 1.0
title: Accounts API

/accounts:
 get:
 queryParameters:
 account_type:
 required: true
 enum:
 - "retail"
 - "commercial"
 industry:
 required: true
 enum:
 - "finance"
 - "construction"
 - "government"

```

et

```
<file:write doc:name="File: sales.csv" path="file-store/sales.csv">
</file:write>
</flow>
```

Download

☐ A The enriched payload in XML format

☐ B An error message

☐ C The enriched payload in CSV format

☒ D The enriched payload in JSON format

[Clear Answer](#)

Comment:

☐ Mark for review

[< Previous](#)
[Next >](#)

IN PROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

et

✖ ERROR: Password has expired, please reset it by editing your profile
Download

## MuleSoft Certified Developer - Level 1

[< Previous](#)
[Next >](#)

Remaining: 77:37 Minutes

**10** Refer to the exhibits. A web client sends sale data in a POST request to the Mule application. The Transform Message component then enriches the payload by prepending a vendor name to the sale data.

What is written to the sales.csv file when the flow executes?

**Input payload:**

```
<?xml version="1.0" encoding="UTF-8"?>
<sale>
 <transaction_id>SS-4848-44KK-45YQ</transaction_id>
 <customer_id>anniepoint@acme.com</customer_id>
 <customer>Annie Point</customer>
 <item>Car Seat</item>
 <qty>1</qty>
 <price>59</price>
</sale>
```

```
<flow name="writeRecords" >
 <http:listener doc:name="HTTP: POST /sales" config-ref="HTTP_Listener_config"
```

rt

}}' />  
<logger level="INFO" doc:name="typeOf(payload)" message='#[typeOf(payload)]' />  
</flow>

A

"Array"

B

"JSON"

C

"String"

D

"Object"

Clear Answer

Comment:

Mark for review

< Previous

Next >

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

rt

✖ ERROR : Password has expired, please reset it by editing your profile

Dow

MuleSoft Certified Developer - Level 1

Remaining: 77.46 Minutes

< Previous

Next >

9 Refer to the exhibits. A payload is set in the Set Payload transformer.

What is logged by the Logger?

logPayload

Scheduler

Set Payload  
Set to JSON

Logger  
typeOf(payload)

Error handling

```
<flow name="logPayload" >
 <scheduler doc:name="Scheduler" >
 <scheduling-strategy >
 <fixed-frequency />
 </scheduling-strategy>
 </scheduler>
```

Dow

8 A shopping API contains a method to look up store details by department.

To get information for a particular store, web clients will submit requests with a query parameter named department and a URI parameter named storeId.

What is a valid RAML snippet that supports requests from web clients to get data for a specific storeId and department name?

☐ A

```
get:
 uriParameters:
 !storeId:
 queryParameters:
 department:
```

☐ B

```
get:
 queryParameters:
 department:
 uriParameters:
 storeId:
```

☐ C

```
/department:
 get:
 uriParameter:
 storeId:
```

☒ D

```
/(!storeId):
 get:
 queryParameters:
 department:
```

Dow

7 Following MuleSoft's recommended API-led connectivity approach, Northern Trail Outfitters (NTO) has created an application network. NTO now needs to create an API to transform, orchestrate, and aggregate data provided by other APIs in the application network. This API should be flexible enough to handle data from additional APIs in the future.

According to MuleSoft's recommended API-led connectivity approach, what is the best layer for this new API?

☐ A Experience layer

☐ B System layer

☒ C Process layer

☐ D Security layer

[Clear Answer](#)

Comment:

☐ Mark for review

[Previous](#)

[Next](#)

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

## MuleSoft Certified Developer - Level 1

Remaining: 78:12 Minutes

Down

< Previous Next >

6 An API was designed in API Designer, published to Anypoint Exchange, then imported into API Manager.

A Mule application implements this API and is deployed to CloudHub. API Manager manages this deployed API implementation.

What is the easiest and most idiomatic (used for its intended purpose) way to enforce a Client ID Enforcement policy on this Mule application?

- ☐ A In Anypoint Studio, code a custom policy for Client ID Enforcement and then add the custom policy to Runtime Manager for the Mule application deployment
- ☒ B In Anypoint Design Center, code a custom policy for Client ID Enforcement and then publish the custom policy to the API portal in Anypoint Exchange
- ☐ C In API Manager, apply a Client ID Enforcement policy for the API instance
- ☐ D In API Designer, add Client ID Enforcement policy requirements to the API specification

[Clear Answer](#)

Comment:

☐ Mark for review

## MuleSoft Certified Developer - Level 1

Remaining: 78:16 Minutes

Down

< Previous Next >

5 A Mule application configured with autodiscovery implements an API.

Where is governance enforced for policies defined for this Mule application?

- ☐ A In Runtime Manager
- ☒ B In API Manager
- ☐ C In the Mule application
- ☐ D In a separate API proxy application

[Clear Answer](#)

Comment:

☐ Mark for review

< Previous Next >

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

## MuleSoft Certified Developer - Level 1

Remaining: 78:19 Minutes

Down

< Previous

Next >

4 A web client sends a request to `http://localhost:8081?dept=sales`.

What is the correct DataWeave expression to access the value of `dept`?

- ☐ A `message.queryParams.dept`
- ☐ B `vars.dept`
- ☐ C `attributes.dept`
- ☒ D `attributes.queryParams.dept`

[Clear Answer](#)

Comment:

☐ Mark for review

< Previous

Next >

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM

## MuleSoft Certified Developer - Level 1

Remaining: 78:24 Minutes

Down

< Previous

Next >

3 What is the output type of the DataWeave `flatten` function?

- ☐ A `Object`
- ☒ B `Array`
- ☐ C `Java`
- ☐ D `Map`

[Clear Answer](#)

Comment:

☐ Mark for review

< Previous

Next >

INPROGRESS

Questions: 60 Attempted: 60 Pending: 0

Started: 5 Sep 2023 11:11 PM





et

Source

Destination

Error handling

☐ A The result of the internationalShipping flow

☐ B A string with value "FR"

☐ C The result of the domesticShipping flow

☒ D A DataWeave syntax error

[Clear Answer](#)

Comment:

☐ Mark for review

Next >

IN PROGRESS
Questions: 60 Attempted: 60 Pending: 0
Started: 5 Sep 2023 11:11 PM

et

✖ ERROR : Password has expired, please reset it by editing your profile
Down

MuleSoft Certified Developer - Level 1
Remaining: 79.25 Minutes

Next >

1 Refer to the exhibits. In the Choice router, the When expression for the domesticShipping route is set to "[payload = 'FR']".

What is logged after the Choice router completes?

