

Salesforce Certified Omnistudio Developer

1. A company wants to allow agents to send customers a quote for signature. The quote is a document created using a DocuSign template that has been prefilled with all of the quote details. The document will be emailed to one or more recipients for signature.

How should a developer configure this functionality in an OmniScript?

A. DocuSign Envelope Action

B. DocuSign Signature Action

C. Email Action

D. PDF Action

2 A developer is configuring an Integration Procedure Action in an OmniScript. The OmniScript needs a JSON response from the Integration Procedure but does not need to wait for the response for the user to proceed.

Which feature should the developer enable?

A. Invoke Mode Non-Blocking

B. Toast Completion

C. Use Future

D. Invoice Mode Fire and Forget

3. A developer needs to create a DataRaptor to retrieve the name of an account for a contact.

Following best practices, how should a developer configure the extraction steps?

- A. Define extraction steps for the Contact and the Account objects, and set the Extract JSON Path to Contact.Account.Name
- B. Define an extraction step for the Account object, and set the Extract JSON Path to Account:Contact.Name
- C. Define an extraction step for the Contact object and set the Extract JSON Path to Contact:Account.Name
- D. Define extraction steps for the Contact and the Account objects, and set the Extract JSON Path to Account.Name

4. A developer is building an OmniScript and needs to save data to Salesforce and to an AWS Order Management system.

Which OmniScript element could save all of this data?

- A. Integration Procedure Action
- B. HTTP Action
- C. DataRaptor Load Action
- D. DataRaptor Post Action

5. An OmniScript displays data from an API using an Integration Procedure, but some of the data is missing.

Which two configuration errors could cause this?

Choose 2 answers

A. The Integration Procedure Preview Input Parameters do not match the JSON sent from the OmniScript.

B. The element name for the missing data does not match the JSON node key in the Integration Procedure Response.

C. The missing data is trimmed in the Integration Procedure Action Response JSON Path.

D. The JSON sent from the Integration Procedure Action does not match any of the Original Input for the Integration Procedure.

6. A developer creates a DataRaptor Extract to retrieve data to pass to an external service. The external service expects the field value to be an integer. However, the DataRaptor is sending it as a string.

Which action can the developer take to fix this?

A. In the DataRaptor Extract tab, set the Input Data Type field to Integer.

B. In the DataRaptor Formula tab, define a formula using the function TOINTEGER and use the formula as output.

C. In the DataRaptor Output tab, enter the default value as 0 on the field.

D. In the DataRaptor Output tab, select the Output Data Type of that field to Integer.

7. A developer is building an OmniScript and needs to retrieve data from Salesforce and from an on-premises billing database.

Which two OmniScript elements could retrieve this data?

Choose 2 answers

A. HTTP Action

B. Navigate Action

C. Response Action

D. DataRaptor Extract Action

8. When launching an OmniScript from an action on a FlexCard, the OmniScript displays, but no Salesforce data is populated.

Which two errors could cause this behavior?

Choose 2 answers

A. There is no active version of the OmniScript.

B. The Id Field for Actions in the FlexCard is blank.

C. There is no active version of the DataRaptor Extract.

D. In the DataRaptor Extract Action, the Input Parameters Filter Value is misspelled.

9. A developer is configuring a DataRaptor Load to save contact data. The developer needs to set the record type of the contact using DeveloperName.

Which two configuration actions should the developer take to set this up in the DataRaptor Load?

Choose 2 answers

A. Select RecordType in the Lookup Object list, DeveloperName in the Lookup Field list, and ID in the Lookup Requested Field list.

B. Add Link to RecordType object in the Contact Object with the Id field of RecordType object.

C. Select RecordType in the Lookup Object list, ID in the Lookup Field list, and DeveloperName in the Lookup Requested Field list.

D. Check Is Lookup property when mapping the fields.

10. Refer to the following row-versioned decision matrix.

Version 1

RowStartDate	RowEndDate	State	County	Code
Jan011980	Jun301980	CA	San Francisco	CA-SF
Jan011980	Jun301980	CA	San Matao	CA-SM

Version 2

RowStartDate	RowEndDate	State	County	Code
Jul011980	Dec311980	CA	Mountain View	CA-MV

Version 3

RowStartDate	RowEndDate	State	County	Code
Jul011980	Dec311980	CA	Mountain View	CA-MV
Jan011980	Dec311980	CA	San Carlos	CA-SC

Color Yellow - represents the rows that are shared across versions.

The developer needs to delete the row that contains the Code CA-SF.

If the developer deletes that row in Version 3, what is the result?

- A. The row is deleted In Version 3 and Version 1.
- B. The row is deleted in all versions.
- C. The row is deleted only in Version 3.
- D. The row Is deleted In Versions 2 and 3 but will remain In Version 1.

10 of 60. Refer to the following row-versioned decision matrix.

Version 1

Input	Input	Output	RowStartDate	RowEndDate
State	County	Code		
CA	San Francisco	CA-SF	Jan011980	Jun301980
CA	San Mateo	CA-SM	Jan011980	Jun301980

Version 2

Input	Input	Output	RowStartDate	RowEndDate
State	County	Code		
CA	San Francisco	CA-SF	Jan011980	Jun301980
CA	San Mateo	CA-SM	Jan011980	Jun301980
CA	Mountain View	CA-MV	Jul011980	Dec311980

Version 3

Input	Input	Output	RowStartDate	RowEndDate
State	County	Code		
CA	San Francisco	CA-SF	Jan011980	Jun301980
CA	San Mateo	CA-SM	Jan011980	Jun301980
CA	Mountain View	CA-MV	Jul011980	Jan311980
CA	San Carlos	CA-SC	Jul011980	Dec311980

Color Yellow - represents the rows that are shared across versions.

The developer needs to delete the row that contains the Code CA-SF.

CA	San Carlos	CA-SC	Jul011980	Dec311980
----	------------	-------	-----------	-----------

Color Yellow - represents the rows that are shared across versions.

The developer needs to delete the row that contains the Code CA-SF.

If the developer deletes that row in Version 3, what is the result?

- DB31E6E17E3517D96ABD3C34EFC499FB
- A. ☐ The row is deleted in Version 3 and Version 1.
 - B. ☐ The row is deleted in all versions.
 - C. ☒ The row is deleted only in Version 3.
 - D. ☐ The row is deleted in Versions 2 and 3 but will remain in Version 1.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Ex

11. Which two fields in an Integration Procedure or DataRaptor can execute a function like CONCAT or DATEDIFF?

Choose 2 answers

- A. In a DataRaptor in an Output Tab Output JSON Path.
- B. In a Remote Action in an Additional Output value field.
- C. In a DataRaptor Action in an Input Parameters value field.
- D. In a Set Values Action in a Value field.

12. A developer needs to retrieve data from an external system that stores policy data. The external system supports REST APIs to access and update the policies. Due to the volume of the policy data and peak hours of business, calls to the REST APIs sometimes take longer than expected to respond.

The developer creates an Integration Procedure to retrieve the policy data for use in an OmniScript.

Given the external system's known performance issues, which two configurations should be used to implement the call to the external system?

Choose 2 answers

- A. Set the Timeout property on the HTTP Action in the Integration Procedure
- B. Check the Chainable checkbox on the Integration Procedure Action in the OmniScript
- C. Check the Chain On Step checkbox on the HTTP Action in the Integration Procedure
- D. Configure a Remote action with timeout settings of 120000

13. A developer needs to configure an expression set to calculate the sum of the entire BasePrice.

What is the most efficient way for the developer to meet this requirement?

- A. Add a Sub Expression step as SUM(BasePrice).
- B. Add a Calculation Step as SUM(BasePrice).
- C. Add an Aggregation Step as SUM(BasePrice).

14 . A developer needs to limit the output of a DataRaptor Extract to a maximum of one result.

How should the developer configure this?

A. Use the LIMIT filter on the Extract definition

B. Set the Limit property on the action that calls the DataRaptor Extract

C. Use a Custom Output Type when creating the DataRaptor

D. Define a formula with the Filter function

15. A developer has a requirement to create a child FlexCard that contains all of its parent FlexCard's records in a Datatable.

How should the developer configure the parent FlexCard's Data Node?

A. (records)

B. (records[0])

C. (records[1])

D. (Params.records)

16. A developer creates a FlexCard with five state elements. Four of the states have a condition. To test the FlexCard, the developer previews it using sample data that causes two of the states to have true conditions.

In this scenario, how will the developer know which state will display?

A. The first state with true conditions sequenced closest to the top of the FlexCard canvas will display.

B. The state sequenced first in the FlexCard canvas will display.

C. The first state with a true nested condition, regardless of sequence in the FlexCard canvas, will display.

D. The first state with a true AND condition, regardless of sequence in the FlexCard canvas, will display.

17. Which two of these options can a developer use to retrieve data from a Salesforce object?

Choose 2 answers

A. A Lookup Input Element

B. A DataRaptor Post Action

C. A DataRaptor Load Action

D. A DataRaptor Extract Action

18. A developer writes an OmniScript that includes a DataRaptor that updates the Account status based on information provided from the OmniScript. The information must be updated only if the Account record already exists. Otherwise, a new account must be created.

How should the developer accomplish this task?

A. Populate the Lookup Object and Lookup Fields

B. Check the Upsert Key and Is Required for Upsert checkboxes on the Account Id field

C. Check the Upsert Key checkbox on the Account Status field

D. Check Overwrite Target For All Null Inputs checkbox on the Account Id field

19. A developer needs to use the COUNTIF function to process data entered by the user in an OmniScript. The output of the function needs to be displayed to the user immediately in the current step.

Based on best practice, what element should the developer use this function in?

A. A Set Values element

B. A Formula element

C. A Range element

20. An Integration Procedure uses an HTTP action to make a REST API call. The response from the REST API must be converted into a specific XML structure before sending it as an input to another external web service.

How should the developer configure the Integration Procedure to meet this requirement?

A. Use a Remote Action that calls the XMLStreamWriter class

B. Use a DataRaptor Transform to convert JSON to XML

C. Use a DataRaptor Extract and check the XML checkbox on the Output JSON Path

D. Use a Remote Action that calls the XMLStreamReader class

21. A developer needs to create a list of cases for an account in a single Datatable in a FlexCard, like the one shown below.

Viewing Flex Card AccountCases

*Author, Current Version, Status, Result, N-Child Card, Last Modified, 1/24/2020, 1:28 PM, Theme Lightning, company.org, 1, inactive, -, -, -, Add Text Patterns, Disapp, Origin, Type, Subject, Status, Created, CodeNumber, Priority, Web, Mechanical, Generator work start, New, 2020 07 27/10/22:44 0002, 00001008, High, Phone, Electrical, Component missing, Excluded, 2020 07 27/10/22:44 0002, 00001007, High, Phone, Electrical, Starting generator after electrical failure, Excluded, 2020 09

27/12/28:20 0002, 00001000, High, Web, Electrical, Easy installation process, Cancel, 2020 09
 27/12/28:20 0002, 00001003, Low, Web, Mechanical, Stealing down of generator, Cancel, 2020 09
 27/12/28:20 0002, 00001017, Medium, Phone, Electrical, Current start generator after electrical failure, Cancel, 2020 09 27/12/28:20 0002, 00001018, Medium*

How can the developer configure the FlexCard to display the case records in this way?

A. Disable the Repeat Records feature on the FlexCard setup tab

B. Enable the Repeat Records feature on the FlexCard setup tab


C. Select the Repeatable Mode property on the data table elements

D. Enable the Record Looping feature on the data table elements

Salesforce Certified OmniStudio Developer

Time Remaining: 01:21:35 [Hide](#)

21 of 60. A developer needs to create a list of cases for an account in a single Datatable in a FlexCard, like the one shown below.

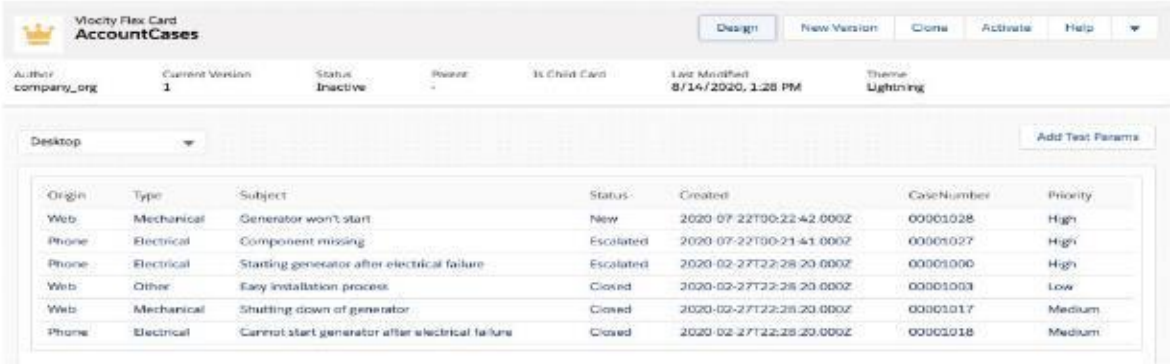

The screenshot shows the Salesforce FlexCard Designer interface. At the top, there's a header for 'Vlocity Flex Card AccountCases' with buttons for 'Design', 'New Version', 'Clone', 'Activate', and 'Help'. Below this, there's a metadata bar showing 'Author: company_org', 'Current Version: 1', 'Status: Inactive', 'Parent: -', 'Is Child Card', 'Last Modified: 8/14/2020, 1:28 PM', and 'Theme: Lightning'. The main area displays a 'Desktop' view of a table with the following data:

Origin	Type	Subject	Status	Created	CaseNumber	Priority
Web	Mechanical	Generator won't start	New	2020-07-22T00:22:42.000Z	00001028	High
Phone	Electrical	Component missing	Escalated	2020-07-22T00:21:41.000Z	00001027	High
Phone	Electrical	Starting generator after electrical failure	Escalated	2020-02-27T22:28:20.000Z	00001000	High
Web	Other	Easy installation process	Closed	2020-02-27T22:28:20.000Z	00001003	Low
Web	Mechanical	Shutting down of generator	Closed	2020-02-27T22:28:20.000Z	00001017	Medium
Phone	Electrical	Cannot start generator after electrical failure	Closed	2020-02-27T22:28:20.000Z	00001018	Medium

How can the developer configure the FlexCard to display the case

Web	Mechanical	Generator won't start	New	2020-07-22T00:22:42.000Z	00001028	High
Phone	Electrical	Component missing	Escalated	2020-07-22T00:21:41.000Z	00001027	High
Phone	Electrical	Starting generator after electrical failure	Escalated	2020-02-27T22:28:20.000Z	00001000	High
Web	Other	Easy installation process	Closed	2020-02-27T22:28:20.000Z	00001003	Low
Web	Mechanical	Shutting down of generator	Closed	2020-02-27T22:28:20.000Z	00001017	Medium
Phone	Electrical	Cannot start generator after electrical failure	Closed	2020-02-27T22:28:20.000Z	00001018	Medium

How can the developer configure the FlexCard to display the case records in this way?

- 0B31E6E17E3517D96ABD3C34EFC499FB
- A. ☒ Disable the Repeat Records feature on the FlexCard setup tab
 - B. ☐ Enable the Repeat Records feature on the FlexCard setup tab
 - C. ☐ Select the Repeatable Mode property on the data table elements
 - D. ☐ Enable the Record Looping feature on the data table elements

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

22. A communications provider wants to enable their customers to troubleshoot mobile devices using a self-service portal. The developer builds an OmniScript to meet this requirement.

The OmniScript must retrieve device details stored in the Asset object and then call an external system to send troubleshooting commands via REST API to the device.

Which two OmniScript elements should the developer use to configure this functionality?

Choose 2 answers

A. REST API Action

B. DataRaptor Extract Action

C. Navigate Action

D. SOQL Action

E. HTTP Action

23 . An Integration Procedure contains a Remote Action element that calls a method of an APEX class. The method requires two fields as input: AccountId and ProductId. The Integration Procedure data JSON contains the following nodes:

```
...  
  
{  
  "AccountId": "023476",  
  "Details": {  
    "ProductId": "3BU4X9"  
  }  
}  
...
```

How should the Remote Action element be configured to pass the data correctly to the method?

A. Check the DataRaptor Transform checkbox, and add the following Key/Value pairs to Output JSON Path:

- * AccountId: %AccountId%
- * ProductId: %Details:ProductId%

B. Check the Send Only Additional Input checkbox, and add the following Key/Value pairs to Additional Input:

- * AccountId: %AccountId%
- * ProductId: %Details:ProductId%

C. Add the following to Send JSON Path: AccountId: %AccountId%, ProductId: %Details:ProductId%

24. A developer is creating a FlexCard and needs to display additional information using a Flyout.

Which two types of components can the developer embed in the flyout?

Choose 2 answers

- A. A DataRaptor
- B. An Integration Procedure
- C. An OmniScript
- D. A child FlexCard

25. A developer creates an OmniScript to display FirstName, LastName, and BirthDate of a contact using a Type Ahead Block. The DataRaptor used in the Type Ahead has been tested and fetches the correct data.

When previewing the OmniScript, the developer enters a name in the Type Ahead and makes a selection of a contact from the list. However, the text fields FirstName, LastName, and BirthDate are not getting populated with the data.

Refer to the exhibit below.

What is the reason that the fields fail to display the fetched data?

- A. Lookup Mode is not selected in the properties of the Type Ahead Block.
- B. FirstName, LastName, and BirthDate are not placed inside the Type Ahead Block.
- C. The Typeahead Key is not in the correct format.
- D. Use Data JSON is not selected in the properties of the Type Ahead Block.

25 of 60. A developer creates an OmniScript to display FirstName, LastName, and BirthDate of a contact using a Type Ahead Block. The DataRaptor used in the Type Ahead has been tested and fetches the correct data.

When previewing the OmniScript, the developer enters a name in the Type Ahead and makes a selection of a contact from the list. However, the text fields FirstName, LastName, and BirthDate are not getting populated with the data.

Refer to the exhibit below.



26. Refer to the exhibit below. What JSON from the DRGetAccountDetails action would display all six values correctly in the OmniScript structure shown? BIKContacts is a Repeat Block.

Exhibit:

StepAccount, Stop, Account & Contact Information, Account Name, Account Phone, Contacts, Contact Name

```
D. {  
  "BikContacts": [{  
    "ContactPhone": "(212) 169-1475",  
    "ContactName": "Edward Stamos"  
  },  
  {  
    "ContactPhone": "(212) 189-8979",  
    "ContactName": "Leanne Tomlin"  
  }  
}]
```

"AccountPhone": "2221556450",

"AccountName": "Acme"

}

Salesforce Certified OmniStudio Developer

Time Remaining: 01:20:39 Hide

26 of 60. Refer to the exhibit below. What JSON from the DRGetAccountDetails action would display all six values correctly in the OmniScript structure shown? BlkContacts is a Repeat Block.

The screenshot shows an OmniScript structure. At the top is a DataRaptor Extract Action named 'DRGetAccountDetails'. Below it is a Step named 'StepAccount'. Inside 'StepAccount', there is a section titled 'Account & Contact Information'. This section contains three input fields: 'Account Name', 'Account Phone', and a Repeat Block named 'Contacts'. The 'Contacts' block has a sub-section for 'Contact Name' and an 'Add' button.

27. Refer to the exhibit below. A developer has configured an Integration Procedure element with SEND/RESPONSE TRANSFORMATIONS as shown.

Exhibit:

SEND/RESPONSE TRANSFORMATIONS

Send JSON Path: DRExtractAction:Account

Response JSON Path:

Send JSON Node: SecondaryAccount

Response JSON Node:

Alternatively, how could the developer configure Additional Input to send exactly the same data? Assume that the developer checked Send Only Additional Input.

- A. Key: DRExtractAction:Account, Value: SecondaryAccount
- B. Key: Response JSON Path, Value: Response JSON Node
- C. Key: sDRExtractAction:Account, Value: SecondaryAccount
- D. Key: SecondaryAccount, Value: DRExtractAction:Account

Time Remaining: 01:20:22 Hide

27 of 60. Refer to the exhibit below. A developer has configured an Integration Procedure element with SEND/RESPONSE TRANSFORMATIONS as shown.

Alternatively, how could the developer configure Additional Input to send exactly the same data? Assume that the developer checked Send Only Additional Input.

▼ SEND/RESPONSE TRANSFORMATIONS

Send JSON Path ⓘ	Send JSON Node ⓘ
DRExtractAction:Account	SecondaryAccount
Response JSON Path ⓘ	Response JSON Node ⓘ

0B31E6E17E3517D96ABD3C34EFC499FB

A. ☐ Key	Value
DRExtractAction:Account	SecondaryAccount
B. ☐ Key	Value

Response JSON Path ⓘ Response JSON Node ⓘ

0B31E6E17E3517D96ABD3C34EFC499FB

A. ☐ Key	DRExtractAction:Account	Value	SecondaryAccount
B. ☐ Key	%DRExtractAction:Account%	Value	SecondaryAccount
C. ☐ Key	SecondaryAccount	Value	DRExtractAction:Account
D. ☒ Key	SecondaryAccount	Value	%DRExtractAction:Account%

☐ Mark this item for later review.

< Back Next > Review All Submit Exam

28. A developer has an existing DataRaptor Load that inserts Contact records with inputs as lastName and firstName. The DataRaptor works as expected when previewed.

The developer creates an Integration Procedure to test the DataRaptor and is using a SetValues element in the Integration Procedure to set the first name and last name for the contact record. The DataRaptor and Integration Procedure are set up as shown in the exhibits below.

How should the developer address this issue?

- A. The DataRaptor Post Action in the Integration Procedure should have been executed before the Set Values Action
- B. The Set Values Action keys should include the DataRaptor Post Action element name path, e.g. LoadContactDetails:lastname
- C. SetValuesContactDetails should have been added to Additional Input of DataRaptor Post Action in Integration Procedure
- D. The valid field names should be added in the Domain Object Field in the DataRaptor

Salesforce Certified OmniStudio Developer

Time Remaining: 01:20:11 Hide

28 of 60. A developer has an existing DataRaptor Load that inserts Contact records with inputs as lastName and firstName. The DataRaptor works as expected when previewed.

The developer creates an Integration Procedure to test the DataRaptor and is using a SetValues element in the Integration Procedure to set the first name and last name for the contact record. The DataRaptor and Integration Procedure are set up as shown in the exhibits below.



29. A developer needs to build a multi-step intake form. Each step must allow the user to cancel the intake at any time. The developer is using an LWC OmniScript to build the form.

How should the developer implement the cancel functionality for all steps using the LWC OmniScript Designer?

- A. Check the Enable Cancel checkbox in the Setup tab under Cancel Options.
- B. Add a Navigate Action inside each step and set the Element Name to "Cancel".
- C. Add a Navigate Action inside each step and set the Component Name to "Cancel".
- D. Add a Navigate Action outside each step and set the Element Name to "Cancel".

30. A healthcare company wants to enable its subscribers to add, edit, or delete dependents related to their policy via their Community portal. The developer on the project decides to use an OmniScript.

How should the developer configure the OmniScript to provide this functionality?

- A. Use an Input Block element and a DataRaptor Post Action element.
- B. Use an Edit Block element configured with Remote Actions.
- C. Use an Edit Block element configured with SOQL statements.
- D. Use a Text Block element and a Remote Action element.

31. A developer is configuring the API URL in an HTTP Action element within an Integration Procedure.

What is the merge code syntax for passing a Date node from an element named SetValues in the URL?

- A. [{SetValues.Date}]
- B. {SetValues.Date}
- C. %SetValues.Date%
- D. [{SetValues'}}] ['Data']

32. A customer sets up two LWC OmniScripts, one embedded into another. AccountId is set in a Set Values element in the parent OmniScript. The AccountId set in the parent OmniScript is used to set another Set Values element ContextAccountId in the embedded OmniScript. The embedded OmniScript is activated.

While previewing the OmniScript flow from the parent, it is found that AccountId is set correctly in the parent OmniScript. However, ContextAccountId in the embedded OmniScript is not set with the AccountId from parent OmniScript. On previewing the embedded OmniScript individually, it is found that ContextAccountId is set correctly.

What is the reason for this? Refer to the exhibits below.

- A. A developer failed to include a Navigate Action Element to pass data from the parent OmniScript.
- B. The flag passDataJSON in the parent OmniScript is not configured correctly.
- C. The LWC PubSub Message flag in the Set Values action of the parent OmniScript has not been set.
- D. Both parent and embedded OmniScripts have the same element name for the Set Values element.

33. Refer to the exhibit below. The card layout uses an Integration Procedure as a data source. The cards use the layout data source.

Which JSON data structure supports this card layout and follows best practices?

Exhibit:

```
| Account | Contact | Contact | |
|---|---|---|---|
| Name | Name | Edward Blames |
| Phone | (222) 156-6460 | Cell Phone | (212) 156-6562 |
| Contact | Name | Howard Jones |
| Cell Phone | (050) 156-1102 |
```

A.

'''

{

"ContactCellPhone": "(212) 154-8562",

"ContactName": "Edward Stamos",

"AccountPhone": "2221546450",

"AccountName": "Acme"

}

{

"ContactCellPhone": "(650) 156-1102",

"ContactName": "Howard Jones",

"AccountPhone": "2221546450",

"AccountName": "Acme"

}

33 of 60. Refer to the exhibit below. The card layout uses an Integration Procedure as a data source. The cards use the layout data source.

Which JSON data structure supports this card layout and follows best practices?

Account	Contact	Contact
Name	Edward Stamos	Howard Jones
Phone	Cell Phone	Cell Phone
(222) 154-6450	(212) 154-8562	(650) 156-1102

A. 

```
0B31E6E17E3517D96ABD3C34EFC499FB
[
  {
    "ContactCellPhone": "(212) 154-8562",
    "ContactName": "Edward Stamos",
    "AccountPhone": "2221546450",
    "AccountName": "Acme"
  },
  {
    "ContactCellPhone": "(650) 156-1102",
    "ContactName": "Howard Jones",
    "AccountPhone": "2221546450",
    "AccountName": "Acme"
  }
]
```

34. A developer needs to display the following information together on one FlexCard:

- account name, address, phone number, website
- primary contact first name, contact last name, address, phone number, email

The account information must always be visible, and the contact information should only be visible as needed by the user.

What approach should the developer use to display the contact information on the card?

- A. Use a conditional FlexCard State
- B. Set the class="collapsible" on the block element

C. Set the collapsible property on the block element

D. Use a Datatable element

35. A developer needs to transform contact data into a JSON array.

Input JSON

...

```
{
  "Contact": {
    "Name": "John Doe",
    "Phone": "12324456457",
    "Birthdate": "1970-11-12"
  }
}
```

...

Output JSON

...

```
{
  "Contact": [
    {
      "Name": "John Doe",
      "Phone": "12324456457",
      "Birthdate": "1970-11-12"
    }
  ]
}
```

...

Choose 2 answers

A. Set the Input JSON Path as Contact and the Output JSON Path as LIST(Contact).

B. Set the Input JSON Path as Contact, the Output JSON Path as Contact, and Output Data Type as List.

C. Use a formula LIST(Contact), and add the output of the formula as the input in the Transform tab.

D. Set the Input JSON Path as LIST(Contact) and the Output JSON Path as Contact.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:18:51 [Hide](#)

35 of 60. A developer needs to transform contact data into a JSON array.

Input JSON

```
{
  "Contact": {
    "Name": "John Doe",
    "Phone": "12324456457",
    "Birthdate": "1970-11-12"
  }
}
```

Output JSON

```
{
  "Contact": [
    {
      "Name": "John Doe",
      "Phone": "12324456457",
      "Birthdate": "1970-11-12"
    }
  ]
}
```

36. A developer builds a new OmniScript. It contains a Set Values element with a ContextId key/value pair that was used during testing.

What should the developer do before moving the OmniScript to a production org?

A. Add a Show/Hide condition on the Set Values element.

B. Delete or deactivate the Set Values element.

C. Deactivate the ContextId key/value pair.

D. Update the ContextId value to specify an id from the production org.

37. Refer to the exhibit.

| Input Data | Output Data |

|---|---|

| ProductCode (Text) | BasePrice (#) |

| Search column | Search column |

| ACC154 | 10.23 |

| CAAB76B | 20.36 |

| HRA320 | 12.99 |

| HRA320B | 13.99 |

All inputs to the Decision Matrix are set correctly.

The Decision Matrix has the following input:

...

{

"input": {

"ProductCode": "HRA32e"

}

}

...

What is the output?

A. 12.99

B. 13.99

37 of 60. Refer to the exhibit.

Input Data	Output Data
ProductCode (Text) ✓	BasePrice (#)
Search column	Search column
ACC154	10.23
CAA876B	20.36
HRA320	12.99
HRA320B	13.99

All inputs to the Decision Matrix are set correctly.

The Decision Matrix has the following input:

```
{
  "input": {
    "ProductCode": "HRA320"
  }
}
```

What is the output?

DB31E6E17E3517D96ABD3C34EFC499FB

- A. ☒ 12.99
 B. ☐ 13.99

38. A developer needs to build a DataRaptor Transform to send current weather to both an OmniScript and Card Layout. Which of these samples would be valid for the Expected Output JSON?

A.

...

{

"Current": {

"TempF": 53.1,

"CityState": "Baltimore, MD",

"TempC": 14.6

}

}

...

B.

```
...  
  
{  
  "Current:TempF": 53.1,  
  "Current:CityState": "Baltimore, MD",  
  "Current:TempF": 14.6  
}  
...  
  
C.  
...  
  
<root> ... </root>  
...  
  
---
```

39. A developer is troubleshooting an Integration Procedure with two elements: a Remote Action named FetchCart and a Response Action named ResponseCart.

In Preview, what JSON node shows the data sent to the Response Action?

- A. Response
- B. ResponseCartDebug
- C. FetchCart
- D. ResponseCart

40. A developer is creating an OmniScript that provisions trial orgs to their customers. The following text block in the OmniScript uses a merge code to display the ID for the new trial org:

Welcome to Salesforce! Your ID is \$Details:Customer!0:ID%

During testing, the developer notices that the ID does not display. The data JSON is structured as shown below.

How should the developer correct the merge code in order for the ID to display?

...

```
{  
  "Details": {  
    "Customer": [  
      {"ID": "123456"}  
    ]  
  }  
}
```

...

- A. To %%%Details:Customer!0:ID%%%
- B. To \$Details:Customer!0:ID\$
- C. To %%Details:Customer!n:ID%
- D. To %%Details:Customer!1:ID%**

41. A developer creates an Integration Procedure with a Set Values and a DataRaptor Extract Action that requires AccountId as a key. When the developer previews the Integration Procedure, the developer enters the AccountId correctly and executes the preview. The developer sees the data extracted by the DataRaptor in the Debug Log, but the response is empty.

What is the likely cause of this issue?

- A. A Response Action was not added and DR output was not mapped to the Send JSON path
- B. The DataRaptor Action did not have the Add Response To Response JSON properly set to true.
- C. A Response Action was not added to the Integration Procedure.**
- D. The AccountId used for the preview is invalid.

42. A developer needs to configure a DataRaptor to retrieve data from a single object. The structure of the output data does not need to be changed.

Following best practices, which type of DataRaptor should the developer use?

A. DataRaptor Turbo Extract

B. DataRaptor Transform

C. DataRaptor Load

D. DataRaptor Extract

43. A developer needs to change some field labels on a FlexCard. The FlexCard is currently deployed to production. The developer decides that the best course of action is to version the FlexCard rather than cloning it.

Which factor would lead the developer to this decision?

A. The new version of the FlexCard will be used in a new Console, and the current version of the FlexCard should remain active.

B. The new and current versions will be displayed together on the same target.

C. All instances of the FlexCard must be updated with the changes.

D. Another team member is developing new actions, fields and styling for the current version of the FlexCard.

44. An OmniScript updates data from one Salesforce record, but when it completes, only some of the data is updated in Salesforce. A DataRaptor Load saves the data. What error could cause this behavior?

Choose 2 answers

- A. In the DataRaptor Load, in the preview tab, the RecordId is from the wrong record type.
- B. ContextId is misspelled in the merge code that passes the RecordId to the DataRaptor.
- C. The fields that are not updated are read only in Salesforce.
- D. The Input JSON paths in the DataRaptor Load do not match the JSON sent from the OmniScript.

45. What should a developer's first step be when troubleshooting whether a DataRaptor Extract is retrieving data?

- A. Deactivate the card and layout, and go to the PREVIEW tab for the card to test.
- B. Add a key/value pair in the DataRaptor to test it.
- C. Go to the Lightning Console and reload the page to test.
- D. Go to the PREVIEW tab in OmniScript to test.

46. A developer creates an OmniScript to update billing information. After analyzing the different types of customer interactions that occur at the company, the developer determines updating billing information should be included in the majority of customer interactions.

What should the developer use to configure the action that invokes the OmniScript?

- A. Custom Action
- B. Lightning Action
- C. OmniScript Action

47. A developer examines data received from an external data source. The data is nested two levels down in the JSON structure.

Which OmniStudio tool could the developer use to simplify this data?

A. A guided workflow

B. A DataRaptor Transform

C. An HTTP Action Element

D. An Integration Procedure

48. Why would a developer clone an Integration Procedure instead of versioning it?

A. The new Integration Procedure is replacing stub data.

B. The new Integration Procedure is Chainable.

C. The new Integration Procedure uses a Cache Block.

D. The new Integration Procedure will be used independently.

49. A developer needs to configure a calculation procedure to calculate a subtotal using two different formulas depending on whether the input Boolean variable isCustomer is set to true or false.

How should a developer configure the calculation procedure to conditionally execute the correct formula?

A. Use two separate Calculation Steps with the Conditional Step property selected; compare the isCustomer variable directly to the literal true and false values in the Condition syntax.

B. Use two separate Calculation Steps with the Conditional Step property selected; use the ISTRUE(isCustomer) and NOT(ISTRUE(isCustomer)) functions in the Condition syntax.

- C. Use two separate Calculation Steps with the Conditional Step property selected; reference just the isCustomer variable in the Condition syntax (no comparison necessary).
- D. Use a single Calculation Step with an IF statement directly in the formula definition to reference the isCustomer variable and conditionally perform the appropriate calculation.

50. In an expression set, what is required for the output of a calculation step to be used in an aggregation step?

- A. It must be included in constants.
- B. It must be a calculation step.
- C. It must be included in the output.

51. A developer creates a FlexCard that displays a contact's mailing address and passes the contact's postal code to a child FlexCard.

When configuring text elements in the child FlexCard, what syntax should a developer use to refer to the contact's postal code?

- A. (Parent.postalcode)
- B. (postalcode)
- C. (Records.postalcode)
- D. (Params.postalcode)

52. A developer is creating a FlexCard for a new Community page. The FlexCard will display case information along with actions to close the case and update the case, and it will be styled using the Community's theme.

What must the developer do to configure the FlexCard for deployment in a Community?

- A. Add the FlexCard's API name to the FlexCard Player component
- B. Configure the Component Visibility in the Custom Component
- C. Set the Target property in Publish Options to "CommunityPage"
- D. Set the Deployment property in Card Configuration to "Community"

53. Users receive an APEX CPU Limit Exceeded error when running an OmniScript in a Salesforce Community. The OmniScript includes an Integration Procedure that contains two DataRaptors.

Which two locations should the developer check to troubleshoot the issue?

Choose 2 answers

- A. Script Configuration
- B. Community logs
- C. Action Debugger
- D. DataRaptor configuration

54. A developer needs to display read-only contact information in an OmniScript. The developer will format the information as a table, using merge codes to dynamically include first name, last name, street address, state, postal code, and country from the data JSON.

Which OmniScript element should the developer use to meet this requirement?

- A. Text Block
- B. Rich Text Area
- C. Text Area
- D. Edit Block

55. Refer to the exhibit below. What is the merge code needed for this Integration Procedure structure to pass a CaseNumber node from the DRReadCase DataRaptor Extract Action to the HTTP Action's HTTP Path URL?

STRUCTURE: Procedure Configuration, DRReadCase, HTTPGetCaseDetails

A. *DRReadCase:CaseNumber*

B. {{DRReadCase.GaseNumber}}

C. {{caseNumber}}

D. *HTTPGetCaseDetails:CaseNumber*

The screenshot shows a Salesforce Certified OmniStudio Developer exam interface. At the top, it says 'Salesforce Certified OmniStudio Developer'. Below that, a timer shows 'Time Remaining: 01:16:35' with a 'Hide' button. The question number is '55 of 60'. The question text is: 'Refer to the exhibit below. What is the merge code needed for this Integration Procedure structure to pass a CaseNumber node from the DRReadCase DataRaptor Extract Action to the HTTP Action's HTTP Path URL?'. Below the question, there is a 'STRUCTURE' panel with two components: 'Procedure Configuration' and 'DRReadCase'.

56. Refer to the exhibit below. What JSON code correctly represents the step in the OmniScript Structure panel shown?

Exhibit: Step1, Step, Step 1, Block1, Text1, Telephone1, Block2, Checkbox1, Blocks, Multi-select1

A.

...

```
"Block2": {  
  "Telephone1": "1234567890",  
  "Checkbox1": false,  
  "Blocks": {  
    "Multi - select1": "Value A;Value B"  
  }  
}
```

...

B.

...

```
"step1": {  
  "Block1": {  
    "Text1": "Text",  
    "Telephone1": "1234567890"  
  },  
  "Block2": {  
    "Checkbox1": false,  
    "Blocks": {  
      "Multi-select1": "Value A;Value B"  
    }  
  }  
}
```

...

C.

...

```
"step1": {  
  "Block1": {  
    "Text1": "Text",
```

```
"Telephone1": "1234567890",  
"Block2": {  
  "Checkbox1": false  
}  
}  
}
```

Salesforce Certified OmniStudio Developer

Time Remaining: 01:16:28 [Hide](#)

56 of 60. Refer to the exhibit below. What JSON code correctly represents the step in the OmniScript Structure panel shown?

The screenshot shows the OmniScript Structure panel. At the top, there is a tab labeled 'Step1' with a sub-label 'Step'. Below the tab, the panel is titled 'Step 1'. Under 'Step 1', there are two expandable blocks. 'Block1' is expanded, showing two input fields: 'Text1' and 'Telephone1'. 'Block2' is collapsed. The 'Text1' field is a single-line text input, and the 'Telephone1' field is a single-line text input.

```

    "Block2": {
      "Telephone1": "1234567890 ",
      "Checkbox1": false,
      "Block3": {
        "Multi - select1": "Value A;Value B "
      }
    }
  }
}

B. ☒ "Step1": {
  "Block1": {
    "Text1": "Text",
    "Telephone1": "1234567890"
  },
  "Block2": {
    "Checkbox1": false,
    "Block3": {
      "Multi-select1": "Value A;Value B"
    }
  }
}

C. ☐ "Step1": {
  "Block1": {
    "Text1": "Text",
    "Telephone1": "1234567890",
    "Block2": {
      "Checkbox1": false
    }
  }
}

```

57. What two advantages does a DataRaptor Turbo Extract have over a standard DataRaptor Extract?

Choose 2 answers

- A. It is easier to configure
- B. It has better performance at runtime
- C. It populates data in PDF and DocuSign format
- D. It supports complex field mappings

58. Refer to the exhibit below. In this Integration Procedure structure, what Send JSON Path would be used to send the output of the Action1 element to a Remote Action?

STRUCTURE: Procedure Configuration, BlockA, BlockB, Action1

A. Action1:BlockB:BlockA

B. BlockA:BlockB:Action1

C. BlockA.BlockB.Action1

D. Action1.BlockB.BlockA

Salesforce Certified OmniStudio Developer

Time Remaining: 01:16:12 [Hide](#)

58 of 60. Refer to the exhibit below. In this Integration Procedure structure, what Send JSON Path would be used to send the output of the Action1 element to a Remote Action?

STRUCTURE

Procedure Configuration

▼ BlockA

▼ BlockB

Action1

Action1

0B31E6E17E3517D96ABD3C34EFC499FB

- A. ☐ Action1:BlockB:BlockA
- B. ☒ BlockA:BlockB:Action1
- C. ☐ BlockA.BlockB.Action1
- D. ☐ Action1.BlockB.BlockA

☐ Mark this Item for later review.

< Back

Next >

Review All

Submit Ex

59. A developer configures a FlexCard with a DataRaptor data source that uses the params.id as an input. When the developer clicks View Data on the FlexCard, valid data displays. However, when the developer previews the layout, the FlexCard does not display. What could cause this error?

Choose 2 answers

A. The RecordId in the Test Data Source Settings is for the wrong record type.

B. The Attributes haven't been configured to pass the data to the fields.

C. The Data Node field for the FlexCard is empty.

D. There is no Salesforce record for the FlexCard based on the RecordId in the layout's Test Data Source Settings.

60. In an OmniScript, a developer needs to configure a Disclosure element to require user input only if the user already checked a Non-Disclosure Agreement checkbox.

How should the developer configure the conditional view to meet this requirement?

A. Set element to optional if false

B. Show element if true

C. Set element to required if true

D. Disable read only if true

Set 3

61. In an OmniScript, a developer needs to configure a Disclosure element to require user input only if the user already checked a Non-Disclosure Agreement checkbox.

How should the developer configure the conditional view to meet this requirement?

- A. Show element if true
- B. Set element to required if true
- C. Set element to optional if false
- D. Disable read only if true

62. A developer needs to transform contact data into a JSON array.

Input JSON

```
```json
{
 "Contact": {
 "Name": "John Doe",
 "Phone": "12324456457",
 "Birthdate": "1970-11-12"
 }
}
```
```

Output JSON

```
```json
{
 "Contact": [
 {
 "Name": "John Doe",
 "Phone": "12324456457",
 "Birthdate": "1970-11-12"
 }
]
}
```
```


Given the Input JSON shown above, what are two ways a developer could configure a DataRaptor Transform to achieve the expected Output JSON?

Choose 2 answers

- A. Set the Input JSON Path as Contact and the Output JSON Path as LIST(Contact).
- B. Use a formula LIST(Contact), and add the output of the formula as the input in the Transform tab.
- C. Set the Input JSON Path as LIST(Contact) and the Output JSON Path as Contact.
- D. Set the Input JSON Path as Contact, the Output JSON Path as Contact, and Output Data Type as List.

63. A developer is troubleshooting an Integration Procedure with two elements: a Remote Action named FetchCart and a Response Action named ResponseCart.

In Preview, what JSON node shows the data sent to the Response Action?

- A. FetchCart
- B. ResponseCart
- C. ResponseCartDebug
- D. Response

Set 1

66. A customer has a new Engagement Manager who is going to be the new Primary Contact for the Account.

What type of mapping does a DataRaptor Load use to create the new contact and then add it as the new Primary Contact?

- A. Relationship Query

- B. Linked Mapping

- C. Lookup Key

- D. Lookup Mapping

67. Refer to the exhibit below. The card layout has an Integration Procedure as a data source. The cards use the layout data source.

Which JSON data structure below supports this card layout and uses best practices?

Contact Case

- Contact Name

- Contact Phone

- Case Subject

- Case Number

Exhibit JSON Options:

```
```json
```

```
// Option A
```

```
{
 "Contact": {
 "Name": "Leanne Tomlin",
 "CellPhone": "(212) 177-6630"
 },
 "CaseSubject": "Cannot track our order.",
 "CaseNumber": "00001002"
}
```\n```json
```

Option B

```
{  
  "Contact": {  
    "Name": "Leanne Tomlin",  
    "CellPhone": "(212) 177-6630"  
  },  
  "CaseSubject": "Billing status",  
  "CaseNumber": "00001004"  
}
```

```
...
```

```
```json
```

```
// Option C
```

```
{
 "ContactName": "Leanne Tomlin",
 "ContactCellPhone": "(212) 177-6630",
 "CaseSubject": "Billing status",
 "CaseNumber": "00001004"
}
```

```
...
```

```
```json
```

```
// Option D
```

```
{  
  "ContactName": "Leanne Tomlin",  
  "ContactCellPhone": "(212) 177-6630",  
  "CaseSubject": "Cannot track our order.",  
  "CaseNumber": "00001002"  
}
```

Salesforce Certified OmniStudio Developer

Time Remaining: 01:22:00

38 of 60. Refer to the exhibit below. The card layout has an Integration Procedure as a data source. The cards use the layout data source.

Which JSON data structure below supports this card layout and uses best practices?

Contact	Case	Case
Name Leanne Tomlin	Number 00001002	Number 00001004
Cell Phone (212) 177-6630	Subject Cannot track our order.	Subject Billing status

A. ☐

```
{
  "Contact": {
    "Name": "Leanne Tomlin",
    "CellPhone": "(212) 177-6630"
  },
  "CaseSubject": "Cannot track our order.",
  "CaseNumber": "00001002"
},
{
  "Contact": {
    "Name": "Leanne Tomlin",
    "CellPhone": "(212) 177-6630"
  },
  "CaseSubject": "Billing status",
  "CaseNumber": "00001004"
}
}
```

A. ☐

```
{
  "Contact": {
    "Name": "Leanne Tomlin",
    "CellPhone": "(212) 177-6630"
  },
  "CaseSubject": "Cannot track our order.",
  "CaseNumber": "00001002"
},
{
  "Contact": {
    "Name": "Leanne Tomlin",
    "CellPhone": "(212) 177-6630"
  },
  "CaseSubject": "Billing status",
  "CaseNumber": "00001004"
}
}
```

B. ☒

```
{
  "CaseSubject": "Cannot track our order.",
  "CaseNumber": "00001002",
  "ContactName": "Leanne Tomlin",
  "ContactCellPhone": "(212) 177-6630"
},
{
  "CaseSubject": "Billing status",
  "CaseNumber": "00001004",
  "ContactName": "Leanne Tomlin",
  "ContactCellPhone": "(212) 177-6630"
}
}
```

C. ☐

```
{
  "Case": {
    "Number": "00001002",
    "Subject": "Cannot track our order."
  },
  {
    "Number": "00001004",
    "Subject": "Billing status"
  }
}
```

Note: Any notes a

Enter tex

68. What OmniStudio tool pre-populates the data in a PDF used by an OmniScript?

- A. A DataRaptor Load
- B. A SOQL Query

- C. A DataRaptor Extract
- D. A DataRaptor Transform

69. A developer is building a DataRaptor Load for an Integration Procedure used in an OmniScript.

What is the most efficient way for the developer to configure the DataRaptor Input JSON?

- A. Copy the Input JSON from the DataRaptor Action Debug node.
- B. Copy the Input JSON from the OmniScript Data JSON.
- C. Build the Input JSON node by node in an editor.
- D. Build the Input JSON node by node in the DataRaptor Designer.

70. A developer is building an OmniScript and needs to retrieve data from many fields in a Salesforce record.

Which OmniScript element does this?

- A. Select
- B. HTTP Action
- C. DataRaptor Extract Action
- D. Lookup

71. In an Integration Procedure, a developer needs to perform a multi-step calculation on every element of an array.

Based on best practices, what two actions are recommended?

Choose 2 answers

- A. Use an Expression Set Action to call an Expression Set.
- B. Use a Decision Matrix Action to call a Decision Matrix.
- C. Use a List Action to merge the array elements together.
- D. Use a Set Values Element inside a Loop Block.

72. Which calculation procedure version in the list would execute on 2/15/2020 at 12:00 PM?

Weekly Calculation Procedure Versions

Version Name	Version Number	Start DateTime	End DateTime	Priority
NumBefore(Option 1)	1	1/10/2020, 1:00 AM	4/20/2020, 1:00 AM	1
NumBefore(Option 2)	2	1/10/2020, 1:00 AM	4/20/2020, 1:00 AM	2
NumBefore(Option 3)	3	1/10/2020, 1:00 AM	4/20/2020, 1:00 AM	4
NumBefore(Option 4)	5	1/10/2020, 1:00 AM	3/10/2020, 1:00 AM	5

- A. Version Number 2
- B. Version Number 3
- C. Version Number 1
- D. Version Number 4

by GRAVE INTERNATIONAL

Salesforce Certified OmniStudio Developer

Time Remaining: 01:24:46

2 of 60. Which calculation procedure version in the list would execute on 2/15/2020 at 12:00 PM?

Velocity Calculation Procedures > BundlePriceQuote
Velocity Calculation Procedure Versions
4 items - Sorted by Version Number - Updated a few seconds ago

	Calculation Procedure Version Name	Version Number	Enabled	Start Date Time	End Date Time	Priority
1	BundlePriceQuote v1	1	☒	1/1/2020, 12:00 AM	4/1/2020, 12:00 AM	1
2	BundlePriceQuote v2	2	☒	3/1/2020, 12:00 AM	3/1/2020, 12:00 AM	2
3	BundlePriceQuote v3	3	☒	3/1/2020, 12:00 AM	4/1/2020, 12:00 AM	4
4	BundlePriceQuote v4	4	☐	1/1/2020, 12:00 AM	3/1/2020, 12:00 AM	3

A. ☐ Version Number 2
B. ☐ Version Number 3
C. ☐ Version Number 1
D. ☒ Version Number 4

☐ Mark this item for later review.

< Back Next > Review All Submit Exam

Note: Any notes a
Enter tex

73. Why would you version an Integration Procedure instead of cloning it?

- A. The new Integration Procedure uses a Cache Block.
- B. The new Integration Procedure is Chainable.
- C. The new Integration Procedure will be used independently.
- D. The new Integration Procedure will replace the existing one.

Pearson Screenshot – revision

Pearson set 1_ocrd

74. A developer is building a Data Mapper Load for an Integration Procedure used in an Omniscript.

What is the most efficient way for the developer to configure the Data Mapper Input JSON?

- A. Copy the Input JSON from the Omniscript Data JSON.
- B. Copy the Input JSON from the Data Mapper Action Debug node.
- C. Build the Input JSON node by node in the Data Mapper Designer.
- D. Build the Input JSON node by node in an editor.

75. A developer creates an Omniscript to display FirstName, LastName, and BirthDate of a contact using a Type Ahead Block. The Data Mapper used in the Type Ahead Block has been tested and fetches the correct data.

When previewing the Omniscript, the developer enters a name in the Type Ahead Block and makes a selection of a contact from the list. However, the text fields FirstName, LastName, and BirthDate are not getting populated with the data.

Refer to the exhibit below.

| Script Configuration | TAC Contact | Type Ahead Block |

|---|---|---|

| Step1 | Element Name | b |

| IAC contact | TAC contact | |

| GetContact | Field Label | |

| | TypeAhead | |

0

Typeahead Key: 0

FirstName:

What is the reason that the fields fail to display the fetched data?

- A. FirstName, LastName, and BirthDate are not placed inside the Type Ahead Block.

- B. Lookup Mode is not selected in the properties of the Type Ahead Block.

- C. Use Data JSON is not selected in the properties of the Type Ahead Block.

- D. The Typeahead Key is not in the correct format.

Choose 1 option.

A developer creates an Omniscript to display FirstName, LastName, and BirthDate of a contact using a Type Ahead Block. The Data Mapper used in the Type Ahead Block has been tested and fetches the correct data.

When previewing the Omniscript, the developer enters a name in the Type Ahead Block and makes a selection of a contact from the list. However, the text fields FirstName, LastName, and BirthDate are not getting populated with the data.

Refer to the exhibit below.

Script Configuration

▼ Step1

▼ TAContact

GetContact

TAContact Type Ahead Block

Element Name @

TAContact

Field Label @

Typeahead1

Typeahead Key @

0

FirstName

What is the reason that the fields fail to display the fetched data?

☒ A. FirstName, LastName, and BirthDate are not placed inside the Type Ahead Block.

☐ B. Lookup Mode is not selected in the properties of the Type Ahead Block.

☐ C. Use Data JSON is not selected in the properties of the Type Ahead Block.

☐ D. The Typeahead Key is not in the correct format.

77. On a Flexcard canvas, several fields display with Salesforce data, but one of the fields shows only the label. What could cause this?

- A. There are No Test Data Test Parameters configured.
- B. In the Flexcard state, the Field type for the field does not match the type in the Salesforce record.
- C. In the Setup Panel, (recordId) is misspelled in the Data Source Input Map.
- D. The Field name in the Flexcard state does not match the Data Mapper Extract's Output JSON Path name.

78. A developer is building an Omniscript and needs to retrieve data from Salesforce and from an AWS Order Management system.

Which two Omniscript elements could retrieve this data?

- A. Navigate Action
- B. Data Mapper Extract Action
- C. Remote Action
- D. Response Action

79. How should the developer

- A. Populate the Lookup Object and Lookup Fields.
- B. Check Overwrite Target for All Null Inputs checkbox on the Account ID field.
- C. Check the Upsort Key checkbox on the Account Status field.
- D. Check the Upsort Key and Is Required for Upsort checkboxes on the Account ID field.

*

80. On a Flexcard canvas, several fields display with Salesforce data, but one of the fields shows only the label. What could cause this?

- A. In the Flexcard state, the Field type for the field does not match the type in the Salesforce record.
- B. The Field name in the Flexcard state does not match the Data Mapper Extract's Output JSON Path name.
- C. In the Setup Panel, (recordId) is misspelled in the Data Source Input Map.
- D. There are No Test Data Test Parameters configured.

81. A developer creates a new Flexcard to display customer data and actions, such as updating billing information and changing the primary contact for the customer account. The Flexcard contains 10 fields and 5 actions.

During testing, several fields display with the correct data, but one of the fields shows only the label.

What could cause this?

- A. There are no test parameters configured.
- B. The fields have exceeded the maximum number allowed on the card.
- C. (recordId) is misspelled in the Data Source Input Map.
- D. The field is null in the Salesforce record.

82. Which two of these options can a developer use to retrieve data from a Salesforce object?

- A. Data Mapper Extract Action
- B. Data Mapper Post Action
- C. Data Mapper Load Action
- D. Lookup Input Element

*

Set 3

83.

Exhibit:

...

- Step/CorrectDetails
- Red Load: 0
- Element Value: Map
- Element Names
- Type
- Value
- Corrected/corrected
- JSON Node
- Subconvertible
- Add Name Values
- Window Pass Message: 0
- Show Predawn Component: 0
- Section Storage Message: 0
- <Edit>
- <Connecting>
- UVC Public Message: 0

What is the reason for this? Refer to the exhibits below.

Options:

- A. The flag passDataJSON in the parent Omniscrypt is not configured correctly.
- B. The UVC PubSub Message flag in the Set Values action of the parent Omniscrypt has not been set.
- C. Both parent and embedded Omniscrypts have the same element name for the Set Values element.

- D. A developer failed to include a Navigate Action Element to pass data from the parent Omniscript.

84.

Exhibit:

A developer creates a new Flexcard to display customer data and actions, such as updating billing information and changing the primary contact for the customer account. The Flexcard contains 10 fields and 5 actions.

During testing, several fields display with the correct data, but one of the fields shows only the label.

Question:

What could cause this?

Options:

- A. (recordId) is misspelled in the Data Source Input Map.
- B. The field is null in the Salesforce record.
- C. The fields have exceeded the maximum number allowed on the card.
- D. There are no test parameters configured.