


CGDC-RSG-HRGV-Net: decomposed cross-granularity evidence and disagreement calibration

双残差适配器将角色与种类证据显式分解；仅在两专家分歧时对融合后验施加有界校准。

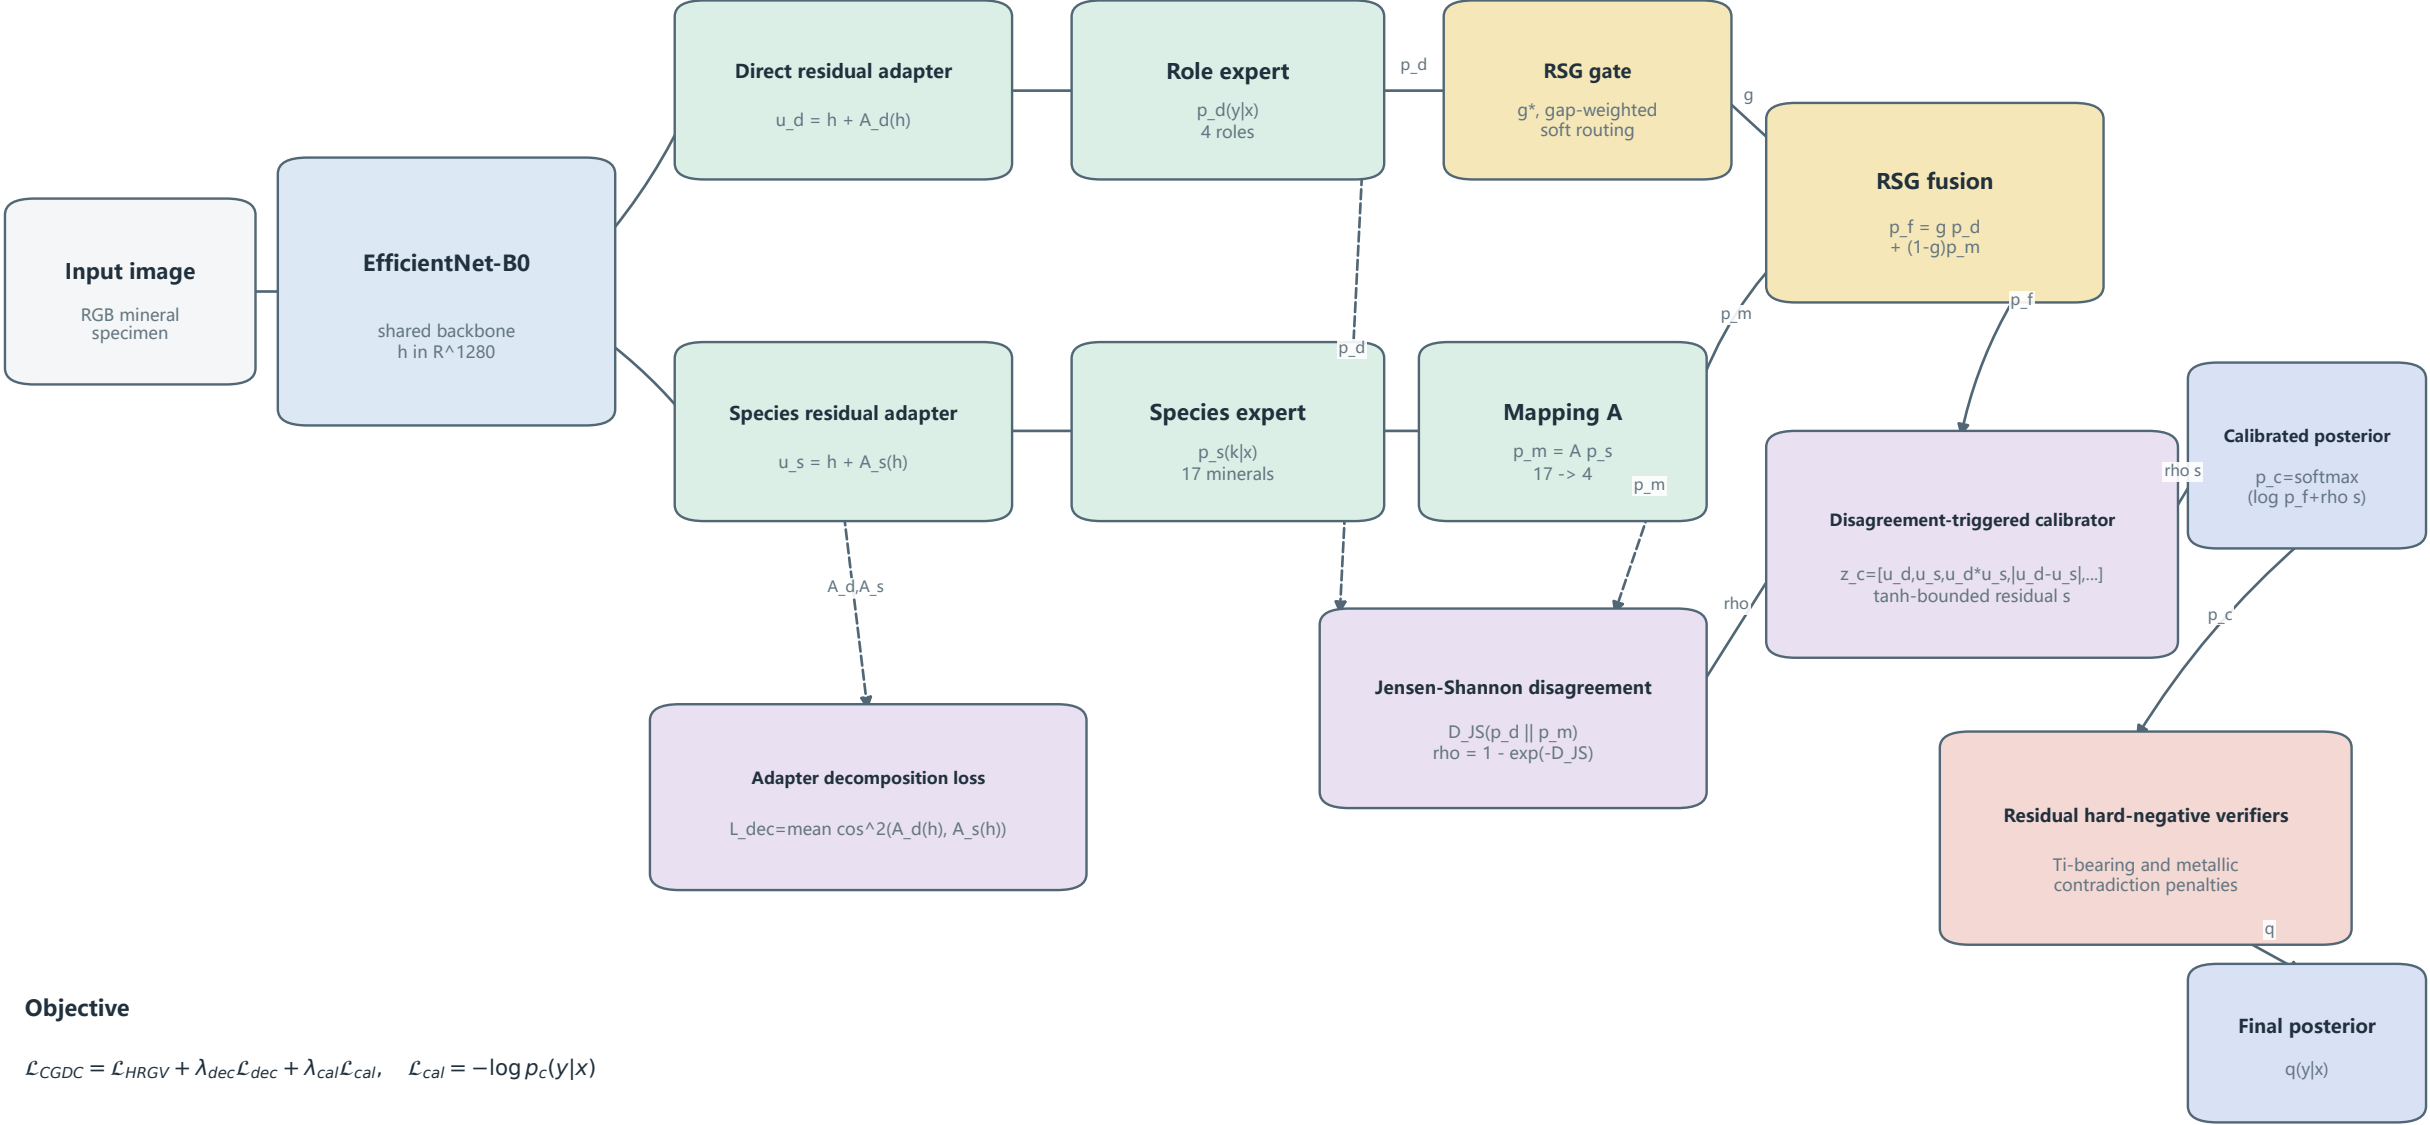

Objective

$$\mathcal{L}_{CGDC} = \mathcal{L}_{HRGV} + \lambda_{dec} \mathcal{L}_{dec} + \lambda_{cal} \mathcal{L}_{cal}, \quad \mathcal{L}_{cal} = -\log p_c(y|x)$$

Agreement identity: $p_d = p_m \Rightarrow \rho = 0 \Rightarrow p_c = p_f$. Bounded shift: $|\log(p_{c,j}/p_{c,k}) - \log(p_{f,j}/p_{f,k})| \leq 2\rho$.