Obligaton Warehouse

PARTICIPANT INTERACTIVE MESSAGING SPECIFICATION

VERSION 8.0

MAY 1, 2014

DOCUMENT REVISION HISTORY

Date	Version	Description
February 2011	5	Addition of ICNS and XCNS Reason Codes for CNS processing.
May 2012	6	Addition of IREO and XREO Reason Codes for Reorg processing.
June 2013	7	Addition of IPOF and XPOF Reason Codes for Pair Off Processing. Addition of POFF in MT518 overview and POFC in MT599 overview.
May 2014	8	Updated MT518 POFP/POFF 22F::PROC values for obligations involved in full or partial Pair off. Added MT509 values for IMSC, IMSD and IMSR for permanent cancel, permanent drop and permanent reject messages rejected by Obligation Warehouse.

TABLE OF CONTENTS

1. Overview 4

Related SWIFT Material 4

2. Introduction to NSCC Obligation Warehouse Interactive Messaging 5

Obligation Warehouse Service Features 5

Obligation Input Messages from Participants 6

Settlement Update Messages from Participants 6

Obligation Warehouse Output Messages to Participants 6

2. Interactive Message Guidelines 7

ISO 15022 Message Structure 7

Message Header 7

Blocks and Sub-blocks 7

Fields 9

Tag and Field Format Illustrations and Chart 10

Illustration of Message Structure 11

MT515 Message Overview 12

MT509 Message Overview 14

MT518 Message Overview 18

MT599 Message Overview 21

MT598 Message Overview 21

Obligation Warehouse Obligation Entry Message Flow 22

Message Flow Explanation 23

3. Communications Overview 25

4. Messaging Specification 26

Message Formatting Rules 26

Message Rules 26

Message Field Rules 27

Message Format Conventions 27

Typical Message Form 29

Message Header Format 30
MT598 30
MT599 Format Differences 30

1. OVERVIEW

The Obligation Warehouse interactive messaging provides a means for Participants to input obligations for real-time matching similar to CMU RTTM and to update obligations with the delivery status. This document provides an interactive messaging specification for all NSCC participants' inputs to, and output from the Obligation Warehouse. Participants are able to send ISO 15022 MT515 messages to Obligation Warehouse as obligation inputs for matching or settlement updates. The messaging outputs from Obligation Warehouse are ISO 15022 MT509 that provide status of obligation updates or MT518 messages, which are advice/advisories containing obligation details or MT599 messages and announcements of administrative messages or MT598 messages that are rejects.

Related SWIFT Material

The specifications for interactive messages supporting real-time matching are based on ISO15022 SWIFT messages. A high-level overview of how SWIFT messages are structured is included in Section 2 of the Interactive Message Guidelines. This section of the document provides participants with a general idea of how SWIFT messages are structured and it is not intended to replace SWIFT documentation in any way. ***Participants are strongly urged to access the SWIFT user documentation to obtain a complete and comprehensive understanding of these message standards.*** View SWIFT information, including message formats, in the Obligation Warehouse Technical Resources section of the DTCC Learning Center and also at www.iso15022.org, https://www.swift.com/standards, and https://www2.swift.com/. Resources include SWIFT messages, SWIFT User Handbook, Standards Release Guide, and Category 5 - Securities Markets: Message Usage Guidelines.

2. INTRODUCTION TO NSCC OBLIGATION WAREHOUSE INTERACTIVE MESSAGING

This document details the input and output messaging specifications for NSCC Obligation Warehouse. NSCC Participants today can submit obligation input in real-time using interactive messaging built on ISO 15022 formats. The MT515, MT509, MT518, MT598 and MT599 messaging formats are used for real- time interactive communication between Participants and the Obligation Warehouse application. Participants that subscribe to use interactive messaging can submit obligations, delivery notifications, receive status updates and get notified of detailed advisories against them in real-time. This real-time information can be used by Participants to affirm or DK the Contra's obligation or to modify their own obligations to communicate settlement information.

While inputs can still be submitted through the web interface, and files are available at EOD, Participants are encouraged to use interactive messaging for up-to-the-minute obligation status reporting.

Obligation Warehouse Service Features

With the implementation of Obligation Warehouse for NSCC:

- Members have the ability to submit obligation input to Obligation Warehouse intra-day, using the SWIFT MT515 message format. The MT515 inbound message specification supports all information required for Obligation Warehouse to facilitate matching and settlement.
- Submitters can immediately receive Obligation Warehouse obligation status information (notification of whether the obligation has been accepted or rejected) through the SWIFT MT509 message format. This format is also used to provide up-to-the-minute obligation status information to members as transactions are processed by Obligation Warehouse, For example, a message is sent when an obligation matches, is canceled, modified, settles, or closed).
- Obligation parties can also be notified immediately through a SWIFT MT518 message when an obligation has been submitted against them or when a delivery notification or bilateral cancel is initiated by one of the participants. The SWIFT MT518 message contains full obligation details, unlike the MT509. It is also used to communicate to the participant those changes that Obligation Warehouse may have made to obligation records that were previously submitted.
- NSCC members are also apprised of Obligation Warehouse system availability and major system events through MT599 Administrative Messages.
- Submitters are notified with an MT598 message when their input is not parsable and invalid or if a CDTS subscription is not set up properly.
- With interactive messaging, members have the ability to submit obligation data to Obligation Warehouse, review output, and identify and correct any errors, all within minutes of execution. To ensure participants are able to reconcile Obligation Warehouse system events to their own applications at any point in time, it is highly recommended that they process interactive output. Interactive output is created irrespective of the method of input to the Obligation Warehouse application.

For more service details, see NSCC Important Notices available on the Internet at www.dtcc.com.

Obligation Input Messages from Participants

Participants can submit message inputs for Obligation matching, Modifies, Cancels and DKs for immediate processing at any time while the system is open for inputs (for example, after Start of Day and before EOD for accepting inputs). Participant inputs submitted outside this period are queued up for the next day's processing.

Settlement Update Messages from Participants

Participants can submit message inputs to update the Settlement Status of Obligations for immediate processing at any time while the system is open for inputs (for example, after Start of Day and before EOD for accepting inputs). Participant inputs submitted outside this period are queued up for the next day's processing.

Obligation Warehouse Output Messages to Participants

Participants who subscribe to interactive messaging outputs from Obligation Warehouse can receive messages for every Obligation entered, irrespective of whether the input was through the Web or through interactive messaging.

The outputs to Participants are of four types - MT509 (Summary Status), MT518 (Detailed Advice./Advisory) or MT599 (Free-format Administrative) or MT598 (Reject of not parsable message) that are all ISO 15022 message formats.

2. INTERACTIVE MESSAGE GUIDELINES

This section of the document provides some background information that may be useful for interpreting the detailed message specifications that follow. NSCC participants are using interactive messaging for real- time matching of obligations.

NSCC has adapted the ISO 15022 message formats for interactive matching input and output. These ISO formats were developed in coordination with international securities industry working groups (ISO Technical Committee, TC68) to establish a viable and efficient industry standard. This standard defines messages composed of required and optional variable-length sequences of tags and data fields, maximizing the flexibility and practical application of the messages.

The important aspect of this format is the ability to include only the data necessary for a specific business transaction. Each SWIFT message may require different fields. Coding for these formats should allow new functionality to be added without requiring extensive re-testing.

The flexible format of the ISO 15022, continuing evolution message standards, and the ongoing deployment of new services, makes it likely that new fields are added to the standard. Efforts should be made to implement a general, field-processing engine, rather than a hard-coded, fixed implementation of the entire message specification. Chapter 14 of the SWIFT Standards Category 5 Securities Markets Message Usage Guidelines – September, 2000 Edition document presents a programming guide that provides suggestions for programming these ISO 15022 message format.

Much of the information that appears in this section of the document has been derived from the SWIFT Standards Category 5 Securities Market Message Usage Guidelines – September, 2000 Edition.

While NSCC has elected to use SWIFT standardized messages, it is not intending to utilize the SWIFT network. The current plan is to utilize our proprietary network for communication between NSCC and its members. The messages are intended, however, to be compliant with SWIFT regulations so that the SWIFT network could be used, if deemed appropriate.

ISO 15022 Message Structure

ISO 15022 SWIFT message formats are constructed using a modular methodology based on the premise that information can be identified and programmed once, then reused wherever needed. Using this approach, data is configured into logical groups (generic fields and blocks) according to business purpose. These groups are then uniquely identified (using tags, qualifiers, and start/end of block designators) so that they can be used whenever needed to fulfill particular business purposes across a number of messages without requiring extensive reprogramming.

If the basic message structure were diagrammed from the top down (going from the more general to the more specific), you would have a Message Header followed by one or more information blocks (potentially containing sub-blocks), composed of one or more fields. Each of these components is defined in the following sections.

Message Header

An ISO compliant message header is used. For more information, see Participant Interactive Messaging Specifications: Appendix B: Headers for Messages.

Blocks and Sub-blocks

A block may be defined as a group of fields containing related business information that is framed by start-of-block and end-of-block designators. The use of a block is not restricted to any given message; it can be reused across a number of messages and combined with other blocks to fulfill a variety of business requirements. For example, the General Information block (found in the MT515, MT509 and MT518) contains general information regarding the obligation, such as obligation reference numbers. The Confirmation Details block (found in the MT515 and MT518) contains specific obligation information such as trade date, settlement date, quantity, security, and information regarding the confirming parties.

Each message contains one or more blocks. A typical message contains a General Information block, followed by a series of detail blocks. These blocks may be mandatory or optional within a particular message, and are structured as follows:

- Start-of-block designator (represented by the tag 16R), indicating the start of a group of related information.
- One or more sub-blocks, fields, or both.
- End-of-block designator (represented by the tag 16S), indicating the end of a group of related information.

An information block may be further divided into sub-blocks containing groups of fields that further define the block. The structure of a sub-block is the same as that of a block, the difference being that it is nested or contained within the block. For example, the Confirmation Parties blocks are sub-blocks of the Confirmation Details block. Sub-blocks, under certain circumstances, can be repeated in a block, such as the Buyer/Receiver and Seller/Deliverer Confirming Party sub-blocks).

Fields

There are two types of fields: ***generic fields and discrete fields***. As the names imply, generic fields are multi-purpose fields used across messages and message types, whereas discrete fields in messages are limited to a single purpose. Generic fields further support the flexibility and modular message structure of the message formats. Each generic field is a basic group of business data that is common throughout all messages, such as date and amount.

At a minimum, each field is composed of an identifying ***tag*** and its associated ***field data***. A tag may be thought of simply as a 2-digit number that represents the type of data contained in the field followed by an alpha character that provides format information associated with the field contents. For example, 98A is the generic tag used to indicate a date field in a particular format (YYYYMMDD).[1] The format for a tag includes two delimiters – one to indicate the start of the tag, and a second to indicate the end of the tag. These delimiters are indicated using a colon. Continuing with the example, the proper format for the generic tag used to indicate a date in the YYYYMMDD format would be :98A:.

Because there are a number of different types of dates that may be associated with any given obligation, the generic field tag must be further described if it is to be useful. Qualifiers are used to provide this additional level of description. For example, the tag 98A followed by the qualifier SETT means that the corresponding field data is the settlement date for the obligation. The tag 98A followed by the qualifier TRAD means the corresponding field data is the trade date for the obligation. Qualifiers for generic tags are always preceded by an additional colon (:).

The generic field for a settlement date of March 31, 2010 in the YYYYMMDD format, including the generic tag, the qualifier and the field data would be:


:98A::SETT//20100331

Although tags are numeric, they generally do not need to be placed in sequence, except if there is a sequence dependency as part of the format. Tags that are part of a block must remain within the start and end block tags.

[1] Note that for each field, there may be several format options for expressing the data. The alpha character in the tag is used to indicate which format option has been applied. If the alpha character in the tag is lowercase in the SWIFT documentation, this means that there are several format options for the field and that there is free choice to use any of these options. If the alpha character in the tag is uppercase, this means that, while there are several format options for the field, the option designated by the uppercase alpha character must be used. For example, 98A refers to a date in the YYYYMMDD format. 98C refers to a date that also includes the time. **Note that NSCC has mandated the options that participants must use in the layouts**.

Tag and Field Format Illustrations and Chart

The figure shows the format for a generic field tag, such as :98A: and its associated field data. The figures are followed by charts providing the definitions of the elements delineated:

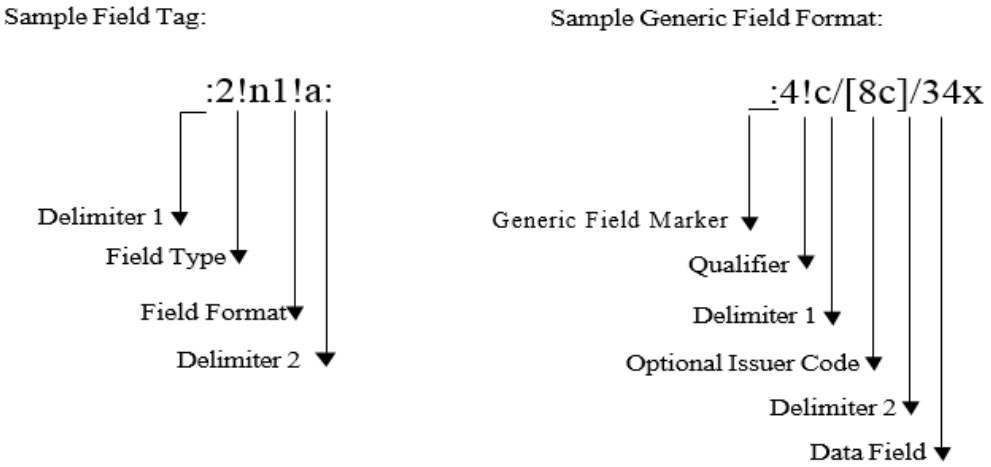


Field Tag Components	Format	Definition
Delimiter 1	:	Shows the start of the field tag.
Type of Field	2!n	2-digit number representing the data type. Note that ! indicates a fixed field size.
Field Format	1!a	The format of the contents of the data field.
Delimiter 2	:	Shows the end of the field tag.
Example - Field Tag	:98A:	98 denotes Generic Date Field. A denotes date 8!n (YYYYMMDD) format.
Generic Field Marker	:	Identifies the field as generic.
Qualifier	4!c	Provides the business significance of the data, and is mandatory.
Delimiter 1	/	Mandatory delimiter.
Optional Issuer Code	[8c]	When SWIFT defined codes are not used, allows for the use of market, or issuer, codes with a maximum of eight characters. Example: DTCY
Delimiter 2	/	Mandatory delimiter.
Data Field	34x	Data for the field. The format is specified by the letter option of the field format. Example: 98A specifies a date format of 8!n = YYYYMMDD

Field Tag Components	Format	Definition
Example - Tag/Qualifier/Data Field	:98A::SETT//20100331	The colon preceding the qualifier SETT indicates that this is a generic field. :SETT// with the tag 98Adenotes that this field is a Settlement Date in the YYYYMMDD format.

Illustration of Message Structure

The figure shows the basic SWIFT Message structure for ISO 15022 messages. For generic structural illustrations of the MT515, MT509, and MT518 messages (as specified by SWIFT), see **Participant Interactive Messaging Specifications**: Appendix D: Message Samples.

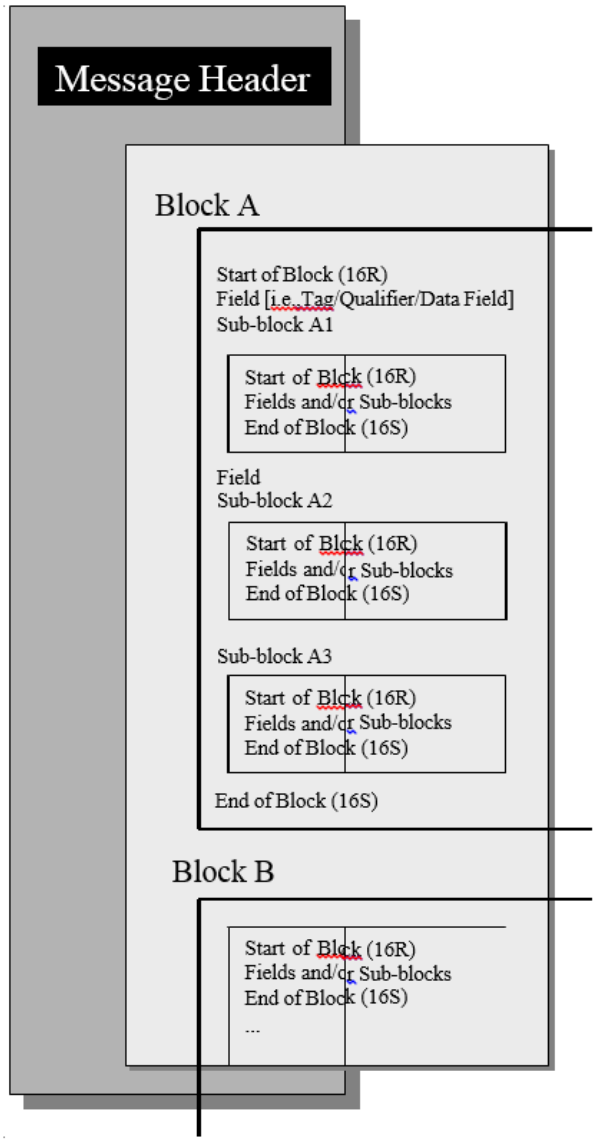

MT515 Message Overview

The SWIFT MT515 is specified as a Client Confirmation of Purchase (Receive) or Sale (Deliver). It can also serve as a binding electronic contract. The MT515 message is used by NSCC members to enter new obligations for matching, to modify existing obligations, and to DK obligations. MT515 messages contain all of the information required for Obligation Warehouse to facilitate matching, settlement, and reporting to regulatory bodies. Field 22F PROC in the Confirmation Details (CONFDET) block enables the participant to indicate to Obligation Warehouse the type of record being sent. The details of how this field is populated for each record type is provided. The MT515 format supports the following message types:

	Message Type	Usage
1.	**Instruct Message** (:22F::PROC/DTCY/INST)	Used to submit obligation details to Obligation Warehouse for obligations submitted by participants for comparison. Message contains fields required for comparison and settlement.
2.	**Cancel Message** (:22F::PROC/DTCY/CANC)	Used to cancel an uncompared obligation. Message contains all details of obligations as present in the system.
3.	**Cancel Matched Message** (:22F::PROC/DTCY/CNMT)	Used to request the cancel a matched obligation.
4.	**Cancel Delivery Message** (:22F::PROC/DTCY/CNDL)	Used to cancel an earlier Delivery Notification on an obligation pending delivery acceptance by the contra.
5.	**Modify Message** (:22F::PROC/DTCY/MDFC)	Used to submit a modification to a previously entered obligation that is unmatched and has not had deliveries applied to it.
6.	**DK Message** (:22F::PROC/DTCY/DKUC)	Used to submit a notification to Obligation Warehouse (and the Contra party) that a participant does not know, or agree with, the obligation submitted against it by the Contra party.
7.	**DK Delivery Message** (:22F::PROC/DTCY/DKDL)	Used to submit a notification to Obligation Warehouse (and the Contra party) that a participant does not know, or agree with, the delivery notification submitted against it by the Contra party.
8.	**DK Cancel Message** (:22F::PROC/DTCY/DKCN)	Used to DK the Contra's Cancel of an Open obligation.
9.	**Delivery Notification Message** (:22F::PROC/DTCY/DLVR)	Used to submit the delivery/receipt notification to Obligation Warehouse.
10.	**Reclaim Notification** (:22F::PROC/DTCY/RCLM)	Used to submit a reclaim request against an obligation that has had deliveries posted against it.
11.	**Cancel Reclaim** (:22F::PROC/DTCY/CNRC)	Used to cancel a previously submitted reclaim request.
12.	**DK Reclaim Request** (:22F::PROC/DTCY/DKRC)	Used to DK the contra's Reclaim Request.
13.	**UnDK** (:22F::PROC/DTCY/UNDK)	Used to submit an UnDK of a previously submitted DK of an uncompared obligation.

	Message Type	Usage
14.	**UnCancel** (:22F::PROC/DTCY/UNCN)	Used to submit a Cancel of a previously submitted Cancel Compared Message.
15.	**Include for RECAPS** (:22F::PROC/DTCY/IRCP)	Used to request a compared obligation be included for RECAPS processing.
16.	**Exclude from RECAPS** (:22F::PROC/DTCY/XRCP)	Used to request a compared obligation be excluded from RECAPS processing.
17.	**Remove Withhold from CNS** (:22F::PROC/DTCY/ICNS)	Used to remove the Withhold from CNS. This action is only available to the submitter of the Withhold from CNS request.
18.	**Withhold from CNS** (:22F::PROC/DTCY/XCNS)	Used to request that a matched obligation that was matched with Include for CNS be unilaterally withheld from CNS processing.
19.	**Include for Reorg Processing** (:22F::PROC/DTCY/IREO)	Used to request a compared obligation be included for Reorg processing.
20.	**Exclude from Reorg Processing** (:22F::PROC/DTCY/XREO)	Used to request a compared obligation be excluded from Reorg processing.
21.	**Include for Pair Off Processing** (:22F::PROC/DTCY/IPOF)	Used to request a compared obligation be included for Reorg processing.
22.	**Exclude from Pair Off Processing** (:22F::PROC/DTCY/XPOF)	Used to request a compared obligation be excluded from Reorg processing.

Participants using Obligation Warehouse web submit updates to Obligation Warehouse in real-time and immediate notification regarding the requested update's status are returned on the screen. If the update is successful, Obligation Warehouse generates MT509 or MT518 messages reflecting the obligation's updated status.

MT509 Message Overview

The SWIFT MT509 Message is specified as a Status Message. It is used to convey the status of each input transaction that has been submitted to Obligation Warehouse for processing by an NSCC member and to inform participants of the status of obligations due to system actions. The MT509 message does not contain full obligation details, but rather provides the obligation status along with the full set of reference numbers to enable the participant to identify the obligation or record submitted. Certain status messages also include additional fields, such as reason codes for reject messages, etc. Field 25D in the Status (STAT) Block indicates to the recipient the type of message being sent ***(in the case of a Modify, DK, Delivery Notification reject and rejects of settlement updates by other systems such as IMS, ECS and NYW, a second field, 70D in the Reason (REAS) block, must also be read to determine the record type).*** The qualifiers for these fields are shown for each example.

The list of SWIFT MT509 status messages follows:

	Status Message	Usage
1.	**Obligation Input Accepted** (:25D::IPRC//PACK)	Sent to the obligation submitter to acknowledge that its obligation has been validated, accepted and is available for further processing within Obligation Warehouse.
2.	**Obligation Input Rejected** (:25D::IPRC//REJT)	Sent to the obligation submitter to indicate that its obligation has been rejected by Obligation Warehouse as part of the validation process. The reason for the rejection is also indicated on the message
3.	**Modify Processed** (:25D::IPRC/DTCY/MODP)	Sent to the submitting party when an Obligation Modification has been accepted and successfully processed within Obligation Warehouse.
4.	**Delivery Notification Input Accepted** (:25D::IPRC/DTCY/DLVA)	Sent to the delivery notification submitter to acknowledge that its input has been accepted and processed by the system. As a result of the processing the obligation would be placed in Pending Delivery status.
5.	**Obligation sent to IMS** (:25D::IPRC/DTCY/SIMS)	Sent to both parties indicating that their obligation has been sent to IMS settlement system and is eligible for settlement activities.
6.	**Deleted due to DK** (:25D::IPRC/DTCY/DEDK)	Sent to the submitter of an obligation to inform it that the obligation it submitted has been administratively deleted by the system at End-of-Day after the fifth day after it had been DKed by the contraparty.
7.	**Deleted due to Participant Swing** (:25D::IPRC/DTCY/DEPS)	Sent to the submitting party indicating that their uncompared obligation has been deleted by the system due to Participant Swing actions.
8.	**Deleted due to Admin action** (:25D::IPRC/DTCY/DEAD)	Sent to the submitting party indicating that their uncompared obligation has been deleted by the system due to Admin action.
9.	**Closed due to obligation Sent to CNS** (:25D::IPRC/DTCY/CCNS)	Sent to both parties indicating that their obligation has been closed due to having been sent to CNS.
10.	**Closed due to RECAPS activity** (:25D::IPRC/DTCY/CRCP)	Sent to both parties indicating that their obligation has been closed due to RECAPS activity.

	Status Message	Usage
11.	**Closed due to Participant Swing Activity** (:25D::IPRC/DTCY/CPSW)	Sent to both parties indicating that their obligation has been closed due to Participant Swing activity.
12.	**Closed due to Admin activity** (:25D::IPRC/DTCY/CLAD)	Sent to both parties indicating that their obligation has been closed due to Admin activity.
13.	**Closed due to Mandatory Re-org activity** (:25D::IPRC/DTCY/CMRO)	Sent to both parties indicating that their obligation has been closed due to Mandatory Reorg activity.
14.	**Reclaim Request Input Accepted** (:25D::IPRC/DTCY/RCLA)	Sent to the submitter of a Reclaim Request to indicate that Obligation Warehouse has accepted the reclaim request and the Reclaim is awaiting action by the contra.
15.	**Closed due to Cancel Reclaim** (25D::CPRC/DTCY/CCNR)	Closed due to the cancel of a Reclaim Notification. This can happen when the cancel of a Reclaim Notification results in an obligation that has been fully delivered.
16.	**Closed due to DK Cancelled** (25D::IPRC/DTCY/CLDC)	Sent to both parties to indicate an obligation has been closed because it has been fully delivered while in a DK state.
17.	**Closed due to Cancel Request Cancelled** (25D::IPRC/DTCY/CLCC)	Sent to both parties to indicate an obligation has been closed because it has been fully delivered while in a pending cancel state.
18.	**Include for RECAPS accepted** (:25D::IPRC/DTCY/IRCP)	Send to the submitter of an Include for RECAPS message to acknowledge that its input has been accepted and processed by the system.
19.	**Exclude for RECAPS accepted** (:25D::IPRC/DTCY/XRCP)	Send to the submitter of an Exclude from RECAPS message to acknowledge that its input has been accepted and processed by the system.
20.	**Remove withhold from CNS accepted** (:25D::IPRC/DTCY/ICNS)	Send to the submitter of a Remove Withhold from CNS Processing message to acknowledge that its input has been accepted and processed by the system.
21.	**Withhold from CNS Processing accepted** (:25D::IPRC/DTCY/XCNS)	Send to the submitter of a Withhold from CNS message to acknowledge that its input has been accepted and processed by the system.
22.	**Include for Reorg Processing accepted** (:25D::IPRC/DTCY/IREO)	Send to the submitter of an Include for Reorg processing message to acknowledge that its input has been accepted and processed by the system.
23.	**Exclude for Reorg Processing accepted** (:25D::IPRC/DTCY/XREO)	Send to the submitter of an Exclude from Reorg processing message to acknowledge that its input has been accepted and processed by the system.
24.	**Include for Pair Off accepted** (:25D::IPRC/DTCY/IPOF)	Send to the submitter of an Include for Pair Off processing message to acknowledge that its input has been accepted and processed by the system.

	Status Message	Usage
25.	**Exclude from Pair Off accepted** (:25D::IPRC/DTCY/XPOF)	Send to the submitter of an Exclude from Pair Off processing message to acknowledge that its input has been accepted and processed by the system.
26.	**Cancel Rejected** (:25D::CPRC//REJT)	Sent to the submitter of an Obligation Cancel message to indicate that the message has been rejected by Obligation Warehouse as part of the validation process. The reason for the rejection is also indicated on the message.
27.	**Cancel Processed** (:25D::CPRC//CAND)	Sent to the submitter of an Obligation Cancel to acknowledge that the message has been validated and accepted. The obligation is canceled in Obligation Warehouse.
28.	**Cancel Matched/Open Accepted** (:25D::CPRC/DTCY/CNMT)	Sent to the submitter of a Match/Open Cancel to acknowledge that the message has been validated and accepted. The obligation is marked as Pending Cancel.
29.	**Closed due to Participant Cancel** (:25D::CPRC/DTCY/CCAN)	Sent to both parties indicating that their obligation has been closed due to Participant Cancel updates through the Obligation Warehouse application.
30.	**Cancel Delivery** (:25D::CPRC/DTCY/CNDL)	Sent to the receiver of the Delivery Notification to inform that their delivery status has been removed. The obligation would move from Pending Delivery state back to Open state.
31.	**Reclaim Notification Cancelled** (:25D::CPRC/DTCY/CNRC)	Sent to the submitter of a Reclaim Notification Cancel to indicate the Reclaim Notification has been cancelled.
32.	**UnCancel** (:25D::CPRC/DTCY/UNCA)	Sent to the submitter of a Cancel Request to indicate the Cancel Request has been cancelled.
33.	**UnDK accepted** (:25D::CPRC/DTCY/UNDA)	Sent to the submitter of an UnDK request to indicate that the UnDK has been accepted and processed.
34.	**Modify Rejected** (:25D::IPRC//REJT and :70D::REAS//DTCY/MDRJ)	Sent to the submitter of an Obligation Modification message to indicate that Obligation Warehouse has rejected the modification message as part of the validation process. The reason for the rejection is also indicated on the message.
35.	**DK Rejected** (:25D::IPRC//REJT and :70D::REAS//DTCY/DKRJ)	Sent to DK submitter to indicate that the DK sent has been rejected by Obligation Warehouse as part of the validation process. The reason for the rejection is also indicated on the message.
36.	**Delivery Notification Rejected** (:25D::IPRC//REJT and :70D::REAS//DTCY/DLRJ)	Sent to the submitter of a Delivery Notification to indicate that their Delivery Notification has been rejected as part of the validation process. The reason for the rejection is also indicated on the message
37.	**Settlement Update by IMS system rejected** (:25D::IPRC//REJT and :70D::REAS//DTCY/IMRJ)	Sent to the receiver and deliverer indicating that their settlement of the obligation through the IMS system has been rejected by Obligation Warehouse. The reject reasons are indicated on the message.

	Status Message	Usage
38.	**Settlement Update by NYW system rejected** (:25D::IPRC//REJT and :70D::REAS//DTCY/NYRJ)	Sent to the receiver and deliverer indicating that their settlement of the obligation through the NYW system has been rejected by Obligation Warehouse. The reject reasons are indicated on the message.
39.	**Settlement Update by ECS system rejected** (:25D::IPRC//REJT and :70D::REAS//DTCY/ECRJ)	Sent to the receiver and deliverer indicating that their settlement of the obligation through the ECS system has been rejected by Obligation Warehouse. The reject reasons are indicated on the message.
40.	**Reclaim Notification rejected** (:25D::IPRC//REJT and :70D::REAS//DTCY/RCRJ)	Sent to the submitter of a Reclaim Notification to indicate that their Reclaim Notification has been rejected as part of the validation process. The reason for the rejection is also indicated on the message.
41.	**Include for RECAPS rejected** (:25D::IPRC//REJT and :70D::REAS//DTCY/IRRJ)	Sent to the submitter of an Include for RECAPS message to indicate that their message has been rejected as part of the validation process. The reason for the rejection is also indicated on the message.
42.	**Exclude for RECAPS rejected** (:25D::IPRC//REJT and :70D::REAS//DTCY/XRRJ)	Sent to the submitter of an Exclude for RECAPS message to indicate that their message has been rejected as part of the validation process. The reason for the rejection is also indicated on the message.
43.	**Remove Withhold from CNS rejected** (:25D::IPRC//REJT and :70D::REAS//DTCY/ICRJ)	Sent to the submitter of a Remove Withhold from CNS message to indicate that their message has been rejected as part of the validation process. The reason for the rejection is also indicated on the message.
44.	**Withhold from CNS rejected** (:25D::IPRC//REJT and :70D::REAS//DTCY/XCRJ)	Sent to the submitter of a Withhold from CNS message to indicate that their message has been rejected as part of the validation process. The reason for the rejection is also indicated on the message.
45.	**Include for Reorg Processing rejected** (:25D::IPRC//REJT and :70D::REAS//DTCY/IORJ)	Sent to the submitter of an Include for Reorg processing message to indicate that their message has been rejected as part of the validation process. The reason for the rejection is also indicated on the message.
46.	**Exclude for Reorg Processing rejected** (:25D::IPRC//REJT and :70D::REAS//DTCY/XORJ)	Sent to the submitter of an Exclude for Reorg processing message to indicate that their message has been rejected as part of the validation process. The reason for the rejection is also indicated on the message.
47.	**Include for Pair Off Processing rejected** (:25D::IPRC//REJT and :70D::REAS//DTCY/IPOJ)	Sent to the submitter of an Include for Pair Off processing message to indicate that their message has been rejected as part of the validation process. The reason for the rejection is also indicated on the message.
48.	**Exclude for Pair Off Processing rejected** (:25D::IPRC//REJT and :70D::REAS//DTCY/XPOJ)	Sent to the submitter of an Exclude for Pair Off processing message to indicate that their message has been rejected as part of the validation process. The reason for the rejection is also indicated on the message.

	Status Message	Usage
49.	**IMS permanent cancel Processing rejected** **(:25D::IPRC//REJT and :70D::REAS//DTCY/IMSC)**	**Sent to both participants to indicate the IMS permanent cancel has been rejected by Obligation Warehouse.**
50.	**IMS permanent drop Processing rejected** **(:25D::IPRC//REJT and :70D::REAS//DTCY/IMSD)**	**Sent to both participants to indicate the IMS permanent drop has been rejected by Obligation Warehouse.**
51.	**IMS permanent reject Processing rejected** **(:25D::IPRC//REJT and :70D::REAS//DTCY/IMSR)**	**Sent to both participants to indicate the IMS permanent reject has been rejected by Obligation Warehouse.**
52.	**Cancel Delivery Rejected** (:25D::CPRC//REJT and :70D::REAS//DTCY/CDRJ)	Sent to the submitter of a Delivery Notification message to indicate that the message has been rejected by Obligation Warehouse as part of the validation process. The reason for the rejection is also indicated on the message.
53.	**Cancel Reclaim Rejected** (:25D::CPRC//REJT and :70D::REAS//DTCY/CRRJ)	Sent to submitter of a Cancel Reclaim message to indicate that the message has been rejected by Obligation Warehouse as part of the validation process. The reason for the rejection is also indicated on the message.
54.	**UnCancel rejected** (:25D::CPRC//REJT and :70D::REAS//DTCY/UCRJ)	Sent to the submitter of an UnCancel message to indicate that the UnCancel message has been rejected as part of the validation process. The reason for the rejection is also indicated on the message.
55.	**UnDK rejected** (:25D::CPRC//REJT and :70D::REAS//DTCY/UDRJ)	Sent to the submitter of an UnDK message to indicate that the UnDK message has been rejected as part of the validation process. The reason for the rejection is also indicated on the message.

MT518 Message Overview

The SWIFT MT518 Message is specified as a Market Side Securities Trade (Obligation) Confirmation. It is used to convey full obligation information to the parties associated with an obligation. This message is used to provide information to participants where Obligation Warehouse or the one of the parties has taken action on the obligation, such as system created Open obligations, Partial Delivery updates, DK and DK removal. As in the MT515, field: 22F::PROC in the Confirmation Details (CONFDET) block indicates to the participant the record type being sent. Additionally, field: 70E:: TPRO// indicates the reason for the event occurring, preceded by the mnemonic MSGR. See Participant Interactive Messaging Specifications: Appendix A: Code Tables. On DK messages this narrative field also provides the reason for the DK having been submitted against the recipient's trade (preceded by the mnemonic DKRS (DK reason).

SWIFT MT518 Messages includes the following types:

	Message	Usage
1.	**Comparison Request Advisory** (:22F::PROC/DTCY/CMPR)	Used to inform a member that an Instruct Message has been submitted to Obligation Warehouse against it

	Message	Usage
2.	**Comparison Request Modify Advisory** (:22F::PROC/DTCY/CRQM)	Used to inform a member that a Modify Message has been submitted by its contraparty for an obligation that is Pending matching
3.	**Comparison Request Cancel Advice** (:22F::PROC/DTCY/CADV)	Used to inform a member that its contraparty or Obligation Warehouse has canceled an advice of an obligation that has not yet or has just compared.
4.	**Post Comparison Contra Obligation Modification** (:22F::PROC/DTCY/CMDA)	Used to provide full trade details for the modifications the contraparty has made to its (already compared) obligation record such as the Exclude from RECAPS or Include in RECAPS action.
5.	**Delivery Request Advisory** (:22F::PROC/DTCY/DLRQ)	Used to inform a member that a Delivery Notification has been submitted to Obligation Warehouse against it.
6.	**Delivery Request Cancel** (:22F::PROC/DTCY/CNDL)	Used to inform a member that its contraparty or Obligation Warehouse has canceled an advice of a delivery request.
7.	**Cancel Request Advisory** (:22F::PROC/DTCY/CREQ)	Used to inform a member that an Cancel Message has been submitted to Obligation Warehouse against its open obligation
8.	**Cancel Request Cancel Advice** (:22F::PROC/DTCY/CCRQ)	Used to inform a member that its contraparty or Obligation Warehouse has canceled an advice of a cancel request.
9.	**Screen Input Replay** (:22F::PROC/DTCY/SITR)	Used to provide full obligation details to the participant where an action has been taken through an Obligation Warehouse web screen.
10.	**Open Obligation Advice** (:22F::PROC/DTCY/OADV)	Used to inform a member that an Open Obligation has been created by the System with them as a party to the obligation. The reason for opening is enclosed in the message.
11.	**DK of Uncompared Advice** (:22F::PROC/DTCY/DKUC)	Used to inform a member that its contra party has DK'ed its uncompared obligation.
12.	**DK of Delivery Advice** (:22F::PROC/DTCY/DKDL)	Used to inform a member that its contra party has DK'ed the Delivery Notification submitted by the participant.
13.	**UNDK of Uncompared Advice** (:22F::PROC/DTCY/UNDK)	Used to inform a member that the DK has been lifted on their obligation.
14.	**Delivery Advice** (:22F::PROC/DTCY/DLVR)	Used to inform the parties to an obligation that a delivery has been posted to their obligation. The source of the delivery is enclosed in the message.
15.	**Delivery Request Modify** (:22F::PROC/DTCY/DLRM)	Used to inform a member that an additional delivery has been submitted by its contraparty for an obligation that is Pending Delivery acceptance.
16.	**Reclaim Request Advisory** (:22F::PROC/DTCY/RCRQ)	Used to inform a member that a Reclaim Notification has been submitted to Obligation Warehouse against it.

	Message	Usage
17.	**Reclaim Request Modify** (:22F::PROC/DTCY/RCRM)	Used to inform a member that an additional reclaim has been submitted by its contraparty for an obligation that is Pending Reclaim acceptance.
18.	**Reclaim Request Cancel** (:22F::PROC/DTCY/CNRC)	Used to inform a member that its contraparty or Obligation Warehouse has canceled an advice of a reclaim request.
19.	**Reclaim Advice** (:22F::PROC/DTCY/RCLM)	Used to inform the parties to an obligation that was partially or fully settled has been reclaimed.
20.	**DK of Reclaim Advice** (:22F::PROC/DTCY/DKRC)	Used to inform a member that its contra party has DK'ed the Reclaim Notification submitted by the participant.
21.	**Closed due to DK Advice** (:22F::PROC/DTCY/CLDK)	Used to inform the parties to an obligation that was fully settled was closed when a Cancel Request was DKed. This can happen when deliveries from IMS, ECS or NYW were posted to an obligation while it was in a Pending Cancel state and the Cancel Request is subsequently DKed by the contraparty.
22.	**Closed due to Delivery** (:22F::PROC/DTCY/CLDL)	Used to inform the parties to an obligation that was fully settled has been closed.
23.	**Closed due to Match** (:22F::PROC/DTCY/CLMT)	Used to inform the parties to an obligation that an obligation that was fully settled was closed when it was matched.
24.	**Closed due to Prime Broker delivery** (:22F::PROC/DTCY/CLPB)	Used to inform the parties to a Prime Broker obligation that it was fully settled and closed before it was matched.
25.	**Obligation included in full Pair Off (:22F::PROC/DTCY/POFF)**	**Used to inform the parties that the obligation has been included in a full Pair Off.**
26.	**Obligation included in partial Pair Off (:22F::PROC/DTCY/POFP)**	**Used to inform the parties that the obligation has been included in a partial Pair Off.**

As noted for MT509 events, MT518 messages are sent to the participant and/or its contraparty where a change has been made in the Obligation Warehouse system.

MT599 Message Overview

The MT599 Message is specified by SWIFT as a Free Format Message. Obligation Warehouse uses this message to convey system administrative information to participants.

	Message	Usage
1.	**Obligation Warehouse Start-of-Day Notification** (:79:GADM…/GSOD/)	Sent in the beginning of each business day to inform a member that the Obligation Warehouse system is available.
2.	**Obligation Warehouse Submission Cutoff End-of- Day Message** (:79:GADM…/EDCS/)	Sent when participants may no longer submit transactions to be included in processing for that day. Any transactions submitted to Obligation Warehouse after this point are queued to be included in the next business day's processing.
3.	**Obligation Warehouse Processing End-of-Day Message** (:79:GADM…/EODC/)	Sent to members to inform them that the Obligation Warehouse system has completed processing for that business day, and that all interactive output to be generated that day has been transmitted.
4.	**CNS eligibility check completed** (:79:GADM…/CNSE)	Sent to members to inform them that the Obligation Warehouse system has completed CNS eligibility check
5.	**Pair Off Processing has completed** **(:79:GADM…/POFC)**	**Sent to members to inform them that the Obligation Warehouse system has completed Pair Off Processing**

MT598 Message Overview


The MT598 Message is specified by SWIFT as a reject of not parsable input messages. The MT598 content holds the MT515 submitted by the participant that is deemed invalid. It is also used to reject messages that have an invalid CDTS subscription.

	Message	Usage
1.	**Obligation Warehouse Processing Intra-Day Message** (:20:20090511075200 :12:999 :77E:)	Sent to participant to inform them that the message(s) sent is invalid. The response message contains the content of the message that was submitted by the participant. This message is also used to reject message that have an invalid CDTS subscription.

Obligation Warehouse Obligation Entry Message Flow

This depicts a typical message flow for an obligation submitted for bilateral matching. For more message flows, see Participant Interactive Messaging Specifications: Appendix C: Message Flows.

DLVR-7
1. Instruct from Participant A via SWIFT accepted
2. Instruct from Participant B via SWIFT accepted and matched
3. Delivery Notification (partial) from Participant A via SWIFT accepted on Open
4. Delivery Notification (partial) from Participant A via SWIFT accepted on Open, Pending Acceptance - full quantity now delivered
5. Delivery Notification (full) from Participant B via SWIFT accepted, obligation Closed - completed delivery

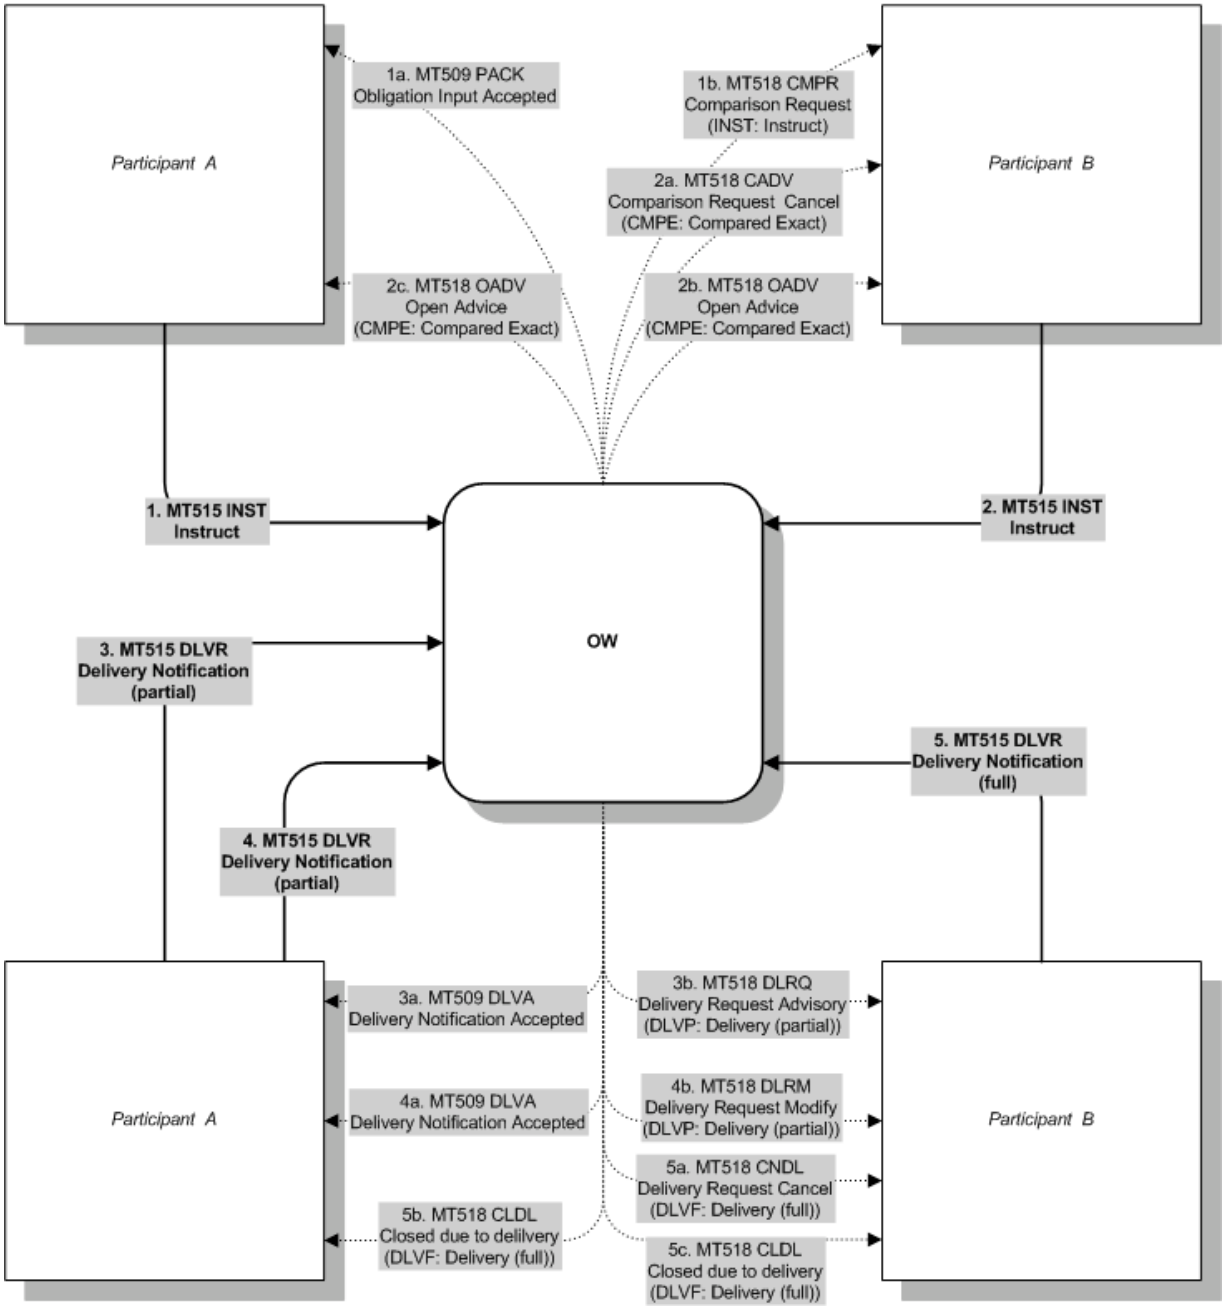

Message Flow Explanation

1. MT515 INST – Instruct: This input message conveys the obligation data submitted by Participant A for comparison within Obligation Warehouse.

   1a. MT509 PACK - Obligation Accepted: This output message is sent to Participant A acknowledging that Obligation Warehouse has accepted its Obligation and is awaiting further processing. This message also provides the Obligation ID assigned by Obligation Warehouse.

   1b. MT518 CMPR - Comparison Request: – Once Participant A's input is accepted by Obligation Warehouse, this output message containing full obligation details as entered by Participant A is sent to the contra party, Participant B. This message informs Participant B that an obligation has been submitted against it for which Participant B must submit a corresponding MT515 Instruct to effect a match.

2. MT515 INST – Instruct: This input message conveys the obligation data submitted by Participant B for comparison within Obligation Warehouse.

   2a. MT518 CADV - Comparison Request Cancel (due to compared exact): This output message is sent to Participant B to cancel the MT518 Comparison Request message previously sent (1b), since the obligation is now matched.

   2b. MT518 OADV – Open Advice: This output message is sent to Participant B to indicate that it has an open obligation.

   2c. MT518 OADV - Open Advice: This output message is sent to Participant A to indicate that it has an open obligation.

3. MT515 DLVR – Delivery Notification: This input message is sent Participant A to indicate the details of a partial delivery which took place away from DTCC related to this obligation.

   3a. MT509 DLVA- Delivery Notification Accepted: This output message is sent to Participant A to indicate the details of the partial delivery have been accepted by Obligation Warehouse and the settlement is pending acceptance by Participant B.

   3b. MT518 DLRQ – Delivery Request: This output message is sent to Participant B to indicate the details of the partial settlement, including the Obligation Control Number.

4. MT509 DLVR – Delivery Notification: This input message is sent Participant A to indicate the details of a partial delivery which took place away from DTCC related to this obligation.

   4a. MT509 DLVA- Delivery Notification Accepted: This output message is sent to Participant A to indicate the details of the partial delivery have been accepted by Obligation Warehouse and the settlement is pending acceptance by Participant B.

   4b. MT518 DLRM – Delivery Request Modify: This output message is sent to Participant B to indicate the updated details of the settlement which is pending Participant B's acceptance.

5. MT509 DLVR – Delivery Notification: This input message is sent Participant B to indicate the details of a delivery which took place away from DTCC related to this obligation.

   5a. MT518 CNDL – Delivery Request Cancel: This output message is sent to Participant B to indicate the details of the delivery have been accepted by Obligation Warehouse and the outstanding Delivery Request is cancelled.

   5b. MT518 CLDL – Closed due to delivery: This output message is sent to Participant A to indicate the obligation has been closed due to full delivery.

   5c. MT518 CLDL – Closed due to delivery: This output message is sent to Participant B to indicate the obligation has been closed due to full delivery.

This illustration shows much of the logic used by Obligation Warehouse in processing interactive messages. For each MT515 submitted by a participant conveying information to Obligation Warehouse, either an MT509 or an MT518 message is generated indicating that the information has been accepted or rejected.

In an effort to reduce the number of messages generated, some of the MT509 messages are suppressed when there are other messages sent to the participant and these messages would convey the same information as in an MT509.

Another generally applied rule of Obligation Warehouse Interactive Messaging is that each time a participant submits a record (MT515) that is accepted by Obligation Warehouse, its contra party receives a notification (MT518) of comparison information. In the example, the submission of the MT515 Instruct Message by Participant A resulted in the generation of an MT518 Comparison Request Message for Participant B.

Any request messages generated by Obligation Warehouse system, such as MT518 Comparison Requests, are subsequently canceled by Obligation Warehouse system if the request is no longer valid. In the example, after the obligation is matched, Participant B receives an MT518 Comparison Request Cancel, effectively nullifying the previously generated MT518 Comparison Requests, as the obligation is now matched and open and available for further processing.

3. COMMUNICATIONS OVERVIEW

Participants send messages to and receive messages from DTCC through DTCC's Common Data Transfer System (CDTS). CDTS messaging uses IBM WebSphere MQ to provide guaranteed delivery of messages. Participants who are using interactive messaging specify the application/service in the destination field on the message header. For example, participants can use existing communication channels with CDTS and specify the appropriate destination in the header.

4. MESSAGING SPECIFICATION

This section contains the detailed specification for the MT515, MT509, MT518, MT598 and MT599 messages to be used to support Real-Time Obligation Matching, and is organized into the following subsections:

- MT515 →

Obligation Warehouse_MT515_General_Format_v6.0.doc

Obligation Warehouse_MT515_Specs_v6.0.doc

Obligation Warehouse_MT515 Analysis_v6.0.doc

- MT509 →

Obligation Warehouse_MT509_General_Format_v6.0.doc

Obligation Warehouse_MT509_Specs_v6.0.doc

Obligation Warehouse_MT509 Analysis_64.0.doc

- MT518 →

Obligation Warehouse_MT518_General_Format_v6.0.doc

Obligation Warehouse_MT518_Specs_v6.0.doc

Obligation Warehouse_MT518 Analysis_v6.0.doc

- MT598 →

55813_Obligation Warehouse_MT598_General_Format_v5.0.doc

- MT599 →

55813_Obligation Warehouse_MT598_General_Format_v5.0.doc

55813_Obligation Warehouse_MT599_Specs_v4.0.doc

Message Formatting Rules

The following Message and Message Field rules apply to all messages in the Obligation Warehouse Interactive Message Specification:

Message Rules

1.	**Direction**	–	Messages are sent either to or from Obligation Warehouse.
2.	**Variable Length**	–	All messages can vary in length up to a maximum allowable number of characters per message type.
3.	**Header**	–	All messages begin with a standard fixed length header.
4.	**Terminator**	–	All messages end with a standard terminator sequence reflected by a Carriage Return/Line Feed and a Dash (CRLF –).
5.	**Message Type**	–	Each message belongs to a specified message type.
6.	**Message Fields**	–	A message is composed of one or more message fields.
7.	**Character Set**	–	A-Z, a-z, 0-9, white space and the following punctuation :/,-

Message Field Rules

1.	**Field Tag**	–	Each field begins with a field tag.
2.	**Tag Format**	–	Each tag is composed of 2 digits and an optional character (2!c[1a]).
3.	**Tag Delimiter**	–	Each tag is prefixed and suffixed by the colon (:) character (for example :23G:).
4.	**Field Data**	–	Field data (including qualifiers and sub qualifiers) immediately follows the tag suffix delimiter. Generic tags are prefixed by an additional colon (:).
5.	**Data Format**	–	Data conforms to format rules for a specified tag.
6.	**Data Elements**	–	Field data may be divided into multiple elements or subfields.
7.	**Qualifiers**	–	Qualifiers within a data field provide additional format definition. If a qualifier is used, it must appear immediately after the tag suffix delimiter (Example :98A::SETT). If further data is required after the qualifier, and the data complies with SWIFT standards, the qualifier is delimited by the characters // and the data follows. Example :98A::SETT//20100331 or :20C::MAST//19960815 If the data is Obligation Warehouse system specific, then the DTCY issuer code is included. Example :95R::BUYR/DTCY/00008520
8.	**Field Delimiter**	–	The field delimiter sequence is Carriage Return Line Feed , CRLF (ASCII Character 13, ASCII Character 10). This sequence immediately follows the data. The combination of Carriage Return Line Feed, Colon (CRLF:) indicates the end of one field and the beginning of the next.

Message Format Conventions

Note that all the layouts for each of the messages (included in this Section of the document) are organized using the following columns of data:

Column Heading	Description
M/O	The M/O column defines whether the field is always Mandatory, or is Optional in the particular message and sequence according to SWIFT requirements. This column does not provide information as to whether the field is required or optional for Obligation Warehouse system. See the Messaging Specification section that provides a list of Obligation Warehouse system required fields based on the messaging type.
Tag	The Tag column defines the exact tag value that must precede the field. Tags are always delimited by a colon (:). A colon (:) is the character immediately before and after the tag For example, :98A: indicates a date, in the YYYYMMDD format, follows.
Block or Qualifier	The Block or Qualifier column specifies the Block Name in the case of a start block (16R) or end block (16S) tag. Otherwise, it specifies the required qualifier for the tag. Example :98A::SETT indicates a Settlement Date field.
Sub qualifier/Options	The Options column specifies the different options available for individual qualifiers for a tag. Each tag, qualifier and option combination uniquely specifies a data element. Example 22H::BUSE//BUYI/ indicates a Receive transaction

Column Heading	Description
Field Description	The Field Description column provides a text description of the purpose or use of a data field.
Data Format	The Data Format column specifies the size and characters allowed within a data field, **as specified by SWIFT**. The Field Specifications that follow each layout indicate how each field should be populated for Obligation Warehouse input/output. The format provided in this column reflects the data that the participant must populate the field. Example :98A::SETT// has a format of YYYYMMDD

It should be reiterated that the Mandatory/Optional (M/O) Field on the layout indicates if the field is SWIFT mandatory or optional for the message/sequence. It does not denote, however, if the field is required for submission to Obligation Warehouse. To identify NSCC required fields for the various products, Participants must see the Messaging Specification section. Those fields that are SWIFT mandatory and/or NSCC mandatory must be reflected on the MT515, or the message (Instruct, Modify, Cancel, or DK) are rejected.

The Data Format field on the layouts is intended to reflect the format of the data that participants/ Obligation Warehouse must use to populate the field. For example, the format for the Settlement Date field (:98A::SETT//20100331) is reflected as YYYYMMDD.

It should also be noted that there are not only differences in data field sizes (as noted previously in this document), but field formats can also be different for the population of the SWIFT record. For example, date fields on the MT515, MT509 and MT518 SWIFT records are reflected as YYYYMMDD rather than MMDDYYYY, which is used on some of the NSCC proprietary layouts.

In addition, all fields on the SWIFT messages are left justified, and if the field has a decimal format (d), it must use a decimal comma, rather than a decimal point.

As a supplement to the layout, a detailed description of each field format follows which reflects the options, defines the usage, and provides an example of each field.

The following characters may appear in the Data Format Column or in any discussion of data format and content:

Character	Meaning	Example Format	Example Usage
a	Upper Case Alpha Characters	6a	ABCDEF
c	Alphanumeric Characters (upper case only)	6c	AB12EF
d	Decimal Number (decimal comma)	15d	2035,45
e	Space	1e	(1blank space)
n	Numeric Characters	8n	20011228
x	Any Printable ASCII Symbol	20x	Anytime & Anyplace
/	The literal / as a separator	6c/2a	AB12EF/NY
[ ]	Optional element format	[/4c]	[optional data - /4 characters]
[N]	Optional sign (negative) format	[N]	:19A::SPCN//USDN500,45
!	Fixed length field	12!c	ABCDEFGHIJKL

All fields are, by definition, variable in length with a maximum field size specified, unless a fixed length format is defined by inclusion of the exclamation (!), in which case the size specified is the fixed field size. In the case where the data value in the fixed length field is smaller than the field size specified, the data should be left justified with trailing blanks.

Typical Message Form

Form	Example
{1: Header 1}{2:Header 2}{3:Header 3}{4:Message Body-}	{1:F0100000188 0000000003}{2:O5181103100607INTDTC 000000000001006071103N}{3:{113:0701}{108:ZT0000014 3641104}{115:11.03.14.00}}{4: ….. -}
:<BLOCK START TAG>:<BLOCK NAME><cr><lf>	:16R:GENL
:<GENERIC TAG 1>::QUALIFIER//DATA FIELD 1 <cr><lf>	:20C::SEME//004354NY4355
:<TAG2>:DATA FIELD2<cr><lf>	:23G:NEWM
:<GENERIC TAG 3>::QUALIF/ISSUER CODE/DATA FIELD3<cr><lf>	:22F::TRTR/DTCY/CASH
:<BLOCK START TAG>:<BLOCK NAME><cr><lf>	:16R:LINK
:<GENERIC TAG 4>::QUALIFIER//DATA FIELD 3<cr><lf>	:20C::MAST//ABCD1234
:<BLOCK END TAG>:<BLOCK NAME><cr><lf>	:16S:LINK
:<BLOCK END TAG>:<BLOCK NAME><cr><lf>	:16S:GENL

As can be seen from the example, blocks are demarcated by start (16R) and end (16S) block tags, with an associated block name. The tags contained within, provide the data associated with the purpose of the block. Subsequent blocks, such as the confirming party block, may be repeated as necessary (to identify the buyer and sellers of securities) as specified by SWIFT.

Generic fields, as previously described in this document, are designed to serve a particular function, with a qualifier code specifying a specific business purpose to that function. In the preceding example, the 20C tag is a generic reference number, and the SEME qualifier in the GENL block indicates that this is the Sender's Message identifier. In the LINK subsequence, however, 20C is used to provide a Master Reference Number (Participant External Reference). Processing code can thereby be designed to be reused for creating or validating generic fields as the fields are reused within a message, or across messages.

Message Header Format

The headers used by messages to and from Obligation Warehouse is in the ISO 15022 format. For more information about messages, see Participant Interactive Messaging Specifications: Appendix B: Headers for Messages. The SWIFT header format used in RTTM are not used.

MT598

The MT598 message are returned to a participant in response to a MT515 this is not parsable or when a subscription is missing in CTDS.

MT599 Format Differences

It is important to note that the MT599 message is an older SWIFT message type, which is slightly different in format from the other ISO 15022 messages that we are using to support Obligation Warehouse.

As noted in the MT599 specifications:

- There are no beginning- and end-of-block tags (16R and 16S).
- Tags do not always include the optional 1 character format suffix.
- There are no generic fields, qualifiers, or repeating sequences.

We have included qualifiers in Tag 79 in an attempt to maintain similar formats to other messages implemented, given that SWIFT allows any type of text to be included in narrative fields. NSCC, for this purpose, has attempted to delineate, and label, the ‘subfields’ included in this tag in a similar manner to those on other messages in the interactive messaging specification. Tag 79 reflects a reference to the record type being sent, which always follows the message preparation date and time.

© 2023 DTCC. All rights reserved. DTCC and DTCC (Stylized) and Financial Markets. Forward. are registered and unregistered trademarks of The Depository Trust & Clearing Corporation DTCC. The services described herein are provided under the DTCC brand name by certain affiliates of The Depository Trust & Clearing Corporation (DTCC). DTCC itself does not provide such services. Each of these affiliates is a separate legal entity, subject to the laws and regulations of the particular country or countries in which such entity operates. Please see www.dtcc.com for more information on DTCC, its affiliates and the services they offer.

Doc Date: December 29, 2023
Publication Code: OW171
Service: Obligation Warehouse
Title: Participant Interactive Messaging Specification

For More Information

Email DTCC Learning at:
DTCCLearning@dtcc.com

or visit us on the web at:
www.dtcclearning.com

