

# CHAPTER 2

Input: Concepts, Instances, and  
Attributes

# Outline

- ✿ What's a concept?
- ✿ What's in an example?
- ✿ What's in an attribute?
- ✿ Preparing the input



# What's a Concept? (1/2)

## ✦ Concept

- Structural patterns
- e.g.
  - Classify unseen examples
  - Find association among features
  - Group examples
  - Predict numeric outcome

# What's a Concept? (2/2)

## ✦ Concept description

- models

- e.g.

- Decision trees

- Rules

- Regression functions

- Clustering trees

- Neural network



# What's in an Example?

- ✿ Instances
- ✿ Input is generally expressed as a table of independent instances
  - Flat file
  - Records in DB

**Table 1.2** Weather Data


Outlook	Temperature	Humidity	Windy	Play
Sunny	hot	high	false	no
Sunny	hot	high	true	no
Overcast	hot	high	false	yes
Rainy	mild	high	false	yes
Rainy	cool	normal	false	yes
Rainy	cool	normal	true	no
Overcast	cool	normal	true	yes
Sunny	mild	high	false	no
Sunny	cool	normal	false	yes
Rainy	mild	normal	false	yes
Sunny	mild	normal	true	yes
Overcast	mild	high	true	yes
Overcast	hot	normal	false	yes
Rainy	mild	high	true	no

# What's in an Attribute?

- ✧ Fields in DB
- ✧ Values of attributes
  - Dichotomy (nominal or categorical)
    - e.g. true, false
  - No ordering or distance measure (nominal)
    - e.g. sunny, overcast, rainy
  - Ordinal (nominal)
    - e.g. hot > mild > cool
  - Interval (numeric)
    - e.g. temperature expressed in degree



# Preparing the Input (1/7)

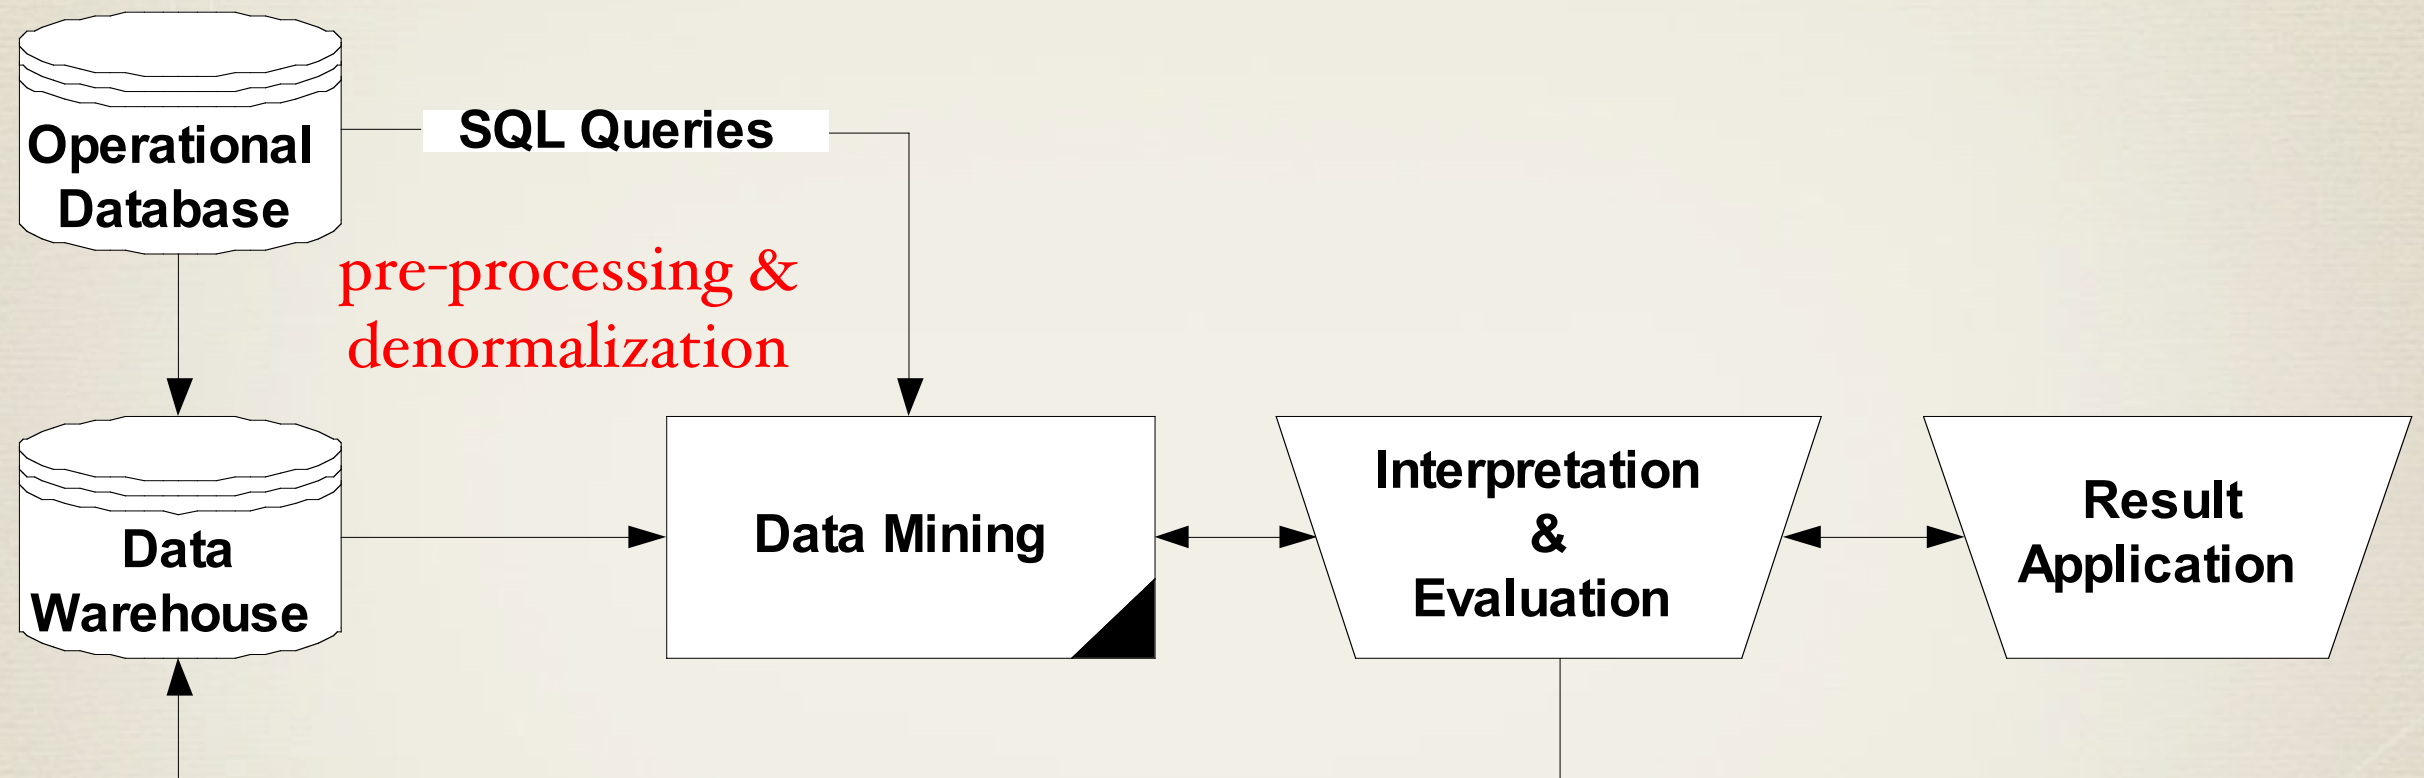

A simple data mining process model

# Preparing the Input (2/7)

attributes

attribute's type

instance

Relation: weather					
No.	outlook Nominal	temperature Numeric	humidity Numeric	windy Nominal	play Nominal
1	sunny	85.0	85.0	FALSE	no
2	sunny	80.0	90.0	TRUE	no
3	overcast	83.0	86.0	FALSE	yes
4	rainy	70.0	96.0	FALSE	yes
5	rainy	68.0	80.0	FALSE	yes
6	rainy	65.0	70.0	TRUE	no
7	overcast	64.0	65.0	TRUE	yes
8	sunny	72.0	95.0	FALSE	no
9	sunny	69.0	70.0	FALSE	yes
10	rainy	75.0	80.0	FALSE	yes
11	sunny	75.0	70.0	TRUE	yes
12	overcast	72.0	90.0	TRUE	yes
13	overcast	81.0	75.0	FALSE	yes
14	rainy	71.0	91.0	TRUE	no

```
weather.arff
@relation weather

@attribute outlook {sunny, overcast, rainy}
@attribute temperature real
@attribute humidity real
@attribute windy {TRUE, FALSE}
@attribute play {yes, no}

@data
sunny,85,85,FALSE,no
sunny,80,90,TRUE,no
overcast,83,86,FALSE,yes
rainy,70,96,FALSE,yes
rainy,68,80,FALSE,yes
rainy,65,70,TRUE,no
overcast,64,65,TRUE,yes
sunny,72,95,FALSE,no
sunny,69,70,FALSE,yes
rainy,75,80,FALSE,yes
sunny,75,70,TRUE,yes
overcast,72,90,TRUE,yes
overcast,81,75,FALSE,yes
rainy,71,91,TRUE,no
```



# Preparing the Input (3/7)

```
% ARFF file for the weather data with some numeric features
%
@relation weather

@attribute outlook { sunny, overcast, rainy }
@attribute temperature numeric
@attribute humidity numeric
@attribute windy { true, false }
@attribute play? { yes, no }

@data
%
% 14 instances
%
sunny, 85, 85, false, no
sunny, 80, 90, true, no
overcast, 83, 86, false, yes
rainy, 70, 96, false, yes
rainy, 68, 80, false, yes
rainy, 65, 70, true, no
overcast, 64, 65, true, yes
sunny, 72, 95, false, no
sunny, 69, 70, false, yes
rainy, 75, 80, false, yes
sunny, 75, 70, true, yes
overcast, 72, 90, true, yes
overcast, 81, 75, false, yes
rainy, 71, 91, true, no
```

# Preparing the Input (4/7)

## ✦ ARFF (Attribute-Relation File Format)

### ● Attribute types

#### ● nominal

● e.g. @attribute outlook {sunny, overcast, rainy}

#### ● numeric

● e.g. @attribute temperature numeric  
@attribute temperature real

#### ● string

● e.g. @attribute description string

#### ● date

● e.g. @attribute today date  
2014-03-05T13:00:00



# Preparing the Input (5/7)

- relation-valued
  - A separate set of instances
  - e.g. @attribute bag relational
    - @attribute outlook {sunny, overcast, rainy}
    - @attribute temperature numeric
    - @attribute humidity numeric
    - @attribute windy {true, false}
    - @end bag

# Preparing the Input (6/7)

```
% Multiple instance ARFF file for the weather data
%
@relation weather

@attribute bag_ID { 1, 2, 3, 4, 5, 6, 7 }
@attribute bag relational
    @attribute outlook { sunny, overcast, rainy }
    @attribute temperature numeric
    @attribute humidity numeric
    @attribute windy { true, false }
@end bag
@attribute play? { yes, no }

@data
%
% seven "multiple instance" instances
%
1, "sunny, 85, 85, false\nsunny, 80, 90, true", no
2, "overcast, 83, 86, false\nrainy, 70, 96, false", yes
3, "rainy, 68, 80, false\nrainy, 65, 70, true", yes
4, "overcast, 64, 65, true\nsunny, 72, 95, false", yes
5, "sunny, 69, 70, false\nrainy, 75, 80, false", yes
6, "sunny, 75, 70, true\novercast, 72, 90, true", yes
7, "overcast, 81, 75, false\nrainy, 71, 91, true", yes
```

**FIGURE 2.3**

Multi-instance ARFF file for the weather data.



# Preparing the Input (7/7)

- Missing value

- e.g. @data

sunny, 85, 85, false, ?

- Sparse value

- e.g. 0, X, 0, 0, 0, 0, Y, 0, 0, 0, “class A”

=> {1 X, 6 Y, 10 “class A”}

0, 0, 0, w, 0, 0, 0, 0, 0, 0, “class B”

=> {3 w, 10 “class B”}