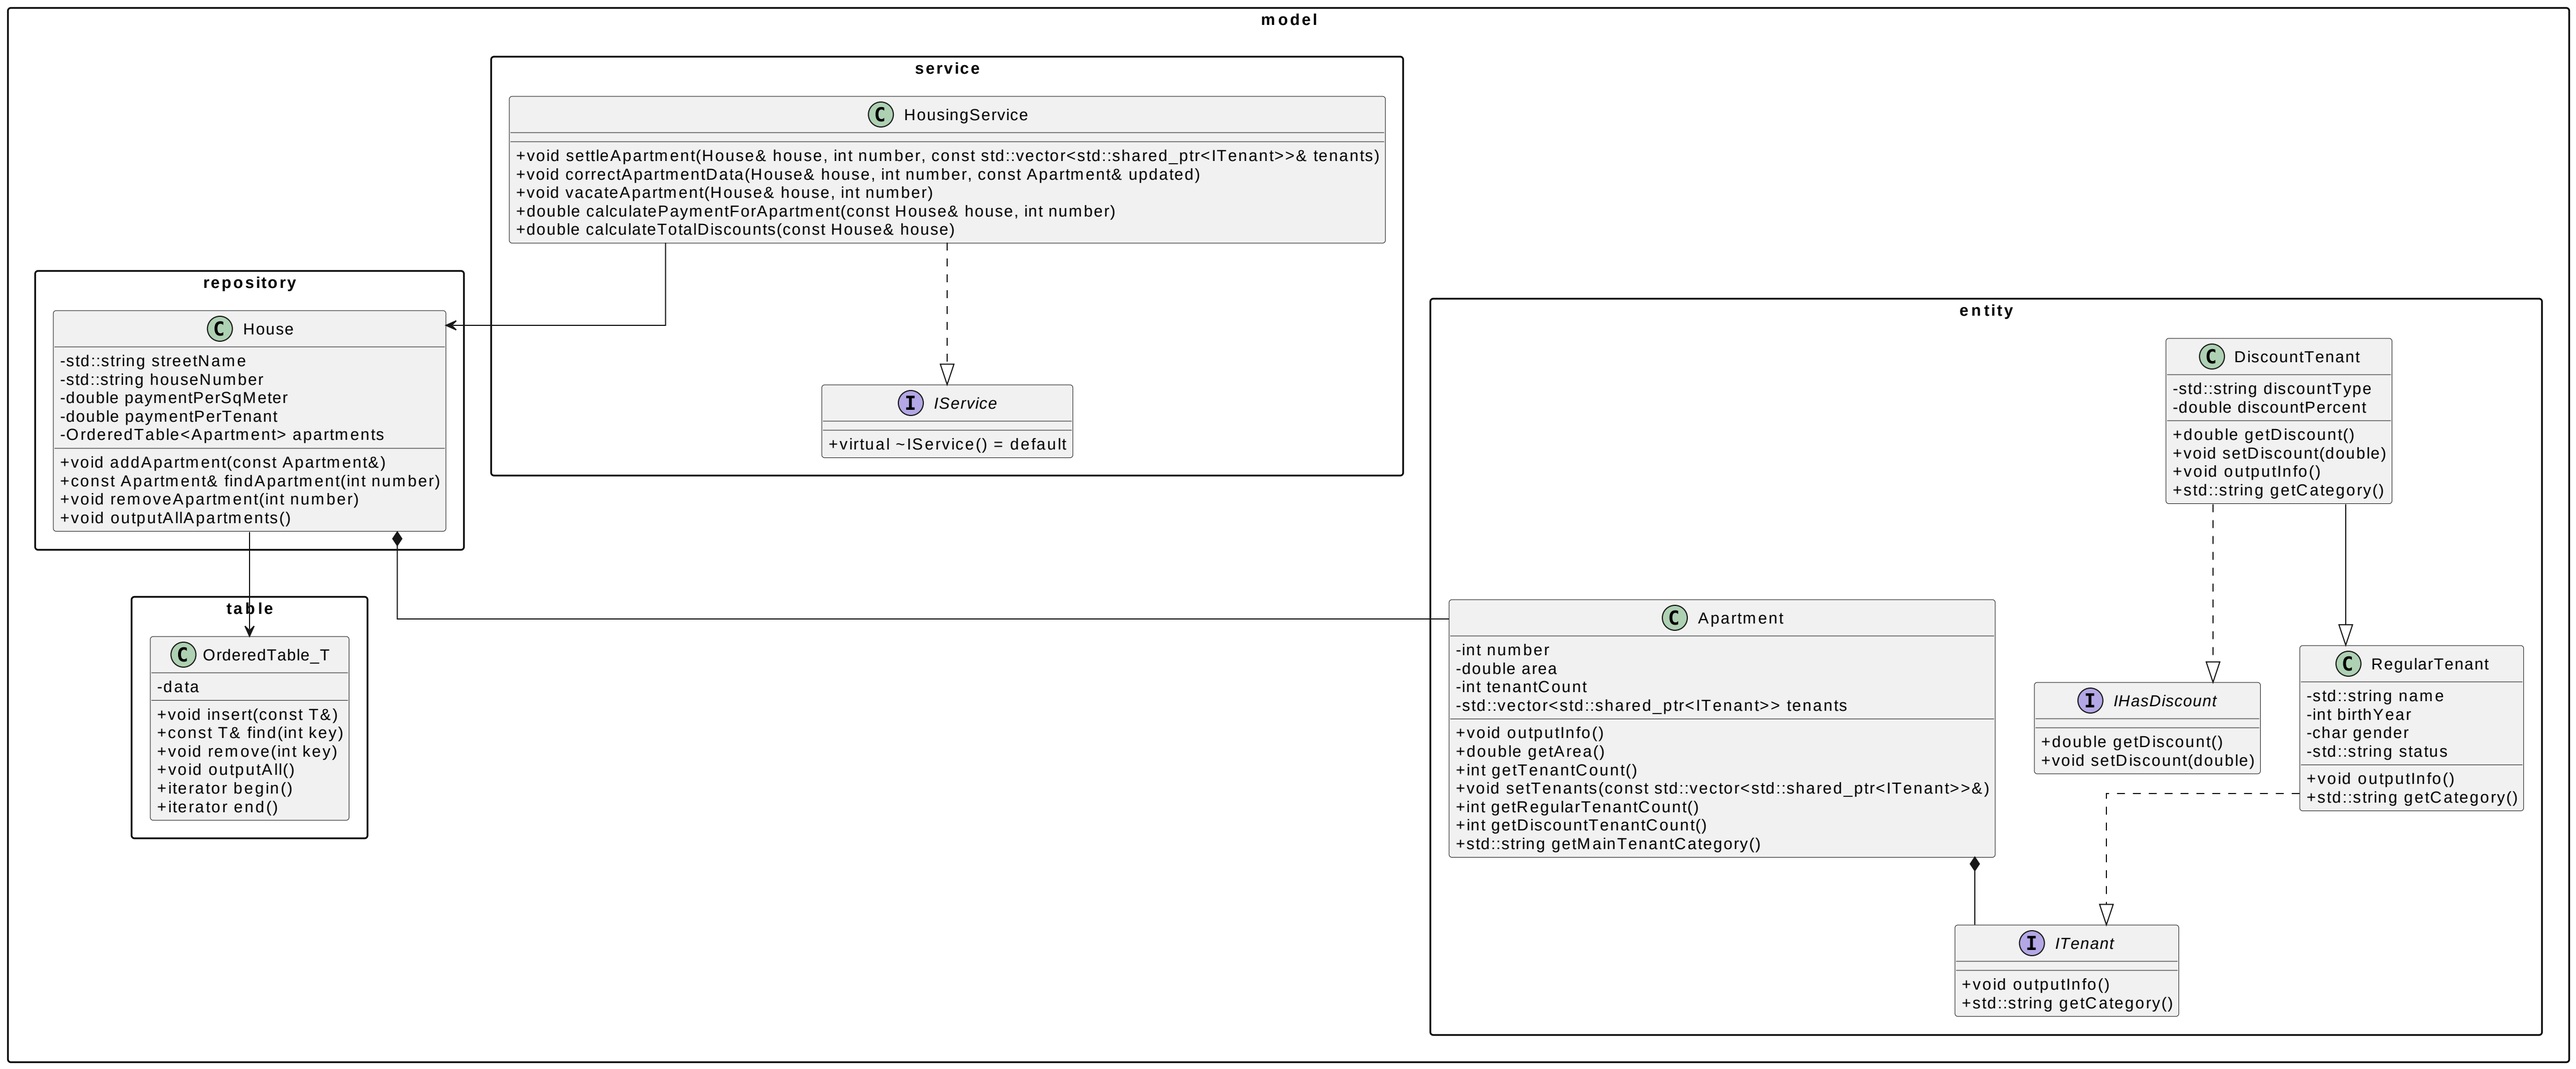
model
service
HousingService
+void settleApartment(House& house, int number, const std::vector<std::shared_ptr<ITenant>>& tenants)
+void correctApartmentData(House& house, int number, const Apartment& updated)
+void vacateApartment(House& house, int number)
+double calculatePaymentForApartment(const House& house, int number)
+double calculateTotalDiscounts(const House& house)
IService
+virtual ~IService() = default
repository
House
-std::string streetName
-std::string houseNumber
-double paymentPerSqMeter
-double paymentPerTenant
-OrderedTable<Apartment> apartments
+void addApartment(const Apartment&)
+const Apartment& findApartment(int number)
+void removeApartment(int number)
+void outputAllApartments()
table
OrderedTable_T
-data
+void insert(const T&)
+const T& find(int key)
+void remove(int key)
+void outputAll()
+iterator begin()
+iterator end()
entity
DiscountTenant
-std::string discountType
-double discountPercent
+double getDiscount()
+void setDiscount(double)
+void outputInfo()
+std::string getCategory()
Apartment
-int number
-double area
-int tenantCount
-std::vector<std::shared_ptr<ITenant>> tenants
+void outputInfo()
+double getArea()
+int getTenantCount()
+void setTenants(const std::vector<std::shared_ptr<ITenant>>&)
+int getRegularTenantCount()
+int getDiscountTenantCount()
+std::string getMainTenantCategory()
IHasDiscount
+double getDiscount()
+void setDiscount(double)
RegularTenant
-std::string name
-int birthYear
-char gender
-std::string status
+void outputInfo()
+std::string getCategory()
ITenant
+void outputInfo()
+std::string getCategory()